

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P938579

Luminaire Tested: SQ4-FB-150U-125D-B2750-1D-UNV-W2A-W-12-3500K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P938579
REPORT IS A COMBINATION OF REPORTS P933624 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-150U-125D-B2750-1D-UNV-W2A-W-12-3500K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 29358.7 lumens
Efficiency: N/A
Efficacy: 117.6 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 12' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 249.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P938579

CATALOG NUMBER: SQ4-FB-150U-125D-B2750-1D-UNV-W2A-W-12-3500K

Luminous Intensity Polar Plot

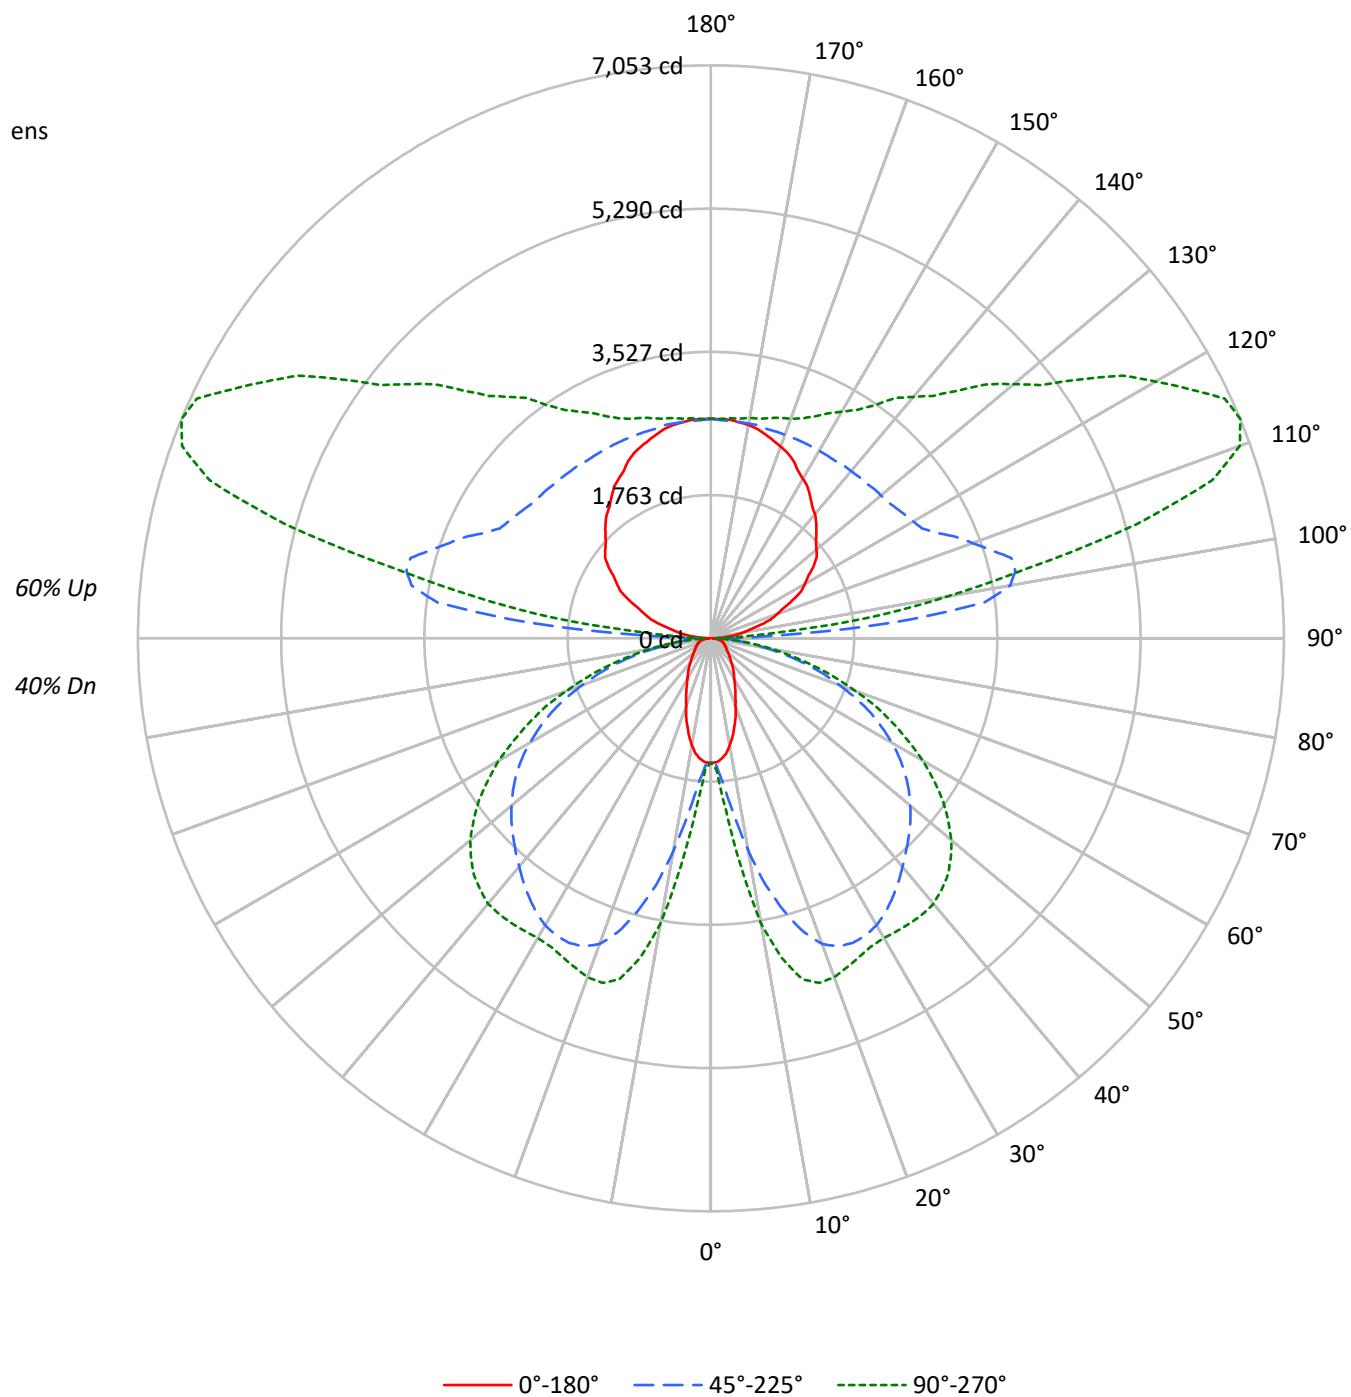

TEST NUMBER: P938579

CATALOG NUMBER: SQ4-FB-150U-125D-B2750-1D-UNV-W2A-W-12-3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	95	95	95	95	78	78	78	62	62	62	47	47	47
1	95	91	87	83	86	83	79	76	68	65	63	54	52	51	41	40	39
2	86	79	72	67	78	72	66	62	59	55	51	47	44	42	36	34	32
3	78	69	61	55	71	63	56	51	51	47	43	41	37	35	31	29	27
4	71	60	52	46	65	55	48	43	45	40	36	36	32	29	27	25	23
5	65	53	45	39	59	49	42	36	40	35	30	32	28	25	24	22	19
6	60	48	39	34	54	44	36	31	36	30	26	29	25	21	22	19	17
7	55	43	35	29	50	39	32	27	32	27	23	26	22	19	20	17	15
8	51	39	31	25	46	35	28	24	29	24	20	23	19	16	18	15	13
9	47	35	27	22	43	32	25	21	27	21	18	21	17	15	17	14	11
10	44	32	25	20	40	29	23	18	24	19	16	20	16	13	15	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4732	4732	4732
5°	4624	5471	6361
10°	4197	7977	10545
15°	3568	10424	12733
20°	2906	12082	12977
25°	2425	12647	12713
30°	2046	12730	12689
35°	1810	12522	13017
40°	1578	12251	13357
45°	1430	12053	13409
50°	1313	11876	13187
55°	1258	11615	12602
60°	1290	11110	11679
65°	1344	10340	10411
70°	1435	9024	8795
75°	1596	7364	6864
80°	1757	5113	4625
85°	1594	2718	2367

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 45°

Luminance: 13409 cd/sqm

TEST NUMBER: P938579

CATALOG NUMBER: SQ4-FB-150U-125D-B2750-1D-UNV-W2A-W-12-3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	197.9	0.7
10°-20°	877.1	3.0
20°-30°	1534.2	5.2
30°-40°	1974.9	6.7
40°-50°	2205.9	7.5
50°-60°	2112.8	7.2
60°-70°	1674.4	5.7
70°-80°	984.6	3.4
80°-90°	283.8	1.0
90°-100°	1316.9	4.5
100°-110°	3462.1	11.8
110°-120°	3589.9	12.2
120°-130°	2879.5	9.8
130°-140°	2259.4	7.7
140°-150°	1734.2	5.9
150°-160°	1248.9	4.3
160°-170°	764.1	2.6
170°-180°	258.2	0.9
0°-30°	2609.2	8.9
0°-40°	4584.1	15.6
0°-60°	8902.9	30.3
0°-90°	11845.7	40.3
90°-120°	8368.8	28.5
90°-150°	15241.9	51.9
90°-180°	17513.0	59.7
0°-180°	29358.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1530	1530	1530	1530	1530	
5°	1490	1599	1800	2037	2110	138
15°	1117	2061	3473	4211	4344	311
25°	713	2337	4137	4319	4324	329
35°	482	2233	3896	4118	4280	301
45°	330	1781	3444	3945	4122	255
55°	236	1131	2922	3394	3488	215
65°	187	600	2169	2440	2474	185
75°	138	369	1190	1308	1314	144
85°	49	113	295	325	330	52
90°	18	51	138	69	69	18
95°	174	682	2268	1170	796	193
105°	624	945	3828	5811	5421	661
115°	1108	1345	3066	6116	6980	1094
125°	1541	1728	2789	4712	5559	1368
135°	1837	2022	2702	3804	4313	1421
145°	2130	2266	2667	3246	3499	1335
155°	2408	2475	2667	2928	3013	1106
165°	2598	2633	2667	2772	2807	733
175°	2702	2702	2685	2720	2720	256
180°	2702	2702	2702	2702	2702	

TEST NUMBER: P938579

CATALOG NUMBER: SQ4-FB-150U-125D-B2750-1D-UNV-W2A-W-12-3500K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	1530.0	1530.0	1530.0	1530.0	1530.0	1530.0	1530.0	1530.0	1530.0	1530.0	1530.0
2.5°	1530.0	1530.0	1539.7	1544.7	1554.5	1559.4	1569.3	1579.1	1608.6	1613.6	1623.4
5°	1490.5	1510.2	1574.1	1598.8	1667.6	1761.2	1800.5	1864.5	1997.2	2036.6	2061.2
7.5°	1431.5	1475.8	1633.2	1672.6	1844.8	2090.7	2194.0	2331.8	2543.3	2646.6	2730.3
10°	1338.1	1431.5	1711.9	1805.3	2085.8	2459.6	2651.5	2843.3	3163.1	3305.7	3359.9
12.5°	1234.8	1387.2	1795.6	1923.5	2326.9	2872.9	3104.1	3315.6	3679.7	3871.5	3901.0
15°	1116.7	1323.3	1874.2	2061.2	2582.7	3217.3	3473.0	3733.8	4073.2	4211.0	4245.4
17.5°	1013.4	1274.1	1948.1	2144.8	2779.4	3527.2	3787.9	4004.3	4279.8	4373.3	4397.9
20°	885.5	1195.4	1997.2	2253.0	2986.1	3753.4	4004.3	4171.5	4358.6	4417.6	4427.4
22.5°	792.0	1111.7	2026.8	2292.4	3123.8	3891.2	4102.7	4235.5	4363.4	4383.1	4388.0
25°	713.3	1018.3	2021.8	2336.6	3241.8	3974.8	4137.1	4235.5	4309.3	4319.1	4319.1
27.5°	639.5	915.0	2002.1	2346.5	3330.4	3994.5	4122.4	4191.2	4225.7	4245.4	4245.4
30°	575.6	816.6	1952.9	2326.9	3369.7	3974.8	4078.1	4112.5	4147.0	4176.5	4191.2
32.5°	526.4	723.2	1879.2	2287.5	3374.6	3925.6	3999.5	4019.1	4068.2	4137.1	4161.8
35°	482.1	629.7	1795.6	2233.4	3345.2	3846.9	3896.1	3915.8	4014.2	4117.5	4151.9
37.5°	437.8	560.8	1687.3	2139.9	3300.9	3753.4	3787.9	3822.3	3974.8	4097.8	4137.1
40°	393.5	501.7	1559.4	2036.6	3232.0	3640.3	3669.8	3724.0	3925.6	4068.2	4107.6
42.5°	359.1	452.6	1421.7	1928.4	3143.4	3512.4	3556.7	3635.4	3866.6	4019.1	4063.4
45°	329.6	403.4	1274.1	1780.8	3030.3	3379.6	3443.5	3551.8	3797.7	3945.3	3984.6
47.5°	300.1	369.0	1121.6	1628.3	2907.3	3246.7	3330.4	3453.3	3704.3	3846.9	3881.3
50°	275.5	334.5	969.1	1466.0	2774.5	3104.1	3202.4	3330.4	3586.2	3719.0	3763.3
52.5°	255.8	305.0	826.5	1303.6	2622.0	2956.5	3069.7	3202.4	3443.5	3571.4	3600.9
55°	236.1	280.4	703.5	1131.4	2464.6	2799.1	2922.1	3050.0	3286.1	3394.3	3414.0
57.5°	226.3	260.8	600.2	969.1	2297.3	2622.0	2759.7	2877.8	3099.2	3182.8	3202.4
60°	211.5	245.9	521.4	831.4	2115.3	2454.8	2572.8	2690.9	2877.8	2946.6	2961.5
62.5°	196.8	236.1	462.4	698.6	1928.4	2258.0	2376.0	2484.2	2641.7	2690.9	2710.6
65°	186.9	226.3	418.1	600.2	1736.5	2051.4	2169.4	2262.9	2390.8	2439.9	2449.8
67.5°	177.1	216.5	383.7	516.6	1544.7	1844.8	1933.3	2021.8	2120.3	2169.4	2174.3
70°	162.3	206.6	354.2	457.5	1347.9	1608.6	1682.4	1775.9	1854.6	1879.2	1893.9
72.5°	152.5	191.9	334.5	413.2	1146.2	1382.4	1451.2	1505.3	1574.1	1598.8	1598.8
75°	137.7	172.2	314.8	369.0	939.5	1131.4	1190.5	1244.6	1298.7	1308.5	1293.8
77.5°	123.0	152.5	270.5	309.9	733.0	895.4	944.5	974.0	1018.3	1028.1	1033.1
80°	103.3	132.8	211.5	241.1	531.3	659.2	693.6	718.2	757.6	757.6	767.4
82.5°	78.7	103.3	152.5	172.2	359.1	452.6	482.1	496.8	521.4	521.4	521.4
85°	49.2	64.0	98.4	113.2	216.5	275.5	295.2	300.1	319.8	324.7	324.7
87.5°	24.6	34.4	64.0	68.9	113.2	142.6	142.6	152.5	152.5	147.6	142.6
90°	18.1	32.7	47.2	50.8	79.7	118.4	137.8	122.5	91.9	68.9	68.9
92.5°	72.5	195.7	319.1	349.9	492.0	681.3	776.0	680.0	488.3	344.5	330.8
95°	174.0	399.6	625.3	681.7	1210.6	1915.7	2268.2	2024.0	1535.8	1169.5	1128.0
97.5°	301.0	500.0	699.0	748.8	1630.6	2806.3	3394.1	3239.9	2931.2	2699.7	2620.8
100°	398.8	579.4	759.9	805.0	1783.5	3088.1	3740.4	3751.7	3774.3	3791.2	3697.1
102.5°	482.3	650.7	819.1	861.2	1853.6	3176.8	3838.4	4035.0	4428.2	4723.2	4642.6
105°	623.7	766.4	909.0	944.7	1905.6	3186.8	3827.5	4268.3	5149.8	5811.0	5767.7
107.5°	768.8	901.8	1034.7	1067.9	1915.2	3045.0	3609.9	4224.7	5454.4	6376.7	6387.2
110°	866.7	986.7	1106.8	1136.8	1900.8	2919.3	3428.6	4116.0	5490.7	6521.8	6566.9

TEST NUMBER: P938579

CATALOG NUMBER: SQ4-FB-150U-125D-B2750-1D-UNV-W2A-W-12-3500K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	962.8	1077.2	1191.7	1220.3	1901.4	2809.5	3263.6	3967.1	5374.1	6429.3	6498.6
115°	1107.9	1213.4	1319.0	1345.4	1918.9	2683.6	3066.0	3743.7	5099.1	6115.6	6211.8
117.5°	1251.1	1346.9	1442.8	1466.8	1954.5	2604.8	2930.0	3541.6	4764.9	5682.3	5788.9
120°	1334.4	1424.7	1514.9	1537.5	1983.5	2578.2	2875.6	3434.4	4552.1	5390.4	5493.9
122.5°	1416.0	1507.1	1598.2	1620.9	2025.3	2564.4	2833.9	3337.1	4343.6	5098.5	5200.6
125°	1541.2	1624.1	1707.2	1727.9	2081.5	2552.9	2788.6	3216.1	4071.1	4712.2	4806.3
127.5°	1642.6	1726.5	1810.3	1831.2	2137.6	2546.2	2750.5	3117.6	3851.7	4402.3	4481.6
130°	1697.1	1787.3	1877.5	1900.1	2178.7	2550.2	2736.0	3062.7	3716.3	4206.4	4279.8
132.5°	1753.3	1843.5	1933.7	1956.3	2211.9	2552.8	2723.3	3015.8	3600.9	4039.7	4105.4
135°	1836.6	1918.8	2001.1	2021.6	2248.3	2550.5	2701.6	2946.5	3436.5	3803.9	3860.5
137.5°	1921.9	2003.3	2084.7	2105.1	2302.6	2566.1	2697.9	2905.0	3319.2	3629.9	3676.2
140°	1992.7	2067.6	2142.6	2161.3	2335.9	2568.7	2685.2	2864.1	3221.9	3490.2	3533.6
142.5°	2047.0	2116.3	2185.6	2202.9	2363.7	2578.0	2685.2	2842.4	3156.6	3392.4	3429.7
145°	2130.4	2190.9	2251.3	2266.4	2399.9	2578.0	2667.1	2795.6	3052.6	3245.5	3273.7
147.5°	2213.8	2272.6	2331.4	2346.1	2453.1	2595.8	2667.1	2768.2	2970.5	3122.2	3145.6
150°	2268.2	2321.4	2374.6	2387.9	2480.9	2605.1	2667.1	2752.5	2923.4	3051.5	3070.4
152.5°	2324.4	2364.7	2405.0	2415.0	2499.1	2611.1	2667.1	2740.0	2885.9	2995.3	3009.6
155°	2407.9	2437.7	2467.5	2474.9	2539.0	2624.3	2667.1	2725.1	2841.2	2928.2	2937.7
157.5°	2469.5	2498.5	2527.4	2534.7	2578.8	2637.6	2667.1	2712.2	2802.4	2870.2	2876.9
160°	2511.2	2533.7	2556.3	2561.9	2597.0	2643.7	2667.1	2705.7	2783.1	2841.1	2845.0
162.5°	2552.8	2569.8	2586.6	2590.9	2616.3	2650.1	2667.1	2699.7	2765.0	2814.0	2817.6
165°	2598.2	2613.5	2628.8	2632.7	2644.1	2659.4	2667.1	2690.4	2737.1	2772.2	2776.1
167.5°	2639.9	2647.2	2654.4	2656.2	2665.9	2678.8	2685.2	2700.5	2731.1	2754.1	2755.7
170°	2667.1	2674.3	2681.6	2683.5	2684.0	2684.8	2685.2	2700.5	2731.1	2754.1	2754.1
172.5°	2681.6	2683.2	2684.8	2685.2	2685.2	2685.2	2685.2	2697.3	2721.5	2739.7	2738.2
175°	2701.6	2701.6	2701.6	2701.6	2696.1	2688.9	2685.2	2692.9	2708.2	2719.7	2719.7
177.5°	2701.6	2701.6	2701.6	2701.6	2697.3	2691.7	2688.9	2694.9	2707.0	2716.0	2714.4
180°	2701.6	2701.6	2701.6	2701.6	2701.6	2701.6	2701.6	2701.6	2701.6	2701.6	2701.6

TEST NUMBER: P938579

CATALOG NUMBER: SQ4-FB-150U-125D-B2750-1D-UNV-W2A-W-12-3500K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	1530.0	1530.0
2.5°	1633.2	1623.4
5°	2100.6	2110.4
7.5°	2828.6	2823.7
10°	3517.3	3561.6
12.5°	4019.1	4028.9
15°	4324.1	4343.7
17.5°	4442.2	4447.0
20°	4447.0	4437.2
22.5°	4393.0	4383.1
25°	4329.0	4324.1
27.5°	4270.0	4274.9
30°	4245.4	4260.1
32.5°	4245.4	4270.0
35°	4255.2	4279.8
37.5°	4250.3	4279.8
40°	4230.7	4265.1
42.5°	4176.5	4201.1
45°	4092.9	4122.4
47.5°	3984.6	4004.3
50°	3846.9	3866.6
52.5°	3674.7	3679.7
55°	3468.1	3487.8
57.5°	3246.7	3251.7
60°	3000.8	3015.5
62.5°	2740.0	2740.0
65°	2464.6	2474.4
67.5°	2179.3	2203.9
70°	1889.1	1893.9
72.5°	1603.7	1603.7
75°	1308.5	1313.5
77.5°	1028.1	1028.1
80°	762.5	767.4
82.5°	526.4	536.2
85°	329.6	329.6
87.5°	152.5	137.7
90°	68.9	68.9
92.5°	276.0	221.2
95°	961.9	795.9
97.5°	2304.9	1989.0
100°	3320.9	2944.5
102.5°	4320.3	3997.9
105°	5594.5	5421.3
107.5°	6429.1	6471.0
110°	6747.4	6928.0



TEST NUMBER: P938579

CATALOG NUMBER: SQ4-FB-150U-125D-B2750-1D-UNV-W2A-W-12-3500K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	6775.8	7053.1
115°	6596.1	6980.5
117.5°	6215.2	6641.4
120°	5908.1	6322.3
122.5°	5609.3	6017.8
125°	5182.7	5559.1
127.5°	4799.2	5116.6
130°	4573.1	4866.4
132.5°	4368.0	4630.7
135°	4087.0	4313.4
137.5°	3861.6	4046.8
140°	3706.8	3880.1
142.5°	3578.7	3727.7
145°	3386.6	3499.3
147.5°	3239.1	3332.5
150°	3146.1	3221.9
152.5°	3066.8	3124.0
155°	2975.5	3013.4
157.5°	2903.4	2930.0
160°	2860.3	2875.6
162.5°	2832.1	2846.6
165°	2791.4	2806.7
167.5°	2762.1	2768.6
170°	2754.1	2754.1
172.5°	2732.6	2727.0
175°	2719.7	2719.7
177.5°	2708.0	2701.6
180°	2701.6	2701.6

TEST NUMBER: P938579

CATALOG NUMBER: SQ4-FB-150U-125D-B2750-1D-UNV-W2A-W-12-3500K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.46	6.27	6.49	7.31	8.71	18.65	19.46	19.68	20.50	21.90
	3H	6.16	6.89	7.20	7.94	9.36	20.49	21.22	21.53	22.27	23.69
	4H	6.46	7.15	7.51	8.20	9.62	21.14	21.83	22.19	22.88	24.31
	6H	6.70	7.34	7.76	8.40	9.83	21.57	22.21	22.63	23.26	24.70
	8H	6.77	7.38	7.84	8.45	9.88	21.69	22.30	22.76	23.37	24.80
	12H	6.79	7.36	7.86	8.43	9.89	21.76	22.34	22.83	23.40	24.86
4H	2H	12.68	13.37	13.73	14.42	15.84	18.92	19.61	19.98	20.66	22.09
	3H	14.24	14.82	15.30	15.89	17.33	20.96	21.54	22.03	22.62	24.06
	4H	14.33	14.86	15.40	15.93	17.39	21.73	22.26	22.80	23.33	24.79
	6H	14.34	14.79	15.42	15.89	17.34	22.27	22.73	23.35	23.82	25.28
	8H	14.31	14.74	15.39	15.83	17.30	22.44	22.86	23.52	23.95	25.42
	12H	14.27	14.65	15.37	15.75	17.23	22.53	22.92	23.63	24.02	25.49
8H	4H	15.77	16.20	16.86	17.29	18.76	21.79	22.21	22.87	23.30	24.77
	6H	16.01	16.37	17.12	17.49	18.96	22.42	22.77	23.52	23.90	25.37
	8H	16.03	16.34	17.14	17.45	18.94	22.64	22.95	23.75	24.06	25.55
	12H	16.00	16.27	17.11	17.38	18.90	22.79	23.06	23.90	24.16	25.69
12H	4H	15.92	16.30	17.02	17.40	18.88	21.74	22.12	22.84	23.22	24.70
	6H	16.27	16.58	17.38	17.69	19.18	22.40	22.71	23.51	23.82	25.31
	8H	16.34	16.61	17.46	17.72	19.24	22.63	22.90	23.75	24.01	25.54