

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P934090

Luminaire Tested: SQ4-FA-025U-100D-B2750-1D-UNV-W2A-W-6-4000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P934090
REPORT IS A COMBINATION OF REPORTS P933683 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FA-025U-100D-B2750-1D-UNV-W2A-W-6-4000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Asymmetric Frosted Continuous I
Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6573.3 lumens
Efficiency: N/A
Efficacy: 112.9 lumens/watt
Spacing Criteria (0/90/45): 1.14 / 1.26 / 1.36
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 6' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 58.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P934090

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-W2A-W-6-4000K

Luminous Intensity Polar Plot

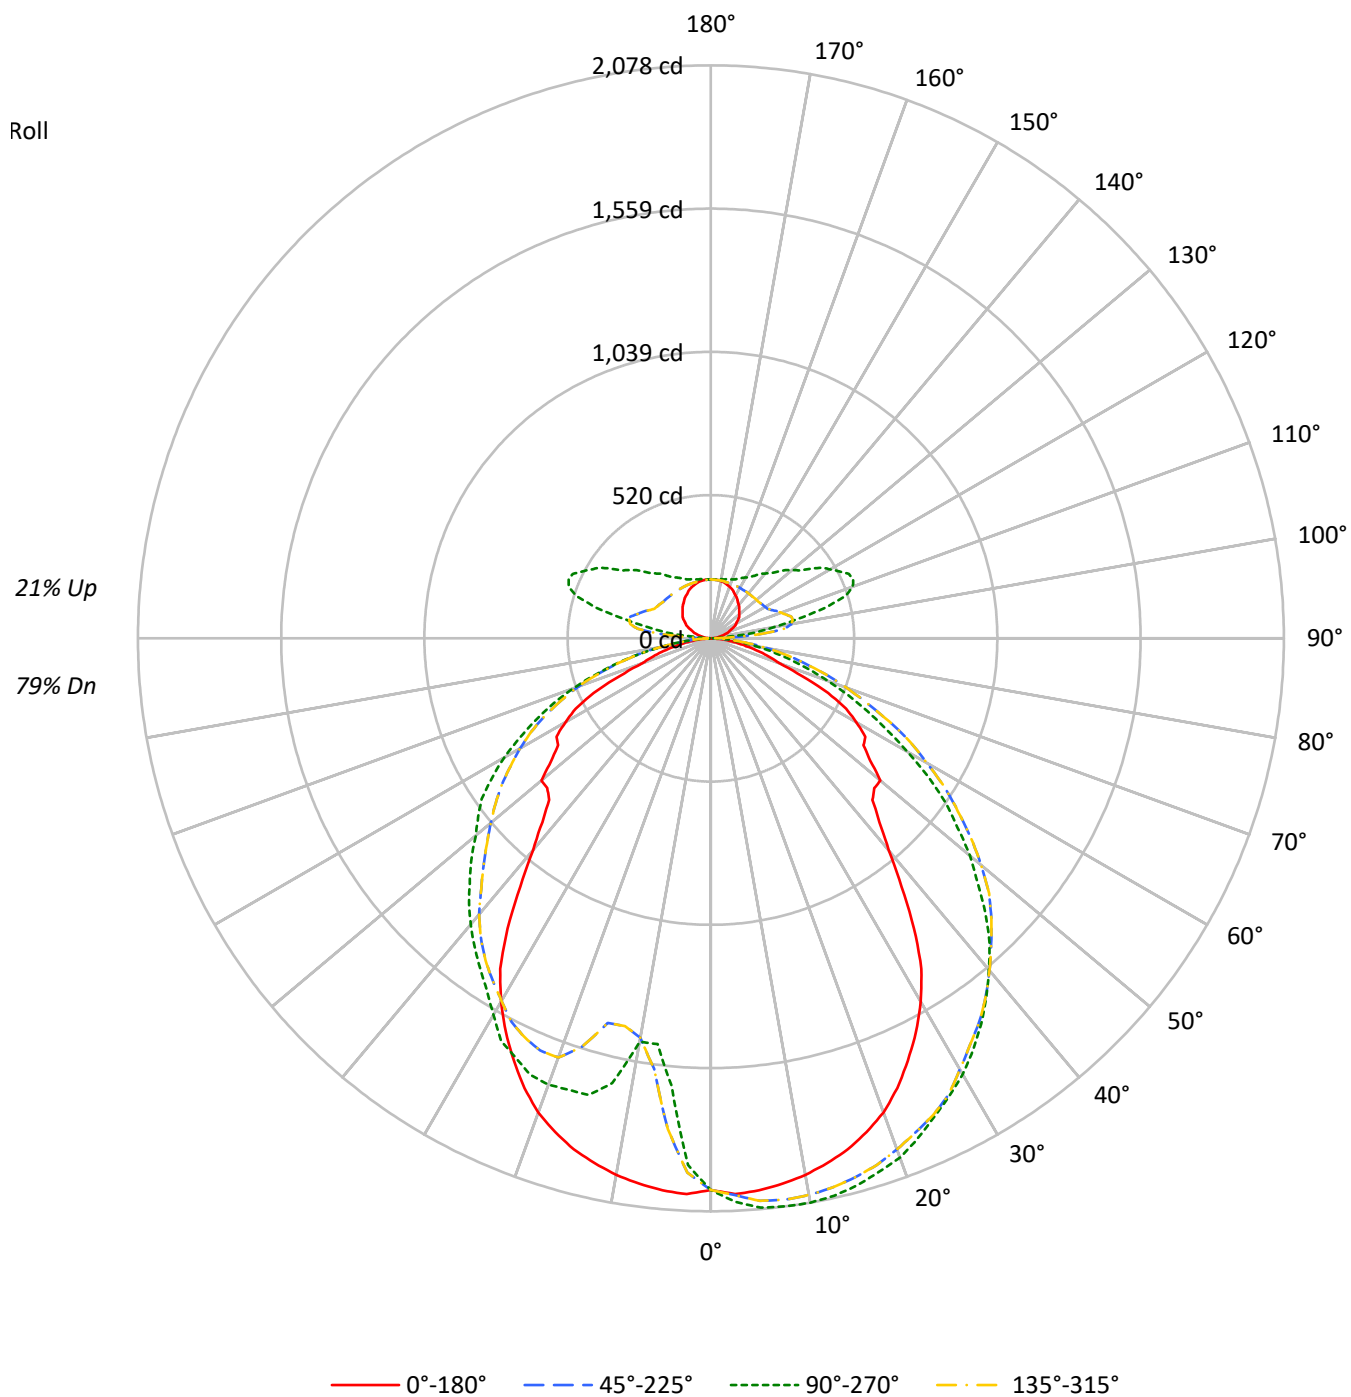

TEST NUMBER: P934090

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-W2A-W-6-4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	114	114	114	114	109	109	109	109	99	99	99	91	91	91	83	83	83			79
1	104	100	96	92	100	96	92	89	88	85	82	80	78	76	73	72	70			67
2	95	87	81	76	91	84	78	73	77	72	68	70	67	64	65	62	59			56
3	87	77	69	63	83	74	67	61	68	62	57	62	58	54	57	54	50			47
4	79	68	60	53	76	65	58	52	60	54	49	56	50	46	51	47	43			41
5	73	61	52	46	70	58	51	45	54	47	42	50	44	40	46	41	38			35
6	67	55	46	40	64	53	45	39	49	42	37	45	39	35	42	37	33			31
7	62	50	41	35	59	48	40	34	44	38	33	41	35	31	38	33	30			27
8	58	45	37	31	55	44	36	31	40	34	29	38	32	28	35	30	26			24
9	54	41	33	28	52	40	33	27	37	31	26	35	29	25	32	27	24			22
10	51	38	30	25	48	37	30	25	34	28	24	32	27	23	30	25	22			20

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	12374	12374	12374	12374
5°	12462	12492	12462	9822
10°	12375	12305	12375	8797
15°	12235	12038	12235	10052
20°	11975	11723	11975	10073
25°	11446	11262	11446	9860
30°	10765	10879	10765	9391
35°	9592	10395	9592	8876
40°	7988	9826	7988	8487
45°	7133	9160	7133	8039
50°	7572	8364	7572	7590
55°	7118	7508	7118	7331
60°	7328	6376	7328	6714
65°	6634	5271	6634	5892
70°	4581	4201	4581	4938
75°	4003	3105	4003	3719
80°	3203	2054	3203	2236
85°	1806	1087	1806	925

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 20°

Vertical Angle: 45°

Luminance: 10940 cd/sqm

TEST NUMBER: P934090

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-W2A-W-6-4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	180.6	2.7
10°-20°	512.7	7.8
20°-30°	792.5	12.1
30°-40°	946.1	14.4
40°-50°	951.6	14.5
50°-60°	828.0	12.6
60°-70°	587.1	8.9
70°-80°	310.6	4.7
80°-90°	78.2	1.2
90°-100°	104.2	1.6
100°-110°	274.0	4.2
110°-120°	284.1	4.3
120°-130°	227.9	3.5
130°-140°	178.8	2.7
140°-150°	137.2	2.1
150°-160°	98.8	1.5
160°-170°	60.5	0.9
170°-180°	20.4	0.3
0°-30°	1485.8	22.6
0°-40°	2431.9	37.0
0°-60°	4211.6	64.1
0°-90°	5187.4	78.9
90°-120°	662.2	10.1
90°-150°	1206.1	18.3
90°-180°	1386.0	21.1
0°-180°	6573.3	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	2000	2000	2000	2000	2000	
5°	2010	2072	2010	1629	2010	191
15°	1919	2053	1919	1715	1919	540
25°	1690	1915	1690	1677	1690	776
35°	1285	1709	1285	1459	1285	795
45°	829	1408	829	1236	829	664
55°	676	1039	676	1014	676	621
65°	469	626	469	700	469	449
75°	178	297	178	356	178	187
85°	30	76	30	64	30	41
90°	1	5	1	5	1	2
95°	14	63	14	63	14	15
105°	49	429	49	429	49	52
115°	88	552	88	552	88	87
125°	122	440	122	440	122	108
135°	145	341	145	341	145	112
145°	169	277	169	277	169	106
155°	190	238	190	238	190	88
165°	206	222	206	222	206	58
175°	214	215	214	215	214	20
180°	214	214	214	214	214	

TEST NUMBER: P934090

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-W2A-W-6-4000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3
2.5°	2017.4	2017.4	2028.8	2032.5	2032.5	2026.9	2021.2	2026.9	2043.9	2049.6	2047.7
5°	2009.8	2025.0	2045.8	2049.6	2053.3	2051.4	2047.7	2051.4	2070.3	2074.2	2076.1
7.5°	1994.7	2023.1	2049.6	2055.3	2060.9	2055.3	2053.3	2057.2	2076.1	2079.9	2079.9
10°	1975.8	2015.5	2045.8	2049.6	2055.3	2049.6	2049.6	2057.2	2076.1	2079.9	2081.7
12.5°	1949.3	2004.2	2032.5	2036.3	2043.9	2042.0	2040.1	2047.7	2066.6	2070.3	2070.3
15°	1919.0	1983.3	2009.8	2013.6	2026.9	2023.1	2023.1	2030.6	2051.4	2057.2	2055.3
17.5°	1877.3	1956.8	1987.2	1992.8	2002.3	2000.3	2002.3	2009.8	2028.8	2032.5	2034.4
20°	1830.1	1920.9	1956.8	1962.5	1972.0	1972.0	1972.0	1981.4	2000.3	2008.0	2008.0
22.5°	1765.7	1883.1	1920.9	1924.7	1936.1	1936.1	1939.8	1953.1	1970.1	1972.0	1972.0
25°	1690.0	1841.4	1873.6	1884.9	1896.2	1902.0	1907.6	1915.3	1920.9	1919.0	1920.9
27.5°	1610.5	1788.4	1830.1	1837.6	1852.8	1858.4	1866.0	1867.9	1869.8	1875.4	1871.7
30°	1521.6	1714.6	1777.1	1784.6	1809.2	1813.0	1805.4	1809.2	1818.7	1822.5	1826.2
32.5°	1421.2	1604.9	1722.2	1739.2	1761.9	1750.5	1748.7	1754.3	1769.5	1769.5	1773.2
35°	1285.0	1519.7	1671.1	1686.2	1703.2	1690.0	1697.6	1699.4	1708.9	1714.6	1712.7
37.5°	1135.5	1445.9	1618.1	1629.4	1642.7	1625.7	1637.0	1642.7	1650.2	1646.5	1646.5
40°	1003.0	1330.4	1555.6	1563.2	1574.6	1561.3	1572.7	1576.4	1580.2	1576.4	1574.6
42.5°	904.6	1203.6	1489.4	1498.9	1491.3	1500.8	1504.5	1512.1	1506.4	1498.9	1498.9
45°	828.9	1169.6	1417.5	1428.9	1417.5	1432.6	1438.3	1438.3	1421.2	1417.5	1415.6
47.5°	804.3	1101.4	1345.6	1345.6	1339.9	1358.8	1368.2	1355.0	1338.0	1332.3	1332.3
50°	802.4	1025.8	1247.1	1239.6	1266.0	1288.8	1279.3	1266.0	1252.9	1232.0	1232.0
52.5°	728.6	933.0	1120.3	1148.8	1190.4	1203.6	1188.5	1175.2	1152.5	1143.0	1135.5
55°	675.7	836.5	1004.9	1061.7	1105.2	1122.2	1093.9	1080.6	1046.6	1040.9	1037.1
57.5°	664.3	696.5	898.9	970.9	1023.9	1021.9	1004.9	980.3	951.9	946.2	944.4
60°	609.4	503.4	785.4	870.6	925.4	919.8	904.6	881.9	855.4	851.7	847.8
62.5°	552.6	365.3	656.7	753.2	830.8	828.9	815.7	781.6	762.7	753.2	745.7
65°	469.4	306.6	467.5	626.4	738.1	741.8	713.5	688.8	668.0	656.7	654.8
67.5°	357.6	249.8	316.0	522.3	649.1	645.4	609.4	598.0	571.6	565.8	554.5
70°	264.9	166.6	219.6	423.9	562.1	552.6	524.2	511.0	486.4	473.1	465.6
72.5°	219.6	134.4	160.8	329.3	473.1	461.7	437.2	422.0	401.2	389.8	382.3
75°	177.9	141.9	123.0	244.1	384.2	376.7	353.9	338.7	321.7	306.6	308.5
77.5°	130.5	132.5	98.4	179.8	304.6	293.4	280.1	261.2	253.6	238.5	238.5
80°	98.4	104.1	73.8	123.0	219.6	219.6	208.2	194.9	181.6	174.1	174.1
82.5°	66.3	66.3	54.9	77.5	149.6	143.8	136.3	132.5	124.9	121.1	121.1
85°	30.3	37.8	34.1	47.3	81.4	85.2	85.2	81.4	79.5	75.7	77.5
87.5°	9.5	17.0	20.8	26.5	41.6	43.5	45.5	45.5	45.5	47.3	47.3
90°	1.4	2.6	3.7	4.0	6.3	9.4	10.9	9.6	7.3	5.4	5.4
92.5°	5.7	15.5	25.2	27.7	39.0	54.0	61.4	53.8	38.6	27.2	26.2
95°	13.8	31.6	49.5	54.0	95.8	151.6	179.4	160.2	121.5	92.5	89.3
97.5°	23.8	39.5	55.3	59.2	129.0	222.0	268.5	256.3	232.0	213.6	207.4
100°	31.6	45.8	60.2	63.7	141.1	244.4	296.0	296.8	298.6	300.0	292.5
102.5°	38.2	51.6	64.8	68.2	146.7	251.4	303.7	319.3	350.4	373.8	367.4
105°	49.4	60.6	71.9	74.8	150.8	252.1	302.8	337.7	407.5	459.8	456.4
107.5°	60.8	71.3	81.8	84.5	151.6	240.9	285.6	334.3	431.7	504.6	505.5
110°	68.6	78.1	87.6	90.0	150.4	231.0	271.3	325.8	434.5	516.1	519.6

TEST NUMBER: P934090

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-W2A-W-6-4000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	76.2	85.3	94.3	96.6	150.4	222.3	258.2	313.9	425.3	508.7	514.2
115°	87.7	96.1	104.4	106.5	151.8	212.3	242.6	296.2	403.5	483.9	491.5
117.5°	99.0	106.6	114.1	116.0	154.6	206.1	231.9	280.3	377.0	449.6	458.0
120°	105.6	112.8	119.9	121.7	157.0	204.1	227.6	271.8	360.2	426.6	434.8
122.5°	112.0	119.3	126.4	128.3	160.2	202.9	224.2	264.1	343.7	403.5	411.6
125°	122.0	128.5	135.1	136.8	164.7	202.1	220.7	254.5	322.2	372.9	380.4
127.5°	130.0	136.6	143.2	144.9	169.1	201.5	217.6	246.7	304.8	348.4	354.7
130°	134.3	141.4	148.5	150.3	172.4	201.8	216.5	242.4	294.0	332.8	338.6
132.5°	138.8	145.9	153.0	154.8	175.1	202.1	215.5	238.7	285.0	319.6	324.8
135°	145.4	151.8	158.3	160.0	177.9	201.9	213.8	233.2	272.0	301.0	305.5
137.5°	152.1	158.5	164.9	166.6	182.2	203.1	213.5	230.0	262.7	287.3	290.9
140°	157.7	163.6	169.5	171.0	184.9	203.3	212.5	226.6	255.0	276.2	279.6
142.5°	162.0	167.4	173.0	174.3	187.0	204.0	212.5	224.9	249.8	268.5	271.4
145°	168.6	173.3	178.1	179.3	189.9	204.0	211.1	221.2	241.5	256.8	259.0
147.5°	175.1	179.8	184.5	185.7	194.2	205.4	211.1	219.1	235.0	247.1	248.9
150°	179.4	183.6	187.9	189.0	196.3	206.2	211.1	217.8	231.3	241.4	243.0
152.5°	183.9	187.1	190.3	191.1	197.8	206.7	211.1	216.8	228.3	237.0	238.2
155°	190.5	192.9	195.3	195.9	200.9	207.7	211.1	215.6	224.8	231.7	232.4
157.5°	195.4	197.7	200.0	200.5	204.1	208.8	211.1	214.6	221.8	227.1	227.7
160°	198.7	200.5	202.3	202.7	205.5	209.2	211.1	214.1	220.2	224.8	225.1
162.5°	202.0	203.3	204.7	205.0	207.0	209.7	211.1	213.6	218.8	222.7	223.0
165°	205.6	206.8	208.0	208.3	209.2	210.5	211.1	212.9	216.6	219.4	219.6
167.5°	208.9	209.4	210.0	210.2	211.0	212.0	212.5	213.7	216.1	217.9	218.0
170°	211.1	211.6	212.2	212.3	212.4	212.5	212.5	213.7	216.1	217.9	217.9
172.5°	212.2	212.3	212.5	212.5	212.5	212.5	212.5	213.4	215.4	216.8	216.7
175°	213.8	213.8	213.8	213.8	213.3	212.8	212.5	213.1	214.3	215.3	215.3
177.5°	213.8	213.8	213.8	213.8	213.4	213.0	212.8	213.3	214.2	215.0	214.9
180°	213.8	213.8	213.8	213.8	213.8	213.8	213.8	213.8	213.8	213.8	213.8

TEST NUMBER: P934090

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-W2A-W-6-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°	100°	110°	112.5°	120°	130°	135°	140°	150°	157.5°
0°	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3
2.5°	2051.4	2045.8	2051.4	2047.7	2049.6	2043.9	2026.9	2021.2	2026.9	2032.5	2032.5
5°	2076.1	2072.3	2076.1	2076.1	2074.2	2070.3	2051.4	2047.7	2051.4	2053.3	2049.6
7.5°	2083.6	2078.0	2083.6	2079.9	2079.9	2076.1	2057.2	2053.3	2055.3	2060.9	2055.3
10°	2083.6	2078.0	2083.6	2081.7	2079.9	2076.1	2057.2	2049.6	2049.6	2055.3	2049.6
12.5°	2074.2	2070.3	2074.2	2070.3	2070.3	2066.6	2047.7	2040.1	2042.0	2043.9	2036.3
15°	2059.1	2053.3	2059.1	2055.3	2057.2	2051.4	2030.6	2023.1	2023.1	2026.9	2013.6
17.5°	2036.3	2028.8	2036.3	2034.4	2032.5	2028.8	2009.8	2002.3	2000.3	2002.3	1992.8
20°	2009.8	2004.2	2009.8	2008.0	2008.0	2000.3	1981.4	1972.0	1972.0	1972.0	1962.5
22.5°	1968.2	1962.5	1968.2	1972.0	1972.0	1970.1	1953.1	1939.8	1936.1	1936.1	1924.7
25°	1920.9	1915.3	1920.9	1920.9	1919.0	1920.9	1915.3	1907.6	1902.0	1896.2	1884.9
27.5°	1875.4	1871.7	1875.4	1871.7	1875.4	1869.8	1867.9	1866.0	1858.4	1852.8	1837.6
30°	1830.1	1826.2	1830.1	1826.2	1822.5	1818.7	1809.2	1805.4	1813.0	1809.2	1784.6
32.5°	1773.2	1769.5	1773.2	1773.2	1769.5	1769.5	1754.3	1748.7	1750.5	1761.9	1739.2
35°	1714.6	1708.9	1714.6	1712.7	1714.6	1708.9	1699.4	1697.6	1690.0	1703.2	1686.2
37.5°	1646.5	1640.8	1646.5	1646.5	1646.5	1650.2	1642.7	1637.0	1625.7	1642.7	1629.4
40°	1576.4	1568.9	1576.4	1574.6	1576.4	1580.2	1576.4	1572.7	1561.3	1574.6	1563.2
42.5°	1497.0	1495.1	1497.0	1498.9	1498.9	1506.4	1512.1	1504.5	1500.8	1491.3	1498.9
45°	1411.8	1408.1	1411.8	1415.6	1417.5	1421.2	1438.3	1438.3	1432.6	1417.5	1428.9
47.5°	1321.0	1311.5	1321.0	1332.3	1332.3	1338.0	1355.0	1368.2	1358.8	1339.9	1345.6
50°	1224.4	1226.3	1224.4	1232.0	1232.0	1252.9	1266.0	1279.3	1288.8	1266.0	1239.6
52.5°	1129.9	1128.0	1129.9	1135.5	1143.0	1152.5	1175.2	1188.5	1203.6	1190.4	1148.8
55°	1035.2	1038.9	1035.2	1037.1	1040.9	1046.6	1080.6	1093.9	1122.2	1105.2	1061.7
57.5°	940.6	934.8	940.6	944.4	946.2	951.9	980.3	1004.9	1021.9	1023.9	970.9
60°	830.8	823.2	830.8	847.8	851.7	855.4	881.9	904.6	919.8	925.4	870.6
62.5°	734.3	721.0	734.3	745.7	753.2	762.7	781.6	815.7	828.9	830.8	753.2
65°	632.1	626.4	632.1	654.8	656.7	668.0	688.8	713.5	741.8	738.1	626.4
67.5°	539.4	539.4	539.4	554.5	565.8	571.6	598.0	609.4	645.4	649.1	522.3
70°	454.2	452.3	454.2	465.6	473.1	486.4	511.0	524.2	552.6	562.1	423.9
72.5°	372.8	370.9	372.8	382.3	389.8	401.2	422.0	437.2	461.7	473.1	329.3
75°	300.9	297.1	300.9	308.5	306.6	321.7	338.7	353.9	376.7	384.2	244.1
77.5°	230.9	230.9	230.9	238.5	238.5	253.6	261.2	280.1	293.4	304.6	179.8
80°	172.2	170.4	172.2	174.1	174.1	181.6	194.9	208.2	219.6	219.6	123.0
82.5°	121.1	117.4	121.1	121.1	121.1	124.9	132.5	136.3	143.8	149.6	77.5
85°	75.7	75.7	75.7	77.5	75.7	79.5	81.4	85.2	85.2	81.4	47.3
87.5°	49.2	47.3	49.2	47.3	47.3	45.5	45.5	45.5	43.5	41.6	26.5
90°	5.4	5.4	5.4	5.4	5.4	7.3	9.6	10.9	9.4	6.3	4.0
92.5°	21.8	17.5	21.8	26.2	27.2	38.6	53.8	61.4	54.0	39.0	27.7
95°	76.1	63.0	76.1	89.3	92.5	121.5	160.2	179.4	151.6	95.8	54.0
97.5°	182.4	157.4	182.4	207.4	213.6	232.0	256.3	268.5	222.0	129.0	59.2
100°	262.8	233.0	262.8	292.5	300.0	298.6	296.8	296.0	244.4	141.1	63.7
102.5°	341.9	316.4	341.9	367.4	373.8	350.4	319.3	303.7	251.4	146.7	68.2
105°	442.7	429.0	442.7	456.4	459.8	407.5	337.7	302.8	252.1	150.8	74.8
107.5°	508.7	512.1	508.7	505.5	504.6	431.7	334.3	285.6	240.9	151.6	84.5
110°	533.9	548.3	533.9	519.6	516.1	434.5	325.8	271.3	231.0	150.4	90.0

TEST NUMBER: P934090

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-W2A-W-6-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°	100°	110°	112.5°	120°	130°	135°	140°	150°	157.5°
112.5°	536.1	558.1	536.1	514.2	508.7	425.3	313.9	258.2	222.3	150.4	96.6
115°	521.9	552.4	521.9	491.5	483.9	403.5	296.2	242.6	212.3	151.8	106.5
117.5°	491.8	525.5	491.8	458.0	449.6	377.0	280.3	231.9	206.1	154.6	116.0
120°	467.6	500.3	467.6	434.8	426.6	360.2	271.8	227.6	204.1	157.0	121.7
122.5°	443.9	476.2	443.9	411.6	403.5	343.7	264.1	224.2	202.9	160.2	128.3
125°	410.1	439.9	410.1	380.4	372.9	322.2	254.5	220.7	202.1	164.7	136.8
127.5°	379.8	404.9	379.8	354.7	348.4	304.8	246.7	217.6	201.5	169.1	144.9
130°	361.8	385.1	361.8	338.6	332.8	294.0	242.4	216.5	201.8	172.4	150.3
132.5°	345.6	366.4	345.6	324.8	319.6	285.0	238.7	215.5	202.1	175.1	154.8
135°	323.4	341.3	323.4	305.5	301.0	272.0	233.2	213.8	201.9	177.9	160.0
137.5°	305.6	320.2	305.6	290.9	287.3	262.7	230.0	213.5	203.1	182.2	166.6
140°	293.3	307.0	293.3	279.6	276.2	255.0	226.6	212.5	203.3	184.9	171.0
142.5°	283.2	295.0	283.2	271.4	268.5	249.8	224.9	212.5	204.0	187.0	174.3
145°	268.0	277.0	268.0	259.0	256.8	241.5	221.2	211.1	204.0	189.9	179.3
147.5°	256.3	263.7	256.3	248.9	247.1	235.0	219.1	211.1	205.4	194.2	185.7
150°	249.0	255.0	249.0	243.0	241.4	231.3	217.8	211.1	206.2	196.3	189.0
152.5°	242.7	247.2	242.7	238.2	237.0	228.3	216.8	211.1	206.7	197.8	191.1
155°	235.4	238.5	235.4	232.4	231.7	224.8	215.6	211.1	207.7	200.9	195.9
157.5°	229.8	231.9	229.8	227.7	227.1	221.8	214.6	211.1	208.8	204.1	200.5
160°	226.3	227.6	226.3	225.1	224.8	220.2	214.1	211.1	209.2	205.5	202.7
162.5°	224.1	225.3	224.1	223.0	222.7	218.8	213.6	211.1	209.7	207.0	205.0
165°	220.9	222.1	220.9	219.6	219.4	216.6	212.9	211.1	210.5	209.2	208.3
167.5°	218.6	219.1	218.6	218.0	217.9	216.1	213.7	212.5	212.0	211.0	210.2
170°	217.9	217.9	217.9	217.9	217.9	216.1	213.7	212.5	212.5	212.4	212.3
172.5°	216.2	215.8	216.2	216.7	216.8	215.4	213.4	212.5	212.5	212.5	212.5
175°	215.3	215.3	215.3	215.3	215.3	214.3	213.1	212.5	212.8	213.3	213.8
177.5°	214.3	213.8	214.3	214.9	215.0	214.2	213.3	212.8	213.0	213.4	213.8
180°	213.8	213.8	213.8	213.8	213.8	213.8	213.8	213.8	213.8	213.8	213.8

TEST NUMBER: P934090

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-W2A-W-6-4000K

CANDELA DISTRIBUTION (continued):

	160°	170°	180°	190°	200°	202.5°	210°	220°	225°	230°	240°
0°	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3
2.5°	2028.8	2017.4	2017.4	1998.4	1990.9	1985.3	1975.8	1947.3	1939.8	1932.3	1943.6
5°	2045.8	2025.0	2009.8	1975.8	1947.3	1936.1	1900.1	1832.0	1786.5	1752.4	1733.5
7.5°	2049.6	2023.1	1994.7	1941.7	1873.6	1843.2	1733.5	1608.6	1574.6	1544.2	1525.3
10°	2045.8	2015.5	1975.8	1896.2	1735.4	1682.4	1572.7	1491.3	1470.5	1464.8	1470.5
12.5°	2032.5	2004.2	1949.3	1816.8	1591.6	1555.6	1491.3	1444.0	1440.2	1449.7	1500.8
15°	2009.8	1983.3	1919.0	1710.8	1512.1	1485.6	1440.2	1423.1	1444.0	1510.2	1663.5
17.5°	1987.2	1956.8	1877.3	1606.7	1451.5	1432.6	1400.4	1434.5	1551.9	1640.8	1691.9
20°	1956.8	1920.9	1830.1	1531.1	1408.1	1391.0	1375.9	1529.1	1618.1	1650.2	1678.6
22.5°	1920.9	1883.1	1765.7	1478.1	1362.6	1349.3	1358.8	1582.1	1618.1	1640.8	1665.4
25°	1873.6	1841.4	1690.0	1436.4	1326.7	1311.5	1347.5	1576.4	1597.2	1603.0	1652.2
27.5°	1830.1	1788.4	1610.5	1398.6	1283.1	1277.4	1357.0	1551.9	1567.0	1572.7	1625.7
30°	1777.1	1714.6	1521.6	1358.8	1237.7	1235.8	1358.8	1521.6	1517.8	1533.0	1585.9
32.5°	1722.2	1604.9	1421.2	1309.6	1194.1	1192.3	1345.6	1476.1	1472.3	1493.1	1533.0
35°	1671.1	1519.7	1285.0	1252.9	1139.3	1141.1	1313.4	1423.1	1425.1	1444.0	1468.6
37.5°	1618.1	1445.9	1135.5	1190.4	1086.3	1086.3	1269.9	1374.0	1370.1	1375.9	1409.9
40°	1555.6	1330.4	1003.0	1109.0	1037.1	1031.4	1216.9	1321.0	1307.7	1305.9	1353.1
42.5°	1489.4	1203.6	904.6	1001.1	980.3	972.8	1152.5	1256.6	1232.0	1237.7	1298.2
45°	1417.5	1169.6	828.9	845.9	921.7	915.9	1082.5	1182.8	1165.8	1181.0	1243.4
47.5°	1345.6	1101.4	804.3	702.1	859.2	857.3	1004.9	1110.9	1101.4	1116.6	1182.8
50°	1247.1	1025.8	802.4	601.8	789.2	796.8	912.2	1040.9	1040.9	1054.1	1124.1
52.5°	1120.3	933.0	728.6	545.0	707.8	730.5	830.8	980.3	984.1	997.3	1059.8
55°	1004.9	836.5	675.7	501.5	611.3	660.5	751.3	917.9	925.4	938.7	995.5
57.5°	898.9	696.5	664.3	450.4	522.3	569.7	681.3	857.3	861.1	872.5	927.3
60°	785.4	503.4	609.4	395.6	444.7	480.7	616.9	785.4	798.7	806.2	853.5
62.5°	656.7	365.3	552.6	357.6	406.9	414.5	563.9	717.3	734.3	739.9	768.4
65°	467.5	306.6	469.4	325.5	367.1	369.0	507.2	647.2	662.4	671.8	692.7
67.5°	316.0	249.8	357.6	295.2	336.8	338.7	452.3	565.8	586.7	594.2	607.5
70°	219.6	166.6	264.9	263.1	302.8	306.6	393.7	492.0	511.0	516.7	524.2
72.5°	160.8	134.4	219.6	236.6	266.8	270.6	333.1	408.7	427.7	433.4	437.2
75°	123.0	141.9	177.9	206.3	227.1	229.0	272.6	333.1	346.3	350.1	352.0
77.5°	98.4	132.5	130.5	166.6	185.5	181.6	213.8	257.4	268.7	268.7	268.7
80°	73.8	104.1	98.4	119.2	136.3	132.5	153.3	183.6	187.4	191.1	189.3
82.5°	54.9	66.3	66.3	75.7	90.8	87.1	102.2	119.2	119.2	119.2	123.0
85°	34.1	37.8	30.3	39.7	51.1	49.2	56.8	64.4	66.3	66.3	62.5
87.5°	20.8	17.0	9.5	15.2	22.7	22.7	26.5	28.4	26.5	26.5	26.5
90°	3.7	2.6	1.4	2.6	3.7	4.0	6.3	9.4	10.9	9.6	7.3
92.5°	25.2	15.5	5.7	15.5	25.2	27.7	39.0	54.0	61.4	53.8	38.6
95°	49.5	31.6	13.8	31.6	49.5	54.0	95.8	151.6	179.4	160.2	121.5
97.5°	55.3	39.5	23.8	39.5	55.3	59.2	129.0	222.0	268.5	256.3	232.0
100°	60.2	45.8	31.6	45.8	60.2	63.7	141.1	244.4	296.0	296.8	298.6
102.5°	64.8	51.6	38.2	51.6	64.8	68.2	146.7	251.4	303.7	319.3	350.4
105°	71.9	60.6	49.4	60.6	71.9	74.8	150.8	252.1	302.8	337.7	407.5
107.5°	81.8	71.3	60.8	71.3	81.8	84.5	151.6	240.9	285.6	334.3	431.7
110°	87.6	78.1	68.6	78.1	87.6	90.0	150.4	231.0	271.3	325.8	434.5

TEST NUMBER: P934090

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-W2A-W-6-4000K

CANDELA DISTRIBUTION (continued):

	160°	170°	180°	190°	200°	202.5°	210°	220°	225°	230°	240°
112.5°	94.3	85.3	76.2	85.3	94.3	96.6	150.4	222.3	258.2	313.9	425.3
115°	104.4	96.1	87.7	96.1	104.4	106.5	151.8	212.3	242.6	296.2	403.5
117.5°	114.1	106.6	99.0	106.6	114.1	116.0	154.6	206.1	231.9	280.3	377.0
120°	119.9	112.8	105.6	112.8	119.9	121.7	157.0	204.1	227.6	271.8	360.2
122.5°	126.4	119.3	112.0	119.3	126.4	128.3	160.2	202.9	224.2	264.1	343.7
125°	135.1	128.5	122.0	128.5	135.1	136.8	164.7	202.1	220.7	254.5	322.2
127.5°	143.2	136.6	130.0	136.6	143.2	144.9	169.1	201.5	217.6	246.7	304.8
130°	148.5	141.4	134.3	141.4	148.5	150.3	172.4	201.8	216.5	242.4	294.0
132.5°	153.0	145.9	138.8	145.9	153.0	154.8	175.1	202.1	215.5	238.7	285.0
135°	158.3	151.8	145.4	151.8	158.3	160.0	177.9	201.9	213.8	233.2	272.0
137.5°	164.9	158.5	152.1	158.5	164.9	166.6	182.2	203.1	213.5	230.0	262.7
140°	169.5	163.6	157.7	163.6	169.5	171.0	184.9	203.3	212.5	226.6	255.0
142.5°	173.0	167.4	162.0	167.4	173.0	174.3	187.0	204.0	212.5	224.9	249.8
145°	178.1	173.3	168.6	173.3	178.1	179.3	189.9	204.0	211.1	221.2	241.5
147.5°	184.5	179.8	175.1	179.8	184.5	185.7	194.2	205.4	211.1	219.1	235.0
150°	187.9	183.6	179.4	183.6	187.9	189.0	196.3	206.2	211.1	217.8	231.3
152.5°	190.3	187.1	183.9	187.1	190.3	191.1	197.8	206.7	211.1	216.8	228.3
155°	195.3	192.9	190.5	192.9	195.3	195.9	200.9	207.7	211.1	215.6	224.8
157.5°	200.0	197.7	195.4	197.7	200.0	200.5	204.1	208.8	211.1	214.6	221.8
160°	202.3	200.5	198.7	200.5	202.3	202.7	205.5	209.2	211.1	214.1	220.2
162.5°	204.7	203.3	202.0	203.3	204.7	205.0	207.0	209.7	211.1	213.6	218.8
165°	208.0	206.8	205.6	206.8	208.0	208.3	209.2	210.5	211.1	212.9	216.6
167.5°	210.0	209.4	208.9	209.4	210.0	210.2	211.0	212.0	212.5	213.7	216.1
170°	212.2	211.6	211.1	211.6	212.2	212.3	212.4	212.5	212.5	213.7	216.1
172.5°	212.5	212.3	212.2	212.3	212.5	212.5	212.5	212.5	212.5	213.4	215.4
175°	213.8	213.8	213.8	213.8	213.8	213.8	213.3	212.8	212.5	213.1	214.3
177.5°	213.8	213.8	213.8	213.8	213.8	213.8	213.4	213.0	212.8	213.3	214.2
180°	213.8	213.8	213.8	213.8	213.8	213.8	213.8	213.8	213.8	213.8	213.8

TEST NUMBER: P934090

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-W2A-W-6-4000K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	260°	270°	280°	290°	292.5°	300°	310°	315°	320°
0°	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3	2000.3
2.5°	1930.3	1924.7	1932.3	1911.4	1932.3	1924.7	1930.3	1943.6	1932.3	1939.8	1947.3
5°	1693.8	1684.3	1654.1	1629.4	1654.1	1684.3	1693.8	1733.5	1752.4	1786.5	1832.0
7.5°	1514.0	1506.4	1498.9	1483.7	1498.9	1506.4	1514.0	1525.3	1544.2	1574.6	1608.6
10°	1474.2	1476.1	1487.5	1485.6	1487.5	1476.1	1474.2	1470.5	1464.8	1470.5	1491.3
12.5°	1576.4	1593.5	1656.0	1652.2	1656.0	1593.5	1576.4	1500.8	1449.7	1440.2	1444.0
15°	1693.8	1699.4	1712.7	1714.6	1712.7	1699.4	1693.8	1663.5	1510.2	1444.0	1423.1
17.5°	1705.2	1707.1	1716.5	1716.5	1716.5	1707.1	1705.2	1691.9	1640.8	1551.9	1434.5
20°	1695.7	1699.4	1718.4	1722.2	1718.4	1699.4	1695.7	1678.6	1650.2	1618.1	1529.1
22.5°	1691.9	1699.4	1714.6	1712.7	1714.6	1699.4	1691.9	1665.4	1640.8	1618.1	1582.1
25°	1673.0	1673.0	1674.9	1676.8	1674.9	1673.0	1673.0	1652.2	1603.0	1597.2	1576.4
27.5°	1633.2	1637.0	1648.3	1646.5	1648.3	1637.0	1633.2	1625.7	1572.7	1567.0	1551.9
30°	1597.2	1593.5	1584.1	1576.4	1584.1	1593.5	1597.2	1585.9	1533.0	1517.8	1521.6
32.5°	1536.7	1527.2	1517.8	1512.1	1517.8	1527.2	1536.7	1533.0	1493.1	1472.3	1476.1
35°	1464.8	1466.7	1464.8	1459.1	1464.8	1466.7	1464.8	1468.6	1444.0	1425.1	1423.1
37.5°	1413.7	1417.5	1415.6	1408.1	1415.6	1417.5	1413.7	1409.9	1375.9	1370.1	1374.0
40°	1360.7	1362.6	1360.7	1355.0	1360.7	1362.6	1360.7	1353.1	1305.9	1307.7	1321.0
42.5°	1309.6	1307.7	1302.0	1298.2	1302.0	1307.7	1309.6	1298.2	1237.7	1232.0	1256.6
45°	1251.0	1252.9	1241.5	1235.8	1241.5	1252.9	1251.0	1243.4	1181.0	1165.8	1182.8
47.5°	1192.3	1192.3	1182.8	1177.1	1182.8	1192.3	1192.3	1182.8	1116.6	1101.4	1110.9
50°	1129.9	1128.0	1114.7	1112.8	1114.7	1128.0	1129.9	1124.1	1054.1	1040.9	1040.9
52.5°	1057.9	1057.9	1059.8	1063.6	1059.8	1057.9	1057.9	1059.8	997.3	984.1	980.3
55°	995.5	997.3	1010.6	1014.4	1010.6	997.3	995.5	995.5	938.7	925.4	917.9
57.5°	931.1	931.1	940.6	940.6	940.6	931.1	931.1	927.3	872.5	861.1	857.3
60°	857.3	861.1	868.7	866.8	868.7	861.1	857.3	853.5	806.2	798.7	785.4
62.5°	779.7	783.5	785.4	781.6	785.4	783.5	779.7	768.4	739.9	734.3	717.3
65°	698.3	702.1	704.0	700.2	704.0	702.1	698.3	692.7	671.8	662.4	647.2
67.5°	615.0	613.2	611.3	618.8	611.3	613.2	615.0	607.5	594.2	586.7	565.8
70°	529.9	529.9	528.0	531.7	528.0	529.9	529.9	524.2	516.7	511.0	492.0
72.5°	439.0	437.2	444.7	439.0	444.7	437.2	439.0	437.2	433.4	427.7	408.7
75°	350.1	353.9	350.1	355.8	350.1	353.9	350.1	352.0	350.1	346.3	333.1
77.5°	266.8	270.6	266.8	266.8	266.8	270.6	266.8	268.7	268.7	268.7	257.4
80°	189.3	187.4	187.4	185.5	187.4	187.4	189.3	189.3	191.1	187.4	183.6
82.5°	121.1	119.2	119.2	123.0	119.2	119.2	121.1	123.0	119.2	119.2	119.2
85°	66.3	68.1	64.4	64.4	64.4	68.1	66.3	62.5	66.3	66.3	64.4
87.5°	24.6	22.7	22.7	22.7	22.7	22.7	24.6	26.5	26.5	26.5	28.4
90°	5.4	5.4	5.4	5.4	5.4	5.4	5.4	7.3	9.6	10.9	9.4
92.5°	27.2	26.2	21.8	17.5	21.8	26.2	27.2	38.6	53.8	61.4	54.0
95°	92.5	89.3	76.1	63.0	76.1	89.3	92.5	121.5	160.2	179.4	151.6
97.5°	213.6	207.4	182.4	157.4	182.4	207.4	213.6	232.0	256.3	268.5	222.0
100°	300.0	292.5	262.8	233.0	262.8	292.5	300.0	298.6	296.8	296.0	244.4
102.5°	373.8	367.4	341.9	316.4	341.9	367.4	373.8	350.4	319.3	303.7	251.4
105°	459.8	456.4	442.7	429.0	442.7	456.4	459.8	407.5	337.7	302.8	252.1
107.5°	504.6	505.5	508.7	512.1	508.7	505.5	504.6	431.7	334.3	285.6	240.9
110°	516.1	519.6	533.9	548.3	533.9	519.6	516.1	434.5	325.8	271.3	231.0

TEST NUMBER: P934090

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-W2A-W-6-4000K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	260°	270°	280°	290°	292.5°	300°	310°	315°	320°
112.5°	508.7	514.2	536.1	558.1	536.1	514.2	508.7	425.3	313.9	258.2	222.3
115°	483.9	491.5	521.9	552.4	521.9	491.5	483.9	403.5	296.2	242.6	212.3
117.5°	449.6	458.0	491.8	525.5	491.8	458.0	449.6	377.0	280.3	231.9	206.1
120°	426.6	434.8	467.6	500.3	467.6	434.8	426.6	360.2	271.8	227.6	204.1
122.5°	403.5	411.6	443.9	476.2	443.9	411.6	403.5	343.7	264.1	224.2	202.9
125°	372.9	380.4	410.1	439.9	410.1	380.4	372.9	322.2	254.5	220.7	202.1
127.5°	348.4	354.7	379.8	404.9	379.8	354.7	348.4	304.8	246.7	217.6	201.5
130°	332.8	338.6	361.8	385.1	361.8	338.6	332.8	294.0	242.4	216.5	201.8
132.5°	319.6	324.8	345.6	366.4	345.6	324.8	319.6	285.0	238.7	215.5	202.1
135°	301.0	305.5	323.4	341.3	323.4	305.5	301.0	272.0	233.2	213.8	201.9
137.5°	287.3	290.9	305.6	320.2	305.6	290.9	287.3	262.7	230.0	213.5	203.1
140°	276.2	279.6	293.3	307.0	293.3	279.6	276.2	255.0	226.6	212.5	203.3
142.5°	268.5	271.4	283.2	295.0	283.2	271.4	268.5	249.8	224.9	212.5	204.0
145°	256.8	259.0	268.0	277.0	268.0	259.0	256.8	241.5	221.2	211.1	204.0
147.5°	247.1	248.9	256.3	263.7	256.3	248.9	247.1	235.0	219.1	211.1	205.4
150°	241.4	243.0	249.0	255.0	249.0	243.0	241.4	231.3	217.8	211.1	206.2
152.5°	237.0	238.2	242.7	247.2	242.7	238.2	237.0	228.3	216.8	211.1	206.7
155°	231.7	232.4	235.4	238.5	235.4	232.4	231.7	224.8	215.6	211.1	207.7
157.5°	227.1	227.7	229.8	231.9	229.8	227.7	227.1	221.8	214.6	211.1	208.8
160°	224.8	225.1	226.3	227.6	226.3	225.1	224.8	220.2	214.1	211.1	209.2
162.5°	222.7	223.0	224.1	225.3	224.1	223.0	222.7	218.8	213.6	211.1	209.7
165°	219.4	219.6	220.9	222.1	220.9	219.6	219.4	216.6	212.9	211.1	210.5
167.5°	217.9	218.0	218.6	219.1	218.6	218.0	217.9	216.1	213.7	212.5	212.0
170°	217.9	217.9	217.9	217.9	217.9	217.9	217.9	216.1	213.7	212.5	212.5
172.5°	216.8	216.7	216.2	215.8	216.2	216.7	216.8	215.4	213.4	212.5	212.5
175°	215.3	215.3	215.3	215.3	215.3	215.3	215.3	214.3	213.1	212.5	212.8
177.5°	215.0	214.9	214.3	213.8	214.3	214.9	215.0	214.2	213.3	212.8	213.0
180°	213.8	213.8	213.8	213.8	213.8	213.8	213.8	213.8	213.8	213.8	213.8

TEST NUMBER: P934090

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-W2A-W-6-4000K

CANDELA DISTRIBUTION (continued):

	330°	337.5°	340°	350°	360°
0°	2000.3	2000.3	2000.3	2000.3	2000.3
2.5°	1975.8	1985.3	1990.9	1998.4	2017.4
5°	1900.1	1936.1	1947.3	1975.8	2009.8
7.5°	1733.5	1843.2	1873.6	1941.7	1994.7
10°	1572.7	1682.4	1735.4	1896.2	1975.8
12.5°	1491.3	1555.6	1591.6	1816.8	1949.3
15°	1440.2	1485.6	1512.1	1710.8	1919.0
17.5°	1400.4	1432.6	1451.5	1606.7	1877.3
20°	1375.9	1391.0	1408.1	1531.1	1830.1
22.5°	1358.8	1349.3	1362.6	1478.1	1765.7
25°	1347.5	1311.5	1326.7	1436.4	1690.0
27.5°	1357.0	1277.4	1283.1	1398.6	1610.5
30°	1358.8	1235.8	1237.7	1358.8	1521.6
32.5°	1345.6	1192.3	1194.1	1309.6	1421.2
35°	1313.4	1141.1	1139.3	1252.9	1285.0
37.5°	1269.9	1086.3	1086.3	1190.4	1135.5
40°	1216.9	1031.4	1037.1	1109.0	1003.0
42.5°	1152.5	972.8	980.3	1001.1	904.6
45°	1082.5	915.9	921.7	845.9	828.9
47.5°	1004.9	857.3	859.2	702.1	804.3
50°	912.2	796.8	789.2	601.8	802.4
52.5°	830.8	730.5	707.8	545.0	728.6
55°	751.3	660.5	611.3	501.5	675.7
57.5°	681.3	569.7	522.3	450.4	664.3
60°	616.9	480.7	444.7	395.6	609.4
62.5°	563.9	414.5	406.9	357.6	552.6
65°	507.2	369.0	367.1	325.5	469.4
67.5°	452.3	338.7	336.8	295.2	357.6
70°	393.7	306.6	302.8	263.1	264.9
72.5°	333.1	270.6	266.8	236.6	219.6
75°	272.6	229.0	227.1	206.3	177.9
77.5°	213.8	181.6	185.5	166.6	130.5
80°	153.3	132.5	136.3	119.2	98.4
82.5°	102.2	87.1	90.8	75.7	66.3
85°	56.8	49.2	51.1	39.7	30.3
87.5°	26.5	22.7	22.7	15.2	9.5
90°	6.3	4.0	3.7	2.6	1.4
92.5°	39.0	27.7	25.2	15.5	5.7
95°	95.8	54.0	49.5	31.6	13.8
97.5°	129.0	59.2	55.3	39.5	23.8
100°	141.1	63.7	60.2	45.8	31.6
102.5°	146.7	68.2	64.8	51.6	38.2
105°	150.8	74.8	71.9	60.6	49.4
107.5°	151.6	84.5	81.8	71.3	60.8
110°	150.4	90.0	87.6	78.1	68.6



TEST NUMBER: P934090

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-W2A-W-6-4000K

CANDELA DISTRIBUTION (continued):

	330°	337.5°	340°	350°	360°
112.5°	150.4	96.6	94.3	85.3	76.2
115°	151.8	106.5	104.4	96.1	87.7
117.5°	154.6	116.0	114.1	106.6	99.0
120°	157.0	121.7	119.9	112.8	105.6
122.5°	160.2	128.3	126.4	119.3	112.0
125°	164.7	136.8	135.1	128.5	122.0
127.5°	169.1	144.9	143.2	136.6	130.0
130°	172.4	150.3	148.5	141.4	134.3
132.5°	175.1	154.8	153.0	145.9	138.8
135°	177.9	160.0	158.3	151.8	145.4
137.5°	182.2	166.6	164.9	158.5	152.1
140°	184.9	171.0	169.5	163.6	157.7
142.5°	187.0	174.3	173.0	167.4	162.0
145°	189.9	179.3	178.1	173.3	168.6
147.5°	194.2	185.7	184.5	179.8	175.1
150°	196.3	189.0	187.9	183.6	179.4
152.5°	197.8	191.1	190.3	187.1	183.9
155°	200.9	195.9	195.3	192.9	190.5
157.5°	204.1	200.5	200.0	197.7	195.4
160°	205.5	202.7	202.3	200.5	198.7
162.5°	207.0	205.0	204.7	203.3	202.0
165°	209.2	208.3	208.0	206.8	205.6
167.5°	211.0	210.2	210.0	209.4	208.9
170°	212.4	212.3	212.2	211.6	211.1
172.5°	212.5	212.5	212.5	212.3	212.2
175°	213.3	213.8	213.8	213.8	213.8
177.5°	213.4	213.8	213.8	213.8	213.8
180°	213.8	213.8	213.8	213.8	213.8

TEST NUMBER: P934090

CATALOG NUMBER: SQ4-FA-025U-100D-B2750-1D-UNV-W2A-W-6-4000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.88	17.08	16.54	17.75	18.54	18.70	19.90	19.36	20.58	21.37
	3H	16.38	17.46	17.05	18.14	18.97	20.07	21.15	20.75	21.84	22.66
	4H	16.59	17.60	17.28	18.30	19.14	20.53	21.54	21.22	22.24	23.08
	6H	16.72	17.66	17.43	18.37	19.22	20.83	21.77	21.54	22.48	23.33
	8H	16.73	17.63	17.45	18.36	19.21	20.91	21.81	21.63	22.54	23.39
	12H	16.71	17.57	17.44	18.29	19.17	20.96	21.81	21.69	22.54	23.42
4H	2H	16.95	17.96	17.65	18.66	19.50	19.15	20.17	19.85	20.87	21.70
	3H	18.01	18.85	18.72	19.59	20.44	20.69	21.53	21.40	22.27	23.12
	4H	18.30	19.06	19.02	19.80	20.69	21.23	22.00	21.95	22.73	23.62
	6H	18.44	19.11	19.19	19.87	20.76	21.61	22.28	22.36	23.04	23.93
	8H	18.45	19.08	19.20	19.84	20.74	21.72	22.35	22.47	23.11	24.01
	12H	18.44	19.00	19.21	19.78	20.69	21.80	22.35	22.57	23.14	24.05
8H	4H	18.78	19.40	19.53	20.16	21.06	21.38	22.00	22.13	22.76	23.67
	6H	19.05	19.57	19.83	20.37	21.28	21.83	22.34	22.61	23.15	24.05
	8H	19.10	19.56	19.89	20.36	21.28	21.98	22.44	22.77	23.24	24.17
	12H	19.10	19.50	19.89	20.29	21.28	22.09	22.50	22.89	23.29	24.27
12H	4H	18.80	19.36	19.57	20.14	21.05	21.36	21.92	22.13	22.70	23.61
	6H	19.11	19.57	19.91	20.38	21.30	21.83	22.29	22.62	23.09	24.01
	8H	19.20	19.60	19.99	20.40	21.38	22.00	22.41	22.80	23.20	24.18

END OF REPORT