

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P934995

Luminaire Tested: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-4000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P934995
REPORT IS A COMBINATION OF REPORTS P933720 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-4000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Asymmetric Frosted Continuous I
Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14580.0 lumens
Efficiency: N/A
Efficacy: 117.6 lumens/watt
Spacing Criteria (0/90/45): 1.14 / 1.26 / 1.36
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 124
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P934995

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-4000K

Luminous Intensity Polar Plot

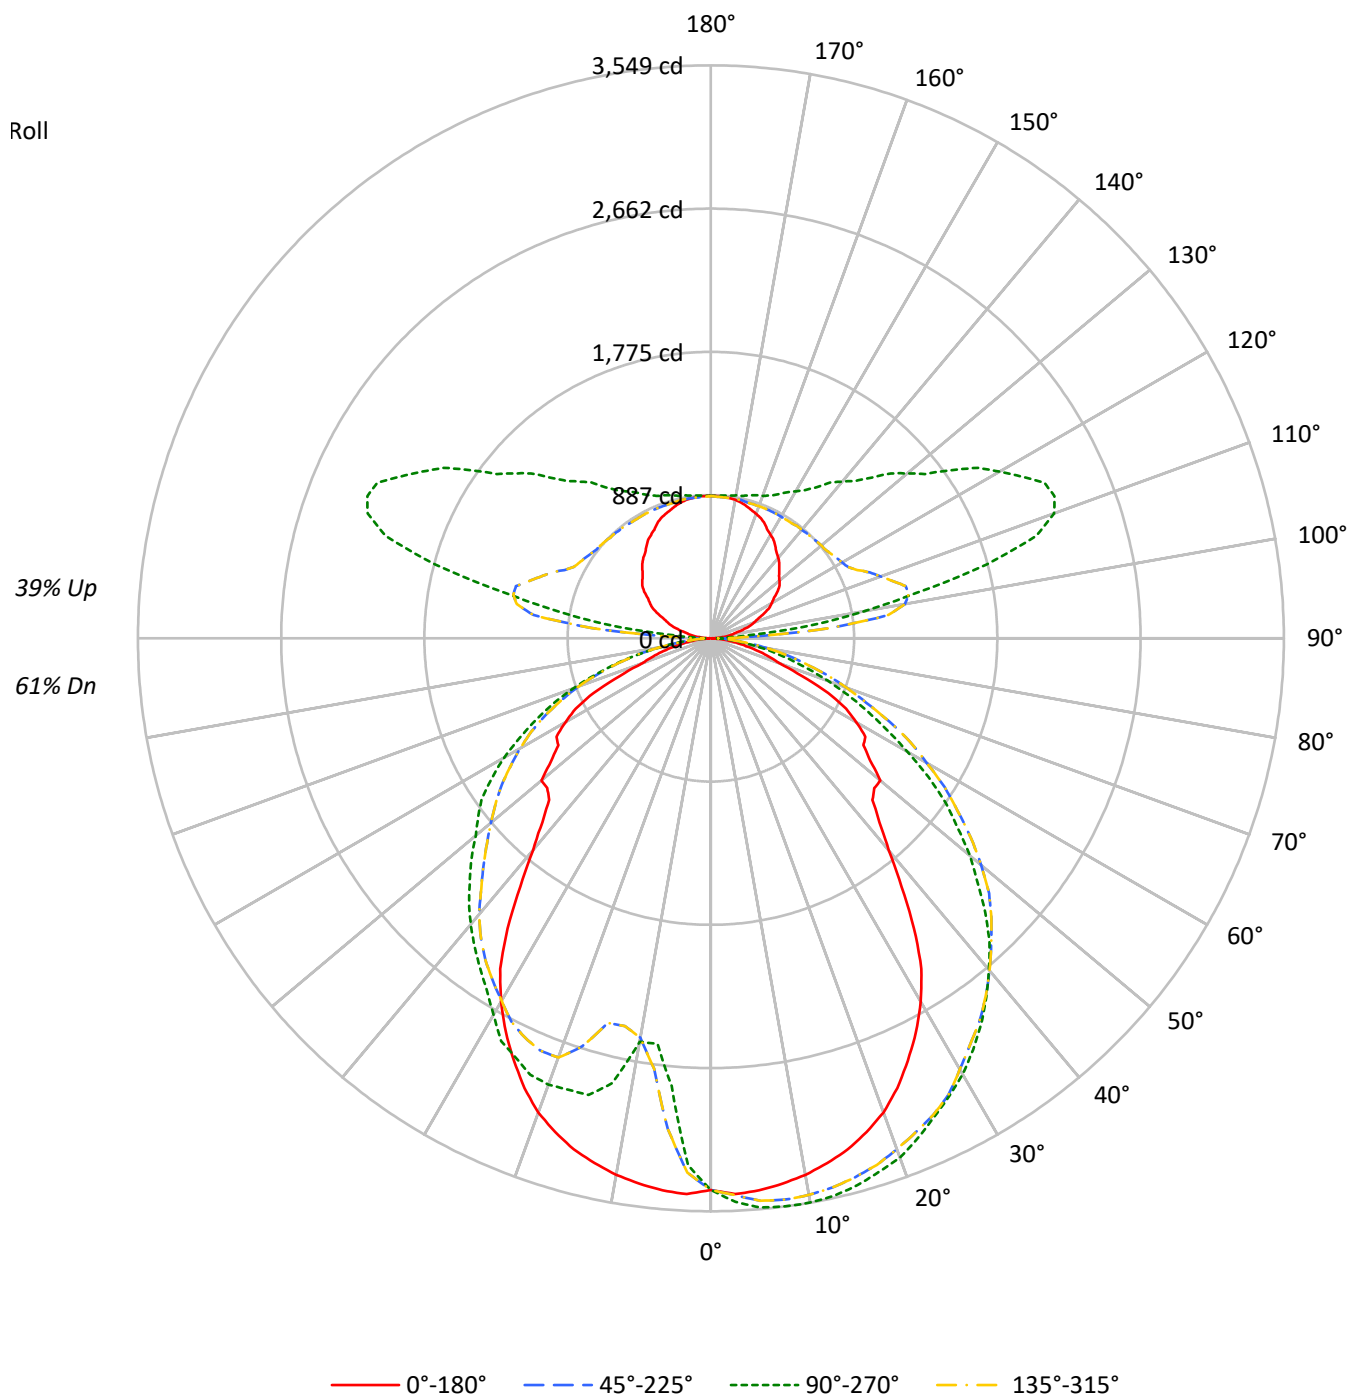

TEST NUMBER: P934995

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66	66	66	61
1	100	96	92	88	94	90	86	83	79	76	74	68	66	65	59	57	56	56	56	51
2	91	84	78	72	85	79	73	68	69	65	61	60	57	54	52	49	47	47	47	43
3	83	74	66	60	78	69	63	57	61	56	51	53	49	46	46	43	40	40	40	36
4	76	65	57	51	71	61	54	49	54	48	44	47	43	39	41	37	35	35	35	31
5	70	58	50	44	65	55	47	42	48	42	38	42	38	34	37	33	30	30	30	27
6	65	52	44	38	60	49	42	36	44	37	33	38	33	30	33	29	26	26	26	24
7	60	47	39	33	56	45	37	32	39	33	29	35	30	26	30	26	23	23	23	21
8	55	43	35	29	52	40	33	28	36	30	26	32	27	23	28	24	21	21	21	19
9	52	39	31	26	48	37	30	25	33	27	23	29	24	21	26	22	19	19	19	17
10	48	36	29	24	45	34	27	23	30	25	21	27	22	19	24	20	17	17	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	15850	15850	15850	15850
5°	15968	16000	15968	12581
10°	15862	15760	15862	11268
15°	15689	15419	15689	12875
20°	15361	15014	15361	12902
25°	14690	14425	14690	12629
30°	13822	13934	13822	12028
35°	12322	13315	12322	11369
40°	10267	12586	10267	10870
45°	9174	11732	9174	10297
50°	9746	10714	9746	9722
55°	9169	9617	9169	9389
60°	9452	8168	9452	8599
65°	8569	6752	8569	7548
70°	5935	5380	5935	6326
75°	5203	3977	5203	4763
80°	4194	2630	4194	2864
85°	2408	1393	2408	1184

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 20°

Vertical Angle: 45°

Luminance: 14060 cd/sqm

TEST NUMBER: P934995

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	308.4	2.1
10°-20°	875.6	6.0
20°-30°	1353.5	9.3
30°-40°	1615.7	11.1
40°-50°	1625.2	11.1
50°-60°	1414.1	9.7
60°-70°	1002.6	6.9
70°-80°	530.5	3.6
80°-90°	135.5	0.9
90°-100°	430.0	2.9
100°-110°	1130.6	7.8
110°-120°	1172.3	8.0
120°-130°	940.3	6.4
130°-140°	737.8	5.1
140°-150°	566.3	3.9
150°-160°	407.8	2.8
160°-170°	249.5	1.7
170°-180°	84.3	0.6
0°-30°	2537.4	17.4
0°-40°	4153.1	28.5
0°-60°	7192.4	49.3
0°-90°	8861.0	60.8
90°-120°	2732.9	18.7
90°-150°	4977.3	34.1
90°-180°	5719.0	39.2
0°-180°	14580.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	3416	3416	3416	3416	3416	
5°	3432	3539	3432	2783	3432	326
15°	3277	3507	3277	2928	3277	922
25°	2886	3271	2886	2864	2886	1325
35°	2194	2918	2194	2492	2194	1358
45°	1416	2405	1416	2110	1416	1134
55°	1154	1774	1154	1732	1154	1060
65°	802	1070	802	1196	802	766
75°	304	507	304	608	304	319
85°	52	129	52	110	52	70
90°	6	22	6	22	6	7
95°	57	260	57	260	57	63
105°	204	1770	204	1770	204	216
115°	362	2280	362	2280	362	357
125°	503	1815	503	1815	503	447
135°	600	1408	600	1408	600	464
145°	696	1143	696	1143	696	436
155°	786	984	786	984	786	361
165°	848	916	848	916	848	239
175°	882	888	882	888	882	84
180°	882	882	882	882	882	

TEST NUMBER: P934995

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-4000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2
2.5°	3445.3	3445.3	3464.6	3471.1	3471.1	3461.5	3451.8	3461.5	3490.5	3500.3	3497.0
5°	3432.4	3458.2	3493.8	3500.3	3506.7	3503.5	3497.0	3503.5	3535.8	3542.3	3545.5
7.5°	3406.5	3455.0	3500.3	3509.9	3519.7	3509.9	3506.7	3513.2	3545.5	3551.9	3551.9
10°	3374.2	3442.1	3493.8	3500.3	3509.9	3500.3	3500.3	3513.2	3545.5	3551.9	3555.2
12.5°	3328.9	3422.6	3471.1	3477.6	3490.5	3487.3	3484.1	3497.0	3529.3	3535.8	3535.8
15°	3277.3	3387.1	3432.4	3438.9	3461.5	3455.0	3455.0	3467.9	3503.5	3513.2	3509.9
17.5°	3206.1	3341.8	3393.6	3403.2	3419.5	3416.2	3419.5	3432.4	3464.6	3471.1	3474.4
20°	3125.3	3280.4	3341.8	3351.6	3367.7	3367.7	3367.7	3383.9	3416.2	3429.1	3429.1
22.5°	3015.4	3215.9	3280.4	3286.9	3306.3	3306.3	3312.8	3335.4	3364.5	3367.7	3367.7
25°	2886.2	3144.7	3199.6	3219.0	3238.4	3248.1	3257.9	3270.8	3280.4	3277.3	3280.4
27.5°	2750.4	3054.2	3125.3	3138.2	3164.1	3173.8	3186.7	3190.0	3193.2	3202.9	3196.4
30°	2598.6	2928.2	3034.8	3047.8	3089.8	3096.2	3083.3	3089.8	3105.9	3112.4	3118.8
32.5°	2427.2	2740.8	2941.1	2970.2	3009.0	2989.6	2986.4	2996.0	3021.9	3021.9	3028.4
35°	2194.5	2595.3	2853.8	2879.7	2908.7	2886.2	2899.1	2902.3	2918.5	2928.2	2925.0
37.5°	1939.2	2469.2	2763.4	2782.8	2805.4	2776.3	2795.7	2805.4	2818.3	2811.8	2811.8
40°	1713.0	2272.0	2656.7	2669.6	2689.0	2666.4	2685.7	2692.2	2698.7	2692.2	2689.0
42.5°	1544.9	2055.5	2543.5	2559.7	2546.8	2562.9	2569.4	2582.3	2572.7	2559.7	2559.7
45°	1415.6	1997.4	2420.7	2440.1	2420.7	2446.6	2456.4	2456.4	2427.2	2420.7	2417.5
47.5°	1373.6	1881.0	2297.9	2297.9	2288.3	2320.6	2336.7	2314.1	2285.0	2275.3	2275.3
50°	1370.3	1751.8	2129.8	2116.9	2162.2	2201.0	2184.8	2162.2	2139.6	2104.1	2104.1
52.5°	1244.3	1593.3	1913.3	1961.9	2032.9	2055.5	2029.7	2007.0	1968.3	1952.1	1939.2
55°	1153.8	1428.6	1716.2	1813.2	1887.5	1916.6	1868.1	1845.4	1787.3	1777.6	1771.1
57.5°	1134.4	1189.4	1535.2	1658.0	1748.5	1745.3	1716.2	1674.2	1625.7	1616.0	1612.8
60°	1040.7	859.7	1341.3	1486.7	1580.4	1570.8	1544.9	1506.1	1460.9	1454.4	1448.0
62.5°	943.7	623.8	1121.5	1286.3	1418.8	1415.6	1393.0	1334.8	1302.5	1286.3	1273.4
65°	801.5	523.6	798.3	1069.8	1260.5	1266.9	1218.5	1176.5	1140.8	1121.5	1118.3
67.5°	610.8	426.6	539.8	892.1	1108.6	1102.1	1040.7	1021.3	976.1	966.4	947.0
70°	452.5	284.4	374.9	724.0	959.9	943.7	895.2	872.7	830.7	808.0	795.0
72.5°	374.9	229.5	274.8	562.4	808.0	788.6	746.6	720.7	685.2	665.8	652.8
75°	303.8	242.4	210.1	417.0	656.1	643.2	604.4	578.5	549.4	523.6	526.8
77.5°	223.0	226.2	168.1	307.0	520.4	501.0	478.4	446.0	433.1	407.2	407.2
80°	168.1	177.7	126.1	210.1	374.9	374.9	355.5	332.9	310.3	297.4	297.4
82.5°	113.1	113.1	93.7	132.6	255.4	245.6	232.7	226.2	213.3	206.9	206.9
85°	51.7	64.7	58.2	80.8	139.0	145.4	145.4	139.0	135.7	129.3	132.6
87.5°	16.1	29.1	35.5	45.3	71.1	74.3	77.5	77.5	77.5	80.8	80.8
90°	5.9	10.7	15.5	16.6	26.1	38.7	45.0	40.0	30.0	22.5	22.5
92.5°	23.7	64.0	104.3	114.3	160.7	222.5	253.5	222.1	159.5	112.5	108.0
95°	56.8	130.5	204.2	222.6	395.3	625.5	740.7	661.0	501.5	381.9	368.3
97.5°	98.3	163.3	228.3	244.6	532.5	916.4	1108.4	1057.9	957.2	881.7	855.9
100°	130.3	189.2	248.2	262.9	582.5	1008.5	1221.4	1225.2	1232.5	1238.1	1207.3
102.5°	157.5	212.5	267.5	281.2	605.3	1037.4	1253.4	1317.6	1446.1	1542.4	1516.1
105°	203.7	250.3	296.8	308.5	622.3	1040.7	1249.9	1393.8	1681.7	1897.6	1883.5
107.5°	251.1	294.5	337.9	348.8	625.4	994.3	1178.9	1379.6	1781.2	2082.4	2085.8
110°	283.1	322.2	361.4	371.2	620.7	953.3	1119.6	1344.1	1793.0	2129.7	2144.5

TEST NUMBER: P934995

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-4000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	314.4	351.7	389.1	398.4	620.8	917.5	1065.8	1295.6	1755.0	2099.6	2122.2
115°	361.8	396.2	430.7	439.3	626.6	876.3	1001.2	1222.5	1665.1	1997.1	2028.5
117.5°	408.5	439.9	471.2	479.0	638.3	850.6	956.8	1156.5	1556.0	1855.6	1890.3
120°	435.8	465.2	494.7	502.0	647.7	841.9	939.1	1121.6	1486.6	1760.3	1794.1
122.5°	462.4	492.2	521.9	529.4	661.3	837.3	925.4	1089.8	1418.5	1664.9	1698.3
125°	503.3	530.4	557.4	564.2	679.7	833.6	910.6	1050.2	1329.4	1538.8	1569.5
127.5°	536.4	563.8	591.1	598.0	698.1	831.5	898.2	1018.0	1257.7	1437.6	1463.4
130°	554.2	583.6	613.1	620.5	711.5	832.9	893.5	1000.2	1213.6	1373.7	1397.6
132.5°	572.5	602.0	631.5	638.9	722.4	833.6	889.3	984.8	1175.9	1319.1	1340.6
135°	599.7	626.6	653.5	660.2	734.2	832.9	882.2	962.3	1122.2	1242.2	1260.7
137.5°	627.6	654.2	680.7	687.4	752.0	838.0	881.0	948.6	1083.9	1185.3	1200.4
140°	650.7	675.2	699.6	705.7	762.8	838.9	876.9	935.3	1052.1	1139.8	1153.9
142.5°	668.5	691.1	713.8	719.4	771.9	841.9	876.9	928.2	1030.8	1107.8	1119.9
145°	695.7	715.5	735.2	740.1	783.8	841.9	871.0	913.0	996.9	1059.9	1069.0
147.5°	722.9	742.1	761.4	766.2	801.1	847.7	871.0	904.0	970.0	1019.6	1027.2
150°	740.7	758.1	775.5	779.8	810.1	850.7	871.0	898.8	954.6	996.4	1002.7
152.5°	759.0	772.2	785.4	788.6	816.0	852.6	871.0	894.7	942.4	978.1	982.8
155°	786.3	796.0	805.7	808.2	829.1	857.0	871.0	889.9	927.8	956.2	959.3
157.5°	806.4	815.9	825.3	827.7	842.1	861.3	871.0	885.7	915.2	937.2	939.4
160°	820.1	827.4	834.8	836.6	848.0	863.3	871.0	883.6	908.9	927.8	929.0
162.5°	833.6	839.2	844.7	846.1	854.4	865.4	871.0	881.7	903.0	918.9	920.0
165°	848.4	853.4	858.4	859.7	863.4	868.5	871.0	878.6	893.9	905.3	906.6
167.5°	862.1	864.5	866.9	867.4	870.6	874.8	876.9	881.8	891.9	899.4	899.9
170°	871.0	873.3	875.7	876.3	876.5	876.8	876.9	881.8	891.9	899.4	899.4
172.5°	875.7	876.2	876.8	876.9	876.9	876.9	876.9	880.8	888.7	894.6	894.2
175°	882.2	882.2	882.2	882.2	880.4	878.0	876.9	879.4	884.4	888.2	888.2
177.5°	882.2	882.2	882.2	882.2	880.8	879.0	878.0	880.0	883.9	886.9	886.4
180°	882.2	882.2	882.2	882.2	882.2	882.2	882.2	882.2	882.2	882.2	882.2

TEST NUMBER: P934995

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°	100°	110°	112.5°	120°	130°	135°	140°	150°	157.5°
0°	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2
2.5°	3503.5	3493.8	3503.5	3497.0	3500.3	3490.5	3461.5	3451.8	3461.5	3471.1	3471.1
5°	3545.5	3539.0	3545.5	3545.5	3542.3	3535.8	3503.5	3497.0	3503.5	3506.7	3500.3
7.5°	3558.4	3548.7	3558.4	3551.9	3551.9	3545.5	3513.2	3506.7	3509.9	3519.7	3509.9
10°	3558.4	3548.7	3558.4	3555.2	3551.9	3545.5	3513.2	3500.3	3500.3	3509.9	3500.3
12.5°	3542.3	3535.8	3542.3	3535.8	3535.8	3529.3	3497.0	3484.1	3487.3	3490.5	3477.6
15°	3516.4	3506.7	3516.4	3509.9	3513.2	3503.5	3467.9	3455.0	3455.0	3461.5	3438.9
17.5°	3477.6	3464.6	3477.6	3474.4	3471.1	3464.6	3432.4	3419.5	3416.2	3419.5	3403.2
20°	3432.4	3422.6	3432.4	3429.1	3429.1	3416.2	3383.9	3367.7	3367.7	3367.7	3351.6
22.5°	3361.2	3351.6	3361.2	3367.7	3367.7	3364.5	3335.4	3312.8	3306.3	3306.3	3286.9
25°	3280.4	3270.8	3280.4	3280.4	3277.3	3280.4	3270.8	3257.9	3248.1	3238.4	3219.0
27.5°	3202.9	3196.4	3202.9	3196.4	3202.9	3193.2	3190.0	3186.7	3173.8	3164.1	3138.2
30°	3125.3	3118.8	3125.3	3118.8	3112.4	3105.9	3089.8	3083.3	3096.2	3089.8	3047.8
32.5°	3028.4	3021.9	3028.4	3028.4	3021.9	3021.9	2996.0	2986.4	2989.6	3009.0	2970.2
35°	2928.2	2918.5	2928.2	2925.0	2928.2	2918.5	2902.3	2899.1	2886.2	2908.7	2879.7
37.5°	2811.8	2802.2	2811.8	2811.8	2811.8	2818.3	2805.4	2795.7	2776.3	2805.4	2782.8
40°	2692.2	2679.3	2692.2	2689.0	2692.2	2698.7	2692.2	2685.7	2666.4	2689.0	2669.6
42.5°	2556.5	2553.3	2556.5	2559.7	2559.7	2572.7	2582.3	2569.4	2562.9	2546.8	2559.7
45°	2411.1	2404.6	2411.1	2417.5	2420.7	2427.2	2456.4	2456.4	2446.6	2420.7	2440.1
47.5°	2255.9	2239.8	2255.9	2275.3	2275.3	2285.0	2314.1	2336.7	2320.6	2288.3	2297.9
50°	2091.1	2094.3	2091.1	2104.1	2104.1	2139.6	2162.2	2184.8	2201.0	2162.2	2116.9
52.5°	1929.5	1926.2	1929.5	1939.2	1952.1	1968.3	2007.0	2029.7	2055.5	2032.9	1961.9
55°	1767.9	1774.4	1767.9	1771.1	1777.6	1787.3	1845.4	1868.1	1916.6	1887.5	1813.2
57.5°	1606.3	1596.6	1606.3	1612.8	1616.0	1625.7	1674.2	1716.2	1745.3	1748.5	1658.0
60°	1418.8	1406.0	1418.8	1448.0	1454.4	1460.9	1506.1	1544.9	1570.8	1580.4	1486.7
62.5°	1254.0	1231.4	1254.0	1273.4	1286.3	1302.5	1334.8	1393.0	1415.6	1418.8	1286.3
65°	1079.4	1069.8	1079.4	1118.3	1121.5	1140.8	1176.5	1218.5	1266.9	1260.5	1069.8
67.5°	921.1	921.1	921.1	947.0	966.4	976.1	1021.3	1040.7	1102.1	1108.6	892.1
70°	775.7	772.4	775.7	795.0	808.0	830.7	872.7	895.2	943.7	959.9	724.0
72.5°	636.7	633.5	636.7	652.8	665.8	685.2	720.7	746.6	788.6	808.0	562.4
75°	513.9	507.4	513.9	526.8	523.6	549.4	578.5	604.4	643.2	656.1	417.0
77.5°	394.3	394.3	394.3	407.2	407.2	433.1	446.0	478.4	501.0	520.4	307.0
80°	294.1	290.9	294.1	297.4	297.4	310.3	332.9	355.5	374.9	374.9	210.1
82.5°	206.9	200.4	206.9	206.9	206.9	213.3	226.2	232.7	245.6	255.4	132.6
85°	129.3	129.3	129.3	132.6	129.3	135.7	139.0	145.4	145.4	139.0	80.8
87.5°	84.0	80.8	84.0	80.8	80.8	77.5	77.5	77.5	74.3	71.1	45.3
90°	22.5	22.5	22.5	22.5	22.5	30.0	40.0	45.0	38.7	26.1	16.6
92.5°	90.2	72.2	90.2	108.0	112.5	159.5	222.1	253.5	222.5	160.7	114.3
95°	314.2	260.0	314.2	368.3	381.9	501.5	661.0	740.7	625.5	395.3	222.6
97.5°	752.6	649.5	752.6	855.9	881.7	957.2	1057.9	1108.4	916.4	532.5	244.6
100°	1084.5	961.6	1084.5	1207.3	1238.1	1232.5	1225.2	1221.4	1008.5	582.5	262.9
102.5°	1410.8	1305.6	1410.8	1516.1	1542.4	1446.1	1317.6	1253.4	1037.4	605.3	281.2
105°	1826.8	1770.3	1826.8	1883.5	1897.6	1681.7	1393.8	1249.9	1040.7	622.3	308.5
107.5°	2099.5	2113.1	2099.5	2085.8	2082.4	1781.2	1379.6	1178.9	994.3	625.4	348.8
110°	2203.5	2262.4	2203.5	2144.5	2129.7	1793.0	1344.1	1119.6	953.3	620.7	371.2

TEST NUMBER: P934995

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°	100°	110°	112.5°	120°	130°	135°	140°	150°	157.5°
112.5°	2212.6	2303.2	2212.6	2122.2	2099.6	1755.0	1295.6	1065.8	917.5	620.8	398.4
115°	2154.0	2279.5	2154.0	2028.5	1997.1	1665.1	1222.5	1001.2	876.3	626.6	439.3
117.5°	2029.6	2168.8	2029.6	1890.3	1855.6	1556.0	1156.5	956.8	850.6	638.3	479.0
120°	1929.4	2064.6	1929.4	1794.1	1760.3	1486.6	1121.6	939.1	841.9	647.7	502.0
122.5°	1831.7	1965.1	1831.7	1698.3	1664.9	1418.5	1089.8	925.4	837.3	661.3	529.4
125°	1692.5	1815.4	1692.5	1569.5	1538.8	1329.4	1050.2	910.6	833.6	679.7	564.2
127.5°	1567.2	1670.9	1567.2	1463.4	1437.6	1257.7	1018.0	898.2	831.5	698.1	598.0
130°	1493.3	1589.1	1493.3	1397.6	1373.7	1213.6	1000.2	893.5	832.9	711.5	620.5
132.5°	1426.4	1512.1	1426.4	1340.6	1319.1	1175.9	984.8	889.3	833.6	722.4	638.9
135°	1334.6	1408.5	1334.6	1260.7	1242.2	1122.2	962.3	882.2	832.9	734.2	660.2
137.5°	1261.0	1321.5	1261.0	1200.4	1185.3	1083.9	948.6	881.0	838.0	752.0	687.4
140°	1210.6	1267.1	1210.6	1153.9	1139.8	1052.1	935.3	876.9	838.9	762.8	705.7
142.5°	1168.6	1217.3	1168.6	1119.9	1107.8	1030.8	928.2	876.9	841.9	771.9	719.4
145°	1105.9	1142.8	1105.9	1069.0	1059.9	996.9	913.0	871.0	841.9	783.8	740.1
147.5°	1057.7	1088.2	1057.7	1027.2	1019.6	970.0	904.0	871.0	847.7	801.1	766.2
150°	1027.4	1052.1	1027.4	1002.7	996.4	954.6	898.8	871.0	850.7	810.1	779.8
152.5°	1001.4	1020.1	1001.4	982.8	978.1	942.4	894.7	871.0	852.6	816.0	788.6
155°	971.7	984.0	971.7	959.3	956.2	927.8	889.9	871.0	857.0	829.1	808.2
157.5°	948.1	956.8	948.1	939.4	937.2	915.2	885.7	871.0	861.3	842.1	827.7
160°	934.1	939.1	934.1	929.0	927.8	908.9	883.6	871.0	863.3	848.0	836.6
162.5°	924.8	929.6	924.8	920.0	918.9	903.0	881.7	871.0	865.4	854.4	846.1
165°	911.5	916.5	911.5	906.6	905.3	893.9	878.6	871.0	868.5	863.4	859.7
167.5°	902.0	904.1	902.0	899.9	899.4	891.9	881.8	876.9	874.8	870.6	867.4
170°	899.4	899.4	899.4	899.4	899.4	891.9	881.8	876.9	876.8	876.5	876.3
172.5°	892.4	890.5	892.4	894.2	894.6	888.7	880.8	876.9	876.9	876.9	876.9
175°	888.2	888.2	888.2	888.2	888.2	884.4	879.4	876.9	878.0	880.4	882.2
177.5°	884.3	882.2	884.3	886.4	886.9	883.9	880.0	878.0	879.0	880.8	882.2
180°	882.2	882.2	882.2	882.2	882.2	882.2	882.2	882.2	882.2	882.2	882.2

TEST NUMBER: P934995

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-4000K

CANDELA DISTRIBUTION (continued):

	160°	170°	180°	190°	200°	202.5°	210°	220°	225°	230°	240°
0°	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2
2.5°	3464.6	3445.3	3445.3	3413.0	3400.1	3390.3	3374.2	3325.7	3312.8	3299.8	3319.3
5°	3493.8	3458.2	3432.4	3374.2	3325.7	3306.3	3244.9	3128.6	3051.0	2992.8	2960.5
7.5°	3500.3	3455.0	3406.5	3316.0	3199.6	3148.0	2960.5	2747.2	2689.0	2637.3	2605.0
10°	3493.8	3442.1	3374.2	3238.4	2963.7	2873.2	2685.7	2546.8	2511.3	2501.5	2511.3
12.5°	3471.1	3422.6	3328.9	3102.7	2718.1	2656.7	2546.8	2466.0	2459.5	2475.7	2562.9
15°	3432.4	3387.1	3277.3	2921.7	2582.3	2537.1	2459.5	2430.5	2466.0	2579.2	2840.9
17.5°	3393.6	3341.8	3206.1	2744.0	2478.9	2446.6	2391.7	2449.9	2650.2	2802.2	2889.4
20°	3341.8	3280.4	3125.3	2614.7	2404.6	2375.5	2349.7	2611.4	2763.4	2818.3	2866.8
22.5°	3280.4	3215.9	3015.4	2524.2	2327.0	2304.4	2320.6	2702.0	2763.4	2802.2	2844.2
25°	3199.6	3144.7	2886.2	2453.1	2265.6	2239.8	2301.2	2692.2	2727.8	2737.5	2821.5
27.5°	3125.3	3054.2	2750.4	2388.5	2191.2	2181.6	2317.3	2650.2	2676.1	2685.7	2776.3
30°	3034.8	2928.2	2598.6	2320.6	2113.7	2110.5	2320.6	2598.6	2592.1	2617.9	2708.4
32.5°	2941.1	2740.8	2427.2	2236.5	2039.4	2036.2	2297.9	2520.9	2514.5	2550.0	2617.9
35°	2853.8	2595.3	2194.5	2139.6	1945.6	1948.9	2243.0	2430.5	2433.7	2466.0	2508.0
37.5°	2763.4	2469.2	1939.2	2032.9	1855.2	1855.2	2168.6	2346.4	2339.9	2349.7	2407.8
40°	2656.7	2272.0	1713.0	1894.0	1771.1	1761.4	2078.2	2255.9	2233.3	2230.1	2310.9
42.5°	2543.5	2055.5	1544.9	1709.7	1674.2	1661.2	1968.3	2146.1	2104.1	2113.7	2217.1
45°	2420.7	1997.4	1415.6	1444.7	1573.9	1564.3	1848.7	2020.0	1990.9	2016.8	2123.4
47.5°	2297.9	1881.0	1373.6	1199.1	1467.4	1464.1	1716.2	1897.2	1881.0	1906.8	2020.0
50°	2129.8	1751.8	1370.3	1027.8	1347.7	1360.7	1557.8	1777.6	1777.6	1800.2	1919.8
52.5°	1913.3	1593.3	1244.3	930.8	1208.7	1247.5	1418.8	1674.2	1680.6	1703.2	1809.9
55°	1716.2	1428.6	1153.8	856.4	1043.9	1128.0	1283.1	1567.5	1580.4	1603.1	1700.0
57.5°	1535.2	1189.4	1134.4	769.3	892.1	972.9	1163.5	1464.1	1470.5	1490.0	1583.7
60°	1341.3	859.7	1040.7	675.5	759.5	820.9	1053.7	1341.3	1363.9	1376.8	1457.6
62.5°	1121.5	623.8	943.7	610.8	694.9	707.8	963.1	1224.9	1254.0	1263.8	1312.2
65°	798.3	523.6	801.5	555.9	627.0	630.2	866.2	1105.3	1131.2	1147.3	1182.9
67.5°	539.8	426.6	610.8	504.1	575.3	578.5	772.4	966.4	1001.9	1014.9	1037.5
70°	374.9	284.4	452.5	449.2	517.1	523.6	672.2	840.3	872.7	882.3	895.2
72.5°	274.8	229.5	374.9	404.0	455.7	462.2	568.8	698.1	730.4	740.1	746.6
75°	210.1	242.4	303.8	352.3	387.8	391.1	465.4	568.8	591.4	597.9	601.2
77.5°	168.1	226.2	223.0	284.4	316.8	310.3	365.2	439.6	459.0	459.0	459.0
80°	126.1	177.7	168.1	203.6	232.7	226.2	261.8	313.5	319.9	326.4	323.2
82.5°	93.7	113.1	113.1	129.3	155.1	148.7	174.6	203.6	203.6	203.6	210.1
85°	58.2	64.7	51.7	67.9	87.3	84.0	96.9	109.9	113.1	113.1	106.7
87.5°	35.5	29.1	16.1	25.9	38.8	38.8	45.3	48.5	45.3	45.3	45.3
90°	15.5	10.7	5.9	10.7	15.5	16.6	26.1	38.7	45.0	40.0	30.0
92.5°	104.3	64.0	23.7	64.0	104.3	114.3	160.7	222.5	253.5	222.1	159.5
95°	204.2	130.5	56.8	130.5	204.2	222.6	395.3	625.5	740.7	661.0	501.5
97.5°	228.3	163.3	98.3	163.3	228.3	244.6	532.5	916.4	1108.4	1057.9	957.2
100°	248.2	189.2	130.3	189.2	248.2	262.9	582.5	1008.5	1221.4	1225.2	1232.5
102.5°	267.5	212.5	157.5	212.5	267.5	281.2	605.3	1037.4	1253.4	1317.6	1446.1
105°	296.8	250.3	203.7	250.3	296.8	308.5	622.3	1040.7	1249.9	1393.8	1681.7
107.5°	337.9	294.5	251.1	294.5	337.9	348.8	625.4	994.3	1178.9	1379.6	1781.2
110°	361.4	322.2	283.1	322.2	361.4	371.2	620.7	953.3	1119.6	1344.1	1793.0

TEST NUMBER: P934995

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-4000K

CANDELA DISTRIBUTION (continued):

	160°	170°	180°	190°	200°	202.5°	210°	220°	225°	230°	240°
112.5°	389.1	351.7	314.4	351.7	389.1	398.4	620.8	917.5	1065.8	1295.6	1755.0
115°	430.7	396.2	361.8	396.2	430.7	439.3	626.6	876.3	1001.2	1222.5	1665.1
117.5°	471.2	439.9	408.5	439.9	471.2	479.0	638.3	850.6	956.8	1156.5	1556.0
120°	494.7	465.2	435.8	465.2	494.7	502.0	647.7	841.9	939.1	1121.6	1486.6
122.5°	521.9	492.2	462.4	492.2	521.9	529.4	661.3	837.3	925.4	1089.8	1418.5
125°	557.4	530.4	503.3	530.4	557.4	564.2	679.7	833.6	910.6	1050.2	1329.4
127.5°	591.1	563.8	536.4	563.8	591.1	598.0	698.1	831.5	898.2	1018.0	1257.7
130°	613.1	583.6	554.2	583.6	613.1	620.5	711.5	832.9	893.5	1000.2	1213.6
132.5°	631.5	602.0	572.5	602.0	631.5	638.9	722.4	833.6	889.3	984.8	1175.9
135°	653.5	626.6	599.7	626.6	653.5	660.2	734.2	832.9	882.2	962.3	1122.2
137.5°	680.7	654.2	627.6	654.2	680.7	687.4	752.0	838.0	881.0	948.6	1083.9
140°	699.6	675.2	650.7	675.2	699.6	705.7	762.8	838.9	876.9	935.3	1052.1
142.5°	713.8	691.1	668.5	691.1	713.8	719.4	771.9	841.9	876.9	928.2	1030.8
145°	735.2	715.5	695.7	715.5	735.2	740.1	783.8	841.9	871.0	913.0	996.9
147.5°	761.4	742.1	722.9	742.1	761.4	766.2	801.1	847.7	871.0	904.0	970.0
150°	775.5	758.1	740.7	758.1	775.5	779.8	810.1	850.7	871.0	898.8	954.6
152.5°	785.4	772.2	759.0	772.2	785.4	788.6	816.0	852.6	871.0	894.7	942.4
155°	805.7	796.0	786.3	796.0	805.7	808.2	829.1	857.0	871.0	889.9	927.8
157.5°	825.3	815.9	806.4	815.9	825.3	827.7	842.1	861.3	871.0	885.7	915.2
160°	834.8	827.4	820.1	827.4	834.8	836.6	848.0	863.3	871.0	883.6	908.9
162.5°	844.7	839.2	833.6	839.2	844.7	846.1	854.4	865.4	871.0	881.7	903.0
165°	858.4	853.4	848.4	853.4	858.4	859.7	863.4	868.5	871.0	878.6	893.9
167.5°	866.9	864.5	862.1	864.5	866.9	867.4	870.6	874.8	876.9	881.8	891.9
170°	875.7	873.3	871.0	873.3	875.7	876.3	876.5	876.8	876.9	881.8	891.9
172.5°	876.8	876.2	875.7	876.2	876.8	876.9	876.9	876.9	876.9	880.8	888.7
175°	882.2	882.2	882.2	882.2	882.2	882.2	880.4	878.0	876.9	879.4	884.4
177.5°	882.2	882.2	882.2	882.2	882.2	882.2	880.8	879.0	878.0	880.0	883.9
180°	882.2	882.2	882.2	882.2	882.2	882.2	882.2	882.2	882.2	882.2	882.2

TEST NUMBER: P934995

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-4000K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	260°	270°	280°	290°	292.5°	300°	310°	315°	320°
0°	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2	3416.2
2.5°	3296.7	3286.9	3299.8	3264.3	3299.8	3286.9	3296.7	3319.3	3299.8	3312.8	3325.7
5°	2892.6	2876.5	2824.8	2782.8	2824.8	2876.5	2892.6	2960.5	2992.8	3051.0	3128.6
7.5°	2585.6	2572.7	2559.7	2533.9	2559.7	2572.7	2585.6	2605.0	2637.3	2689.0	2747.2
10°	2517.8	2520.9	2540.3	2537.1	2540.3	2520.9	2517.8	2511.3	2501.5	2511.3	2546.8
12.5°	2692.2	2721.4	2827.9	2821.5	2827.9	2721.4	2692.2	2562.9	2475.7	2459.5	2466.0
15°	2892.6	2902.3	2925.0	2928.2	2925.0	2902.3	2892.6	2840.9	2579.2	2466.0	2430.5
17.5°	2912.0	2915.2	2931.4	2931.4	2931.4	2915.2	2912.0	2889.4	2802.2	2650.2	2449.9
20°	2895.8	2902.3	2934.6	2941.1	2934.6	2902.3	2895.8	2866.8	2818.3	2763.4	2611.4
22.5°	2889.4	2902.3	2928.2	2925.0	2928.2	2902.3	2889.4	2844.2	2802.2	2763.4	2702.0
25°	2857.1	2857.1	2860.3	2863.6	2860.3	2857.1	2857.1	2821.5	2737.5	2727.8	2692.2
27.5°	2789.2	2795.7	2815.1	2811.8	2815.1	2795.7	2789.2	2776.3	2685.7	2676.1	2650.2
30°	2727.8	2721.4	2705.1	2692.2	2705.1	2721.4	2727.8	2708.4	2617.9	2592.1	2598.6
32.5°	2624.3	2608.2	2592.1	2582.3	2592.1	2608.2	2624.3	2617.9	2550.0	2514.5	2520.9
35°	2501.5	2504.8	2501.5	2491.9	2501.5	2504.8	2501.5	2508.0	2466.0	2433.7	2430.5
37.5°	2414.3	2420.7	2417.5	2404.6	2417.5	2420.7	2414.3	2407.8	2349.7	2339.9	2346.4
40°	2323.8	2327.0	2323.8	2314.1	2323.8	2327.0	2323.8	2310.9	2230.1	2233.3	2255.9
42.5°	2236.5	2233.3	2223.6	2217.1	2223.6	2233.3	2236.5	2217.1	2113.7	2104.1	2146.1
45°	2136.3	2139.6	2120.2	2110.5	2120.2	2139.6	2136.3	2123.4	2016.8	1990.9	2020.0
47.5°	2036.2	2036.2	2020.0	2010.3	2020.0	2036.2	2036.2	2020.0	1906.8	1881.0	1897.2
50°	1929.5	1926.2	1903.6	1900.4	1903.6	1926.2	1929.5	1919.8	1800.2	1777.6	1777.6
52.5°	1806.7	1806.7	1809.9	1816.4	1809.9	1806.7	1806.7	1809.9	1703.2	1680.6	1674.2
55°	1700.0	1703.2	1725.9	1732.4	1725.9	1703.2	1700.0	1700.0	1603.1	1580.4	1567.5
57.5°	1590.2	1590.2	1606.3	1606.3	1606.3	1590.2	1590.2	1583.7	1490.0	1470.5	1464.1
60°	1464.1	1470.5	1483.5	1480.2	1483.5	1470.5	1464.1	1457.6	1376.8	1363.9	1341.3
62.5°	1331.6	1338.1	1341.3	1334.8	1341.3	1338.1	1331.6	1312.2	1263.8	1254.0	1224.9
65°	1192.6	1199.1	1202.3	1195.9	1202.3	1199.1	1192.6	1182.9	1147.3	1131.2	1105.3
67.5°	1050.4	1047.2	1043.9	1056.9	1043.9	1047.2	1050.4	1037.5	1014.9	1001.9	966.4
70°	905.0	905.0	901.7	908.2	901.7	905.0	905.0	895.2	882.3	872.7	840.3
72.5°	749.9	746.6	759.5	749.9	759.5	746.6	749.9	746.6	740.1	730.4	698.1
75°	597.9	604.4	597.9	607.6	597.9	604.4	597.9	601.2	597.9	591.4	568.8
77.5°	455.7	462.2	455.7	455.7	455.7	462.2	455.7	459.0	459.0	459.0	439.6
80°	323.2	319.9	319.9	316.8	319.9	319.9	323.2	323.2	326.4	319.9	313.5
82.5°	206.9	203.6	203.6	210.1	203.6	203.6	206.9	210.1	203.6	203.6	203.6
85°	113.1	116.3	109.9	109.9	109.9	116.3	113.1	106.7	113.1	113.1	109.9
87.5°	42.0	38.8	38.8	38.8	38.8	38.8	42.0	45.3	45.3	45.3	48.5
90°	22.5	22.5	22.5	22.5	22.5	22.5	22.5	30.0	40.0	45.0	38.7
92.5°	112.5	108.0	90.2	72.2	90.2	108.0	112.5	159.5	222.1	253.5	222.5
95°	381.9	368.3	314.2	260.0	314.2	368.3	381.9	501.5	661.0	740.7	625.5
97.5°	881.7	855.9	752.6	649.5	752.6	855.9	881.7	957.2	1057.9	1108.4	916.4
100°	1238.1	1207.3	1084.5	961.6	1084.5	1207.3	1238.1	1232.5	1225.2	1221.4	1008.5
102.5°	1542.4	1516.1	1410.8	1305.6	1410.8	1516.1	1542.4	1446.1	1317.6	1253.4	1037.4
105°	1897.6	1883.5	1826.8	1770.3	1826.8	1883.5	1897.6	1681.7	1393.8	1249.9	1040.7
107.5°	2082.4	2085.8	2099.5	2113.1	2099.5	2085.8	2082.4	1781.2	1379.6	1178.9	994.3
110°	2129.7	2144.5	2203.5	2262.4	2203.5	2144.5	2129.7	1793.0	1344.1	1119.6	953.3

TEST NUMBER: P934995

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-4000K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	260°	270°	280°	290°	292.5°	300°	310°	315°	320°
112.5°	2099.6	2122.2	2212.6	2303.2	2212.6	2122.2	2099.6	1755.0	1295.6	1065.8	917.5
115°	1997.1	2028.5	2154.0	2279.5	2154.0	2028.5	1997.1	1665.1	1222.5	1001.2	876.3
117.5°	1855.6	1890.3	2029.6	2168.8	2029.6	1890.3	1855.6	1556.0	1156.5	956.8	850.6
120°	1760.3	1794.1	1929.4	2064.6	1929.4	1794.1	1760.3	1486.6	1121.6	939.1	841.9
122.5°	1664.9	1698.3	1831.7	1965.1	1831.7	1698.3	1664.9	1418.5	1089.8	925.4	837.3
125°	1538.8	1569.5	1692.5	1815.4	1692.5	1569.5	1538.8	1329.4	1050.2	910.6	833.6
127.5°	1437.6	1463.4	1567.2	1670.9	1567.2	1463.4	1437.6	1257.7	1018.0	898.2	831.5
130°	1373.7	1397.6	1493.3	1589.1	1493.3	1397.6	1373.7	1213.6	1000.2	893.5	832.9
132.5°	1319.1	1340.6	1426.4	1512.1	1426.4	1340.6	1319.1	1175.9	984.8	889.3	833.6
135°	1242.2	1260.7	1334.6	1408.5	1334.6	1260.7	1242.2	1122.2	962.3	882.2	832.9
137.5°	1185.3	1200.4	1261.0	1321.5	1261.0	1200.4	1185.3	1083.9	948.6	881.0	838.0
140°	1139.8	1153.9	1210.6	1267.1	1210.6	1153.9	1139.8	1052.1	935.3	876.9	838.9
142.5°	1107.8	1119.9	1168.6	1217.3	1168.6	1119.9	1107.8	1030.8	928.2	876.9	841.9
145°	1059.9	1069.0	1105.9	1142.8	1105.9	1069.0	1059.9	996.9	913.0	871.0	841.9
147.5°	1019.6	1027.2	1057.7	1088.2	1057.7	1027.2	1019.6	970.0	904.0	871.0	847.7
150°	996.4	1002.7	1027.4	1052.1	1027.4	1002.7	996.4	954.6	898.8	871.0	850.7
152.5°	978.1	982.8	1001.4	1020.1	1001.4	982.8	978.1	942.4	894.7	871.0	852.6
155°	956.2	959.3	971.7	984.0	971.7	959.3	956.2	927.8	889.9	871.0	857.0
157.5°	937.2	939.4	948.1	956.8	948.1	939.4	937.2	915.2	885.7	871.0	861.3
160°	927.8	929.0	934.1	939.1	934.1	929.0	927.8	908.9	883.6	871.0	863.3
162.5°	918.9	920.0	924.8	929.6	924.8	920.0	918.9	903.0	881.7	871.0	865.4
165°	905.3	906.6	911.5	916.5	911.5	906.6	905.3	893.9	878.6	871.0	868.5
167.5°	899.4	899.9	902.0	904.1	902.0	899.9	899.4	891.9	881.8	876.9	874.8
170°	899.4	899.4	899.4	899.4	899.4	899.4	899.4	891.9	881.8	876.9	876.8
172.5°	894.6	894.2	892.4	890.5	892.4	894.2	894.6	888.7	880.8	876.9	876.9
175°	888.2	888.2	888.2	888.2	888.2	888.2	888.2	884.4	879.4	876.9	878.0
177.5°	886.9	886.4	884.3	882.2	884.3	886.4	886.9	883.9	880.0	878.0	879.0
180°	882.2	882.2	882.2	882.2	882.2	882.2	882.2	882.2	882.2	882.2	882.2

TEST NUMBER: P934995

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-4000K

CANDELA DISTRIBUTION (continued):

	330°	337.5°	340°	350°	360°
0°	3416.2	3416.2	3416.2	3416.2	3416.2
2.5°	3374.2	3390.3	3400.1	3413.0	3445.3
5°	3244.9	3306.3	3325.7	3374.2	3432.4
7.5°	2960.5	3148.0	3199.6	3316.0	3406.5
10°	2685.7	2873.2	2963.7	3238.4	3374.2
12.5°	2546.8	2656.7	2718.1	3102.7	3328.9
15°	2459.5	2537.1	2582.3	2921.7	3277.3
17.5°	2391.7	2446.6	2478.9	2744.0	3206.1
20°	2349.7	2375.5	2404.6	2614.7	3125.3
22.5°	2320.6	2304.4	2327.0	2524.2	3015.4
25°	2301.2	2239.8	2265.6	2453.1	2886.2
27.5°	2317.3	2181.6	2191.2	2388.5	2750.4
30°	2320.6	2110.5	2113.7	2320.6	2598.6
32.5°	2297.9	2036.2	2039.4	2236.5	2427.2
35°	2243.0	1948.9	1945.6	2139.6	2194.5
37.5°	2168.6	1855.2	1855.2	2032.9	1939.2
40°	2078.2	1761.4	1771.1	1894.0	1713.0
42.5°	1968.3	1661.2	1674.2	1709.7	1544.9
45°	1848.7	1564.3	1573.9	1444.7	1415.6
47.5°	1716.2	1464.1	1467.4	1199.1	1373.6
50°	1557.8	1360.7	1347.7	1027.8	1370.3
52.5°	1418.8	1247.5	1208.7	930.8	1244.3
55°	1283.1	1128.0	1043.9	856.4	1153.8
57.5°	1163.5	972.9	892.1	769.3	1134.4
60°	1053.7	820.9	759.5	675.5	1040.7
62.5°	963.1	707.8	694.9	610.8	943.7
65°	866.2	630.2	627.0	555.9	801.5
67.5°	772.4	578.5	575.3	504.1	610.8
70°	672.2	523.6	517.1	449.2	452.5
72.5°	568.8	462.2	455.7	404.0	374.9
75°	465.4	391.1	387.8	352.3	303.8
77.5°	365.2	310.3	316.8	284.4	223.0
80°	261.8	226.2	232.7	203.6	168.1
82.5°	174.6	148.7	155.1	129.3	113.1
85°	96.9	84.0	87.3	67.9	51.7
87.5°	45.3	38.8	38.8	25.9	16.1
90°	26.1	16.6	15.5	10.7	5.9
92.5°	160.7	114.3	104.3	64.0	23.7
95°	395.3	222.6	204.2	130.5	56.8
97.5°	532.5	244.6	228.3	163.3	98.3
100°	582.5	262.9	248.2	189.2	130.3
102.5°	605.3	281.2	267.5	212.5	157.5
105°	622.3	308.5	296.8	250.3	203.7
107.5°	625.4	348.8	337.9	294.5	251.1
110°	620.7	371.2	361.4	322.2	283.1

TEST NUMBER: P934995

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-4000K

CANDELA DISTRIBUTION (continued):

	330°	337.5°	340°	350°	360°
112.5°	620.8	398.4	389.1	351.7	314.4
115°	626.6	439.3	430.7	396.2	361.8
117.5°	638.3	479.0	471.2	439.9	408.5
120°	647.7	502.0	494.7	465.2	435.8
122.5°	661.3	529.4	521.9	492.2	462.4
125°	679.7	564.2	557.4	530.4	503.3
127.5°	698.1	598.0	591.1	563.8	536.4
130°	711.5	620.5	613.1	583.6	554.2
132.5°	722.4	638.9	631.5	602.0	572.5
135°	734.2	660.2	653.5	626.6	599.7
137.5°	752.0	687.4	680.7	654.2	627.6
140°	762.8	705.7	699.6	675.2	650.7
142.5°	771.9	719.4	713.8	691.1	668.5
145°	783.8	740.1	735.2	715.5	695.7
147.5°	801.1	766.2	761.4	742.1	722.9
150°	810.1	779.8	775.5	758.1	740.7
152.5°	816.0	788.6	785.4	772.2	759.0
155°	829.1	808.2	805.7	796.0	786.3
157.5°	842.1	827.7	825.3	815.9	806.4
160°	848.0	836.6	834.8	827.4	820.1
162.5°	854.4	846.1	844.7	839.2	833.6
165°	863.4	859.7	858.4	853.4	848.4
167.5°	870.6	867.4	866.9	864.5	862.1
170°	876.5	876.3	875.7	873.3	871.0
172.5°	876.9	876.9	876.8	876.2	875.7
175°	880.4	882.2	882.2	882.2	882.2
177.5°	880.8	882.2	882.2	882.2	882.2
180°	882.2	882.2	882.2	882.2	882.2

TEST NUMBER: P934995

CATALOG NUMBER: SQ4-FA-075U-125D-B2750-1D-UNV-W2A-W-8-4000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.35	16.31	16.21	17.19	18.30	18.18	19.15	19.04	20.03	21.14
	3H	15.83	16.70	16.70	17.59	18.72	19.54	20.41	20.41	21.30	22.43
	4H	16.03	16.85	16.91	17.74	18.89	19.99	20.81	20.88	21.71	22.85
	6H	16.15	16.91	17.05	17.81	18.97	20.28	21.04	21.18	21.94	23.10
	8H	16.16	16.88	17.06	17.80	18.95	20.36	21.08	21.27	22.00	23.16
	12H	16.13	16.82	17.04	17.73	18.91	20.41	21.09	21.32	22.00	23.19
4H	2H	16.39	17.21	17.29	18.11	19.25	18.61	19.43	19.50	20.32	21.47
	3H	17.43	18.11	18.33	19.04	20.20	20.12	20.81	21.03	21.73	22.89
	4H	17.71	18.33	18.63	19.26	20.44	20.66	21.28	21.57	22.20	23.39
	6H	17.84	18.38	18.77	19.33	20.51	21.03	21.57	21.96	22.52	23.70
	8H	17.85	18.35	18.78	19.29	20.49	21.14	21.64	22.07	22.58	23.79
	12H	17.82	18.28	18.77	19.23	20.44	21.20	21.66	22.16	22.62	23.82
8H	4H	18.17	18.68	19.11	19.62	20.82	20.79	21.29	21.72	22.23	23.43
	6H	18.44	18.86	19.40	19.84	21.04	21.23	21.65	22.19	22.63	23.83
	8H	18.48	18.85	19.45	19.82	21.04	21.39	21.76	22.36	22.73	23.95
	12H	18.47	18.80	19.44	19.76	21.03	21.49	21.82	22.46	22.78	24.05
12H	4H	18.19	18.64	19.14	19.60	20.80	20.76	21.21	21.71	22.17	23.38
	6H	18.50	18.87	19.47	19.84	21.06	21.23	21.60	22.20	22.57	23.79
	8H	18.57	18.90	19.54	19.86	21.13	21.40	21.72	22.37	22.69	23.96

END OF REPORT