

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P935385

Luminaire Tested: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-4000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P935385
REPORT IS A COMBINATION OF REPORTS P933750 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-4000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Asymmetric Frosted Continuous I
Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8268.4 lumens
Efficiency: N/A
Efficacy: 120.2 lumens/watt
Spacing Criteria (0/90/45): 1.14 / 1.26 / 1.36
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 4' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 68.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P935385

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-4000K

Luminous Intensity Polar Plot

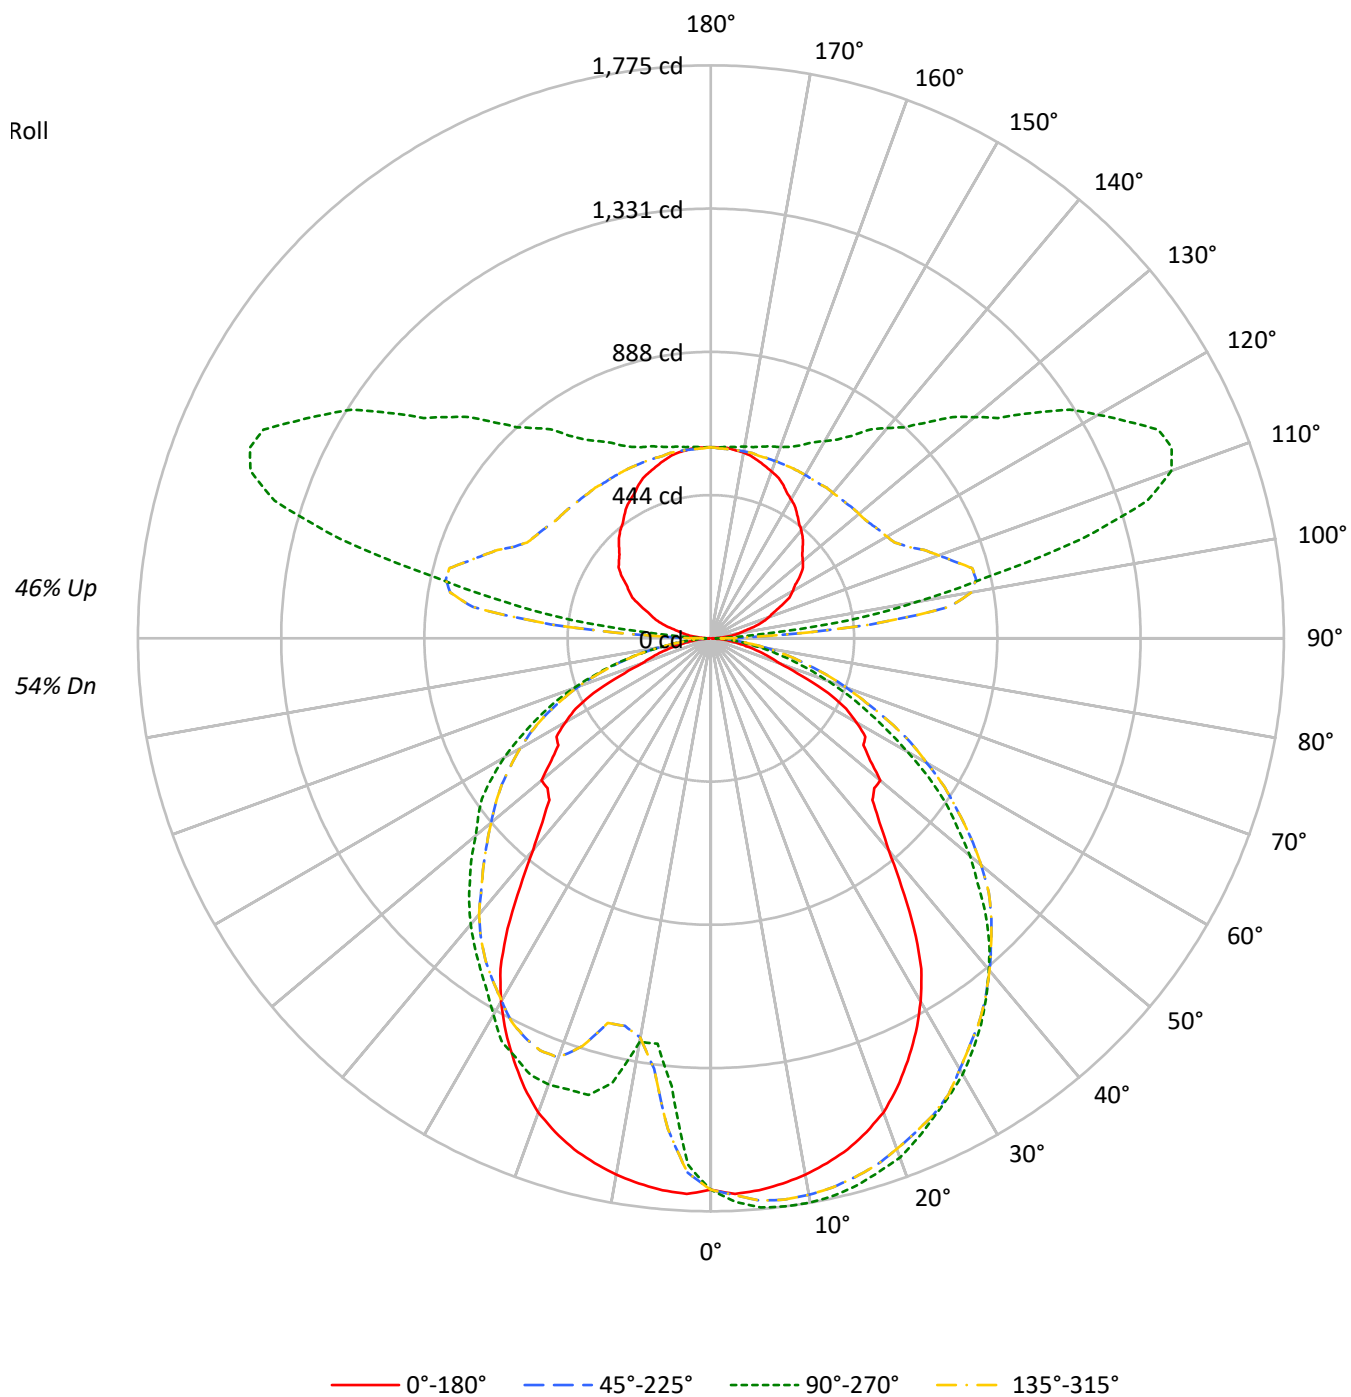

TEST NUMBER: P935385

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	59	59	59
1	99	94	90	87	91	88	84	81	75	73	70	63	62	60	53	51	50
2	90	82	76	71	83	77	71	67	66	62	58	56	53	50	46	44	42
3	82	72	65	59	76	67	61	56	58	53	49	49	46	42	41	38	36
4	75	64	56	50	69	60	53	47	51	46	42	44	40	36	37	34	31
5	69	57	49	43	64	53	46	41	46	40	36	39	35	31	33	30	27
6	63	51	43	37	59	48	41	35	41	36	31	35	31	28	30	26	24
7	59	46	38	33	54	43	36	31	38	32	28	32	28	24	27	24	21
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	22	19
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	15852	15852	15852	15852
5°	15952	16001	15952	12582
10°	15829	15763	15829	11269
15°	15638	15421	15638	12876
20°	15294	15017	15294	12903
25°	14606	14426	14606	12630
30°	13725	13936	13725	12030
35°	12217	13317	12217	11370
40°	10162	12587	10162	10872
45°	9062	11733	9062	10299
50°	9605	10715	9605	9723
55°	9013	9618	9013	9390
60°	9257	8169	9257	8600
65°	8352	6753	8352	7548
70°	5743	5382	5743	6326
75°	4981	3977	4981	4764
80°	3931	2629	3931	2862
85°	2145	1394	2145	1183

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 20°

Vertical Angle: 45°

Luminance: 13917 cd/sqm

TEST NUMBER: P935385

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	154.2	1.9
10°-20°	437.8	5.3
20°-30°	676.8	8.2
30°-40°	807.9	9.8
40°-50°	812.7	9.8
50°-60°	707.1	8.6
60°-70°	501.4	6.1
70°-80°	265.3	3.2
80°-90°	68.3	0.8
90°-100°	288.5	3.5
100°-110°	758.5	9.2
110°-120°	786.5	9.5
120°-130°	630.8	7.6
130°-140°	495.0	6.0
140°-150°	379.9	4.6
150°-160°	273.6	3.3
160°-170°	167.4	2.0
170°-180°	56.6	0.7
0°-30°	1268.8	15.3
0°-40°	2076.8	25.1
0°-60°	3596.6	43.5
0°-90°	4431.5	53.6
90°-120°	1833.5	22.2
90°-150°	3339.2	40.4
90°-180°	3837.0	46.4
0°-180°	8268.4	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1708	1708	1708	1708	1708	
5°	1716	1770	1716	1392	1716	163
15°	1639	1754	1639	1464	1639	461
25°	1443	1636	1443	1432	1443	663
35°	1097	1459	1097	1246	1097	679
45°	708	1202	708	1055	708	567
55°	577	887	577	866	577	530
65°	401	535	401	598	401	383
75°	152	254	152	304	152	160
85°	26	65	26	55	26	35
90°	4	15	4	15	4	4
95°	38	174	38	174	38	42
105°	137	1188	137	1188	137	145
115°	243	1529	243	1529	243	240
125°	338	1218	338	1218	338	300
135°	402	945	402	945	402	311
145°	467	767	467	767	467	292
155°	528	660	528	660	528	242
165°	569	615	569	615	569	161
175°	592	596	592	596	592	56
180°	592	592	592	592	592	

TEST NUMBER: P935385

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-4000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3
2.5°	1722.8	1722.8	1732.6	1735.8	1735.8	1730.9	1726.1	1730.9	1745.5	1750.3	1748.7
5°	1716.3	1729.3	1747.1	1750.3	1753.6	1751.9	1748.7	1751.9	1768.1	1771.3	1773.0
7.5°	1703.4	1727.7	1750.3	1755.2	1760.0	1755.2	1753.6	1756.8	1773.0	1776.2	1776.2
10°	1687.3	1721.2	1747.1	1750.3	1755.2	1750.3	1750.3	1756.8	1773.0	1776.2	1777.8
12.5°	1664.7	1711.6	1735.8	1739.0	1745.5	1743.8	1742.2	1748.7	1764.8	1768.1	1768.1
15°	1638.8	1693.8	1716.3	1719.6	1730.9	1727.7	1727.7	1734.2	1751.9	1756.8	1755.2
17.5°	1603.3	1671.2	1696.9	1701.8	1709.9	1708.3	1709.9	1716.3	1732.6	1735.8	1737.3
20°	1562.9	1640.4	1671.2	1675.9	1684.0	1684.0	1684.0	1692.2	1708.3	1714.8	1714.8
22.5°	1507.8	1608.1	1640.4	1643.7	1653.3	1653.3	1656.5	1667.9	1682.4	1684.0	1684.0
25°	1443.2	1572.5	1600.0	1609.7	1619.4	1624.3	1629.1	1635.5	1640.4	1638.8	1640.4
27.5°	1375.4	1527.2	1562.9	1569.3	1582.2	1587.1	1593.5	1595.1	1596.8	1601.6	1598.4
30°	1299.4	1464.2	1517.6	1524.1	1545.1	1548.2	1541.8	1545.1	1553.1	1556.4	1559.6
32.5°	1213.7	1370.5	1470.7	1485.2	1504.7	1495.0	1493.3	1498.2	1511.1	1511.1	1514.3
35°	1097.4	1297.7	1427.1	1440.0	1454.6	1443.2	1449.7	1451.3	1459.4	1464.2	1462.7
37.5°	969.7	1234.7	1381.8	1391.5	1402.8	1388.3	1398.0	1402.8	1409.3	1406.0	1406.0
40°	856.5	1136.2	1328.5	1335.0	1344.6	1333.4	1343.0	1346.3	1349.5	1346.3	1344.6
42.5°	772.5	1027.9	1272.0	1280.0	1273.5	1281.6	1284.9	1291.4	1286.5	1280.0	1280.0
45°	707.8	998.8	1210.5	1220.2	1210.5	1223.5	1228.3	1228.3	1213.7	1210.5	1208.9
47.5°	686.8	940.6	1149.1	1149.1	1144.3	1160.4	1168.4	1157.2	1142.7	1137.8	1137.8
50°	685.2	875.9	1065.0	1058.6	1081.3	1100.6	1092.5	1081.3	1069.9	1052.1	1052.1
52.5°	622.2	796.8	956.8	981.0	1016.6	1027.9	1015.0	1003.6	984.2	976.2	969.7
55°	577.0	714.3	858.2	906.7	943.8	958.3	934.2	922.8	893.8	888.9	885.7
57.5°	567.3	594.8	767.7	829.1	874.3	872.8	858.2	837.2	812.9	808.1	806.5
60°	520.4	429.9	670.7	743.5	790.3	785.5	772.5	753.1	730.5	727.2	724.1
62.5°	472.0	311.9	560.8	643.2	709.5	707.8	696.6	667.4	651.3	643.2	636.8
65°	400.8	261.9	399.2	535.0	630.3	633.5	609.3	588.3	570.5	560.8	559.2
67.5°	305.4	213.3	269.9	446.1	554.4	551.1	520.4	510.7	488.1	483.2	473.6
70°	226.2	142.2	187.5	362.0	480.0	472.0	447.7	436.3	415.3	404.1	397.6
72.5°	187.5	114.8	137.3	281.2	404.1	394.3	373.3	360.4	342.7	332.9	326.4
75°	151.9	121.2	105.0	208.5	328.0	321.6	302.3	289.3	274.8	261.9	263.4
77.5°	111.5	113.2	84.0	153.6	260.2	250.5	239.2	223.0	216.6	203.6	203.6
80°	84.0	88.9	63.0	105.0	187.5	187.5	177.8	166.5	155.2	148.7	148.7
82.5°	56.5	56.5	46.9	66.3	127.7	122.8	116.3	113.2	106.7	103.4	103.4
85°	25.9	32.3	29.1	40.4	69.5	72.8	72.8	69.5	67.9	64.7	66.3
87.5°	8.1	14.5	17.8	22.6	35.5	37.1	38.8	38.8	38.8	40.4	40.4
90°	4.0	7.2	10.3	11.1	17.5	26.0	30.2	26.8	20.2	15.1	15.1
92.5°	15.9	42.9	69.9	76.7	107.8	149.3	170.0	149.0	107.0	75.4	72.5
95°	38.1	87.6	137.0	149.4	265.2	419.6	496.9	443.4	336.4	256.2	247.2
97.5°	65.9	109.5	153.2	164.1	357.3	614.8	743.6	709.8	642.1	591.4	574.1
100°	87.4	126.9	166.5	176.4	390.8	676.6	819.5	822.0	826.8	830.6	809.9
102.5°	105.6	142.6	179.4	188.7	406.2	696.0	841.0	884.0	970.2	1034.7	1017.1
105°	136.7	167.9	199.1	206.9	417.5	698.2	838.6	935.1	1128.2	1273.1	1263.7
107.5°	168.5	197.6	226.7	234.0	419.6	667.1	790.8	925.6	1195.0	1397.1	1399.4
110°	189.9	216.2	242.5	249.1	416.4	639.6	751.1	901.7	1202.9	1428.8	1438.7

TEST NUMBER: P935385

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-4000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	211.0	236.0	261.0	267.3	416.6	615.5	715.0	869.1	1177.3	1408.5	1423.7
115°	242.7	265.8	288.9	294.7	420.4	588.0	671.7	820.2	1117.2	1339.9	1360.9
117.5°	274.1	295.1	316.1	321.4	428.2	570.7	642.0	775.9	1043.9	1244.9	1268.2
120°	292.3	312.1	331.9	336.8	434.5	564.9	630.0	752.4	997.3	1181.0	1203.7
122.5°	310.3	330.2	350.2	355.2	443.7	561.8	620.8	731.1	951.6	1117.0	1139.3
125°	337.7	355.8	374.0	378.6	456.0	559.2	610.9	704.6	891.9	1032.4	1053.0
127.5°	359.8	378.2	396.6	401.2	468.3	557.8	602.6	683.0	843.8	964.5	981.8
130°	371.8	391.6	411.3	416.3	477.3	558.8	599.5	671.1	814.2	921.6	937.6
132.5°	384.1	403.9	423.6	428.6	484.6	559.2	596.6	660.7	788.8	885.0	899.4
135°	402.4	420.4	438.4	442.9	492.6	558.8	591.9	645.6	752.8	833.3	845.7
137.5°	421.1	438.9	456.7	461.2	504.4	562.2	591.0	636.4	727.1	795.2	805.4
140°	436.5	453.0	469.4	473.5	511.8	562.8	588.3	627.4	705.8	764.7	774.1
142.5°	448.5	463.7	478.8	482.7	517.9	564.8	588.3	622.7	691.5	743.2	751.4
145°	466.7	480.0	493.2	496.5	525.8	564.9	584.4	612.5	668.8	711.0	717.2
147.5°	485.0	497.9	510.7	514.0	537.5	568.7	584.4	606.5	650.8	684.1	689.2
150°	496.9	508.5	520.2	523.1	543.6	570.8	584.4	603.1	640.4	668.5	672.6
152.5°	509.2	518.0	526.9	529.1	547.5	572.0	584.4	600.3	632.2	656.2	659.3
155°	527.5	534.0	540.6	542.2	556.3	575.0	584.4	597.1	622.5	641.5	643.6
157.5°	541.0	547.4	553.7	555.3	565.0	577.9	584.4	594.2	614.0	628.8	630.2
160°	550.2	555.1	560.0	561.3	569.0	579.2	584.4	592.9	609.8	622.5	623.3
162.5°	559.2	563.0	566.7	567.7	573.2	580.6	584.4	591.5	605.8	616.5	617.2
165°	569.2	572.5	575.9	576.7	579.3	582.6	584.4	589.5	599.7	607.4	608.2
167.5°	578.3	580.0	581.6	582.0	584.1	586.8	588.3	591.6	598.3	603.4	603.8
170°	584.4	585.9	587.5	587.9	588.0	588.2	588.3	591.6	598.3	603.4	603.4
172.5°	587.5	587.9	588.2	588.3	588.3	588.3	588.3	591.0	596.2	600.2	599.9
175°	591.9	591.9	591.9	591.9	590.7	589.0	588.3	590.0	593.3	595.8	595.8
177.5°	591.9	591.9	591.9	591.9	591.0	589.7	589.0	590.4	593.1	595.1	594.7
180°	591.9	591.9	591.9	591.9	591.9	591.9	591.9	591.9	591.9	591.9	591.9

TEST NUMBER: P935385

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°	100°	110°	112.5°	120°	130°	135°	140°	150°	157.5°
0°	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3
2.5°	1751.9	1747.1	1751.9	1748.7	1750.3	1745.5	1730.9	1726.1	1730.9	1735.8	1735.8
5°	1773.0	1769.7	1773.0	1773.0	1771.3	1768.1	1751.9	1748.7	1751.9	1753.6	1750.3
7.5°	1779.4	1774.6	1779.4	1776.2	1776.2	1773.0	1756.8	1753.6	1755.2	1760.0	1755.2
10°	1779.4	1774.6	1779.4	1777.8	1776.2	1773.0	1756.8	1750.3	1750.3	1755.2	1750.3
12.5°	1771.3	1768.1	1771.3	1768.1	1768.1	1764.8	1748.7	1742.2	1743.8	1745.5	1739.0
15°	1758.3	1753.6	1758.3	1755.2	1756.8	1751.9	1734.2	1727.7	1727.7	1730.9	1719.6
17.5°	1739.0	1732.6	1739.0	1737.3	1735.8	1732.6	1716.3	1709.9	1708.3	1709.9	1701.8
20°	1716.3	1711.6	1716.3	1714.8	1714.8	1708.3	1692.2	1684.0	1684.0	1684.0	1675.9
22.5°	1680.8	1675.9	1680.8	1684.0	1684.0	1682.4	1667.9	1656.5	1653.3	1653.3	1643.7
25°	1640.4	1635.5	1640.4	1640.4	1638.8	1640.4	1635.5	1629.1	1624.3	1619.4	1609.7
27.5°	1601.6	1598.4	1601.6	1598.4	1601.6	1596.8	1595.1	1593.5	1587.1	1582.2	1569.3
30°	1562.9	1559.6	1562.9	1559.6	1556.4	1553.1	1545.1	1541.8	1548.2	1545.1	1524.1
32.5°	1514.3	1511.1	1514.3	1514.3	1511.1	1511.1	1498.2	1493.3	1495.0	1504.7	1485.2
35°	1464.2	1459.4	1464.2	1462.7	1464.2	1459.4	1451.3	1449.7	1443.2	1454.6	1440.0
37.5°	1406.0	1401.2	1406.0	1406.0	1406.0	1409.3	1402.8	1398.0	1388.3	1402.8	1391.5
40°	1346.3	1339.8	1346.3	1344.6	1346.3	1349.5	1346.3	1343.0	1333.4	1344.6	1335.0
42.5°	1278.4	1276.7	1278.4	1280.0	1280.0	1286.5	1291.4	1284.9	1281.6	1273.5	1280.0
45°	1205.7	1202.4	1205.7	1208.9	1210.5	1213.7	1228.3	1228.3	1223.5	1210.5	1220.2
47.5°	1128.0	1120.0	1128.0	1137.8	1137.8	1142.7	1157.2	1168.4	1160.4	1144.3	1149.1
50°	1045.6	1047.3	1045.6	1052.1	1052.1	1069.9	1081.3	1092.5	1100.6	1081.3	1058.6
52.5°	964.8	963.2	964.8	969.7	976.2	984.2	1003.6	1015.0	1027.9	1016.6	981.0
55°	884.0	887.3	884.0	885.7	888.9	893.8	922.8	934.2	958.3	943.8	906.7
57.5°	803.3	798.4	803.3	806.5	808.1	812.9	837.2	858.2	872.8	874.3	829.1
60°	709.5	703.1	709.5	724.1	727.2	730.5	753.1	772.5	785.5	790.3	743.5
62.5°	627.1	615.8	627.1	636.8	643.2	651.3	667.4	696.6	707.8	709.5	643.2
65°	539.8	535.0	539.8	559.2	560.8	570.5	588.3	609.3	633.5	630.3	535.0
67.5°	460.6	460.6	460.6	473.6	483.2	488.1	510.7	520.4	551.1	554.4	446.1
70°	387.9	386.3	387.9	397.6	404.1	415.3	436.3	447.7	472.0	480.0	362.0
72.5°	318.4	316.8	318.4	326.4	332.9	342.7	360.4	373.3	394.3	404.1	281.2
75°	257.0	253.7	257.0	263.4	261.9	274.8	289.3	302.3	321.6	328.0	208.5
77.5°	197.2	197.2	197.2	203.6	203.6	216.6	223.0	239.2	250.5	260.2	153.6
80°	147.1	145.4	147.1	148.7	148.7	155.2	166.5	177.8	187.5	187.5	105.0
82.5°	103.4	100.2	103.4	103.4	103.4	106.7	113.2	116.3	122.8	127.7	66.3
85°	64.7	64.7	64.7	66.3	64.7	67.9	69.5	72.8	72.8	69.5	40.4
87.5°	42.0	40.4	42.0	40.4	40.4	38.8	38.8	38.8	37.1	35.5	22.6
90°	15.1	15.1	15.1	15.1	15.1	20.2	26.8	30.2	26.0	17.5	11.1
92.5°	60.5	48.4	60.5	72.5	75.4	107.0	149.0	170.0	149.3	107.8	76.7
95°	210.8	174.4	210.8	247.2	256.2	336.4	443.4	496.9	419.6	265.2	149.4
97.5°	504.9	435.8	504.9	574.1	591.4	642.1	709.8	743.6	614.8	357.3	164.1
100°	727.5	645.1	727.5	809.9	830.6	826.8	822.0	819.5	676.6	390.8	176.4
102.5°	946.5	875.9	946.5	1017.1	1034.7	970.2	884.0	841.0	696.0	406.2	188.7
105°	1225.6	1187.7	1225.6	1263.7	1273.1	1128.2	935.1	838.6	698.2	417.5	206.9
107.5°	1408.5	1417.7	1408.5	1399.4	1397.1	1195.0	925.6	790.8	667.1	419.6	234.0
110°	1478.2	1517.8	1478.2	1438.7	1428.8	1202.9	901.7	751.1	639.6	416.4	249.1

TEST NUMBER: P935385

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°	100°	110°	112.5°	120°	130°	135°	140°	150°	157.5°
112.5°	1484.5	1545.2	1484.5	1423.7	1408.5	1177.3	869.1	715.0	615.5	416.6	267.3
115°	1445.1	1529.3	1445.1	1360.9	1339.9	1117.2	820.2	671.7	588.0	420.4	294.7
117.5°	1361.6	1455.0	1361.6	1268.2	1244.9	1043.9	775.9	642.0	570.7	428.2	321.4
120°	1294.4	1385.1	1294.4	1203.7	1181.0	997.3	752.4	630.0	564.9	434.5	336.8
122.5°	1228.9	1318.4	1228.9	1139.3	1117.0	951.6	731.1	620.8	561.8	443.7	355.2
125°	1135.4	1217.9	1135.4	1053.0	1032.4	891.9	704.6	610.9	559.2	456.0	378.6
127.5°	1051.5	1121.0	1051.5	981.8	964.5	843.8	683.0	602.6	557.8	468.3	401.2
130°	1001.9	1066.2	1001.9	937.6	921.6	814.2	671.1	599.5	558.8	477.3	416.3
132.5°	956.9	1014.5	956.9	899.4	885.0	788.8	660.7	596.6	559.2	484.6	428.6
135°	895.3	945.0	895.3	845.7	833.3	752.8	645.6	591.9	558.8	492.6	442.9
137.5°	846.0	886.6	846.0	805.4	795.2	727.1	636.4	591.0	562.2	504.4	461.2
140°	812.1	850.0	812.1	774.1	764.7	705.8	627.4	588.3	562.8	511.8	473.5
142.5°	784.1	816.7	784.1	751.4	743.2	691.5	622.7	588.3	564.8	517.9	482.7
145°	741.9	766.7	741.9	717.2	711.0	668.8	612.5	584.4	564.9	525.8	496.5
147.5°	709.7	730.1	709.7	689.2	684.1	650.8	606.5	584.4	568.7	537.5	514.0
150°	689.2	705.8	689.2	672.6	668.5	640.4	603.1	584.4	570.8	543.6	523.1
152.5°	671.8	684.4	671.8	659.3	656.2	632.2	600.3	584.4	572.0	547.5	529.1
155°	651.9	660.2	651.9	643.6	641.5	622.5	597.1	584.4	575.0	556.3	542.2
157.5°	636.1	642.0	636.1	630.2	628.8	614.0	594.2	584.4	577.9	565.0	555.3
160°	626.7	630.0	626.7	623.3	622.5	609.8	592.9	584.4	579.2	569.0	561.3
162.5°	620.5	623.6	620.5	617.2	616.5	605.8	591.5	584.4	580.6	573.2	567.7
165°	611.6	614.9	611.6	608.2	607.4	599.7	589.5	584.4	582.6	579.3	576.7
167.5°	605.1	606.5	605.1	603.8	603.4	598.3	591.6	588.3	586.8	584.1	582.0
170°	603.4	603.4	603.4	603.4	603.4	598.3	591.6	588.3	588.2	588.0	587.9
172.5°	598.7	597.4	598.7	599.9	600.2	596.2	591.0	588.3	588.3	588.3	588.3
175°	595.8	595.8	595.8	595.8	595.8	593.3	590.0	588.3	589.0	590.7	591.9
177.5°	593.3	591.9	593.3	594.7	595.1	593.1	590.4	589.0	589.7	591.0	591.9
180°	591.9	591.9	591.9	591.9	591.9	591.9	591.9	591.9	591.9	591.9	591.9

TEST NUMBER: P935385

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-4000K

CANDELA DISTRIBUTION (continued):

	160°	170°	180°	190°	200°	202.5°	210°	220°	225°	230°	240°
0°	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3
2.5°	1732.6	1722.8	1722.8	1706.7	1700.2	1695.3	1687.3	1663.0	1656.5	1650.1	1659.8
5°	1747.1	1729.3	1716.3	1687.3	1663.0	1653.3	1622.6	1564.5	1525.7	1496.6	1480.4
7.5°	1750.3	1727.7	1703.4	1658.2	1600.0	1574.1	1480.4	1373.8	1344.6	1318.8	1302.6
10°	1747.1	1721.2	1687.3	1619.4	1482.1	1436.8	1343.0	1273.5	1255.7	1251.0	1255.7
12.5°	1735.8	1711.6	1664.7	1551.5	1359.2	1328.5	1273.5	1233.1	1229.9	1238.0	1281.6
15°	1716.3	1693.8	1638.8	1461.1	1291.4	1268.7	1229.9	1215.3	1233.1	1289.7	1420.7
17.5°	1696.9	1671.2	1603.3	1372.1	1239.6	1223.5	1195.9	1225.1	1325.3	1401.2	1444.8
20°	1671.2	1640.4	1562.9	1307.5	1202.4	1187.9	1174.9	1305.9	1381.8	1409.3	1433.6
22.5°	1640.4	1608.1	1507.8	1262.2	1163.7	1152.3	1160.4	1351.1	1381.8	1401.2	1422.2
25°	1600.0	1572.5	1443.2	1226.7	1132.9	1120.0	1150.7	1346.3	1364.0	1368.9	1410.9
27.5°	1562.9	1527.2	1375.4	1194.3	1095.8	1090.9	1158.8	1325.3	1338.1	1343.0	1388.3
30°	1517.6	1464.2	1299.4	1160.4	1057.0	1055.4	1160.4	1299.4	1296.1	1309.1	1354.4
32.5°	1470.7	1370.5	1213.7	1118.4	1019.8	1018.2	1149.1	1260.6	1257.4	1275.1	1309.1
35°	1427.1	1297.7	1097.4	1069.9	973.0	974.6	1121.6	1215.3	1217.0	1233.1	1254.1
37.5°	1381.8	1234.7	969.7	1016.6	927.7	927.7	1084.4	1173.3	1170.1	1174.9	1204.1
40°	1328.5	1136.2	856.5	947.1	885.7	880.8	1039.2	1128.0	1116.8	1115.2	1155.6
42.5°	1272.0	1027.9	772.5	854.9	837.2	830.8	984.2	1073.1	1052.1	1057.0	1108.7
45°	1210.5	998.8	707.8	722.5	787.1	782.2	924.4	1010.1	995.6	1008.5	1061.9
47.5°	1149.1	940.6	686.8	599.6	733.7	732.1	858.2	948.7	940.6	953.6	1010.1
50°	1065.0	875.9	685.2	514.0	673.9	680.4	779.0	888.9	888.9	900.2	960.0
52.5°	956.8	796.8	622.2	465.5	604.4	623.8	709.5	837.2	840.4	851.8	905.1
55°	858.2	714.3	577.0	428.3	522.0	564.0	641.7	783.9	790.3	801.6	850.1
57.5°	767.7	594.8	567.3	384.7	446.1	486.5	581.8	732.1	735.4	745.1	791.9
60°	670.7	429.9	520.4	337.8	379.8	410.5	526.9	670.7	682.1	688.5	728.9
62.5°	560.8	311.9	472.0	305.4	347.4	353.9	481.6	612.5	627.1	631.9	656.2
65°	399.2	261.9	400.8	278.0	313.5	315.2	433.1	552.8	565.6	573.8	591.5
67.5°	269.9	213.3	305.4	252.1	287.6	289.3	386.3	483.2	501.0	507.5	518.8
70°	187.5	142.2	226.2	224.6	258.6	261.9	336.2	420.2	436.3	441.2	447.7
72.5°	137.3	114.8	187.5	202.0	227.9	231.1	284.4	349.1	365.3	370.1	373.3
75°	105.0	121.2	151.9	176.2	194.0	195.6	232.7	284.4	295.8	299.0	300.6
77.5°	84.0	113.2	111.5	142.2	158.3	155.2	182.6	219.8	229.5	229.5	229.5
80°	63.0	88.9	84.0	101.8	116.3	113.2	130.9	156.8	160.0	163.2	161.6
82.5°	46.9	56.5	56.5	64.7	77.5	74.3	87.3	101.8	101.8	101.8	105.0
85°	29.1	32.3	25.9	33.9	43.6	42.0	48.5	54.9	56.5	56.5	53.3
87.5°	17.8	14.5	8.1	12.9	19.4	19.4	22.6	24.3	22.6	22.6	22.6
90°	10.3	7.2	4.0	7.2	10.3	11.1	17.5	26.0	30.2	26.8	20.2
92.5°	69.9	42.9	15.9	42.9	69.9	76.7	107.8	149.3	170.0	149.0	107.0
95°	137.0	87.6	38.1	87.6	137.0	149.4	265.2	419.6	496.9	443.4	336.4
97.5°	153.2	109.5	65.9	109.5	153.2	164.1	357.3	614.8	743.6	709.8	642.1
100°	166.5	126.9	87.4	126.9	166.5	176.4	390.8	676.6	819.5	822.0	826.8
102.5°	179.4	142.6	105.6	142.6	179.4	188.7	406.2	696.0	841.0	884.0	970.2
105°	199.1	167.9	136.7	167.9	199.1	206.9	417.5	698.2	838.6	935.1	1128.2
107.5°	226.7	197.6	168.5	197.6	226.7	234.0	419.6	667.1	790.8	925.6	1195.0
110°	242.5	216.2	189.9	216.2	242.5	249.1	416.4	639.6	751.1	901.7	1202.9

TEST NUMBER: P935385

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-4000K

CANDELA DISTRIBUTION (continued):

	160°	170°	180°	190°	200°	202.5°	210°	220°	225°	230°	240°
112.5°	261.0	236.0	211.0	236.0	261.0	267.3	416.6	615.5	715.0	869.1	1177.3
115°	288.9	265.8	242.7	265.8	288.9	294.7	420.4	588.0	671.7	820.2	1117.2
117.5°	316.1	295.1	274.1	295.1	316.1	321.4	428.2	570.7	642.0	775.9	1043.9
120°	331.9	312.1	292.3	312.1	331.9	336.8	434.5	564.9	630.0	752.4	997.3
122.5°	350.2	330.2	310.3	330.2	350.2	355.2	443.7	561.8	620.8	731.1	951.6
125°	374.0	355.8	337.7	355.8	374.0	378.6	456.0	559.2	610.9	704.6	891.9
127.5°	396.6	378.2	359.8	378.2	396.6	401.2	468.3	557.8	602.6	683.0	843.8
130°	411.3	391.6	371.8	391.6	411.3	416.3	477.3	558.8	599.5	671.1	814.2
132.5°	423.6	403.9	384.1	403.9	423.6	428.6	484.6	559.2	596.6	660.7	788.8
135°	438.4	420.4	402.4	420.4	438.4	442.9	492.6	558.8	591.9	645.6	752.8
137.5°	456.7	438.9	421.1	438.9	456.7	461.2	504.4	562.2	591.0	636.4	727.1
140°	469.4	453.0	436.5	453.0	469.4	473.5	511.8	562.8	588.3	627.4	705.8
142.5°	478.8	463.7	448.5	463.7	478.8	482.7	517.9	564.8	588.3	622.7	691.5
145°	493.2	480.0	466.7	480.0	493.2	496.5	525.8	564.9	584.4	612.5	668.8
147.5°	510.7	497.9	485.0	497.9	510.7	514.0	537.5	568.7	584.4	606.5	650.8
150°	520.2	508.5	496.9	508.5	520.2	523.1	543.6	570.8	584.4	603.1	640.4
152.5°	526.9	518.0	509.2	518.0	526.9	529.1	547.5	572.0	584.4	600.3	632.2
155°	540.6	534.0	527.5	534.0	540.6	542.2	556.3	575.0	584.4	597.1	622.5
157.5°	553.7	547.4	541.0	547.4	553.7	555.3	565.0	577.9	584.4	594.2	614.0
160°	560.0	555.1	550.2	555.1	560.0	561.3	569.0	579.2	584.4	592.9	609.8
162.5°	566.7	563.0	559.2	563.0	566.7	567.7	573.2	580.6	584.4	591.5	605.8
165°	575.9	572.5	569.2	572.5	575.9	576.7	579.3	582.6	584.4	589.5	599.7
167.5°	581.6	580.0	578.3	580.0	581.6	582.0	584.1	586.8	588.3	591.6	598.3
170°	587.5	585.9	584.4	585.9	587.5	587.9	588.0	588.2	588.3	591.6	598.3
172.5°	588.2	587.9	587.5	587.9	588.2	588.3	588.3	588.3	588.3	591.0	596.2
175°	591.9	591.9	591.9	591.9	591.9	591.9	590.7	589.0	588.3	590.0	593.3
177.5°	591.9	591.9	591.9	591.9	591.9	591.9	591.0	589.7	589.0	590.4	593.1
180°	591.9	591.9	591.9	591.9	591.9	591.9	591.9	591.9	591.9	591.9	591.9

TEST NUMBER: P935385

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-4000K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	260°	270°	280°	290°	292.5°	300°	310°	315°	320°
0°	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3	1708.3
2.5°	1648.5	1643.7	1650.1	1632.3	1650.1	1643.7	1648.5	1659.8	1650.1	1656.5	1663.0
5°	1446.4	1438.4	1412.5	1391.5	1412.5	1438.4	1446.4	1480.4	1496.6	1525.7	1564.5
7.5°	1293.0	1286.5	1280.0	1267.1	1280.0	1286.5	1293.0	1302.6	1318.8	1344.6	1373.8
10°	1259.0	1260.6	1270.3	1268.7	1270.3	1260.6	1259.0	1255.7	1251.0	1255.7	1273.5
12.5°	1346.3	1360.8	1414.2	1410.9	1414.2	1360.8	1346.3	1281.6	1238.0	1229.9	1233.1
15°	1446.4	1451.3	1462.7	1464.2	1462.7	1451.3	1446.4	1420.7	1289.7	1233.1	1215.3
17.5°	1456.2	1457.8	1465.8	1465.8	1465.8	1457.8	1456.2	1444.8	1401.2	1325.3	1225.1
20°	1448.1	1451.3	1467.5	1470.7	1467.5	1451.3	1448.1	1433.6	1409.3	1381.8	1305.9
22.5°	1444.8	1451.3	1464.2	1462.7	1464.2	1451.3	1444.8	1422.2	1401.2	1381.8	1351.1
25°	1428.7	1428.7	1430.3	1431.9	1430.3	1428.7	1428.7	1410.9	1368.9	1364.0	1346.3
27.5°	1394.8	1398.0	1407.7	1406.0	1407.7	1398.0	1394.8	1388.3	1343.0	1338.1	1325.3
30°	1364.0	1360.8	1352.8	1346.3	1352.8	1360.8	1364.0	1354.4	1309.1	1296.1	1299.4
32.5°	1312.4	1304.2	1296.1	1291.4	1296.1	1304.2	1312.4	1309.1	1275.1	1257.4	1260.6
35°	1251.0	1252.5	1251.0	1246.1	1251.0	1252.5	1251.0	1254.1	1233.1	1217.0	1215.3
37.5°	1207.3	1210.5	1208.9	1202.4	1208.9	1210.5	1207.3	1204.1	1174.9	1170.1	1173.3
40°	1162.0	1163.7	1162.0	1157.2	1162.0	1163.7	1162.0	1155.6	1115.2	1116.8	1128.0
42.5°	1118.4	1116.8	1111.9	1108.7	1111.9	1116.8	1118.4	1108.7	1057.0	1052.1	1073.1
45°	1068.3	1069.9	1060.2	1055.4	1060.2	1069.9	1068.3	1061.9	1008.5	995.6	1010.1
47.5°	1018.2	1018.2	1010.1	1005.2	1010.1	1018.2	1018.2	1010.1	953.6	940.6	948.7
50°	964.8	963.2	951.9	950.3	951.9	963.2	964.8	960.0	900.2	888.9	888.9
52.5°	903.4	903.4	905.1	908.3	905.1	903.4	903.4	905.1	851.8	840.4	837.2
55°	850.1	851.8	863.0	866.3	863.0	851.8	850.1	850.1	801.6	790.3	783.9
57.5°	795.1	795.1	803.3	803.3	803.3	795.1	795.1	791.9	745.1	735.4	732.1
60°	732.1	735.4	741.8	740.2	741.8	735.4	732.1	728.9	688.5	682.1	670.7
62.5°	665.8	669.1	670.7	667.4	670.7	669.1	665.8	656.2	631.9	627.1	612.5
65°	596.4	599.6	601.2	598.0	601.2	599.6	596.4	591.5	573.8	565.6	552.8
67.5°	525.2	523.6	522.0	528.5	522.0	523.6	525.2	518.8	507.5	501.0	483.2
70°	452.5	452.5	451.0	454.1	451.0	452.5	452.5	447.7	441.2	436.3	420.2
72.5°	374.9	373.3	379.8	374.9	379.8	373.3	374.9	373.3	370.1	365.3	349.1
75°	299.0	302.3	299.0	303.9	299.0	302.3	299.0	300.6	299.0	295.8	284.4
77.5°	227.9	231.1	227.9	227.9	227.9	231.1	227.9	229.5	229.5	229.5	219.8
80°	161.6	160.0	160.0	158.3	160.0	160.0	161.6	161.6	163.2	160.0	156.8
82.5°	103.4	101.8	101.8	105.0	101.8	101.8	103.4	105.0	101.8	101.8	101.8
85°	56.5	58.2	54.9	54.9	54.9	58.2	56.5	53.3	56.5	56.5	54.9
87.5°	21.0	19.4	19.4	19.4	19.4	19.4	21.0	22.6	22.6	22.6	24.3
90°	15.1	15.1	15.1	15.1	15.1	15.1	15.1	20.2	26.8	30.2	26.0
92.5°	75.4	72.5	60.5	48.4	60.5	72.5	75.4	107.0	149.0	170.0	149.3
95°	256.2	247.2	210.8	174.4	210.8	247.2	256.2	336.4	443.4	496.9	419.6
97.5°	591.4	574.1	504.9	435.8	504.9	574.1	591.4	642.1	709.8	743.6	614.8
100°	830.6	809.9	727.5	645.1	727.5	809.9	830.6	826.8	822.0	819.5	676.6
102.5°	1034.7	1017.1	946.5	875.9	946.5	1017.1	1034.7	970.2	884.0	841.0	696.0
105°	1273.1	1263.7	1225.6	1187.7	1225.6	1263.7	1273.1	1128.2	935.1	838.6	698.2
107.5°	1397.1	1399.4	1408.5	1417.7	1408.5	1399.4	1397.1	1195.0	925.6	790.8	667.1
110°	1428.8	1438.7	1478.2	1517.8	1478.2	1438.7	1428.8	1202.9	901.7	751.1	639.6

TEST NUMBER: P935385

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-4000K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	260°	270°	280°	290°	292.5°	300°	310°	315°	320°
112.5°	1408.5	1423.7	1484.5	1545.2	1484.5	1423.7	1408.5	1177.3	869.1	715.0	615.5
115°	1339.9	1360.9	1445.1	1529.3	1445.1	1360.9	1339.9	1117.2	820.2	671.7	588.0
117.5°	1244.9	1268.2	1361.6	1455.0	1361.6	1268.2	1244.9	1043.9	775.9	642.0	570.7
120°	1181.0	1203.7	1294.4	1385.1	1294.4	1203.7	1181.0	997.3	752.4	630.0	564.9
122.5°	1117.0	1139.3	1228.9	1318.4	1228.9	1139.3	1117.0	951.6	731.1	620.8	561.8
125°	1032.4	1053.0	1135.4	1217.9	1135.4	1053.0	1032.4	891.9	704.6	610.9	559.2
127.5°	964.5	981.8	1051.5	1121.0	1051.5	981.8	964.5	843.8	683.0	602.6	557.8
130°	921.6	937.6	1001.9	1066.2	1001.9	937.6	921.6	814.2	671.1	599.5	558.8
132.5°	885.0	899.4	956.9	1014.5	956.9	899.4	885.0	788.8	660.7	596.6	559.2
135°	833.3	845.7	895.3	945.0	895.3	845.7	833.3	752.8	645.6	591.9	558.8
137.5°	795.2	805.4	846.0	886.6	846.0	805.4	795.2	727.1	636.4	591.0	562.2
140°	764.7	774.1	812.1	850.0	812.1	774.1	764.7	705.8	627.4	588.3	562.8
142.5°	743.2	751.4	784.1	816.7	784.1	751.4	743.2	691.5	622.7	588.3	564.8
145°	711.0	717.2	741.9	766.7	741.9	717.2	711.0	668.8	612.5	584.4	564.9
147.5°	684.1	689.2	709.7	730.1	709.7	689.2	684.1	650.8	606.5	584.4	568.7
150°	668.5	672.6	689.2	705.8	689.2	672.6	668.5	640.4	603.1	584.4	570.8
152.5°	656.2	659.3	671.8	684.4	671.8	659.3	656.2	632.2	600.3	584.4	572.0
155°	641.5	643.6	651.9	660.2	651.9	643.6	641.5	622.5	597.1	584.4	575.0
157.5°	628.8	630.2	636.1	642.0	636.1	630.2	628.8	614.0	594.2	584.4	577.9
160°	622.5	623.3	626.7	630.0	626.7	623.3	622.5	609.8	592.9	584.4	579.2
162.5°	616.5	617.2	620.5	623.6	620.5	617.2	616.5	605.8	591.5	584.4	580.6
165°	607.4	608.2	611.6	614.9	611.6	608.2	607.4	599.7	589.5	584.4	582.6
167.5°	603.4	603.8	605.1	606.5	605.1	603.8	603.4	598.3	591.6	588.3	586.8
170°	603.4	603.4	603.4	603.4	603.4	603.4	603.4	598.3	591.6	588.3	588.2
172.5°	600.2	599.9	598.7	597.4	598.7	599.9	600.2	596.2	591.0	588.3	588.3
175°	595.8	595.8	595.8	595.8	595.8	595.8	595.8	593.3	590.0	588.3	589.0
177.5°	595.1	594.7	593.3	591.9	593.3	594.7	595.1	593.1	590.4	589.0	589.7
180°	591.9	591.9	591.9	591.9	591.9	591.9	591.9	591.9	591.9	591.9	591.9

TEST NUMBER: P935385

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-4000K

CANDELA DISTRIBUTION (continued):

	330°	337.5°	340°	350°	360°
0°	1708.3	1708.3	1708.3	1708.3	1708.3
2.5°	1687.3	1695.3	1700.2	1706.7	1722.8
5°	1622.6	1653.3	1663.0	1687.3	1716.3
7.5°	1480.4	1574.1	1600.0	1658.2	1703.4
10°	1343.0	1436.8	1482.1	1619.4	1687.3
12.5°	1273.5	1328.5	1359.2	1551.5	1664.7
15°	1229.9	1268.7	1291.4	1461.1	1638.8
17.5°	1195.9	1223.5	1239.6	1372.1	1603.3
20°	1174.9	1187.9	1202.4	1307.5	1562.9
22.5°	1160.4	1152.3	1163.7	1262.2	1507.8
25°	1150.7	1120.0	1132.9	1226.7	1443.2
27.5°	1158.8	1090.9	1095.8	1194.3	1375.4
30°	1160.4	1055.4	1057.0	1160.4	1299.4
32.5°	1149.1	1018.2	1019.8	1118.4	1213.7
35°	1121.6	974.6	973.0	1069.9	1097.4
37.5°	1084.4	927.7	927.7	1016.6	969.7
40°	1039.2	880.8	885.7	947.1	856.5
42.5°	984.2	830.8	837.2	854.9	772.5
45°	924.4	782.2	787.1	722.5	707.8
47.5°	858.2	732.1	733.7	599.6	686.8
50°	779.0	680.4	673.9	514.0	685.2
52.5°	709.5	623.8	604.4	465.5	622.2
55°	641.7	564.0	522.0	428.3	577.0
57.5°	581.8	486.5	446.1	384.7	567.3
60°	526.9	410.5	379.8	337.8	520.4
62.5°	481.6	353.9	347.4	305.4	472.0
65°	433.1	315.2	313.5	278.0	400.8
67.5°	386.3	289.3	287.6	252.1	305.4
70°	336.2	261.9	258.6	224.6	226.2
72.5°	284.4	231.1	227.9	202.0	187.5
75°	232.7	195.6	194.0	176.2	151.9
77.5°	182.6	155.2	158.3	142.2	111.5
80°	130.9	113.2	116.3	101.8	84.0
82.5°	87.3	74.3	77.5	64.7	56.5
85°	48.5	42.0	43.6	33.9	25.9
87.5°	22.6	19.4	19.4	12.9	8.1
90°	17.5	11.1	10.3	7.2	4.0
92.5°	107.8	76.7	69.9	42.9	15.9
95°	265.2	149.4	137.0	87.6	38.1
97.5°	357.3	164.1	153.2	109.5	65.9
100°	390.8	176.4	166.5	126.9	87.4
102.5°	406.2	188.7	179.4	142.6	105.6
105°	417.5	206.9	199.1	167.9	136.7
107.5°	419.6	234.0	226.7	197.6	168.5
110°	416.4	249.1	242.5	216.2	189.9



TEST NUMBER: P935385

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-4000K

CANDELA DISTRIBUTION (continued):

	330°	337.5°	340°	350°	360°
112.5°	416.6	267.3	261.0	236.0	211.0
115°	420.4	294.7	288.9	265.8	242.7
117.5°	428.2	321.4	316.1	295.1	274.1
120°	434.5	336.8	331.9	312.1	292.3
122.5°	443.7	355.2	350.2	330.2	310.3
125°	456.0	378.6	374.0	355.8	337.7
127.5°	468.3	401.2	396.6	378.2	359.8
130°	477.3	416.3	411.3	391.6	371.8
132.5°	484.6	428.6	423.6	403.9	384.1
135°	492.6	442.9	438.4	420.4	402.4
137.5°	504.4	461.2	456.7	438.9	421.1
140°	511.8	473.5	469.4	453.0	436.5
142.5°	517.9	482.7	478.8	463.7	448.5
145°	525.8	496.5	493.2	480.0	466.7
147.5°	537.5	514.0	510.7	497.9	485.0
150°	543.6	523.1	520.2	508.5	496.9
152.5°	547.5	529.1	526.9	518.0	509.2
155°	556.3	542.2	540.6	534.0	527.5
157.5°	565.0	555.3	553.7	547.4	541.0
160°	569.0	561.3	560.0	555.1	550.2
162.5°	573.2	567.7	566.7	563.0	559.2
165°	579.3	576.7	575.9	572.5	569.2
167.5°	584.1	582.0	581.6	580.0	578.3
170°	588.0	587.9	587.5	585.9	584.4
172.5°	588.3	588.3	588.2	587.9	587.5
175°	590.7	591.9	591.9	591.9	591.9
177.5°	591.0	591.9	591.9	591.9	591.9
180°	591.9	591.9	591.9	591.9	591.9

TEST NUMBER: P935385

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-4000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.72	15.62	15.65	16.56	17.78	17.52	18.41	18.44	19.36	20.58
	3H	15.20	16.00	16.14	16.95	18.20	18.86	19.66	19.79	20.61	21.85
	4H	15.39	16.15	16.35	17.11	18.36	19.30	20.05	20.25	21.01	22.26
	6H	15.51	16.21	16.48	17.18	18.44	19.57	20.27	20.54	21.24	22.50
	8H	15.52	16.18	16.49	17.16	18.42	19.65	20.31	20.62	21.29	22.55
	12H	15.49	16.12	16.46	17.10	18.38	19.68	20.31	20.66	21.29	22.58
4H	2H	15.75	16.51	16.71	17.47	18.72	17.93	18.69	18.89	19.65	20.90
	3H	16.78	17.41	17.75	18.40	19.66	19.43	20.06	20.40	21.05	22.32
	4H	17.06	17.63	18.03	18.62	19.91	19.96	20.53	20.93	21.51	22.80
	6H	17.18	17.68	18.17	18.69	19.97	20.31	20.81	21.30	21.82	23.10
	8H	17.19	17.66	18.18	18.65	19.96	20.42	20.88	21.41	21.88	23.18
	12H	17.16	17.58	18.17	18.59	19.90	20.47	20.89	21.48	21.90	23.21
8H	4H	17.51	17.97	18.50	18.97	20.27	20.08	20.55	21.07	21.55	22.85
	6H	17.77	18.16	18.79	19.19	20.50	20.51	20.90	21.53	21.94	23.24
	8H	17.81	18.15	18.84	19.18	20.50	20.66	21.00	21.68	22.03	23.35
	12H	17.80	18.10	18.83	19.12	20.48	20.75	21.05	21.78	22.07	23.44
12H	4H	17.52	17.93	18.52	18.95	20.26	20.05	20.47	21.06	21.48	22.79
	6H	17.83	18.17	18.85	19.20	20.52	20.51	20.85	21.53	21.88	23.20
	8H	17.90	18.20	18.93	19.22	20.58	20.67	20.97	21.70	21.99	23.35

END OF REPORT