

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937690

Luminaire Tested: SQ4-FB-100U-100D-B2750-1D-UNV-W2A-W-6-4000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P937690
REPORT IS A COMBINATION OF REPORTS P933575 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-100U-100D-B2750-1D-UNV-W2A-W-6-4000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10312.1 lumens
Efficiency: N/A
Efficacy: 118.5 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 6' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 87
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P937690

CATALOG NUMBER: SQ4-FB-100U-100D-B2750-1D-UNV-W2A-W-6-4000K

Luminous Intensity Polar Plot

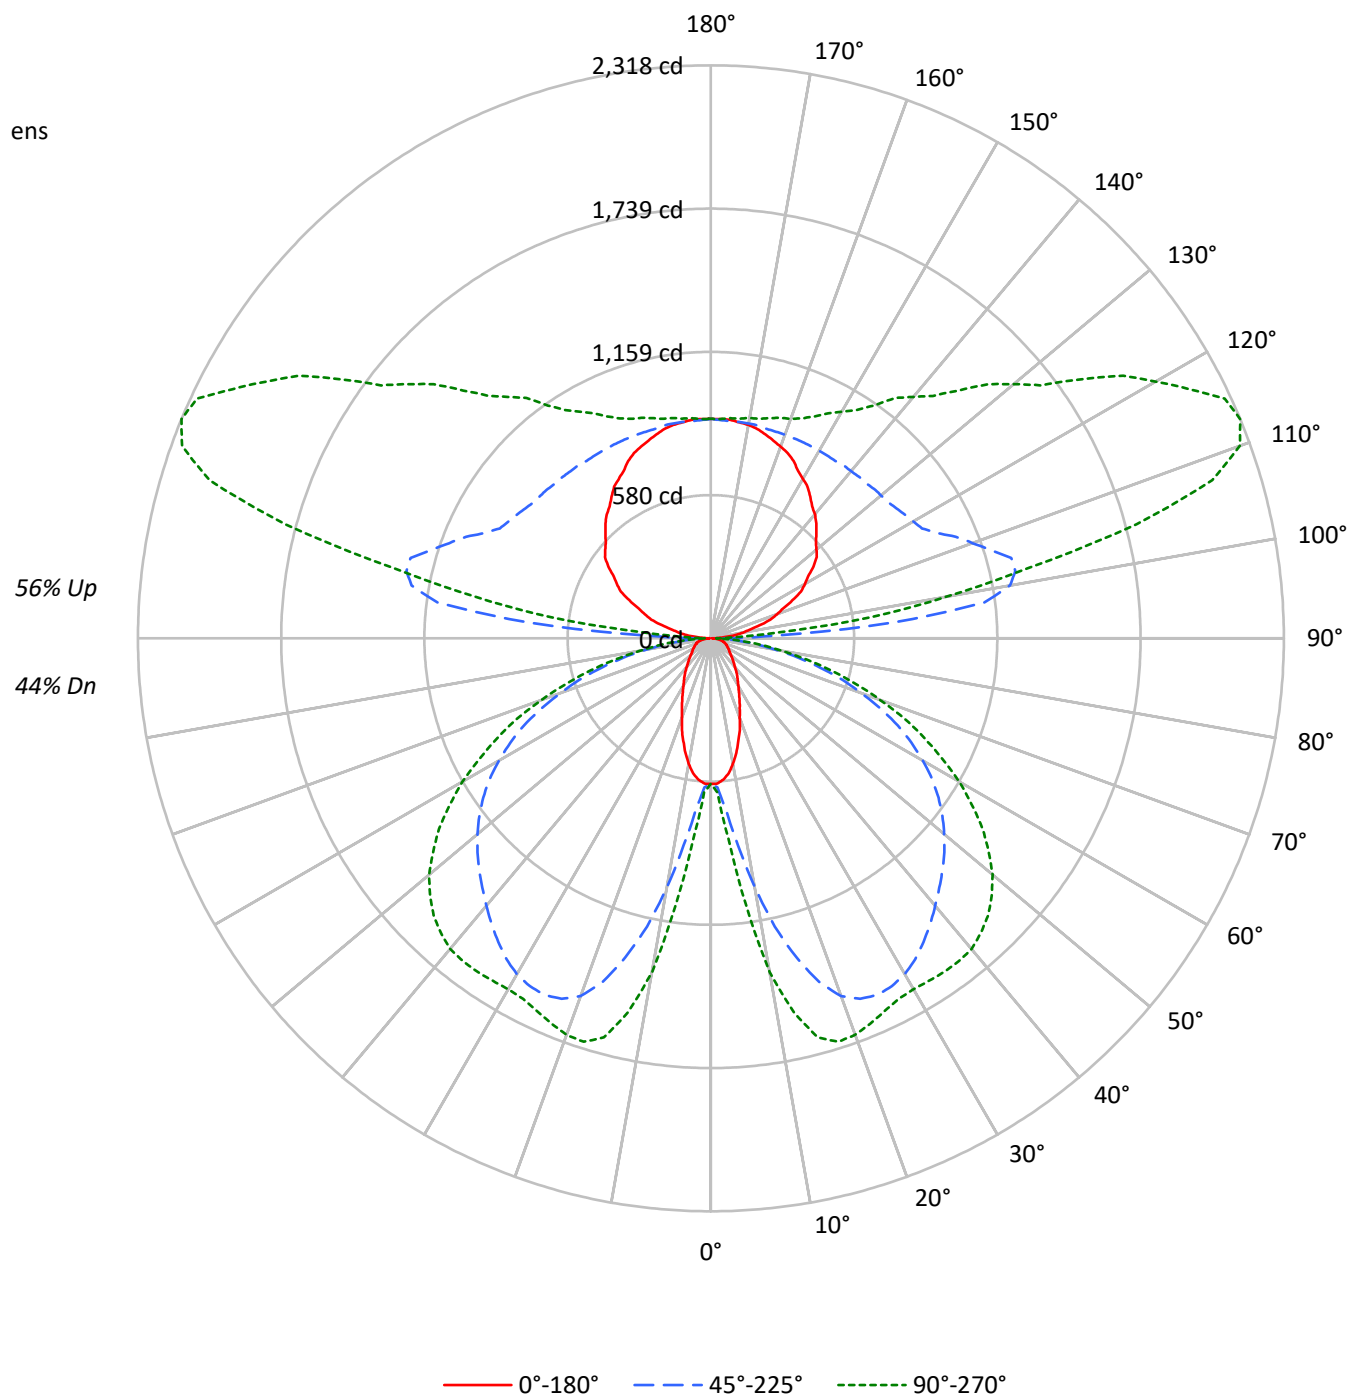

TEST NUMBER: P937690

CATALOG NUMBER: SQ4-FB-100U-100D-B2750-1D-UNV-W2A-W-6-4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51			44
1	96	91	87	84	88	84	80	77	69	67	65	56	55	53	44	43	42			36
2	87	79	73	68	79	73	67	63	60	56	53	49	46	43	38	36	34			30
3	79	69	62	56	72	63	57	52	53	48	44	43	39	36	33	31	29			24
4	72	61	53	46	65	56	49	43	46	41	37	38	34	30	29	27	24			20
5	66	54	46	39	60	49	42	37	41	36	31	33	29	26	26	23	21			17
6	60	48	40	34	55	44	37	31	37	31	27	30	26	22	24	20	18			15
7	56	43	35	29	51	40	32	27	33	27	23	27	23	19	21	18	16			13
8	51	39	31	26	47	36	29	24	30	24	20	25	20	17	19	16	14			11
9	48	35	28	23	44	33	26	21	27	22	18	22	18	15	18	15	12			10
10	44	32	25	20	41	30	23	19	25	20	16	21	16	14	16	13	11			9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3641	3641	3641
5°	3556	4207	4894
10°	3224	6131	8114
15°	2740	8009	9798
20°	2229	9279	9986
25°	1859	9707	9782
30°	1567	9766	9764
35°	1385	9602	10016
40°	1206	9388	10277
45°	1091	9231	10317
50°	1000	9089	10147
55°	957	8882	9697
60°	979	8489	8986
65°	1016	7892	8010
70°	1081	6878	6768
75°	1193	5602	5281
80°	1292	3880	3559
85°	1127	2054	1821

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 45°

Luminance: 10317 cd/sqm

TEST NUMBER: P937690

CATALOG NUMBER: SQ4-FB-100U-100D-B2750-1D-UNV-W2A-W-6-4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	76.1	0.7
10°-20°	337.5	3.3
20°-30°	590.2	5.7
30°-40°	759.8	7.4
40°-50°	848.7	8.2
50°-60°	812.9	7.9
60°-70°	644.2	6.2
70°-80°	378.8	3.7
80°-90°	108.6	1.1
90°-100°	432.8	4.2
100°-110°	1137.7	11.0
110°-120°	1179.7	11.4
120°-130°	946.3	9.2
130°-140°	742.5	7.2
140°-150°	569.9	5.5
150°-160°	410.4	4.0
160°-170°	251.1	2.4
170°-180°	84.8	0.8
0°-30°	1003.8	9.7
0°-40°	1763.7	17.1
0°-60°	3425.2	33.2
0°-90°	4556.8	44.2
90°-120°	2750.2	26.7
90°-150°	5008.9	48.6
90°-180°	5755.0	55.8
0°-180°	10312.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	589	589	589	589	589	
5°	574	615	693	784	812	53
15°	430	793	1336	1620	1671	120
25°	274	899	1592	1662	1664	126
35°	186	859	1499	1584	1647	116
45°	127	685	1325	1518	1586	98
55°	91	435	1124	1306	1342	83
65°	72	231	835	939	952	71
75°	53	142	458	504	505	55
85°	19	44	114	125	127	20
90°	6	17	45	23	23	6
95°	57	224	745	384	262	64
105°	205	310	1258	1910	1782	217
115°	364	442	1008	2010	2294	360
125°	506	568	916	1549	1827	450
135°	604	664	888	1250	1418	467
145°	700	745	876	1066	1150	439
155°	791	813	876	962	990	364
165°	854	865	876	911	922	241
175°	888	888	882	894	894	84
180°	888	888	888	888	888	

TEST NUMBER: P937690

CATALOG NUMBER: SQ4-FB-100U-100D-B2750-1D-UNV-W2A-W-6-4000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	588.6	588.6	588.6	588.6	588.6	588.6	588.6	588.6	588.6	588.6	588.6
2.5°	588.6	588.6	592.4	594.3	598.0	599.9	603.8	607.6	618.8	620.8	624.6
5°	573.5	581.0	605.7	615.1	641.6	677.6	692.7	717.3	768.4	783.6	793.0
7.5°	550.7	567.7	628.4	643.5	709.8	804.4	844.1	897.1	978.5	1018.2	1050.4
10°	514.7	550.7	658.7	694.6	802.5	946.3	1020.1	1094.0	1217.0	1271.9	1292.7
12.5°	475.0	533.7	690.8	740.0	895.2	1105.3	1194.2	1275.6	1415.7	1489.5	1500.9
15°	429.7	509.1	721.1	793.0	993.6	1237.8	1336.2	1436.5	1567.1	1620.1	1633.3
17.5°	389.9	490.2	749.5	825.2	1069.3	1357.1	1457.3	1540.6	1646.6	1682.5	1692.0
20°	340.6	459.9	768.4	866.9	1148.9	1444.1	1540.6	1605.0	1676.9	1699.6	1703.3
22.5°	304.7	427.7	779.8	881.9	1201.8	1497.1	1578.4	1629.5	1678.8	1686.3	1688.2
25°	274.5	391.7	777.8	899.0	1247.2	1529.2	1591.7	1629.5	1658.0	1661.7	1661.7
27.5°	246.0	352.0	770.3	902.8	1281.3	1536.8	1586.0	1612.5	1625.8	1633.3	1633.3
30°	221.5	314.2	751.4	895.2	1296.4	1529.2	1569.0	1582.2	1595.5	1606.8	1612.5
32.5°	202.6	278.2	722.9	880.0	1298.3	1510.3	1538.7	1546.2	1565.1	1591.7	1601.2
35°	185.5	242.3	690.8	859.2	1287.0	1480.1	1499.0	1506.5	1544.3	1584.2	1597.3
37.5°	168.5	215.7	649.2	823.3	1270.0	1444.1	1457.3	1470.6	1529.2	1576.5	1591.7
40°	151.4	193.0	599.9	783.6	1243.4	1400.5	1411.9	1432.7	1510.3	1565.1	1580.3
42.5°	138.2	174.1	546.9	741.9	1209.4	1351.3	1368.3	1398.6	1487.6	1546.2	1563.3
45°	126.8	155.2	490.2	685.1	1165.9	1300.2	1324.9	1366.5	1461.1	1517.9	1533.1
47.5°	115.5	141.9	431.6	626.5	1118.5	1249.1	1281.3	1328.6	1425.1	1480.1	1493.2
50°	106.0	128.7	372.8	564.0	1067.4	1194.2	1232.1	1281.3	1379.7	1430.8	1447.9
52.5°	98.5	117.4	317.9	501.6	1008.8	1137.5	1181.0	1232.1	1324.9	1374.1	1385.4
55°	90.8	107.9	270.6	435.3	948.2	1076.9	1124.2	1173.4	1264.2	1305.9	1313.5
57.5°	87.1	100.3	230.9	372.8	883.9	1008.8	1061.8	1107.2	1192.3	1224.5	1232.1
60°	81.4	94.6	200.6	319.8	813.9	944.4	989.9	1035.2	1107.2	1133.7	1139.3
62.5°	75.7	90.8	177.9	268.7	741.9	868.7	914.1	955.8	1016.3	1035.2	1042.9
65°	71.9	87.1	160.9	230.9	668.1	789.2	834.7	870.6	919.9	938.8	942.5
67.5°	68.1	83.3	147.6	198.7	594.3	709.8	743.8	777.8	815.8	834.7	836.6
70°	62.5	79.5	136.3	176.0	518.6	618.8	647.3	683.2	713.5	722.9	728.7
72.5°	58.6	73.8	128.7	159.0	441.0	531.8	558.3	579.1	605.7	615.1	615.1
75°	53.0	66.3	121.1	141.9	361.5	435.3	458.0	478.8	499.7	503.5	497.7
77.5°	47.3	58.6	104.1	119.3	282.0	344.5	363.4	374.7	391.7	395.6	397.5
80°	39.7	51.1	81.4	92.7	204.4	253.6	266.8	276.3	291.5	291.5	295.3
82.5°	30.3	39.7	58.6	66.3	138.2	174.1	185.5	191.2	200.6	200.6	200.6
85°	18.9	24.6	37.8	43.5	83.3	106.0	113.5	115.5	123.0	124.9	124.9
87.5°	9.5	13.3	24.6	26.5	43.5	54.9	54.9	58.6	58.6	56.8	54.9
90°	5.9	10.7	15.5	16.7	26.3	39.0	45.3	40.2	30.2	22.6	22.6
92.5°	23.9	64.4	104.9	115.0	161.7	223.9	255.0	223.5	160.4	113.2	108.7
95°	57.2	131.3	205.5	224.0	397.9	629.5	745.4	665.2	504.6	384.3	370.6
97.5°	98.9	164.4	229.8	246.1	535.9	922.2	1115.4	1064.7	963.3	887.2	861.2
100°	131.1	190.4	249.7	264.5	586.1	1014.8	1229.2	1232.9	1240.4	1245.9	1215.0
102.5°	158.5	213.9	269.2	283.1	609.2	1044.0	1261.4	1326.0	1455.2	1552.2	1525.7
105°	204.9	251.8	298.7	310.5	626.3	1047.3	1257.8	1402.7	1692.4	1909.6	1895.4
107.5°	252.6	296.3	340.1	351.0	629.4	1000.6	1186.3	1388.4	1792.4	2095.6	2099.0
110°	284.8	324.2	363.8	373.6	624.7	959.4	1126.7	1352.6	1804.4	2143.2	2158.0

TEST NUMBER: P937690

CATALOG NUMBER: SQ4-FB-100U-100D-B2750-1D-UNV-W2A-W-6-4000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	316.4	354.0	391.6	401.0	624.9	923.3	1072.5	1303.7	1766.1	2112.8	2135.6
115°	364.0	398.7	433.4	442.1	630.6	881.8	1007.5	1230.2	1675.7	2009.8	2041.4
117.5°	411.1	442.6	474.2	482.0	642.2	856.0	962.8	1163.9	1565.8	1867.3	1902.4
120°	438.5	468.2	497.8	505.3	651.9	847.3	945.0	1128.6	1495.9	1771.4	1805.4
122.5°	465.4	495.3	525.2	532.7	665.5	842.7	931.3	1096.7	1427.4	1675.5	1709.1
125°	506.4	533.7	561.1	567.8	684.1	839.0	916.4	1056.9	1337.9	1548.6	1579.6
127.5°	539.9	567.4	595.0	601.8	702.5	836.8	903.9	1024.5	1265.8	1446.7	1472.8
130°	557.7	587.4	617.0	624.5	716.1	838.1	899.1	1006.5	1221.3	1382.4	1406.4
132.5°	576.2	605.9	635.5	642.9	726.9	839.0	894.9	991.1	1183.3	1327.5	1349.1
135°	603.6	630.6	657.6	664.4	738.9	838.1	887.8	968.3	1129.3	1250.1	1268.7
137.5°	631.5	658.3	685.1	691.8	756.7	843.4	886.6	954.7	1090.8	1192.9	1208.1
140°	654.8	679.5	704.1	710.2	767.6	844.1	882.4	941.2	1058.8	1147.0	1161.2
142.5°	672.7	695.5	718.3	724.0	776.8	847.2	882.4	934.1	1037.3	1114.8	1127.0
145°	700.1	720.0	739.8	744.8	788.7	847.3	876.5	918.7	1003.2	1066.5	1075.8
147.5°	727.5	746.8	766.1	771.0	806.1	853.0	876.5	909.7	976.2	1026.1	1033.7
150°	745.4	762.9	780.3	784.7	815.3	856.1	876.5	904.6	960.6	1002.8	1009.0
152.5°	763.9	777.2	790.4	793.7	821.3	858.1	876.5	900.5	948.4	984.3	989.0
155°	791.3	801.1	810.8	813.3	834.4	862.5	876.5	895.6	933.7	962.3	965.4
157.5°	811.6	821.1	830.6	833.0	847.5	866.9	876.5	891.3	921.0	943.3	945.4
160°	825.2	832.7	840.1	841.9	853.5	868.9	876.5	889.2	914.6	933.7	934.9
162.5°	839.0	844.5	850.0	851.5	859.8	871.0	876.5	887.2	908.7	924.7	925.9
165°	853.9	858.8	863.9	865.1	869.0	874.0	876.5	884.1	899.5	911.1	912.3
167.5°	867.5	869.9	872.3	872.9	876.0	880.3	882.4	887.5	897.5	905.1	905.6
170°	876.5	878.9	881.3	881.8	882.0	882.3	882.4	887.5	897.5	905.1	905.1
172.5°	881.3	881.8	882.3	882.4	882.4	882.4	882.4	886.4	894.4	900.3	899.8
175°	887.8	887.8	887.8	887.8	886.0	883.6	882.4	884.9	890.0	893.8	893.8
177.5°	887.8	887.8	887.8	887.8	886.4	884.6	883.7	885.7	889.6	892.5	892.0
180°	887.8	887.8	887.8	887.8	887.8	887.8	887.8	887.8	887.8	887.8	887.8

TEST NUMBER: P937690

CATALOG NUMBER: SQ4-FB-100U-100D-B2750-1D-UNV-W2A-W-6-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	588.6	588.6
2.5°	628.4	624.6
5°	808.1	811.9
7.5°	1088.2	1086.4
10°	1353.2	1370.2
12.5°	1546.2	1550.1
15°	1663.6	1671.2
17.5°	1709.1	1710.9
20°	1710.9	1707.2
22.5°	1690.1	1686.3
25°	1665.5	1663.6
27.5°	1642.8	1644.7
30°	1633.3	1639.0
32.5°	1633.3	1642.8
35°	1637.2	1646.6
37.5°	1635.2	1646.6
40°	1627.6	1640.9
42.5°	1606.8	1616.3
45°	1574.7	1586.0
47.5°	1533.1	1540.6
50°	1480.1	1487.6
52.5°	1413.8	1415.7
55°	1334.3	1341.9
57.5°	1249.1	1251.0
60°	1154.5	1160.1
62.5°	1054.2	1054.2
65°	948.2	951.9
67.5°	838.4	847.8
70°	726.8	728.7
72.5°	617.0	617.0
75°	503.5	505.3
77.5°	395.6	395.6
80°	293.4	295.3
82.5°	202.6	206.3
85°	126.8	126.8
87.5°	58.6	53.0
90°	22.6	22.6
92.5°	90.6	72.7
95°	316.1	261.6
97.5°	757.4	653.6
100°	1091.3	967.6
102.5°	1419.7	1313.8
105°	1838.5	1781.6
107.5°	2112.8	2126.6
110°	2217.4	2276.7



TEST NUMBER: P937690

CATALOG NUMBER: SQ4-FB-100U-100D-B2750-1D-UNV-W2A-W-6-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	2226.7	2317.8
115°	2167.7	2294.0
117.5°	2042.5	2182.6
120°	1941.6	2077.7
122.5°	1843.3	1977.6
125°	1703.1	1826.8
127.5°	1577.2	1681.5
130°	1502.9	1599.2
132.5°	1435.5	1521.8
135°	1343.1	1417.5
137.5°	1269.0	1329.9
140°	1218.2	1275.1
142.5°	1176.1	1225.1
145°	1113.0	1150.0
147.5°	1064.4	1095.2
150°	1033.9	1058.8
152.5°	1007.8	1026.6
155°	977.8	990.2
157.5°	954.1	962.8
160°	940.0	945.0
162.5°	930.6	935.4
165°	917.4	922.3
167.5°	907.7	909.8
170°	905.1	905.1
172.5°	898.0	896.2
175°	893.8	893.8
177.5°	889.9	887.8
180°	887.8	887.8

TEST NUMBER: P937690

CATALOG NUMBER: SQ4-FB-100U-100D-B2750-1D-UNV-W2A-W-6-4000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.94	5.78	5.93	6.79	8.14	18.10	18.94	19.10	19.96	21.31
	3H	5.64	6.40	6.65	7.42	8.79	19.93	20.69	20.94	21.72	23.08
	4H	5.94	6.66	6.96	7.68	9.06	20.57	21.29	21.60	22.32	23.70
	6H	6.19	6.85	7.22	7.88	9.27	21.00	21.66	22.03	22.69	24.08
	8H	6.25	6.89	7.29	7.93	9.32	21.12	21.75	22.16	22.80	24.18
	12H	6.27	6.87	7.31	7.91	9.32	21.18	21.78	22.23	22.83	24.24
4H	2H	12.14	12.86	13.17	13.89	15.26	18.37	19.09	19.40	20.12	21.50
	3H	13.71	14.31	14.74	15.36	16.75	20.41	21.01	21.45	22.07	23.46
	4H	13.80	14.35	14.85	15.40	16.81	21.18	21.73	22.22	22.77	24.19
	6H	13.81	14.29	14.87	15.36	16.76	21.71	22.19	22.76	23.25	24.66
	8H	13.79	14.23	14.84	15.29	16.72	21.87	22.31	22.92	23.38	24.80
	12H	13.74	14.15	14.82	15.22	16.65	21.96	22.36	23.03	23.44	24.87
8H	4H	15.24	15.69	16.30	16.75	18.17	21.23	21.68	22.29	22.74	24.16
	6H	15.48	15.85	16.56	16.95	18.38	21.86	22.23	22.94	23.33	24.75
	8H	15.50	15.82	16.59	16.91	18.35	22.08	22.40	23.16	23.49	24.93
	12H	15.47	15.75	16.56	16.84	18.32	22.22	22.50	23.31	23.58	25.06
12H	4H	15.38	15.79	16.46	16.86	18.29	21.19	21.59	22.26	22.66	24.09
	6H	15.74	16.06	16.83	17.15	18.59	21.84	22.17	22.93	23.25	24.69
	8H	15.81	16.09	16.90	17.18	18.66	22.07	22.35	23.16	23.44	24.92