

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P938085

Luminaire Tested: SQ4-FB-125U-100D-B2750-1D-UNV-W2A-W-4-4000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P938085
REPORT IS A COMBINATION OF REPORTS P933599 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-125U-100D-B2750-1D-UNV-W2A-W-4-4000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7814.8 lumens
Efficiency: N/A
Efficacy: 121.3 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 4' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 64.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P938085

CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-W2A-W-4-4000K

Luminous Intensity Polar Plot

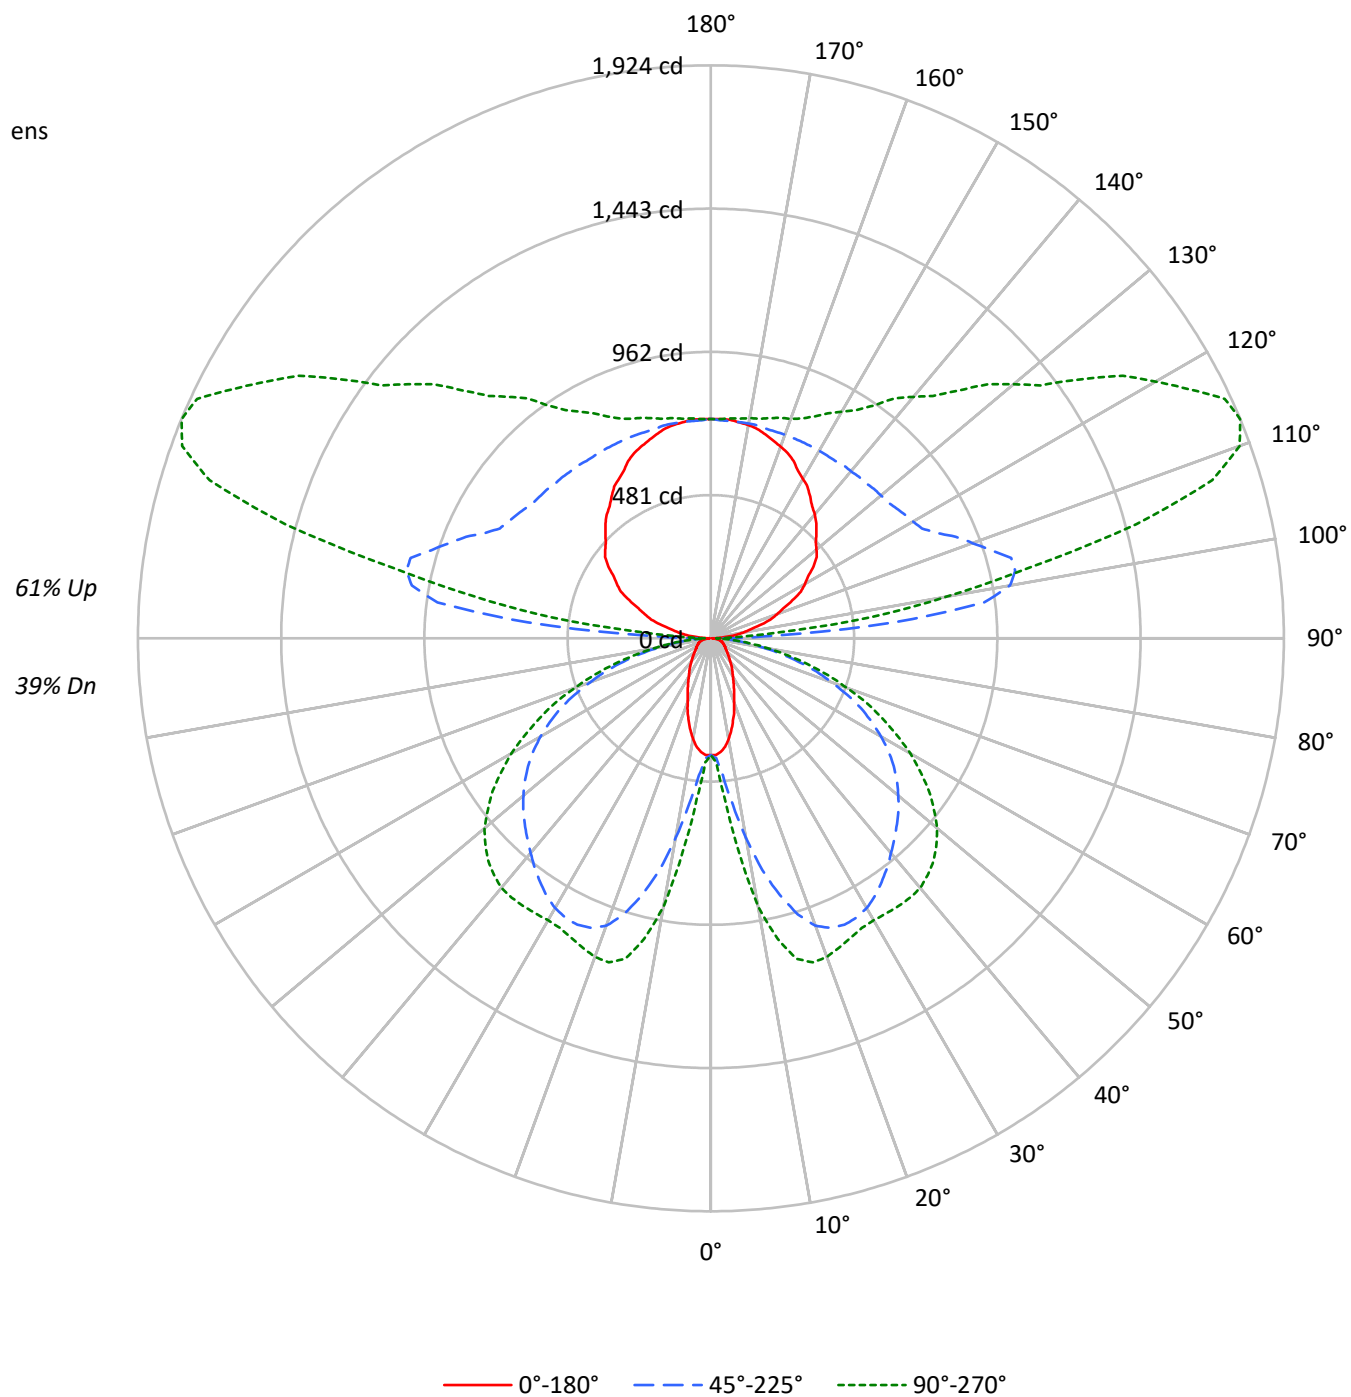

TEST NUMBER: P938085

CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-W2A-W-4-4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	95	95	95	95	77	77	77	61	61	61	46	46	46
1	95	90	86	83	86	82	79	76	67	65	62	53	51	50	40	39	38
2	86	78	72	67	78	71	66	61	58	54	51	46	43	41	35	33	31
3	78	68	61	55	71	62	56	51	51	46	42	40	37	34	30	28	26
4	71	60	52	46	64	55	48	42	45	40	35	35	32	29	27	24	22
5	65	53	45	39	59	49	41	36	40	34	30	31	27	24	24	21	19
6	60	47	39	33	54	43	36	31	35	30	26	28	24	21	21	18	16
7	55	43	35	29	50	39	32	27	32	26	23	25	21	18	19	16	14
8	51	38	31	25	46	35	28	23	29	24	20	23	19	16	18	15	13
9	47	35	27	22	43	32	25	21	26	21	17	21	17	14	16	13	11
10	44	32	25	20	40	29	23	18	24	19	16	19	15	13	15	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3641	3641	3641
5°	3554	4205	4895
10°	3220	6127	8115
15°	2733	7998	9798
20°	2222	9262	9986
25°	1852	9684	9783
30°	1559	9738	9765
35°	1377	9569	10018
40°	1197	9350	10278
45°	1082	9189	10319
50°	991	9041	10148
55°	945	8829	9697
60°	964	8430	8988
65°	998	7829	8011
70°	1056	6814	6768
75°	1158	5541	5282
80°	1240	3828	3558
85°	1043	2020	1821

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 45°

Luminance: 10319 cd/sqm

TEST NUMBER: P938085

CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-W2A-W-4-4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	50.8	0.6
10°-20°	225.0	2.9
20°-30°	393.5	5.0
30°-40°	506.6	6.5
40°-50°	565.9	7.2
50°-60°	542.0	6.9
60°-70°	429.5	5.5
70°-80°	252.6	3.2
80°-90°	73.0	0.9
90°-100°	359.1	4.6
100°-110°	944.2	12.1
110°-120°	979.0	12.5
120°-130°	785.3	10.0
130°-140°	616.2	7.9
140°-150°	472.9	6.1
150°-160°	340.6	4.4
160°-170°	208.4	2.7
170°-180°	70.4	0.9
0°-30°	669.3	8.6
0°-40°	1175.9	15.0
0°-60°	2283.7	29.2
0°-90°	3038.8	38.9
90°-120°	2282.3	29.2
90°-150°	4156.6	53.2
90°-180°	4776.0	61.1
0°-180°	7814.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	392	392	392	392	392	
5°	382	410	462	522	541	35
15°	286	529	891	1080	1114	80
25°	183	599	1061	1108	1109	84
35°	124	573	999	1056	1098	77
45°	84	457	883	1012	1058	65
55°	60	290	750	871	895	55
65°	48	154	556	626	635	48
75°	35	95	305	336	337	37
85°	13	29	76	83	84	13
90°	5	14	38	19	19	5
95°	48	186	619	319	217	53
105°	170	258	1044	1585	1478	180
115°	302	367	836	1668	1904	298
125°	420	471	760	1285	1516	373
135°	501	551	737	1037	1176	388
145°	581	618	727	885	954	364
155°	657	675	727	799	822	302
165°	708	718	727	756	765	200
175°	737	737	732	742	742	70
180°	737	737	737	737	737	

TEST NUMBER: P938085

CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-W2A-W-4-4000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	392.4	392.4	392.4	392.4	392.4	392.4	392.4	392.4	392.4	392.4	392.4
2.5°	392.4	392.4	395.0	396.2	398.7	400.0	402.5	405.0	412.7	413.9	416.4
5°	382.4	387.4	403.8	410.1	427.7	451.7	461.8	478.3	512.4	522.4	528.7
7.5°	367.2	378.6	419.0	429.1	473.2	536.3	562.8	598.1	652.4	678.9	700.3
10°	343.2	367.2	439.1	463.1	535.0	631.0	680.2	729.3	811.4	847.9	861.9
12.5°	316.8	355.8	460.6	493.4	596.9	737.0	796.3	850.5	943.9	993.1	1000.6
15°	286.4	339.4	480.7	528.7	662.5	825.3	890.9	957.8	1044.9	1080.2	1089.0
17.5°	260.0	326.8	499.7	550.2	713.0	904.8	971.6	1027.2	1097.9	1121.8	1128.1
20°	227.1	306.7	512.4	578.0	766.0	962.8	1027.2	1070.1	1118.0	1133.2	1135.7
22.5°	203.1	285.2	519.9	588.0	801.2	998.2	1052.4	1086.5	1119.3	1124.3	1125.6
25°	183.0	261.2	518.7	599.4	831.6	1019.6	1061.2	1086.5	1105.4	1107.9	1107.9
27.5°	164.1	234.7	513.6	601.9	854.2	1024.6	1057.5	1075.1	1083.9	1089.0	1089.0
30°	147.6	209.4	501.0	596.9	864.4	1019.6	1046.1	1054.9	1063.8	1071.3	1075.1
32.5°	135.0	185.5	482.1	586.8	865.6	1007.0	1025.9	1030.9	1043.5	1061.2	1067.6
35°	123.7	161.5	460.6	572.9	858.1	986.8	999.4	1004.5	1029.7	1056.2	1065.0
37.5°	112.3	143.8	432.8	548.9	846.7	962.8	971.6	980.5	1019.6	1051.2	1061.2
40°	100.9	128.7	400.0	522.4	829.0	933.8	941.3	955.3	1007.0	1043.5	1053.7
42.5°	92.2	116.1	364.7	494.7	806.3	900.9	912.3	932.6	991.9	1030.9	1042.3
45°	84.5	103.4	326.8	456.8	777.3	866.9	883.3	911.1	974.2	1012.0	1022.1
47.5°	77.0	94.6	287.7	417.7	745.8	832.9	854.2	885.9	950.2	986.8	995.6
50°	70.7	85.9	248.6	376.1	711.7	796.3	821.5	854.2	920.0	953.9	965.3
52.5°	65.6	78.2	212.0	334.4	672.6	758.4	787.4	821.5	883.3	916.1	923.7
55°	60.5	71.9	180.5	290.2	632.2	718.0	749.6	782.3	843.0	870.7	875.7
57.5°	58.1	66.8	153.9	248.6	589.3	672.6	707.9	738.2	794.9	816.4	821.5
60°	54.2	63.1	133.8	213.3	542.6	629.6	660.0	690.3	738.2	755.9	759.6
62.5°	50.5	60.5	118.6	179.2	494.7	579.2	609.5	637.3	677.7	690.3	695.3
65°	47.9	58.1	107.2	153.9	445.4	526.2	556.5	580.4	613.3	625.9	628.4
67.5°	45.5	55.5	98.5	132.5	396.2	473.2	495.9	518.7	543.9	556.5	557.7
70°	41.6	53.0	90.8	117.4	345.7	412.7	431.6	455.5	475.7	482.1	485.8
72.5°	39.2	49.2	85.9	106.0	294.0	354.6	372.3	386.1	403.8	410.1	410.1
75°	35.3	44.1	80.8	94.6	241.0	290.2	305.4	319.3	333.1	335.7	331.9
77.5°	31.5	39.2	69.4	79.5	188.0	229.7	242.3	249.8	261.2	263.8	265.0
80°	26.5	34.1	54.2	61.8	136.3	169.1	177.9	184.2	194.3	194.3	196.8
82.5°	20.2	26.5	39.2	44.1	92.2	116.1	123.7	127.5	133.8	133.8	133.8
85°	12.6	16.4	25.2	29.0	55.5	70.7	75.7	77.0	82.0	83.3	83.3
87.5°	6.3	8.8	16.4	17.7	29.0	36.6	36.6	39.2	39.2	37.8	36.6
90°	5.0	8.9	12.9	13.8	21.8	32.3	37.5	33.3	25.0	18.8	18.8
92.5°	19.8	53.4	87.0	95.4	134.2	185.8	211.6	185.5	133.2	94.0	90.2
95°	47.5	109.0	170.6	185.9	330.1	522.4	618.6	552.0	418.9	319.0	307.6
97.5°	82.0	136.3	190.6	204.2	444.6	765.2	925.6	883.5	799.3	736.2	714.7
100°	108.8	158.1	207.2	219.6	486.4	842.1	1020.0	1023.1	1029.3	1033.9	1008.2
102.5°	131.5	177.4	223.4	234.8	505.5	866.4	1046.8	1100.4	1207.7	1288.1	1266.1
105°	170.1	209.0	247.9	257.7	519.7	869.1	1043.8	1164.0	1404.4	1584.7	1572.9
107.5°	209.6	245.9	282.2	291.3	522.4	830.5	984.5	1152.2	1487.5	1739.0	1741.8
110°	236.4	269.1	301.8	310.0	518.4	796.2	935.0	1122.5	1497.4	1778.6	1790.9

TEST NUMBER: P938085

CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-W2A-W-4-4000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	262.5	293.8	324.9	332.7	518.5	766.2	890.1	1081.9	1465.6	1753.4	1772.3
115°	302.1	330.9	359.7	366.9	523.3	731.8	836.1	1020.9	1390.6	1667.8	1694.0
117.5°	341.2	367.4	393.6	400.0	533.1	710.4	799.0	965.8	1299.4	1549.6	1578.6
120°	364.0	388.6	413.2	419.3	541.0	703.2	784.2	936.7	1241.4	1470.0	1498.3
122.5°	386.2	411.0	435.9	442.1	552.4	699.3	772.9	910.1	1184.6	1390.4	1418.3
125°	420.3	442.9	465.6	471.2	567.7	696.2	760.5	877.1	1110.2	1285.0	1310.7
127.5°	448.0	470.8	493.6	499.4	582.9	694.4	750.1	850.1	1050.4	1200.5	1222.2
130°	462.8	487.4	512.1	518.2	594.2	695.5	746.1	835.2	1013.4	1147.1	1167.1
132.5°	478.2	502.8	527.4	533.6	603.3	696.2	742.7	822.4	982.0	1101.7	1119.5
135°	500.9	523.3	545.7	551.3	613.1	695.5	736.8	803.6	937.2	1037.4	1052.9
137.5°	524.1	546.3	568.5	574.1	627.9	699.8	735.7	792.2	905.1	989.9	1002.5
140°	543.4	563.8	584.3	589.4	637.1	700.6	732.3	781.1	878.7	951.8	963.7
142.5°	558.2	577.1	596.0	600.8	644.6	703.1	732.3	775.2	860.8	925.1	935.2
145°	581.0	597.4	614.0	618.1	654.5	703.1	727.3	762.4	832.5	885.1	892.8
147.5°	603.8	619.8	635.8	639.8	669.0	707.8	727.3	754.9	810.1	851.5	857.9
150°	618.6	633.1	647.6	651.2	676.6	710.4	727.3	750.6	797.2	832.2	837.3
152.5°	633.9	644.9	655.9	658.7	681.6	712.0	727.3	747.2	787.0	816.8	820.7
155°	656.7	664.8	672.9	674.9	692.4	715.7	727.3	743.2	774.8	798.6	801.1
157.5°	673.5	681.4	689.2	691.2	703.3	719.3	727.3	739.6	764.3	782.7	784.5
160°	684.8	690.9	697.2	698.7	708.2	720.9	727.3	737.8	758.9	774.8	775.8
162.5°	696.2	700.8	705.5	706.6	713.5	722.7	727.3	736.2	754.1	767.4	768.4
165°	708.5	712.7	716.9	718.0	721.1	725.2	727.3	733.7	746.4	756.0	757.0
167.5°	720.0	721.9	723.9	724.4	727.0	730.6	732.3	736.5	744.8	751.1	751.6
170°	727.3	729.3	731.3	731.8	732.0	732.2	732.3	736.5	744.8	751.1	751.1
172.5°	731.3	731.7	732.2	732.3	732.3	732.3	732.3	735.5	742.1	747.1	746.7
175°	736.8	736.8	736.8	736.8	735.3	733.2	732.3	734.4	738.5	741.7	741.7
177.5°	736.8	736.8	736.8	736.8	735.6	734.0	733.2	734.9	738.2	740.7	740.2
180°	736.8	736.8	736.8	736.8	736.8	736.8	736.8	736.8	736.8	736.8	736.8

TEST NUMBER: P938085

CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-W2A-W-4-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	392.4	392.4
2.5°	419.0	416.4
5°	538.8	541.4
7.5°	725.6	724.3
10°	902.3	913.6
12.5°	1030.9	1033.5
15°	1109.2	1114.2
17.5°	1139.5	1140.7
20°	1140.7	1138.2
22.5°	1126.9	1124.3
25°	1110.5	1109.2
27.5°	1095.3	1096.5
30°	1089.0	1092.8
32.5°	1089.0	1095.3
35°	1091.6	1097.9
37.5°	1090.2	1097.9
40°	1085.3	1094.0
42.5°	1071.3	1077.6
45°	1049.9	1057.5
47.5°	1022.1	1027.2
50°	986.8	991.9
52.5°	942.6	943.9
55°	889.6	894.6
57.5°	832.9	834.1
60°	769.7	773.6
62.5°	702.9	702.9
65°	632.2	634.7
67.5°	559.1	565.4
70°	484.6	485.8
72.5°	411.4	411.4
75°	335.7	336.9
77.5°	263.8	263.8
80°	195.6	196.8
82.5°	135.0	137.5
85°	84.5	84.5
87.5°	39.2	35.3
90°	18.8	18.8
92.5°	75.3	60.4
95°	262.3	217.1
97.5°	628.6	542.4
100°	905.6	803.0
102.5°	1178.2	1090.3
105°	1525.7	1478.4
107.5°	1753.3	1764.7
110°	1840.1	1889.3



TEST NUMBER: P938085

CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-W2A-W-4-4000K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	1847.8	1923.5
115°	1798.8	1903.7
117.5°	1694.9	1811.2
120°	1611.2	1724.2
122.5°	1529.6	1641.1
125°	1413.3	1516.0
127.5°	1308.7	1395.4
130°	1247.1	1327.2
132.5°	1191.2	1262.8
135°	1114.6	1176.3
137.5°	1053.1	1103.6
140°	1010.9	1058.1
142.5°	975.9	1016.6
145°	923.6	954.3
147.5°	883.3	908.8
150°	858.1	878.7
152.5°	836.3	852.0
155°	811.5	821.8
157.5°	791.8	799.0
160°	780.0	784.2
162.5°	772.4	776.3
165°	761.2	765.4
167.5°	753.3	755.0
170°	751.1	751.1
172.5°	745.2	743.7
175°	741.7	741.7
177.5°	738.5	736.8
180°	736.8	736.8

TEST NUMBER: P938085

CATALOG NUMBER: SQ4-FB-125U-100D-B2750-1D-UNV-W2A-W-4-4000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.37	5.17	5.41	6.22	7.64	17.51	18.31	18.55	19.36	20.78
	3H	5.07	5.79	6.12	6.85	8.28	19.33	20.04	20.38	21.10	22.54
	4H	5.37	6.04	6.43	7.11	8.55	19.96	20.64	21.02	21.70	23.15
	6H	5.61	6.24	6.68	7.30	8.76	20.38	21.00	21.45	22.07	23.52
	8H	5.68	6.28	6.76	7.36	8.81	20.49	21.08	21.56	22.17	23.62
	12H	5.70	6.26	6.78	7.34	8.81	20.55	21.11	21.63	22.19	23.67
4H	2H	11.55	12.23	12.62	13.29	14.74	17.78	18.46	18.85	19.52	20.96
	3H	13.12	13.69	14.19	14.77	16.23	19.80	20.37	20.88	21.46	22.92
	4H	13.21	13.73	14.29	14.81	16.29	20.56	21.08	21.64	22.16	23.64
	6H	13.22	13.67	14.31	14.77	16.24	21.08	21.53	22.17	22.63	24.10
	8H	13.19	13.61	14.28	14.71	16.20	21.23	21.65	22.32	22.75	24.24
	12H	13.15	13.53	14.25	14.63	16.13	21.31	21.69	22.42	22.80	24.30
8H	4H	14.64	15.06	15.73	16.15	17.64	20.61	21.03	21.70	22.13	23.62
	6H	14.88	15.23	15.99	16.36	17.85	21.23	21.57	22.34	22.71	24.20
	8H	14.90	15.20	16.02	16.32	17.82	21.44	21.74	22.56	22.86	24.37
	12H	14.86	15.13	15.99	16.24	17.79	21.57	21.84	22.69	22.95	24.49
12H	4H	14.78	15.16	15.88	16.26	17.76	20.56	20.94	21.67	22.05	23.54
	6H	15.13	15.44	16.25	16.56	18.06	21.21	21.51	22.33	22.63	24.14
	8H	15.20	15.47	16.32	16.58	18.12	21.43	21.70	22.55	22.81	24.35