

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P934291

Luminaire Tested: SQ4-FA-050U-050D-B2750-1D-UNV-W2A-W-6-5000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P934291
REPORT IS A COMBINATION OF REPORTS P933691 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FA-050U-050D-B2750-1D-UNV-W2A-W-6-5000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Asymmetric Frosted Continuous I
Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5365.8 lumens
Efficiency: N/A
Efficacy: 126.0 lumens/watt
Spacing Criteria (0/90/45): 1.14 / 1.26 / 1.36
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 6' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 42.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P934291

CATALOG NUMBER: SQ4-FA-050U-050D-B2750-1D-UNV-W2A-W-6-5000K

Luminous Intensity Polar Plot

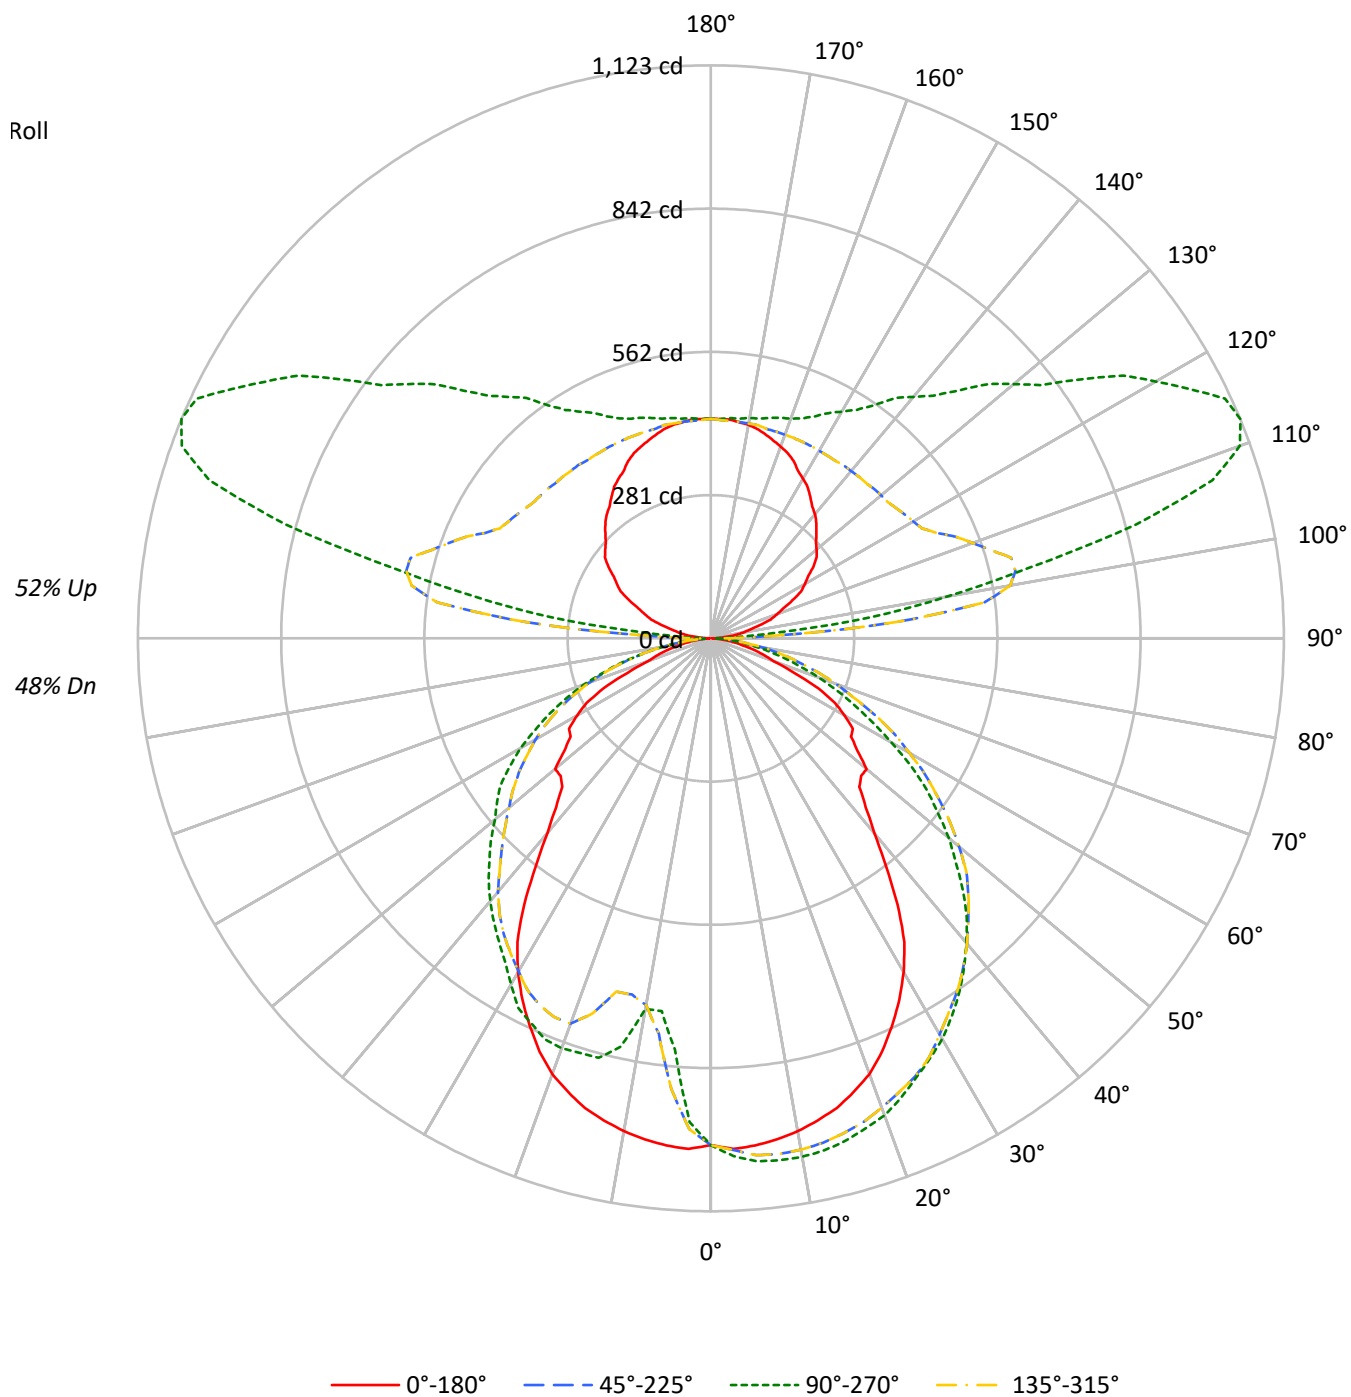

TEST NUMBER: P934291

CATALOG NUMBER: SQ4-FA-050U-050D-B2750-1D-UNV-W2A-W-6-5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	98	98	98	98	82	82	82	68	68	68	54	54	54
1	97	93	89	86	89	86	83	80	72	70	68	60	58	56	48	47	46
2	89	81	75	70	81	75	70	65	63	59	56	52	50	47	42	40	39
3	81	71	64	58	74	66	60	55	56	51	47	46	43	40	38	35	33
4	74	63	55	49	68	58	52	46	50	44	40	41	37	34	33	31	28
5	68	56	48	42	62	52	45	40	44	39	35	37	33	30	30	27	25
6	62	50	42	37	57	47	40	34	40	34	30	33	29	26	27	24	22
7	58	45	38	32	53	42	35	30	36	30	26	30	26	23	25	22	19
8	54	41	34	28	49	38	31	27	33	27	23	28	23	20	23	20	17
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	16
10	47	34	27	22	43	32	26	21	28	22	19	23	19	16	20	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	6143	6143	6143	6143
5°	6187	6202	6187	4876
10°	6144	6109	6144	4368
15°	6075	5977	6075	4990
20°	5945	5820	5945	5001
25°	5683	5591	5683	4895
30°	5345	5401	5345	4663
35°	4763	5161	4763	4407
40°	3966	4879	3966	4214
45°	3541	4547	3541	3991
50°	3760	4153	3760	3769
55°	3533	3727	3533	3639
60°	3638	3166	3638	3333
65°	3293	2617	3293	2925
70°	2274	2085	2274	2452
75°	1989	1542	1989	1846
80°	1588	1018	1588	1110
85°	894	539	894	458

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 20°

Vertical Angle: 45°

Luminance: 5432 cd/sqm

TEST NUMBER: P934291

CATALOG NUMBER: SQ4-FA-050U-050D-B2750-1D-UNV-W2A-W-6-5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	89.6	1.7
10°-20°	254.5	4.7
20°-30°	393.5	7.3
30°-40°	469.7	8.8
40°-50°	472.5	8.8
50°-60°	411.1	7.7
60°-70°	291.5	5.4
70°-80°	154.2	2.9
80°-90°	40.0	0.7
90°-100°	209.7	3.9
100°-110°	551.4	10.3
110°-120°	571.7	10.7
120°-130°	458.6	8.5
130°-140°	359.8	6.7
140°-150°	276.2	5.1
150°-160°	198.9	3.7
160°-170°	121.7	2.3
170°-180°	41.1	0.8
0°-30°	737.7	13.7
0°-40°	1207.4	22.5
0°-60°	2090.9	39.0
0°-90°	2576.7	48.0
90°-120°	1332.8	24.8
90°-150°	2427.4	45.2
90°-180°	2789.0	52.0
0°-180°	5365.8	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	993	993	993	993	993	
5°	998	1029	998	809	998	95
15°	953	1020	953	851	953	268
25°	839	951	839	832	839	385
35°	638	848	638	724	638	395
45°	412	699	412	614	412	330
55°	335	516	335	504	335	308
65°	233	311	233	348	233	223
75°	88	148	88	177	88	93
85°	15	38	15	32	15	20
90°	3	11	3	11	3	3
95°	28	127	28	127	28	31
105°	99	863	99	863	99	105
115°	176	1112	176	1112	176	174
125°	246	885	246	885	246	218
135°	292	687	292	687	292	226
145°	339	557	339	557	339	213
155°	384	480	384	480	384	176
165°	414	447	414	447	414	117
175°	430	433	430	433	430	41
180°	430	430	430	430	430	

TEST NUMBER: P934291

CATALOG NUMBER: SQ4-FA-050U-050D-B2750-1D-UNV-W2A-W-6-5000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	993.1	993.1	993.1	993.1	993.1	993.1	993.1	993.1	993.1	993.1	993.1
2.5°	1001.6	1001.6	1007.2	1009.1	1009.1	1006.3	1003.5	1006.3	1014.8	1017.6	1016.7
5°	997.8	1005.4	1015.7	1017.6	1019.5	1018.5	1016.7	1018.5	1027.9	1029.8	1030.8
7.5°	990.3	1004.4	1017.6	1020.4	1023.2	1020.4	1019.5	1021.3	1030.8	1032.6	1032.6
10°	980.9	1000.7	1015.7	1017.6	1020.4	1017.6	1017.6	1021.3	1030.8	1032.6	1033.6
12.5°	967.8	995.0	1009.1	1011.0	1014.8	1013.9	1012.8	1016.7	1026.0	1027.9	1027.9
15°	952.8	984.7	997.8	999.8	1006.3	1004.4	1004.4	1008.2	1018.5	1021.3	1020.4
17.5°	932.0	971.5	986.6	989.4	994.1	993.1	994.1	997.8	1007.2	1009.1	1010.0
20°	908.6	953.7	971.5	974.3	979.0	979.0	979.0	983.8	993.1	996.9	996.9
22.5°	876.7	934.8	953.7	955.6	961.2	961.2	963.0	969.7	978.1	979.0	979.0
25°	839.0	914.2	930.2	935.9	941.5	944.3	947.1	950.9	953.7	952.8	953.7
27.5°	799.6	887.9	908.6	912.3	919.9	922.7	926.4	927.4	928.3	931.1	929.2
30°	755.4	851.2	882.3	886.0	898.2	900.1	896.4	898.2	902.9	904.9	906.7
32.5°	705.6	796.8	855.0	863.5	874.8	869.1	868.2	871.0	878.5	878.5	880.4
35°	638.0	754.5	829.7	837.1	845.6	839.0	842.8	843.8	848.4	851.2	850.3
37.5°	563.8	717.9	803.3	808.9	815.6	807.1	812.8	815.6	819.3	817.4	817.4
40°	498.0	660.5	772.3	776.1	781.8	775.1	780.8	782.7	784.6	782.7	781.8
42.5°	449.2	597.6	739.4	744.1	740.4	745.1	747.0	750.7	747.9	744.1	744.1
45°	411.5	580.7	703.8	709.4	703.8	711.2	714.0	714.0	705.6	703.8	702.8
47.5°	399.3	546.9	668.1	668.1	665.2	674.6	679.3	672.8	664.3	661.5	661.5
50°	398.4	509.2	619.1	615.4	628.6	639.9	635.1	628.6	622.0	611.7	611.7
52.5°	361.7	463.2	556.2	570.3	591.0	597.6	590.1	583.5	572.2	567.5	563.8
55°	335.4	415.3	498.9	527.1	548.7	557.1	543.1	536.5	519.6	516.8	514.9
57.5°	329.8	345.8	446.3	482.0	508.3	507.3	498.9	486.7	472.6	469.8	468.9
60°	302.5	249.9	389.9	432.3	459.4	456.6	449.2	437.9	424.7	422.8	421.0
62.5°	274.3	181.4	326.1	374.0	412.5	411.5	405.0	388.1	378.6	374.0	370.2
65°	233.0	152.2	232.1	311.0	366.4	368.3	354.3	342.0	331.7	326.1	325.1
67.5°	177.6	124.0	156.9	259.4	322.3	320.4	302.5	296.9	283.7	280.9	275.3
70°	131.5	82.7	109.0	210.4	279.1	274.3	260.3	253.7	241.4	234.9	231.2
72.5°	109.0	66.7	79.9	163.5	234.9	229.3	217.1	209.5	199.2	193.5	189.8
75°	88.4	70.4	61.1	121.2	190.7	187.0	175.7	168.2	159.7	152.2	153.2
77.5°	64.8	65.8	48.8	89.3	151.3	145.6	139.1	129.6	125.9	118.4	118.4
80°	48.8	51.7	36.6	61.1	109.0	109.0	103.4	96.8	90.2	86.5	86.5
82.5°	32.9	32.9	27.3	38.5	74.3	71.5	67.6	65.8	62.0	60.1	60.1
85°	15.0	18.8	16.9	23.4	40.4	42.3	42.3	40.4	39.5	37.5	38.5
87.5°	4.7	8.5	10.4	13.2	20.6	21.6	22.5	22.5	22.5	23.4	23.4
90°	2.9	5.2	7.6	8.1	12.7	18.9	21.9	19.5	14.6	10.9	10.9
92.5°	11.6	31.2	50.8	55.8	78.4	108.5	123.6	108.3	77.7	54.8	52.7
95°	27.7	63.6	99.6	108.5	192.8	305.1	361.3	322.4	244.6	186.2	179.6
97.5°	47.9	79.7	111.3	119.3	259.7	447.0	540.6	516.0	466.8	429.9	417.3
100°	63.5	92.3	121.0	128.2	284.0	491.8	595.7	597.5	601.1	603.8	588.9
102.5°	76.8	103.7	130.5	137.2	295.2	505.9	611.3	642.6	705.3	752.2	739.4
105°	99.4	122.1	144.8	150.5	303.5	507.5	609.5	679.8	820.1	925.5	918.6
107.5°	122.4	143.6	164.8	170.1	305.0	484.9	574.9	672.8	868.6	1015.5	1017.2
110°	138.0	157.1	176.2	181.0	302.7	464.9	546.0	655.5	874.5	1038.7	1045.9

TEST NUMBER: P934291

CATALOG NUMBER: SQ4-FA-050U-050D-B2750-1D-UNV-W2A-W-6-5000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	153.4	171.6	189.8	194.4	302.8	447.5	519.8	631.9	855.9	1023.9	1035.0
115°	176.4	193.2	210.1	214.3	305.6	427.4	488.3	596.3	812.1	974.0	989.3
117.5°	199.2	214.5	229.8	233.6	311.3	414.9	466.6	564.0	758.9	905.0	922.0
120°	212.5	226.9	241.3	244.9	315.9	410.6	457.9	547.0	725.0	858.4	875.0
122.5°	225.6	240.0	254.5	258.2	322.5	408.3	451.3	531.4	691.8	812.0	828.3
125°	245.5	258.6	271.9	275.2	331.5	406.6	444.1	512.2	648.4	750.5	765.4
127.5°	261.6	275.0	288.3	291.7	340.4	405.5	438.0	496.5	613.4	701.1	713.7
130°	270.3	284.7	299.1	302.6	347.0	406.1	435.7	487.7	591.9	670.0	681.6
132.5°	279.3	293.6	308.0	311.6	352.3	406.6	433.7	480.4	573.5	643.3	653.8
135°	292.5	305.6	318.7	321.9	358.1	406.2	430.3	469.3	547.3	605.8	614.9
137.5°	306.1	319.1	331.9	335.2	366.7	408.6	429.6	462.6	528.6	578.1	585.4
140°	317.4	329.3	341.2	344.2	372.0	409.1	427.7	456.2	513.1	555.8	562.7
142.5°	326.0	337.0	348.0	350.8	376.4	410.6	427.7	452.7	502.7	540.2	546.2
145°	339.3	348.9	358.6	361.0	382.3	410.6	424.8	445.2	486.1	516.9	521.4
147.5°	352.6	361.9	371.4	373.7	390.7	413.4	424.8	440.8	473.1	497.3	501.0
150°	361.3	369.8	378.2	380.3	395.2	414.9	424.8	438.4	465.6	486.0	488.9
152.5°	370.1	376.6	383.0	384.6	398.0	415.8	424.8	436.4	459.6	477.0	479.2
155°	383.5	388.3	392.9	394.1	404.3	418.0	424.8	434.0	452.5	466.3	467.8
157.5°	393.3	397.9	402.6	403.7	410.7	420.1	424.8	432.0	446.4	457.1	458.1
160°	399.9	403.5	407.0	408.0	413.6	421.0	424.8	430.9	443.3	452.5	453.1
162.5°	406.6	409.3	412.0	412.6	416.7	422.1	424.8	430.0	440.4	448.1	448.7
165°	413.8	416.2	418.6	419.3	421.1	423.6	424.8	428.5	435.9	441.5	442.2
167.5°	420.4	421.5	422.7	423.0	424.6	426.7	427.7	430.1	435.0	438.6	438.9
170°	424.8	425.9	427.1	427.4	427.5	427.6	427.7	430.1	435.0	438.6	438.6
172.5°	427.1	427.4	427.6	427.7	427.7	427.7	427.7	429.5	433.4	436.3	436.1
175°	430.3	430.3	430.3	430.3	429.5	428.2	427.7	428.9	431.3	433.1	433.1
177.5°	430.3	430.3	430.3	430.3	429.6	428.7	428.2	429.2	431.1	432.5	432.3
180°	430.3	430.3	430.3	430.3	430.3	430.3	430.3	430.3	430.3	430.3	430.3

TEST NUMBER: P934291

CATALOG NUMBER: SQ4-FA-050U-050D-B2750-1D-UNV-W2A-W-6-5000K

CANDELA DISTRIBUTION (continued):

	80°	90°	100°	110°	112.5°	120°	130°	135°	140°	150°	157.5°
0°	993.1	993.1	993.1	993.1	993.1	993.1	993.1	993.1	993.1	993.1	993.1
2.5°	1018.5	1015.7	1018.5	1016.7	1017.6	1014.8	1006.3	1003.5	1006.3	1009.1	1009.1
5°	1030.8	1028.8	1030.8	1030.8	1029.8	1027.9	1018.5	1016.7	1018.5	1019.5	1017.6
7.5°	1034.5	1031.7	1034.5	1032.6	1032.6	1030.8	1021.3	1019.5	1020.4	1023.2	1020.4
10°	1034.5	1031.7	1034.5	1033.6	1032.6	1030.8	1021.3	1017.6	1017.6	1020.4	1017.6
12.5°	1029.8	1027.9	1029.8	1027.9	1027.9	1026.0	1016.7	1012.8	1013.9	1014.8	1011.0
15°	1022.3	1019.5	1022.3	1020.4	1021.3	1018.5	1008.2	1004.4	1004.4	1006.3	999.8
17.5°	1011.0	1007.2	1011.0	1010.0	1009.1	1007.2	997.8	994.1	993.1	994.1	989.4
20°	997.8	995.0	997.8	996.9	996.9	993.1	983.8	979.0	979.0	979.0	974.3
22.5°	977.2	974.3	977.2	979.0	979.0	978.1	969.7	963.0	961.2	961.2	955.6
25°	953.7	950.9	953.7	953.7	952.8	953.7	950.9	947.1	944.3	941.5	935.9
27.5°	931.1	929.2	931.1	929.2	931.1	928.3	927.4	926.4	922.7	919.9	912.3
30°	908.6	906.7	908.6	906.7	904.9	902.9	898.2	896.4	900.1	898.2	886.0
32.5°	880.4	878.5	880.4	880.4	878.5	878.5	871.0	868.2	869.1	874.8	863.5
35°	851.2	848.4	851.2	850.3	851.2	848.4	843.8	842.8	839.0	845.6	837.1
37.5°	817.4	814.6	817.4	817.4	817.4	819.3	815.6	812.8	807.1	815.6	808.9
40°	782.7	779.0	782.7	781.8	782.7	784.6	782.7	780.8	775.1	781.8	776.1
42.5°	743.2	742.2	743.2	744.1	744.1	747.9	750.7	747.0	745.1	740.4	744.1
45°	701.0	699.0	701.0	702.8	703.8	705.6	714.0	714.0	711.2	703.8	709.4
47.5°	655.9	651.1	655.9	661.5	661.5	664.3	672.8	679.3	674.6	665.2	668.1
50°	607.9	608.9	607.9	611.7	611.7	622.0	628.6	635.1	639.9	628.6	615.4
52.5°	561.0	560.0	561.0	563.8	567.5	572.2	583.5	590.1	597.6	591.0	570.3
55°	514.0	515.8	514.0	514.9	516.8	519.6	536.5	543.1	557.1	548.7	527.1
57.5°	467.0	464.2	467.0	468.9	469.8	472.6	486.7	498.9	507.3	508.3	482.0
60°	412.5	408.7	412.5	421.0	422.8	424.7	437.9	449.2	456.6	459.4	432.3
62.5°	364.5	358.0	364.5	370.2	374.0	378.6	388.1	405.0	411.5	412.5	374.0
65°	313.8	311.0	313.8	325.1	326.1	331.7	342.0	354.3	368.3	366.4	311.0
67.5°	267.8	267.8	267.8	275.3	280.9	283.7	296.9	302.5	320.4	322.3	259.4
70°	225.5	224.5	225.5	231.2	234.9	241.4	253.7	260.3	274.3	279.1	210.4
72.5°	185.1	184.2	185.1	189.8	193.5	199.2	209.5	217.1	229.3	234.9	163.5
75°	149.4	147.5	149.4	153.2	152.2	159.7	168.2	175.7	187.0	190.7	121.2
77.5°	114.6	114.6	114.6	118.4	118.4	125.9	129.6	139.1	145.6	151.3	89.3
80°	85.5	84.5	85.5	86.5	86.5	90.2	96.8	103.4	109.0	109.0	61.1
82.5°	60.1	58.3	60.1	60.1	60.1	62.0	65.8	67.6	71.5	74.3	38.5
85°	37.5	37.5	37.5	38.5	37.5	39.5	40.4	42.3	42.3	40.4	23.4
87.5°	24.5	23.4	24.5	23.4	23.4	22.5	22.5	22.5	21.6	20.6	13.2
90°	10.9	10.9	10.9	10.9	10.9	14.6	19.5	21.9	18.9	12.7	8.1
92.5°	43.9	35.2	43.9	52.7	54.8	77.7	108.3	123.6	108.5	78.4	55.8
95°	153.2	126.7	153.2	179.6	186.2	244.6	322.4	361.3	305.1	192.8	108.5
97.5°	367.1	316.8	367.1	417.3	429.9	466.8	516.0	540.6	447.0	259.7	119.3
100°	528.9	469.0	528.9	588.9	603.8	601.1	597.5	595.7	491.8	284.0	128.2
102.5°	688.1	636.7	688.1	739.4	752.2	705.3	642.6	611.3	505.9	295.2	137.2
105°	891.0	863.4	891.0	918.6	925.5	820.1	679.8	609.5	507.5	303.5	150.5
107.5°	1023.9	1030.6	1023.9	1017.2	1015.5	868.6	672.8	574.9	484.9	305.0	170.1
110°	1074.6	1103.3	1074.6	1045.9	1038.7	874.5	655.5	546.0	464.9	302.7	181.0

TEST NUMBER: P934291

CATALOG NUMBER: SQ4-FA-050U-050D-B2750-1D-UNV-W2A-W-6-5000K

CANDELA DISTRIBUTION (continued):

	80°	90°	100°	110°	112.5°	120°	130°	135°	140°	150°	157.5°
112.5°	1079.1	1123.2	1079.1	1035.0	1023.9	855.9	631.9	519.8	447.5	302.8	194.4
115°	1050.5	1111.7	1050.5	989.3	974.0	812.1	596.3	488.3	427.4	305.6	214.3
117.5°	989.9	1057.8	989.9	922.0	905.0	758.9	564.0	466.6	414.9	311.3	233.6
120°	940.9	1006.9	940.9	875.0	858.4	725.0	547.0	457.9	410.6	315.9	244.9
122.5°	893.4	958.4	893.4	828.3	812.0	691.8	531.4	451.3	408.3	322.5	258.2
125°	825.4	885.3	825.4	765.4	750.5	648.4	512.2	444.1	406.6	331.5	275.2
127.5°	764.3	814.9	764.3	713.7	701.1	613.4	496.5	438.0	405.5	340.4	291.7
130°	728.3	775.0	728.3	681.6	670.0	591.9	487.7	435.7	406.1	347.0	302.6
132.5°	695.6	737.5	695.6	653.8	643.3	573.5	480.4	433.7	406.6	352.3	311.6
135°	650.9	687.0	650.9	614.9	605.8	547.3	469.3	430.3	406.2	358.1	321.9
137.5°	615.0	644.6	615.0	585.4	578.1	528.6	462.6	429.6	408.6	366.7	335.2
140°	590.3	617.9	590.3	562.7	555.8	513.1	456.2	427.7	409.1	372.0	344.2
142.5°	569.9	593.7	569.9	546.2	540.2	502.7	452.7	427.7	410.6	376.4	350.8
145°	539.4	557.3	539.4	521.4	516.9	486.1	445.2	424.8	410.6	382.3	361.0
147.5°	515.8	530.7	515.8	501.0	497.3	473.1	440.8	424.8	413.4	390.7	373.7
150°	501.1	513.1	501.1	488.9	486.0	465.6	438.4	424.8	414.9	395.2	380.3
152.5°	488.4	497.5	488.4	479.2	477.0	459.6	436.4	424.8	415.8	398.0	384.6
155°	473.9	479.9	473.9	467.8	466.3	452.5	434.0	424.8	418.0	404.3	394.1
157.5°	462.4	466.6	462.4	458.1	457.1	446.4	432.0	424.8	420.1	410.7	403.7
160°	455.5	457.9	455.5	453.1	452.5	443.3	430.9	424.8	421.0	413.6	408.0
162.5°	451.0	453.4	451.0	448.7	448.1	440.4	430.0	424.8	422.1	416.7	412.6
165°	444.6	447.0	444.6	442.2	441.5	435.9	428.5	424.8	423.6	421.1	419.3
167.5°	439.9	440.9	439.9	438.9	438.6	435.0	430.1	427.7	426.7	424.6	423.0
170°	438.6	438.6	438.6	438.6	438.6	435.0	430.1	427.7	427.6	427.5	427.4
172.5°	435.2	434.3	435.2	436.1	436.3	433.4	429.5	427.7	427.7	427.7	427.7
175°	433.1	433.1	433.1	433.1	433.1	431.3	428.9	427.7	428.2	429.5	430.3
177.5°	431.3	430.3	431.3	432.3	432.5	431.1	429.2	428.2	428.7	429.6	430.3
180°	430.3	430.3	430.3	430.3	430.3	430.3	430.3	430.3	430.3	430.3	430.3

TEST NUMBER: P934291

CATALOG NUMBER: SQ4-FA-050U-050D-B2750-1D-UNV-W2A-W-6-5000K

CANDELA DISTRIBUTION (continued):

	160°	170°	180°	190°	200°	202.5°	210°	220°	225°	230°	240°
0°	993.1	993.1	993.1	993.1	993.1	993.1	993.1	993.1	993.1	993.1	993.1
2.5°	1007.2	1001.6	1001.6	992.2	988.5	985.7	980.9	966.9	963.0	959.3	964.9
5°	1015.7	1005.4	997.8	980.9	966.9	961.2	943.3	909.5	886.9	870.0	860.7
7.5°	1017.6	1004.4	990.3	964.0	930.2	915.1	860.7	798.7	781.8	766.7	757.3
10°	1015.7	1000.7	980.9	941.5	861.6	835.3	780.8	740.4	730.0	727.2	730.0
12.5°	1009.1	995.0	967.8	902.0	790.2	772.3	740.4	716.9	715.0	719.7	745.1
15°	997.8	984.7	952.8	849.4	750.7	737.6	715.0	706.6	716.9	749.8	825.9
17.5°	986.6	971.5	932.0	797.7	720.7	711.2	695.3	712.2	770.5	814.6	839.9
20°	971.5	953.7	908.6	760.1	699.0	690.6	683.0	759.2	803.3	819.3	833.4
22.5°	953.7	934.8	876.7	733.8	676.5	670.0	674.6	785.5	803.3	814.6	826.9
25°	930.2	914.2	839.0	713.1	658.7	651.1	669.0	782.7	793.0	795.9	820.2
27.5°	908.6	887.9	799.6	694.3	637.1	634.2	673.7	770.5	778.0	780.8	807.1
30°	882.3	851.2	755.4	674.6	614.5	613.5	674.6	755.4	753.6	761.0	787.4
32.5°	855.0	796.8	705.6	650.2	592.9	592.0	668.1	732.9	731.0	741.3	761.0
35°	829.7	754.5	638.0	622.0	565.6	566.6	652.0	706.6	707.5	716.9	729.1
37.5°	803.3	717.9	563.8	591.0	539.3	539.3	630.4	682.1	680.2	683.0	700.0
40°	772.3	660.5	498.0	550.6	514.9	512.1	604.1	655.9	649.2	648.3	671.8
42.5°	739.4	597.6	449.2	497.1	486.7	483.0	572.2	623.9	611.7	614.5	644.6
45°	703.8	580.7	411.5	420.0	457.6	454.8	537.4	587.2	578.8	586.3	617.3
47.5°	668.1	546.9	399.3	348.6	426.6	425.6	498.9	551.5	546.9	554.3	587.2
50°	619.1	509.2	398.4	298.8	391.8	395.5	452.9	516.8	516.8	523.3	558.2
52.5°	556.2	463.2	361.7	270.6	351.4	362.7	412.5	486.7	488.6	495.2	526.1
55°	498.9	415.3	335.4	249.0	303.5	327.9	373.0	455.7	459.4	466.1	494.2
57.5°	446.3	345.8	329.8	223.6	259.4	282.8	338.3	425.6	427.5	433.2	460.4
60°	389.9	249.9	302.5	196.3	220.8	238.6	306.3	389.9	396.5	400.2	423.8
62.5°	326.1	181.4	274.3	177.6	202.0	205.8	280.0	356.1	364.5	367.3	381.4
65°	232.1	152.2	233.0	161.6	182.3	183.3	251.8	321.3	328.9	333.5	343.9
67.5°	156.9	124.0	177.6	146.5	167.3	168.2	224.5	280.9	291.3	295.1	301.6
70°	109.0	82.7	131.5	130.6	150.4	152.2	195.4	244.3	253.7	256.5	260.3
72.5°	79.9	66.7	109.0	117.4	132.4	134.4	165.4	203.0	212.4	215.2	217.1
75°	61.1	70.4	88.4	102.5	112.7	113.7	135.3	165.4	171.9	173.8	174.8
77.5°	48.8	65.8	64.8	82.7	92.1	90.2	106.2	127.8	133.4	133.4	133.4
80°	36.6	51.7	48.8	59.2	67.6	65.8	76.1	91.2	93.0	94.9	94.0
82.5°	27.3	32.9	32.9	37.5	45.1	43.2	50.7	59.2	59.2	59.2	61.1
85°	16.9	18.8	15.0	19.7	25.4	24.5	28.2	31.9	32.9	32.9	31.0
87.5°	10.4	8.5	4.7	7.5	11.3	11.3	13.2	14.1	13.2	13.2	13.2
90°	7.6	5.2	2.9	5.2	7.6	8.1	12.7	18.9	21.9	19.5	14.6
92.5°	50.8	31.2	11.6	31.2	50.8	55.8	78.4	108.5	123.6	108.3	77.7
95°	99.6	63.6	27.7	63.6	99.6	108.5	192.8	305.1	361.3	322.4	244.6
97.5°	111.3	79.7	47.9	79.7	111.3	119.3	259.7	447.0	540.6	516.0	466.8
100°	121.0	92.3	63.5	92.3	121.0	128.2	284.0	491.8	595.7	597.5	601.1
102.5°	130.5	103.7	76.8	103.7	130.5	137.2	295.2	505.9	611.3	642.6	705.3
105°	144.8	122.1	99.4	122.1	144.8	150.5	303.5	507.5	609.5	679.8	820.1
107.5°	164.8	143.6	122.4	143.6	164.8	170.1	305.0	484.9	574.9	672.8	868.6
110°	176.2	157.1	138.0	157.1	176.2	181.0	302.7	464.9	546.0	655.5	874.5

TEST NUMBER: P934291

CATALOG NUMBER: SQ4-FA-050U-050D-B2750-1D-UNV-W2A-W-6-5000K

CANDELA DISTRIBUTION (continued):

	160°	170°	180°	190°	200°	202.5°	210°	220°	225°	230°	240°
112.5°	189.8	171.6	153.4	171.6	189.8	194.4	302.8	447.5	519.8	631.9	855.9
115°	210.1	193.2	176.4	193.2	210.1	214.3	305.6	427.4	488.3	596.3	812.1
117.5°	229.8	214.5	199.2	214.5	229.8	233.6	311.3	414.9	466.6	564.0	758.9
120°	241.3	226.9	212.5	226.9	241.3	244.9	315.9	410.6	457.9	547.0	725.0
122.5°	254.5	240.0	225.6	240.0	254.5	258.2	322.5	408.3	451.3	531.4	691.8
125°	271.9	258.6	245.5	258.6	271.9	275.2	331.5	406.6	444.1	512.2	648.4
127.5°	288.3	275.0	261.6	275.0	288.3	291.7	340.4	405.5	438.0	496.5	613.4
130°	299.1	284.7	270.3	284.7	299.1	302.6	347.0	406.1	435.7	487.7	591.9
132.5°	308.0	293.6	279.3	293.6	308.0	311.6	352.3	406.6	433.7	480.4	573.5
135°	318.7	305.6	292.5	305.6	318.7	321.9	358.1	406.2	430.3	469.3	547.3
137.5°	331.9	319.1	306.1	319.1	331.9	335.2	366.7	408.6	429.6	462.6	528.6
140°	341.2	329.3	317.4	329.3	341.2	344.2	372.0	409.1	427.7	456.2	513.1
142.5°	348.0	337.0	326.0	337.0	348.0	350.8	376.4	410.6	427.7	452.7	502.7
145°	358.6	348.9	339.3	348.9	358.6	361.0	382.3	410.6	424.8	445.2	486.1
147.5°	371.4	361.9	352.6	361.9	371.4	373.7	390.7	413.4	424.8	440.8	473.1
150°	378.2	369.8	361.3	369.8	378.2	380.3	395.2	414.9	424.8	438.4	465.6
152.5°	383.0	376.6	370.1	376.6	383.0	384.6	398.0	415.8	424.8	436.4	459.6
155°	392.9	388.3	383.5	388.3	392.9	394.1	404.3	418.0	424.8	434.0	452.5
157.5°	402.6	397.9	393.3	397.9	402.6	403.7	410.7	420.1	424.8	432.0	446.4
160°	407.0	403.5	399.9	403.5	407.0	408.0	413.6	421.0	424.8	430.9	443.3
162.5°	412.0	409.3	406.6	409.3	412.0	412.6	416.7	422.1	424.8	430.0	440.4
165°	418.6	416.2	413.8	416.2	418.6	419.3	421.1	423.6	424.8	428.5	435.9
167.5°	422.7	421.5	420.4	421.5	422.7	423.0	424.6	426.7	427.7	430.1	435.0
170°	427.1	425.9	424.8	425.9	427.1	427.4	427.5	427.6	427.7	430.1	435.0
172.5°	427.6	427.4	427.1	427.4	427.6	427.7	427.7	427.7	427.7	429.5	433.4
175°	430.3	430.3	430.3	430.3	430.3	430.3	429.5	428.2	427.7	428.9	431.3
177.5°	430.3	430.3	430.3	430.3	430.3	430.3	429.6	428.7	428.2	429.2	431.1
180°	430.3	430.3	430.3	430.3	430.3	430.3	430.3	430.3	430.3	430.3	430.3

TEST NUMBER: P934291

CATALOG NUMBER: SQ4-FA-050U-050D-B2750-1D-UNV-W2A-W-6-5000K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	260°	270°	280°	290°	292.5°	300°	310°	315°	320°
0°	993.1	993.1	993.1	993.1	993.1	993.1	993.1	993.1	993.1	993.1	993.1
2.5°	958.4	955.6	959.3	948.9	959.3	955.6	958.4	964.9	959.3	963.0	966.9
5°	841.0	836.2	821.2	808.9	821.2	836.2	841.0	860.7	870.0	886.9	909.5
7.5°	751.7	747.9	744.1	736.6	744.1	747.9	751.7	757.3	766.7	781.8	798.7
10°	732.0	732.9	738.5	737.6	738.5	732.9	732.0	730.0	727.2	730.0	740.4
12.5°	782.7	791.1	822.1	820.2	822.1	791.1	782.7	745.1	719.7	715.0	716.9
15°	841.0	843.8	850.3	851.2	850.3	843.8	841.0	825.9	749.8	716.9	706.6
17.5°	846.6	847.5	852.2	852.2	852.2	847.5	846.6	839.9	814.6	770.5	712.2
20°	841.9	843.8	853.1	855.0	853.1	843.8	841.9	833.4	819.3	803.3	759.2
22.5°	839.9	843.8	851.2	850.3	851.2	843.8	839.9	826.9	814.6	803.3	785.5
25°	830.6	830.6	831.5	832.5	831.5	830.6	830.6	820.2	795.9	793.0	782.7
27.5°	810.9	812.8	818.4	817.4	818.4	812.8	810.9	807.1	780.8	778.0	770.5
30°	793.0	791.1	786.4	782.7	786.4	791.1	793.0	787.4	761.0	753.6	755.4
32.5°	763.0	758.2	753.6	750.7	753.6	758.2	763.0	761.0	741.3	731.0	732.9
35°	727.2	728.1	727.2	724.4	727.2	728.1	727.2	729.1	716.9	707.5	706.6
37.5°	701.9	703.8	702.8	699.0	702.8	703.8	701.9	700.0	683.0	680.2	682.1
40°	675.6	676.5	675.6	672.8	675.6	676.5	675.6	671.8	648.3	649.2	655.9
42.5°	650.2	649.2	646.4	644.6	646.4	649.2	650.2	644.6	614.5	611.7	623.9
45°	621.1	622.0	616.3	613.5	616.3	622.0	621.1	617.3	586.3	578.8	587.2
47.5°	592.0	592.0	587.2	584.4	587.2	592.0	592.0	587.2	554.3	546.9	551.5
50°	561.0	560.0	553.4	552.5	553.4	560.0	561.0	558.2	523.3	516.8	516.8
52.5°	525.2	525.2	526.1	528.1	526.1	525.2	525.2	526.1	495.2	488.6	486.7
55°	494.2	495.2	501.7	503.6	501.7	495.2	494.2	494.2	466.1	459.4	455.7
57.5°	462.2	462.2	467.0	467.0	467.0	462.2	462.2	460.4	433.2	427.5	425.6
60°	425.6	427.5	431.2	430.3	431.2	427.5	425.6	423.8	400.2	396.5	389.9
62.5°	387.1	389.0	389.9	388.1	389.9	389.0	387.1	381.4	367.3	364.5	356.1
65°	346.7	348.6	349.5	347.6	349.5	348.6	346.7	343.9	333.5	328.9	321.3
67.5°	305.3	304.4	303.5	307.3	303.5	304.4	305.3	301.6	295.1	291.3	280.9
70°	263.1	263.1	262.2	264.0	262.2	263.1	263.1	260.3	256.5	253.7	244.3
72.5°	218.0	217.1	220.8	218.0	220.8	217.1	218.0	217.1	215.2	212.4	203.0
75°	173.8	175.7	173.8	176.6	173.8	175.7	173.8	174.8	173.8	171.9	165.4
77.5°	132.4	134.4	132.4	132.4	132.4	134.4	132.4	133.4	133.4	133.4	127.8
80°	94.0	93.0	93.0	92.1	93.0	93.0	94.0	94.0	94.9	93.0	91.2
82.5°	60.1	59.2	59.2	61.1	59.2	59.2	60.1	61.1	59.2	59.2	59.2
85°	32.9	33.8	31.9	31.9	31.9	33.8	32.9	31.0	32.9	32.9	31.9
87.5°	12.2	11.3	11.3	11.3	11.3	11.3	12.2	13.2	13.2	13.2	14.1
90°	10.9	10.9	10.9	10.9	10.9	10.9	10.9	14.6	19.5	21.9	18.9
92.5°	54.8	52.7	43.9	35.2	43.9	52.7	54.8	77.7	108.3	123.6	108.5
95°	186.2	179.6	153.2	126.7	153.2	179.6	186.2	244.6	322.4	361.3	305.1
97.5°	429.9	417.3	367.1	316.8	367.1	417.3	429.9	466.8	516.0	540.6	447.0
100°	603.8	588.9	528.9	469.0	528.9	588.9	603.8	601.1	597.5	595.7	491.8
102.5°	752.2	739.4	688.1	636.7	688.1	739.4	752.2	705.3	642.6	611.3	505.9
105°	925.5	918.6	891.0	863.4	891.0	918.6	925.5	820.1	679.8	609.5	507.5
107.5°	1015.5	1017.2	1023.9	1030.6	1023.9	1017.2	1015.5	868.6	672.8	574.9	484.9
110°	1038.7	1045.9	1074.6	1103.3	1074.6	1045.9	1038.7	874.5	655.5	546.0	464.9

TEST NUMBER: P934291

CATALOG NUMBER: SQ4-FA-050U-050D-B2750-1D-UNV-W2A-W-6-5000K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	260°	270°	280°	290°	292.5°	300°	310°	315°	320°
112.5°	1023.9	1035.0	1079.1	1123.2	1079.1	1035.0	1023.9	855.9	631.9	519.8	447.5
115°	974.0	989.3	1050.5	1111.7	1050.5	989.3	974.0	812.1	596.3	488.3	427.4
117.5°	905.0	922.0	989.9	1057.8	989.9	922.0	905.0	758.9	564.0	466.6	414.9
120°	858.4	875.0	940.9	1006.9	940.9	875.0	858.4	725.0	547.0	457.9	410.6
122.5°	812.0	828.3	893.4	958.4	893.4	828.3	812.0	691.8	531.4	451.3	408.3
125°	750.5	765.4	825.4	885.3	825.4	765.4	750.5	648.4	512.2	444.1	406.6
127.5°	701.1	713.7	764.3	814.9	764.3	713.7	701.1	613.4	496.5	438.0	405.5
130°	670.0	681.6	728.3	775.0	728.3	681.6	670.0	591.9	487.7	435.7	406.1
132.5°	643.3	653.8	695.6	737.5	695.6	653.8	643.3	573.5	480.4	433.7	406.6
135°	605.8	614.9	650.9	687.0	650.9	614.9	605.8	547.3	469.3	430.3	406.2
137.5°	578.1	585.4	615.0	644.6	615.0	585.4	578.1	528.6	462.6	429.6	408.6
140°	555.8	562.7	590.3	617.9	590.3	562.7	555.8	513.1	456.2	427.7	409.1
142.5°	540.2	546.2	569.9	593.7	569.9	546.2	540.2	502.7	452.7	427.7	410.6
145°	516.9	521.4	539.4	557.3	539.4	521.4	516.9	486.1	445.2	424.8	410.6
147.5°	497.3	501.0	515.8	530.7	515.8	501.0	497.3	473.1	440.8	424.8	413.4
150°	486.0	488.9	501.1	513.1	501.1	488.9	486.0	465.6	438.4	424.8	414.9
152.5°	477.0	479.2	488.4	497.5	488.4	479.2	477.0	459.6	436.4	424.8	415.8
155°	466.3	467.8	473.9	479.9	473.9	467.8	466.3	452.5	434.0	424.8	418.0
157.5°	457.1	458.1	462.4	466.6	462.4	458.1	457.1	446.4	432.0	424.8	420.1
160°	452.5	453.1	455.5	457.9	455.5	453.1	452.5	443.3	430.9	424.8	421.0
162.5°	448.1	448.7	451.0	453.4	451.0	448.7	448.1	440.4	430.0	424.8	422.1
165°	441.5	442.2	444.6	447.0	444.6	442.2	441.5	435.9	428.5	424.8	423.6
167.5°	438.6	438.9	439.9	440.9	439.9	438.9	438.6	435.0	430.1	427.7	426.7
170°	438.6	438.6	438.6	438.6	438.6	438.6	438.6	435.0	430.1	427.7	427.6
172.5°	436.3	436.1	435.2	434.3	435.2	436.1	436.3	433.4	429.5	427.7	427.7
175°	433.1	433.1	433.1	433.1	433.1	433.1	433.1	431.3	428.9	427.7	428.2
177.5°	432.5	432.3	431.3	430.3	431.3	432.3	432.5	431.1	429.2	428.2	428.7
180°	430.3	430.3	430.3	430.3	430.3	430.3	430.3	430.3	430.3	430.3	430.3

TEST NUMBER: P934291

CATALOG NUMBER: SQ4-FA-050U-050D-B2750-1D-UNV-W2A-W-6-5000K

CANDELA DISTRIBUTION (continued):

	330°	337.5°	340°	350°	360°
0°	993.1	993.1	993.1	993.1	993.1
2.5°	980.9	985.7	988.5	992.2	1001.6
5°	943.3	961.2	966.9	980.9	997.8
7.5°	860.7	915.1	930.2	964.0	990.3
10°	780.8	835.3	861.6	941.5	980.9
12.5°	740.4	772.3	790.2	902.0	967.8
15°	715.0	737.6	750.7	849.4	952.8
17.5°	695.3	711.2	720.7	797.7	932.0
20°	683.0	690.6	699.0	760.1	908.6
22.5°	674.6	670.0	676.5	733.8	876.7
25°	669.0	651.1	658.7	713.1	839.0
27.5°	673.7	634.2	637.1	694.3	799.6
30°	674.6	613.5	614.5	674.6	755.4
32.5°	668.1	592.0	592.9	650.2	705.6
35°	652.0	566.6	565.6	622.0	638.0
37.5°	630.4	539.3	539.3	591.0	563.8
40°	604.1	512.1	514.9	550.6	498.0
42.5°	572.2	483.0	486.7	497.1	449.2
45°	537.4	454.8	457.6	420.0	411.5
47.5°	498.9	425.6	426.6	348.6	399.3
50°	452.9	395.5	391.8	298.8	398.4
52.5°	412.5	362.7	351.4	270.6	361.7
55°	373.0	327.9	303.5	249.0	335.4
57.5°	338.3	282.8	259.4	223.6	329.8
60°	306.3	238.6	220.8	196.3	302.5
62.5°	280.0	205.8	202.0	177.6	274.3
65°	251.8	183.3	182.3	161.6	233.0
67.5°	224.5	168.2	167.3	146.5	177.6
70°	195.4	152.2	150.4	130.6	131.5
72.5°	165.4	134.4	132.4	117.4	109.0
75°	135.3	113.7	112.7	102.5	88.4
77.5°	106.2	90.2	92.1	82.7	64.8
80°	76.1	65.8	67.6	59.2	48.8
82.5°	50.7	43.2	45.1	37.5	32.9
85°	28.2	24.5	25.4	19.7	15.0
87.5°	13.2	11.3	11.3	7.5	4.7
90°	12.7	8.1	7.6	5.2	2.9
92.5°	78.4	55.8	50.8	31.2	11.6
95°	192.8	108.5	99.6	63.6	27.7
97.5°	259.7	119.3	111.3	79.7	47.9
100°	284.0	128.2	121.0	92.3	63.5
102.5°	295.2	137.2	130.5	103.7	76.8
105°	303.5	150.5	144.8	122.1	99.4
107.5°	305.0	170.1	164.8	143.6	122.4
110°	302.7	181.0	176.2	157.1	138.0

TEST NUMBER: P934291

CATALOG NUMBER: SQ4-FA-050U-050D-B2750-1D-UNV-W2A-W-6-5000K

CANDELA DISTRIBUTION (continued):

	330°	337.5°	340°	350°	360°
112.5°	302.8	194.4	189.8	171.6	153.4
115°	305.6	214.3	210.1	193.2	176.4
117.5°	311.3	233.6	229.8	214.5	199.2
120°	315.9	244.9	241.3	226.9	212.5
122.5°	322.5	258.2	254.5	240.0	225.6
125°	331.5	275.2	271.9	258.6	245.5
127.5°	340.4	291.7	288.3	275.0	261.6
130°	347.0	302.6	299.1	284.7	270.3
132.5°	352.3	311.6	308.0	293.6	279.3
135°	358.1	321.9	318.7	305.6	292.5
137.5°	366.7	335.2	331.9	319.1	306.1
140°	372.0	344.2	341.2	329.3	317.4
142.5°	376.4	350.8	348.0	337.0	326.0
145°	382.3	361.0	358.6	348.9	339.3
147.5°	390.7	373.7	371.4	361.9	352.6
150°	395.2	380.3	378.2	369.8	361.3
152.5°	398.0	384.6	383.0	376.6	370.1
155°	404.3	394.1	392.9	388.3	383.5
157.5°	410.7	403.7	402.6	397.9	393.3
160°	413.6	408.0	407.0	403.5	399.9
162.5°	416.7	412.6	412.0	409.3	406.6
165°	421.1	419.3	418.6	416.2	413.8
167.5°	424.6	423.0	422.7	421.5	420.4
170°	427.5	427.4	427.1	425.9	424.8
172.5°	427.7	427.7	427.6	427.4	427.1
175°	429.5	430.3	430.3	430.3	430.3
177.5°	429.6	430.3	430.3	430.3	430.3
180°	430.3	430.3	430.3	430.3	430.3

TEST NUMBER: P934291

CATALOG NUMBER: SQ4-FA-050U-050D-B2750-1D-UNV-W2A-W-6-5000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.92	11.77	11.90	12.76	14.06	13.75	14.59	14.72	15.58	16.88
	3H	11.40	12.16	12.38	13.15	14.47	15.09	15.85	16.08	16.84	18.16
	4H	11.59	12.31	12.59	13.31	14.64	15.53	16.25	16.53	17.25	18.58
	6H	11.71	12.37	12.72	13.37	14.71	15.82	16.47	16.82	17.48	18.82
	8H	11.71	12.34	12.72	13.36	14.70	15.89	16.52	16.90	17.54	18.88
	12H	11.68	12.28	12.70	13.29	14.65	15.93	16.52	16.95	17.54	18.90
4H	2H	11.95	12.67	12.96	13.67	15.00	14.16	14.87	15.16	15.87	17.20
	3H	12.98	13.58	13.99	14.60	15.95	15.66	16.25	16.67	17.28	18.63
	4H	13.25	13.80	14.28	14.82	16.19	16.18	16.73	17.21	17.75	19.12
	6H	13.38	13.85	14.41	14.89	16.25	16.55	17.02	17.58	18.06	19.42
	8H	13.38	13.82	14.42	14.86	16.24	16.65	17.09	17.69	18.13	19.51
	12H	13.35	13.75	14.40	14.80	16.18	16.71	17.10	17.76	18.16	19.54
8H	4H	13.71	14.14	14.74	15.18	16.56	16.31	16.75	17.34	17.78	19.16
	6H	13.97	14.33	15.02	15.41	16.78	16.74	17.10	17.80	18.18	19.56
	8H	14.01	14.33	15.07	15.39	16.79	16.89	17.21	17.96	18.28	19.67
	12H	13.99	14.27	15.06	15.33	16.77	16.99	17.27	18.06	18.33	19.76
12H	4H	13.71	14.11	14.76	15.16	16.54	16.27	16.67	17.32	17.72	19.10
	6H	14.03	14.35	15.09	15.41	16.80	16.74	17.06	17.80	18.12	19.52
	8H	14.09	14.37	15.16	15.43	16.87	16.90	17.18	17.97	18.24	19.67

END OF REPORT