

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P934596

Luminaire Tested: SQ4-FA-050U-125D-B2750-1D-UNV-W2A-W-8-5000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P934596
REPORT IS A COMBINATION OF REPORTS P933704 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FA-050U-125D-B2750-1D-UNV-W2A-W-8-5000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Asymmetric Frosted Continuous I
Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12383.9 lumens
Efficiency: N/A
Efficacy: 110.6 lumens/watt
Spacing Criteria (0/90/45): 1.14 / 1.26 / 1.36
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 112
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P934596

CATALOG NUMBER: SQ4-FA-050U-125D-B2750-1D-UNV-W2A-W-8-5000K

Luminous Intensity Polar Plot

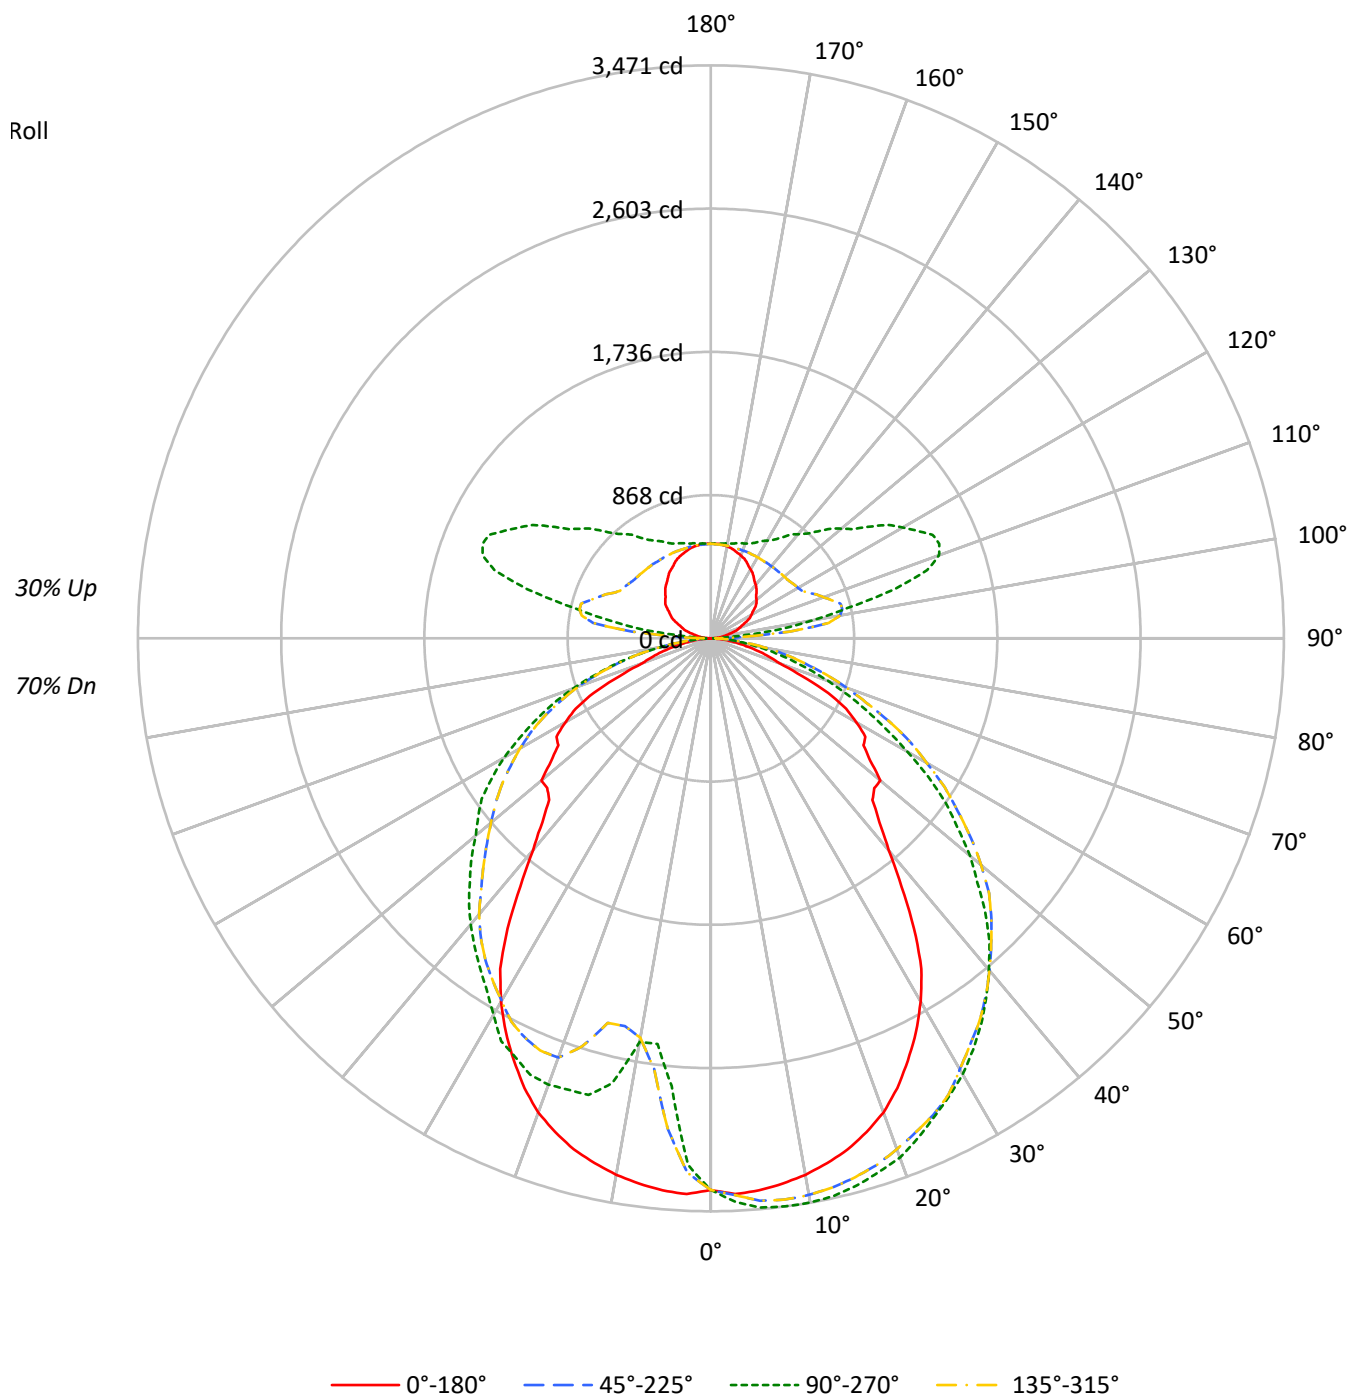

TEST NUMBER: P934596

CATALOG NUMBER: SQ4-FA-050U-125D-B2750-1D-UNV-W2A-W-8-5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	112	112	112	112	106	106	106	106	94	94	94	84	84	84	74	74	74
1	102	98	94	90	97	93	89	86	83	80	78	74	72	70	66	65	63
2	93	86	79	74	88	81	76	71	73	68	65	65	62	59	58	56	53
3	85	75	68	62	80	71	65	59	64	59	54	58	53	50	52	48	45
4	78	67	58	52	73	63	56	50	57	51	46	51	47	43	46	42	39
5	72	60	51	45	67	57	49	43	51	45	40	46	41	37	41	37	34
6	66	53	45	39	62	51	43	38	46	40	35	42	36	32	38	33	30
7	61	48	40	34	58	46	39	33	42	36	31	38	33	29	34	30	27
8	57	44	36	30	54	42	35	29	38	32	28	35	29	26	31	27	24
9	53	40	32	27	50	38	31	26	35	29	25	32	27	23	29	25	21
10	49	37	30	25	47	35	28	24	32	26	22	30	25	21	27	23	19

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	15501	15501	15501	15501
5°	15617	15648	15617	12304
10°	15513	15414	15513	11020
15°	15344	15080	15344	12592
20°	15023	14684	15023	12618
25°	14366	14108	14366	12351
30°	13518	13628	13518	11764
35°	12050	13022	12050	11119
40°	10041	12309	10041	10631
45°	8972	11474	8972	10070
50°	9532	10478	9532	9509
55°	8968	9406	8968	9183
60°	9244	7988	9244	8410
65°	8381	6603	8381	7382
70°	5803	5262	5803	6187
75°	5088	3889	5088	4658
80°	4102	2572	4102	2801
85°	2352	1363	2352	1158

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 20°

Vertical Angle: 45°

Luminance: 13751 cd/sqm

TEST NUMBER: P934596

CATALOG NUMBER: SQ4-FA-050U-125D-B2750-1D-UNV-W2A-W-8-5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	301.6	2.4
10°-20°	856.3	6.9
20°-30°	1323.7	10.7
30°-40°	1580.2	12.8
40°-50°	1589.5	12.8
50°-60°	1383.0	11.2
60°-70°	980.6	7.9
70°-80°	518.8	4.2
80°-90°	131.4	1.1
90°-100°	279.6	2.3
100°-110°	735.2	5.9
110°-120°	762.3	6.2
120°-130°	611.4	4.9
130°-140°	479.8	3.9
140°-150°	368.3	3.0
150°-160°	265.2	2.1
160°-170°	162.3	1.3
170°-180°	54.8	0.4
0°-30°	2481.6	20.0
0°-40°	4061.8	32.8
0°-60°	7034.3	56.8
0°-90°	8665.0	70.0
90°-120°	1777.1	14.4
90°-150°	3236.6	26.1
90°-180°	3719.0	30.0
0°-180°	12383.9	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	3341	3341	3341	3341	3341	
5°	3357	3461	3357	2722	3357	318
15°	3205	3430	3205	2864	3205	902
25°	2823	3199	2823	2801	2823	1296
35°	2146	2854	2146	2437	2146	1328
45°	1384	2352	1384	2064	1384	1109
55°	1128	1735	1128	1694	1128	1037
65°	784	1046	784	1170	784	749
75°	297	496	297	594	297	312
85°	50	126	50	108	50	68
90°	4	15	4	15	4	5
95°	37	169	37	169	37	41
105°	132	1151	132	1151	132	140
115°	235	1482	235	1482	235	232
125°	327	1180	327	1180	327	291
135°	390	916	390	916	390	302
145°	452	743	452	743	452	283
155°	511	640	511	640	511	235
165°	552	596	552	596	552	156
175°	574	578	574	578	574	54
180°	574	574	574	574	574	

TEST NUMBER: P934596

CATALOG NUMBER: SQ4-FA-050U-125D-B2750-1D-UNV-W2A-W-8-5000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1
2.5°	3369.5	3369.5	3388.5	3394.8	3394.8	3385.4	3375.8	3385.4	3413.8	3423.3	3420.1
5°	3356.9	3382.2	3416.9	3423.3	3429.6	3426.5	3420.1	3426.5	3458.0	3464.4	3467.6
7.5°	3331.6	3379.0	3423.3	3432.7	3442.3	3432.7	3429.6	3435.9	3467.6	3473.8	3473.8
10°	3300.0	3366.4	3416.9	3423.3	3432.7	3423.3	3423.3	3435.9	3467.6	3473.8	3477.0
12.5°	3255.7	3347.4	3394.8	3401.2	3413.8	3410.6	3407.5	3420.1	3451.7	3458.0	3458.0
15°	3205.2	3312.6	3356.9	3363.2	3385.4	3379.0	3379.0	3391.6	3426.5	3435.9	3432.7
17.5°	3135.6	3268.3	3319.0	3328.4	3344.3	3341.1	3344.3	3356.9	3388.5	3394.8	3398.0
20°	3056.6	3208.3	3268.3	3277.9	3293.7	3293.7	3293.7	3309.4	3341.1	3353.7	3353.7
22.5°	2949.1	3145.2	3208.3	3214.6	3233.6	3233.6	3240.0	3262.1	3290.5	3293.7	3293.7
25°	2822.7	3075.6	3129.3	3148.2	3167.2	3176.7	3186.2	3198.9	3208.3	3205.2	3208.3
27.5°	2689.9	2987.0	3056.6	3069.2	3094.5	3104.1	3116.7	3119.8	3123.0	3132.4	3126.1
30°	2541.4	2863.8	2968.1	2980.8	3021.9	3028.1	3015.5	3021.9	3037.6	3044.0	3050.3
32.5°	2373.9	2680.5	2876.4	2904.9	2942.8	2923.9	2920.7	2930.1	2955.5	2955.5	2961.8
35°	2146.2	2538.2	2791.1	2816.4	2844.8	2822.7	2835.3	2838.5	2854.3	2863.8	2860.7
37.5°	1896.6	2415.0	2702.6	2721.6	2743.7	2715.2	2734.2	2743.7	2756.3	2750.0	2750.0
40°	1675.3	2222.1	2598.3	2610.9	2629.9	2607.7	2626.7	2633.0	2639.4	2633.0	2629.9
42.5°	1510.9	2010.3	2487.6	2503.4	2490.8	2506.6	2512.9	2525.5	2516.1	2503.4	2503.4
45°	1384.5	1953.5	2367.5	2386.5	2367.5	2392.8	2402.3	2402.3	2373.9	2367.5	2364.3
47.5°	1343.4	1839.6	2247.4	2247.4	2238.0	2269.5	2285.3	2263.2	2234.8	2225.3	2225.3
50°	1340.2	1713.2	2083.0	2070.4	2114.7	2152.6	2136.8	2114.7	2092.5	2057.8	2057.8
52.5°	1216.9	1558.3	1871.3	1918.7	1988.2	2010.3	1985.0	1962.9	1925.0	1909.2	1896.6
55°	1128.5	1397.2	1678.5	1773.3	1846.0	1874.4	1827.0	1804.9	1748.0	1738.5	1732.2
57.5°	1109.5	1163.2	1501.4	1621.5	1710.1	1706.9	1678.5	1637.4	1589.9	1580.4	1577.3
60°	1017.8	840.8	1311.8	1454.1	1545.7	1536.2	1510.9	1473.0	1428.7	1422.4	1416.1
62.5°	923.0	610.1	1096.8	1258.0	1387.6	1384.5	1362.3	1305.5	1273.9	1258.0	1245.4
65°	783.9	512.1	780.7	1046.3	1232.8	1239.0	1191.7	1150.6	1115.8	1096.8	1093.7
67.5°	597.4	417.2	527.9	872.4	1084.2	1077.8	1017.8	998.8	954.6	945.1	926.2
70°	442.5	278.1	366.7	708.1	938.8	923.0	875.5	853.5	812.4	790.3	777.6
72.5°	366.7	224.4	268.7	550.0	790.3	771.3	730.2	704.9	670.1	651.2	638.5
75°	297.1	237.0	205.5	407.8	641.7	629.0	591.1	565.8	537.3	512.1	515.2
77.5°	218.1	221.3	164.4	300.3	508.9	490.0	467.8	436.2	423.6	398.3	398.3
80°	164.4	173.8	123.3	205.5	366.7	366.7	347.7	325.6	303.5	290.8	290.8
82.5°	110.6	110.6	91.6	129.6	249.8	240.2	227.6	221.3	208.7	202.3	202.3
85°	50.5	63.2	56.9	79.0	135.9	142.2	142.2	135.9	132.7	126.5	129.6
87.5°	15.8	28.5	34.7	44.3	69.6	72.7	75.8	75.8	75.8	79.0	79.0
90°	3.8	6.9	10.0	10.7	16.9	25.1	29.2	26.0	19.5	14.7	14.7
92.5°	15.4	41.6	67.8	74.3	104.5	144.7	164.8	144.4	103.7	73.1	70.2
95°	37.0	84.9	132.8	144.8	257.0	406.8	481.7	429.8	326.2	248.4	239.6
97.5°	63.9	106.1	148.4	159.0	346.2	595.9	720.8	688.0	622.4	573.3	556.5
100°	84.7	123.0	161.3	170.9	378.7	655.8	794.3	796.7	801.5	805.0	785.0
102.5°	102.5	138.2	173.9	182.9	393.6	674.6	815.1	856.9	940.4	1002.9	985.8
105°	132.4	162.7	193.1	200.6	404.7	676.8	812.8	906.4	1093.6	1234.0	1224.8
107.5°	163.3	191.5	219.7	226.8	406.7	646.6	766.5	897.1	1158.3	1354.1	1356.4
110°	184.0	209.5	235.1	241.4	403.7	619.9	728.1	874.0	1165.9	1384.8	1394.5

TEST NUMBER: P934596

CATALOG NUMBER: SQ4-FA-050U-125D-B2750-1D-UNV-W2A-W-8-5000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	204.5	228.7	253.0	259.1	403.8	596.6	693.0	842.4	1141.2	1365.2	1380.0
115°	235.3	257.7	280.1	285.7	407.5	569.9	651.1	795.0	1082.8	1298.6	1319.0
117.5°	265.6	286.0	306.4	311.5	415.1	553.1	622.1	752.1	1011.8	1206.6	1229.2
120°	283.4	302.5	321.8	326.5	421.2	547.5	610.6	729.3	966.6	1144.6	1166.6
122.5°	300.7	320.0	339.3	344.2	430.0	544.5	601.8	708.6	922.4	1082.7	1104.4
125°	327.3	344.8	362.5	366.9	442.0	542.1	592.2	682.9	864.5	1000.7	1020.7
127.5°	348.8	366.6	384.3	388.8	453.9	540.7	584.0	662.0	817.9	934.8	951.7
130°	360.3	379.5	398.7	403.5	462.6	541.5	580.9	650.3	789.1	893.2	908.8
132.5°	372.3	391.4	410.7	415.4	469.7	542.1	578.3	640.4	764.7	857.8	871.7
135°	390.0	407.5	424.9	429.3	477.4	541.5	573.7	625.7	729.7	807.7	819.8
137.5°	408.2	425.4	442.7	447.0	488.9	544.9	572.9	616.9	704.9	770.8	780.6
140°	423.1	439.1	455.0	459.0	496.0	545.5	570.2	608.2	684.2	741.1	750.3
142.5°	434.7	449.3	464.1	467.7	501.9	547.4	570.2	603.6	670.3	720.4	728.3
145°	452.4	465.2	478.1	481.3	509.7	547.5	566.4	593.7	648.3	689.2	695.2
147.5°	470.1	482.6	495.1	498.2	520.9	551.2	566.4	587.9	630.7	663.0	667.9
150°	481.7	493.0	504.3	507.1	526.9	553.2	566.4	584.5	620.8	648.0	652.0
152.5°	493.6	502.2	510.7	512.9	530.7	554.5	566.4	581.9	612.8	636.1	639.1
155°	511.3	517.6	524.0	525.6	539.2	557.3	566.4	578.7	603.3	621.8	623.8
157.5°	524.3	530.5	536.7	538.3	547.6	560.1	566.4	575.9	595.1	609.4	610.8
160°	533.2	538.1	542.8	544.1	551.5	561.4	566.4	574.6	590.9	603.3	604.1
162.5°	542.1	545.7	549.3	550.2	555.6	562.8	566.4	573.3	587.2	597.6	598.3
165°	551.7	555.0	558.2	559.0	561.4	564.7	566.4	571.3	581.2	588.7	589.5
167.5°	560.6	562.1	563.7	564.0	566.1	568.8	570.2	573.5	580.0	584.9	585.2
170°	566.4	567.9	569.5	569.8	569.9	570.1	570.2	573.5	580.0	584.9	584.9
172.5°	569.5	569.8	570.1	570.2	570.2	570.2	570.2	572.8	578.0	581.8	581.5
175°	573.7	573.7	573.7	573.7	572.5	571.0	570.2	571.8	575.1	577.5	577.5
177.5°	573.7	573.7	573.7	573.7	572.7	571.5	571.0	572.3	574.8	576.7	576.4
180°	573.7	573.7	573.7	573.7	573.7	573.7	573.7	573.7	573.7	573.7	573.7

TEST NUMBER: P934596

CATALOG NUMBER: SQ4-FA-050U-125D-B2750-1D-UNV-W2A-W-8-5000K

CANDELA DISTRIBUTION (continued):

	80°	90°	100°	110°	112.5°	120°	130°	135°	140°	150°	157.5°
0°	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1
2.5°	3426.5	3416.9	3426.5	3420.1	3423.3	3413.8	3385.4	3375.8	3385.4	3394.8	3394.8
5°	3467.6	3461.2	3467.6	3467.6	3464.4	3458.0	3426.5	3420.1	3426.5	3429.6	3423.3
7.5°	3480.2	3470.7	3480.2	3473.8	3473.8	3467.6	3435.9	3429.6	3432.7	3442.3	3432.7
10°	3480.2	3470.7	3480.2	3477.0	3473.8	3467.6	3435.9	3423.3	3423.3	3432.7	3423.3
12.5°	3464.4	3458.0	3464.4	3458.0	3458.0	3451.7	3420.1	3407.5	3410.6	3413.8	3401.2
15°	3439.1	3429.6	3439.1	3432.7	3435.9	3426.5	3391.6	3379.0	3379.0	3385.4	3363.2
17.5°	3401.2	3388.5	3401.2	3398.0	3394.8	3388.5	3356.9	3344.3	3341.1	3344.3	3328.4
20°	3356.9	3347.4	3356.9	3353.7	3353.7	3341.1	3309.4	3293.7	3293.7	3293.7	3277.9
22.5°	3287.3	3277.9	3287.3	3293.7	3293.7	3290.5	3262.1	3240.0	3233.6	3233.6	3214.6
25°	3208.3	3198.9	3208.3	3208.3	3205.2	3208.3	3198.9	3186.2	3176.7	3167.2	3148.2
27.5°	3132.4	3126.1	3132.4	3126.1	3132.4	3123.0	3119.8	3116.7	3104.1	3094.5	3069.2
30°	3056.6	3050.3	3056.6	3050.3	3044.0	3037.6	3021.9	3015.5	3028.1	3021.9	2980.8
32.5°	2961.8	2955.5	2961.8	2961.8	2955.5	2955.5	2930.1	2920.7	2923.9	2942.8	2904.9
35°	2863.8	2854.3	2863.8	2860.7	2863.8	2854.3	2838.5	2835.3	2822.7	2844.8	2816.4
37.5°	2750.0	2740.5	2750.0	2750.0	2750.0	2756.3	2743.7	2734.2	2715.2	2743.7	2721.6
40°	2633.0	2620.4	2633.0	2629.9	2633.0	2639.4	2633.0	2626.7	2607.7	2629.9	2610.9
42.5°	2500.3	2497.1	2500.3	2503.4	2503.4	2516.1	2525.5	2512.9	2506.6	2490.8	2503.4
45°	2358.1	2351.7	2358.1	2364.3	2367.5	2373.9	2402.3	2402.3	2392.8	2367.5	2386.5
47.5°	2206.3	2190.5	2206.3	2225.3	2225.3	2234.8	2263.2	2285.3	2269.5	2238.0	2247.4
50°	2045.1	2048.3	2045.1	2057.8	2057.8	2092.5	2114.7	2136.8	2152.6	2114.7	2070.4
52.5°	1887.1	1883.9	1887.1	1896.6	1909.2	1925.0	1962.9	1985.0	2010.3	1988.2	1918.7
55°	1729.0	1735.4	1729.0	1732.2	1738.5	1748.0	1804.9	1827.0	1874.4	1846.0	1773.3
57.5°	1571.0	1561.5	1571.0	1577.3	1580.4	1589.9	1637.4	1678.5	1706.9	1710.1	1621.5
60°	1387.6	1375.0	1387.6	1416.1	1422.4	1428.7	1473.0	1510.9	1536.2	1545.7	1454.1
62.5°	1226.4	1204.3	1226.4	1245.4	1258.0	1273.9	1305.5	1362.3	1384.5	1387.6	1258.0
65°	1055.7	1046.3	1055.7	1093.7	1096.8	1115.8	1150.6	1191.7	1239.0	1232.8	1046.3
67.5°	900.8	900.8	900.8	926.2	945.1	954.6	998.8	1017.8	1077.8	1084.2	872.4
70°	758.6	755.4	758.6	777.6	790.3	812.4	853.5	875.5	923.0	938.8	708.1
72.5°	622.7	619.5	622.7	638.5	651.2	670.1	704.9	730.2	771.3	790.3	550.0
75°	502.6	496.2	502.6	515.2	512.1	537.3	565.8	591.1	629.0	641.7	407.8
77.5°	385.6	385.6	385.6	398.3	398.3	423.6	436.2	467.8	490.0	508.9	300.3
80°	287.7	284.5	287.7	290.8	290.8	303.5	325.6	347.7	366.7	366.7	205.5
82.5°	202.3	196.0	202.3	202.3	202.3	208.7	221.3	227.6	240.2	249.8	129.6
85°	126.5	126.5	126.5	129.6	126.5	132.7	135.9	142.2	142.2	135.9	79.0
87.5°	82.2	79.0	82.2	79.0	79.0	75.8	75.8	75.8	72.7	69.6	44.3
90°	14.7	14.7	14.7	14.7	14.7	19.5	26.0	29.2	25.1	16.9	10.7
92.5°	58.6	47.0	58.6	70.2	73.1	103.7	144.4	164.8	144.7	104.5	74.3
95°	204.3	169.1	204.3	239.6	248.4	326.2	429.8	481.7	406.8	257.0	144.8
97.5°	489.4	422.4	489.4	556.5	573.3	622.4	688.0	720.8	595.9	346.2	159.0
100°	705.2	625.2	705.2	785.0	805.0	801.5	796.7	794.3	655.8	378.7	170.9
102.5°	917.4	848.9	917.4	985.8	1002.9	940.4	856.9	815.1	674.6	393.6	182.9
105°	1188.0	1151.2	1188.0	1224.8	1234.0	1093.6	906.4	812.8	676.8	404.7	200.6
107.5°	1365.2	1374.1	1365.2	1356.4	1354.1	1158.3	897.1	766.5	646.6	406.7	226.8
110°	1432.8	1471.1	1432.8	1394.5	1384.8	1165.9	874.0	728.1	619.9	403.7	241.4

TEST NUMBER: P934596

CATALOG NUMBER: SQ4-FA-050U-125D-B2750-1D-UNV-W2A-W-8-5000K

CANDELA DISTRIBUTION (continued):

	80°	90°	100°	110°	112.5°	120°	130°	135°	140°	150°	157.5°
112.5°	1438.8	1497.7	1438.8	1380.0	1365.2	1141.2	842.4	693.0	596.6	403.8	259.1
115°	1400.6	1482.3	1400.6	1319.0	1298.6	1082.8	795.0	651.1	569.9	407.5	285.7
117.5°	1319.8	1410.3	1319.8	1229.2	1206.6	1011.8	752.1	622.1	553.1	415.1	311.5
120°	1254.5	1342.5	1254.5	1166.6	1144.6	966.6	729.3	610.6	547.5	421.2	326.5
122.5°	1191.1	1277.9	1191.1	1104.4	1082.7	922.4	708.6	601.8	544.5	430.0	344.2
125°	1100.5	1180.5	1100.5	1020.7	1000.7	864.5	682.9	592.2	542.1	442.0	366.9
127.5°	1019.1	1086.5	1019.1	951.7	934.8	817.9	662.0	584.0	540.7	453.9	388.8
130°	971.1	1033.4	971.1	908.8	893.2	789.1	650.3	580.9	541.5	462.6	403.5
132.5°	927.6	983.3	927.6	871.7	857.8	764.7	640.4	578.3	542.1	469.7	415.4
135°	867.9	916.0	867.9	819.8	807.7	729.7	625.7	573.7	541.5	477.4	429.3
137.5°	820.1	859.4	820.1	780.6	770.8	704.9	616.9	572.9	544.9	488.9	447.0
140°	787.1	823.9	787.1	750.3	741.1	684.2	608.2	570.2	545.5	496.0	459.0
142.5°	759.9	791.6	759.9	728.3	720.4	670.3	603.6	570.2	547.4	501.9	467.7
145°	719.2	743.1	719.2	695.2	689.2	648.3	593.7	566.4	547.5	509.7	481.3
147.5°	687.8	707.7	687.8	667.9	663.0	630.7	587.9	566.4	551.2	520.9	498.2
150°	668.1	684.2	668.1	652.0	648.0	620.8	584.5	566.4	553.2	526.9	507.1
152.5°	651.3	663.4	651.3	639.1	636.1	612.8	581.9	566.4	554.5	530.7	512.9
155°	631.9	639.9	631.9	623.8	621.8	603.3	578.7	566.4	557.3	539.2	525.6
157.5°	616.5	622.1	616.5	610.8	609.4	595.1	575.9	566.4	560.1	547.6	538.3
160°	607.4	610.6	607.4	604.1	603.3	590.9	574.6	566.4	561.4	551.5	544.1
162.5°	601.4	604.5	601.4	598.3	597.6	587.2	573.3	566.4	562.8	555.6	550.2
165°	592.7	596.0	592.7	589.5	588.7	581.2	571.3	566.4	564.7	561.4	559.0
167.5°	586.6	588.0	586.6	585.2	584.9	580.0	573.5	570.2	568.8	566.1	564.0
170°	584.9	584.9	584.9	584.9	584.9	580.0	573.5	570.2	570.1	569.9	569.8
172.5°	580.3	579.1	580.3	581.5	581.8	578.0	572.8	570.2	570.2	570.2	570.2
175°	577.5	577.5	577.5	577.5	577.5	575.1	571.8	570.2	571.0	572.5	573.7
177.5°	575.1	573.7	575.1	576.4	576.7	574.8	572.3	571.0	571.5	572.7	573.7
180°	573.7	573.7	573.7	573.7	573.7	573.7	573.7	573.7	573.7	573.7	573.7

TEST NUMBER: P934596

CATALOG NUMBER: SQ4-FA-050U-125D-B2750-1D-UNV-W2A-W-8-5000K

CANDELA DISTRIBUTION (continued):

	160°	170°	180°	190°	200°	202.5°	210°	220°	225°	230°	240°
0°	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1
2.5°	3388.5	3369.5	3369.5	3337.9	3325.3	3315.8	3300.0	3252.6	3240.0	3227.3	3246.3
5°	3416.9	3382.2	3356.9	3300.0	3252.6	3233.6	3173.5	3059.8	2983.9	2927.0	2895.4
7.5°	3423.3	3379.0	3331.6	3243.1	3129.3	3078.7	2895.4	2686.7	2629.9	2579.3	2547.7
10°	3416.9	3366.4	3300.0	3167.2	2898.6	2810.0	2626.7	2490.8	2456.0	2446.5	2456.0
12.5°	3394.8	3347.4	3255.7	3034.5	2658.4	2598.3	2490.8	2411.8	2405.4	2421.3	2506.6
15°	3356.9	3312.6	3205.2	2857.5	2525.5	2481.4	2405.4	2377.0	2411.8	2522.5	2778.5
17.5°	3319.0	3268.3	3135.6	2683.7	2424.4	2392.8	2339.1	2396.0	2591.9	2740.5	2825.8
20°	3268.3	3208.3	3056.6	2557.2	2351.7	2323.2	2298.0	2554.0	2702.6	2756.3	2803.8
22.5°	3208.3	3145.2	2949.1	2468.7	2275.9	2253.7	2269.5	2642.6	2702.6	2740.5	2781.6
25°	3129.3	3075.6	2822.7	2399.2	2215.8	2190.5	2250.6	2633.0	2667.8	2677.3	2759.5
27.5°	3056.6	2987.0	2689.9	2335.9	2143.1	2133.6	2266.4	2591.9	2617.3	2626.7	2715.2
30°	2968.1	2863.8	2541.4	2269.5	2067.2	2064.0	2269.5	2541.4	2535.1	2560.4	2648.8
32.5°	2876.4	2680.5	2373.9	2187.3	1994.6	1991.4	2247.4	2465.5	2459.2	2494.0	2560.4
35°	2791.1	2538.2	2146.2	2092.5	1902.8	1906.0	2193.7	2377.0	2380.2	2411.8	2452.9
37.5°	2702.6	2415.0	1896.6	1988.2	1814.4	1814.4	2120.9	2294.8	2288.5	2298.0	2354.9
40°	2598.3	2222.1	1675.3	1852.3	1732.2	1722.7	2032.5	2206.3	2184.2	2181.1	2260.1
42.5°	2487.6	2010.3	1510.9	1672.1	1637.4	1624.7	1925.0	2098.9	2057.8	2067.2	2168.4
45°	2367.5	1953.5	1384.5	1413.0	1539.3	1529.9	1808.0	1975.6	1947.1	1972.4	2076.7
47.5°	2247.4	1839.6	1343.4	1172.7	1435.1	1431.9	1678.5	1855.5	1839.6	1864.9	1975.6
50°	2083.0	1713.2	1340.2	1005.2	1318.1	1330.8	1523.5	1738.5	1738.5	1760.6	1877.6
52.5°	1871.3	1558.3	1216.9	910.4	1182.2	1220.1	1387.6	1637.4	1643.7	1665.8	1770.1
55°	1678.5	1397.2	1128.5	837.6	1021.0	1103.1	1254.9	1533.1	1545.7	1567.8	1662.6
57.5°	1501.4	1163.2	1109.5	752.3	872.4	951.5	1137.9	1431.9	1438.2	1457.2	1548.9
60°	1311.8	840.8	1017.8	660.6	742.8	802.9	1030.5	1311.8	1333.9	1346.5	1425.6
62.5°	1096.8	610.1	923.0	597.4	679.6	692.3	941.9	1197.9	1226.4	1236.0	1283.3
65°	780.7	512.1	783.9	543.7	613.2	616.3	847.1	1081.0	1106.3	1122.1	1156.9
67.5°	527.9	417.2	597.4	493.1	562.6	565.8	755.4	945.1	979.9	992.6	1014.7
70°	366.7	278.1	442.5	439.4	505.8	512.1	657.4	821.8	853.5	862.9	875.5
72.5°	268.7	224.4	366.7	395.1	445.7	452.1	556.3	682.8	714.3	723.8	730.2
75°	205.5	237.0	297.1	344.6	379.3	382.5	455.1	556.3	578.4	584.8	588.0
77.5°	164.4	221.3	218.1	278.1	309.8	303.5	357.2	429.9	448.9	448.9	448.9
80°	123.3	173.8	164.4	199.1	227.6	221.3	256.0	306.6	312.9	319.2	316.1
82.5°	91.6	110.6	110.6	126.5	151.7	145.4	170.7	199.1	199.1	199.1	205.5
85°	56.9	63.2	50.5	66.4	85.4	82.2	94.8	107.5	110.6	110.6	104.3
87.5°	34.7	28.5	15.8	25.3	37.9	37.9	44.3	47.4	44.3	44.3	44.3
90°	10.0	6.9	3.8	6.9	10.0	10.7	16.9	25.1	29.2	26.0	19.5
92.5°	67.8	41.6	15.4	41.6	67.8	74.3	104.5	144.7	164.8	144.4	103.7
95°	132.8	84.9	37.0	84.9	132.8	144.8	257.0	406.8	481.7	429.8	326.2
97.5°	148.4	106.1	63.9	106.1	148.4	159.0	346.2	595.9	720.8	688.0	622.4
100°	161.3	123.0	84.7	123.0	161.3	170.9	378.7	655.8	794.3	796.7	801.5
102.5°	173.9	138.2	102.5	138.2	173.9	182.9	393.6	674.6	815.1	856.9	940.4
105°	193.1	162.7	132.4	162.7	193.1	200.6	404.7	676.8	812.8	906.4	1093.6
107.5°	219.7	191.5	163.3	191.5	219.7	226.8	406.7	646.6	766.5	897.1	1158.3
110°	235.1	209.5	184.0	209.5	235.1	241.4	403.7	619.9	728.1	874.0	1165.9

TEST NUMBER: P934596

CATALOG NUMBER: SQ4-FA-050U-125D-B2750-1D-UNV-W2A-W-8-5000K

CANDELA DISTRIBUTION (continued):

	160°	170°	180°	190°	200°	202.5°	210°	220°	225°	230°	240°
112.5°	253.0	228.7	204.5	228.7	253.0	259.1	403.8	596.6	693.0	842.4	1141.2
115°	280.1	257.7	235.3	257.7	280.1	285.7	407.5	569.9	651.1	795.0	1082.8
117.5°	306.4	286.0	265.6	286.0	306.4	311.5	415.1	553.1	622.1	752.1	1011.8
120°	321.8	302.5	283.4	302.5	321.8	326.5	421.2	547.5	610.6	729.3	966.6
122.5°	339.3	320.0	300.7	320.0	339.3	344.2	430.0	544.5	601.8	708.6	922.4
125°	362.5	344.8	327.3	344.8	362.5	366.9	442.0	542.1	592.2	682.9	864.5
127.5°	384.3	366.6	348.8	366.6	384.3	388.8	453.9	540.7	584.0	662.0	817.9
130°	398.7	379.5	360.3	379.5	398.7	403.5	462.6	541.5	580.9	650.3	789.1
132.5°	410.7	391.4	372.3	391.4	410.7	415.4	469.7	542.1	578.3	640.4	764.7
135°	424.9	407.5	390.0	407.5	424.9	429.3	477.4	541.5	573.7	625.7	729.7
137.5°	442.7	425.4	408.2	425.4	442.7	447.0	488.9	544.9	572.9	616.9	704.9
140°	455.0	439.1	423.1	439.1	455.0	459.0	496.0	545.5	570.2	608.2	684.2
142.5°	464.1	449.3	434.7	449.3	464.1	467.7	501.9	547.4	570.2	603.6	670.3
145°	478.1	465.2	452.4	465.2	478.1	481.3	509.7	547.5	566.4	593.7	648.3
147.5°	495.1	482.6	470.1	482.6	495.1	498.2	520.9	551.2	566.4	587.9	630.7
150°	504.3	493.0	481.7	493.0	504.3	507.1	526.9	553.2	566.4	584.5	620.8
152.5°	510.7	502.2	493.6	502.2	510.7	512.9	530.7	554.5	566.4	581.9	612.8
155°	524.0	517.6	511.3	517.6	524.0	525.6	539.2	557.3	566.4	578.7	603.3
157.5°	536.7	530.5	524.3	530.5	536.7	538.3	547.6	560.1	566.4	575.9	595.1
160°	542.8	538.1	533.2	538.1	542.8	544.1	551.5	561.4	566.4	574.6	590.9
162.5°	549.3	545.7	542.1	545.7	549.3	550.2	555.6	562.8	566.4	573.3	587.2
165°	558.2	555.0	551.7	555.0	558.2	559.0	561.4	564.7	566.4	571.3	581.2
167.5°	563.7	562.1	560.6	562.1	563.7	564.0	566.1	568.8	570.2	573.5	580.0
170°	569.5	567.9	566.4	567.9	569.5	569.8	569.9	570.1	570.2	573.5	580.0
172.5°	570.1	569.8	569.5	569.8	570.1	570.2	570.2	570.2	570.2	572.8	578.0
175°	573.7	573.7	573.7	573.7	573.7	573.7	572.5	571.0	570.2	571.8	575.1
177.5°	573.7	573.7	573.7	573.7	573.7	573.7	572.7	571.5	571.0	572.3	574.8
180°	573.7	573.7	573.7	573.7	573.7	573.7	573.7	573.7	573.7	573.7	573.7

TEST NUMBER: P934596

CATALOG NUMBER: SQ4-FA-050U-125D-B2750-1D-UNV-W2A-W-8-5000K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	260°	270°	280°	290°	292.5°	300°	310°	315°	320°
0°	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1	3341.1
2.5°	3224.2	3214.6	3227.3	3192.5	3227.3	3214.6	3224.2	3246.3	3227.3	3240.0	3252.6
5°	2829.0	2813.2	2762.7	2721.6	2762.7	2813.2	2829.0	2895.4	2927.0	2983.9	3059.8
7.5°	2528.7	2516.1	2503.4	2478.2	2503.4	2516.1	2528.7	2547.7	2579.3	2629.9	2686.7
10°	2462.4	2465.5	2484.4	2481.4	2484.4	2465.5	2462.4	2456.0	2446.5	2456.0	2490.8
12.5°	2633.0	2661.5	2765.8	2759.5	2765.8	2661.5	2633.0	2506.6	2421.3	2405.4	2411.8
15°	2829.0	2838.5	2860.7	2863.8	2860.7	2838.5	2829.0	2778.5	2522.5	2411.8	2377.0
17.5°	2848.0	2851.1	2866.9	2866.9	2866.9	2851.1	2848.0	2825.8	2740.5	2591.9	2396.0
20°	2832.2	2838.5	2870.1	2876.4	2870.1	2838.5	2832.2	2803.8	2756.3	2702.6	2554.0
22.5°	2825.8	2838.5	2863.8	2860.7	2863.8	2838.5	2825.8	2781.6	2740.5	2702.6	2642.6
25°	2794.2	2794.2	2797.4	2800.6	2797.4	2794.2	2794.2	2759.5	2677.3	2667.8	2633.0
27.5°	2727.8	2734.2	2753.2	2750.0	2753.2	2734.2	2727.8	2715.2	2626.7	2617.3	2591.9
30°	2667.8	2661.5	2645.6	2633.0	2645.6	2661.5	2667.8	2648.8	2560.4	2535.1	2541.4
32.5°	2566.6	2550.8	2535.1	2525.5	2535.1	2550.8	2566.6	2560.4	2494.0	2459.2	2465.5
35°	2446.5	2449.7	2446.5	2437.1	2446.5	2449.7	2446.5	2452.9	2411.8	2380.2	2377.0
37.5°	2361.2	2367.5	2364.3	2351.7	2364.3	2367.5	2361.2	2354.9	2298.0	2288.5	2294.8
40°	2272.7	2275.9	2272.7	2263.2	2272.7	2275.9	2272.7	2260.1	2181.1	2184.2	2206.3
42.5°	2187.3	2184.2	2174.7	2168.4	2174.7	2184.2	2187.3	2168.4	2067.2	2057.8	2098.9
45°	2089.4	2092.5	2073.6	2064.0	2073.6	2092.5	2089.4	2076.7	1972.4	1947.1	1975.6
47.5°	1991.4	1991.4	1975.6	1966.1	1975.6	1991.4	1991.4	1975.6	1864.9	1839.6	1855.5
50°	1887.1	1883.9	1861.7	1858.7	1861.7	1883.9	1887.1	1877.6	1760.6	1738.5	1738.5
52.5°	1766.9	1766.9	1770.1	1776.5	1770.1	1766.9	1766.9	1770.1	1665.8	1643.7	1637.4
55°	1662.6	1665.8	1687.9	1694.3	1687.9	1665.8	1662.6	1662.6	1567.8	1545.7	1533.1
57.5°	1555.2	1555.2	1571.0	1571.0	1571.0	1555.2	1555.2	1548.9	1457.2	1438.2	1431.9
60°	1431.9	1438.2	1450.9	1447.7	1450.9	1438.2	1431.9	1425.6	1346.5	1333.9	1311.8
62.5°	1302.3	1308.6	1311.8	1305.5	1311.8	1308.6	1302.3	1283.3	1236.0	1226.4	1197.9
65°	1166.4	1172.7	1175.9	1169.6	1175.9	1172.7	1166.4	1156.9	1122.1	1106.3	1081.0
67.5°	1027.3	1024.1	1021.0	1033.7	1021.0	1024.1	1027.3	1014.7	992.6	979.9	945.1
70°	885.1	885.1	881.9	888.2	881.9	885.1	885.1	875.5	862.9	853.5	821.8
72.5°	733.4	730.2	742.8	733.4	742.8	730.2	733.4	730.2	723.8	714.3	682.8
75°	584.8	591.1	584.8	594.2	584.8	591.1	584.8	588.0	584.8	578.4	556.3
77.5°	445.7	452.1	445.7	445.7	445.7	452.1	445.7	448.9	448.9	448.9	429.9
80°	316.1	312.9	312.9	309.8	312.9	312.9	316.1	316.1	319.2	312.9	306.6
82.5°	202.3	199.1	199.1	205.5	199.1	199.1	202.3	205.5	199.1	199.1	199.1
85°	110.6	113.8	107.5	107.5	107.5	113.8	110.6	104.3	110.6	110.6	107.5
87.5°	41.1	37.9	37.9	37.9	37.9	37.9	41.1	44.3	44.3	44.3	47.4
90°	14.7	14.7	14.7	14.7	14.7	14.7	14.7	19.5	26.0	29.2	25.1
92.5°	73.1	70.2	58.6	47.0	58.6	70.2	73.1	103.7	144.4	164.8	144.7
95°	248.4	239.6	204.3	169.1	204.3	239.6	248.4	326.2	429.8	481.7	406.8
97.5°	573.3	556.5	489.4	422.4	489.4	556.5	573.3	622.4	688.0	720.8	595.9
100°	805.0	785.0	705.2	625.2	705.2	785.0	805.0	801.5	796.7	794.3	655.8
102.5°	1002.9	985.8	917.4	848.9	917.4	985.8	1002.9	940.4	856.9	815.1	674.6
105°	1234.0	1224.8	1188.0	1151.2	1188.0	1224.8	1234.0	1093.6	906.4	812.8	676.8
107.5°	1354.1	1356.4	1365.2	1374.1	1365.2	1356.4	1354.1	1158.3	897.1	766.5	646.6
110°	1384.8	1394.5	1432.8	1471.1	1432.8	1394.5	1384.8	1165.9	874.0	728.1	619.9

TEST NUMBER: P934596

CATALOG NUMBER: SQ4-FA-050U-125D-B2750-1D-UNV-W2A-W-8-5000K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	260°	270°	280°	290°	292.5°	300°	310°	315°	320°
112.5°	1365.2	1380.0	1438.8	1497.7	1438.8	1380.0	1365.2	1141.2	842.4	693.0	596.6
115°	1298.6	1319.0	1400.6	1482.3	1400.6	1319.0	1298.6	1082.8	795.0	651.1	569.9
117.5°	1206.6	1229.2	1319.8	1410.3	1319.8	1229.2	1206.6	1011.8	752.1	622.1	553.1
120°	1144.6	1166.6	1254.5	1342.5	1254.5	1166.6	1144.6	966.6	729.3	610.6	547.5
122.5°	1082.7	1104.4	1191.1	1277.9	1191.1	1104.4	1082.7	922.4	708.6	601.8	544.5
125°	1000.7	1020.7	1100.5	1180.5	1100.5	1020.7	1000.7	864.5	682.9	592.2	542.1
127.5°	934.8	951.7	1019.1	1086.5	1019.1	951.7	934.8	817.9	662.0	584.0	540.7
130°	893.2	908.8	971.1	1033.4	971.1	908.8	893.2	789.1	650.3	580.9	541.5
132.5°	857.8	871.7	927.6	983.3	927.6	871.7	857.8	764.7	640.4	578.3	542.1
135°	807.7	819.8	867.9	916.0	867.9	819.8	807.7	729.7	625.7	573.7	541.5
137.5°	770.8	780.6	820.1	859.4	820.1	780.6	770.8	704.9	616.9	572.9	544.9
140°	741.1	750.3	787.1	823.9	787.1	750.3	741.1	684.2	608.2	570.2	545.5
142.5°	720.4	728.3	759.9	791.6	759.9	728.3	720.4	670.3	603.6	570.2	547.4
145°	689.2	695.2	719.2	743.1	719.2	695.2	689.2	648.3	593.7	566.4	547.5
147.5°	663.0	667.9	687.8	707.7	687.8	667.9	663.0	630.7	587.9	566.4	551.2
150°	648.0	652.0	668.1	684.2	668.1	652.0	648.0	620.8	584.5	566.4	553.2
152.5°	636.1	639.1	651.3	663.4	651.3	639.1	636.1	612.8	581.9	566.4	554.5
155°	621.8	623.8	631.9	639.9	631.9	623.8	621.8	603.3	578.7	566.4	557.3
157.5°	609.4	610.8	616.5	622.1	616.5	610.8	609.4	595.1	575.9	566.4	560.1
160°	603.3	604.1	607.4	610.6	607.4	604.1	603.3	590.9	574.6	566.4	561.4
162.5°	597.6	598.3	601.4	604.5	601.4	598.3	597.6	587.2	573.3	566.4	562.8
165°	588.7	589.5	592.7	596.0	592.7	589.5	588.7	581.2	571.3	566.4	564.7
167.5°	584.9	585.2	586.6	588.0	586.6	585.2	584.9	580.0	573.5	570.2	568.8
170°	584.9	584.9	584.9	584.9	584.9	584.9	584.9	580.0	573.5	570.2	570.1
172.5°	581.8	581.5	580.3	579.1	580.3	581.5	581.8	578.0	572.8	570.2	570.2
175°	577.5	577.5	577.5	577.5	577.5	577.5	577.5	575.1	571.8	570.2	571.0
177.5°	576.7	576.4	575.1	573.7	575.1	576.4	576.7	574.8	572.3	571.0	571.5
180°	573.7	573.7	573.7	573.7	573.7	573.7	573.7	573.7	573.7	573.7	573.7

TEST NUMBER: P934596

CATALOG NUMBER: SQ4-FA-050U-125D-B2750-1D-UNV-W2A-W-8-5000K

CANDELA DISTRIBUTION (continued):

	330°	337.5°	340°	350°	360°
0°	3341.1	3341.1	3341.1	3341.1	3341.1
2.5°	3300.0	3315.8	3325.3	3337.9	3369.5
5°	3173.5	3233.6	3252.6	3300.0	3356.9
7.5°	2895.4	3078.7	3129.3	3243.1	3331.6
10°	2626.7	2810.0	2898.6	3167.2	3300.0
12.5°	2490.8	2598.3	2658.4	3034.5	3255.7
15°	2405.4	2481.4	2525.5	2857.5	3205.2
17.5°	2339.1	2392.8	2424.4	2683.7	3135.6
20°	2298.0	2323.2	2351.7	2557.2	3056.6
22.5°	2269.5	2253.7	2275.9	2468.7	2949.1
25°	2250.6	2190.5	2215.8	2399.2	2822.7
27.5°	2266.4	2133.6	2143.1	2335.9	2689.9
30°	2269.5	2064.0	2067.2	2269.5	2541.4
32.5°	2247.4	1991.4	1994.6	2187.3	2373.9
35°	2193.7	1906.0	1902.8	2092.5	2146.2
37.5°	2120.9	1814.4	1814.4	1988.2	1896.6
40°	2032.5	1722.7	1732.2	1852.3	1675.3
42.5°	1925.0	1624.7	1637.4	1672.1	1510.9
45°	1808.0	1529.9	1539.3	1413.0	1384.5
47.5°	1678.5	1431.9	1435.1	1172.7	1343.4
50°	1523.5	1330.8	1318.1	1005.2	1340.2
52.5°	1387.6	1220.1	1182.2	910.4	1216.9
55°	1254.9	1103.1	1021.0	837.6	1128.5
57.5°	1137.9	951.5	872.4	752.3	1109.5
60°	1030.5	802.9	742.8	660.6	1017.8
62.5°	941.9	692.3	679.6	597.4	923.0
65°	847.1	616.3	613.2	543.7	783.9
67.5°	755.4	565.8	562.6	493.1	597.4
70°	657.4	512.1	505.8	439.4	442.5
72.5°	556.3	452.1	445.7	395.1	366.7
75°	455.1	382.5	379.3	344.6	297.1
77.5°	357.2	303.5	309.8	278.1	218.1
80°	256.0	221.3	227.6	199.1	164.4
82.5°	170.7	145.4	151.7	126.5	110.6
85°	94.8	82.2	85.4	66.4	50.5
87.5°	44.3	37.9	37.9	25.3	15.8
90°	16.9	10.7	10.0	6.9	3.8
92.5°	104.5	74.3	67.8	41.6	15.4
95°	257.0	144.8	132.8	84.9	37.0
97.5°	346.2	159.0	148.4	106.1	63.9
100°	378.7	170.9	161.3	123.0	84.7
102.5°	393.6	182.9	173.9	138.2	102.5
105°	404.7	200.6	193.1	162.7	132.4
107.5°	406.7	226.8	219.7	191.5	163.3
110°	403.7	241.4	235.1	209.5	184.0



TEST NUMBER: P934596

CATALOG NUMBER: SQ4-FA-050U-125D-B2750-1D-UNV-W2A-W-8-5000K

CANDELA DISTRIBUTION (continued):

	330°	337.5°	340°	350°	360°
112.5°	403.8	259.1	253.0	228.7	204.5
115°	407.5	285.7	280.1	257.7	235.3
117.5°	415.1	311.5	306.4	286.0	265.6
120°	421.2	326.5	321.8	302.5	283.4
122.5°	430.0	344.2	339.3	320.0	300.7
125°	442.0	366.9	362.5	344.8	327.3
127.5°	453.9	388.8	384.3	366.6	348.8
130°	462.6	403.5	398.7	379.5	360.3
132.5°	469.7	415.4	410.7	391.4	372.3
135°	477.4	429.3	424.9	407.5	390.0
137.5°	488.9	447.0	442.7	425.4	408.2
140°	496.0	459.0	455.0	439.1	423.1
142.5°	501.9	467.7	464.1	449.3	434.7
145°	509.7	481.3	478.1	465.2	452.4
147.5°	520.9	498.2	495.1	482.6	470.1
150°	526.9	507.1	504.3	493.0	481.7
152.5°	530.7	512.9	510.7	502.2	493.6
155°	539.2	525.6	524.0	517.6	511.3
157.5°	547.6	538.3	536.7	530.5	524.3
160°	551.5	544.1	542.8	538.1	533.2
162.5°	555.6	550.2	549.3	545.7	542.1
165°	561.4	559.0	558.2	555.0	551.7
167.5°	566.1	564.0	563.7	562.1	560.6
170°	569.9	569.8	569.5	567.9	566.4
172.5°	570.2	570.2	570.1	569.8	569.5
175°	572.5	573.7	573.7	573.7	573.7
177.5°	572.7	573.7	573.7	573.7	573.7
180°	573.7	573.7	573.7	573.7	573.7

TEST NUMBER: P934596

CATALOG NUMBER: SQ4-FA-050U-125D-B2750-1D-UNV-W2A-W-8-5000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	16.00	17.07	16.76	17.86	18.81	18.83	19.91	19.60	20.70	21.65
	3H	16.49	17.45	17.27	18.25	19.24	20.20	21.16	20.98	21.96	22.94
	4H	16.69	17.60	17.49	18.41	19.40	20.65	21.56	21.45	22.37	23.37
	6H	16.82	17.66	17.63	18.47	19.48	20.95	21.79	21.76	22.61	23.62
	8H	16.83	17.63	17.65	18.46	19.47	21.03	21.83	21.85	22.67	23.68
	12H	16.81	17.57	17.63	18.40	19.43	21.08	21.84	21.90	22.67	23.71
4H	2H	17.06	17.97	17.86	18.77	19.77	19.27	20.18	20.07	20.99	21.98
	3H	18.10	18.86	18.92	19.70	20.71	20.80	21.56	21.61	22.40	23.41
	4H	18.39	19.08	19.22	19.92	20.96	21.34	22.03	22.16	22.86	23.90
	6H	18.53	19.12	19.37	19.99	21.03	21.72	22.31	22.56	23.17	24.22
	8H	18.54	19.09	19.38	19.95	21.01	21.83	22.39	22.67	23.24	24.30
	12H	18.51	19.02	19.38	19.89	20.96	21.90	22.40	22.76	23.28	24.34
8H	4H	18.86	19.42	19.71	20.28	21.33	21.48	22.03	22.32	22.89	23.95
	6H	19.13	19.59	20.01	20.49	21.55	21.92	22.39	22.80	23.29	24.34
	8H	19.18	19.59	20.06	20.48	21.55	22.08	22.49	22.97	23.38	24.46
	12H	19.17	19.53	20.06	20.42	21.55	22.19	22.55	23.08	23.44	24.57
12H	4H	18.88	19.38	19.74	20.26	21.32	21.45	21.95	22.32	22.83	23.90
	6H	19.19	19.60	20.08	20.50	21.57	21.92	22.33	22.81	23.23	24.30
	8H	19.27	19.63	20.16	20.52	21.65	22.10	22.46	22.98	23.34	24.47

END OF REPORT