

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P935386

Luminaire Tested: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-5000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P935386
REPORT IS A COMBINATION OF REPORTS P933750 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-5000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Asymmetric Frosted Continuous I
Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8086.5 lumens
Efficiency: N/A
Efficacy: 117.5 lumens/watt
Spacing Criteria (0/90/45): 1.14 / 1.26 / 1.36
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 4' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 68.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P935386

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-5000K

Luminous Intensity Polar Plot

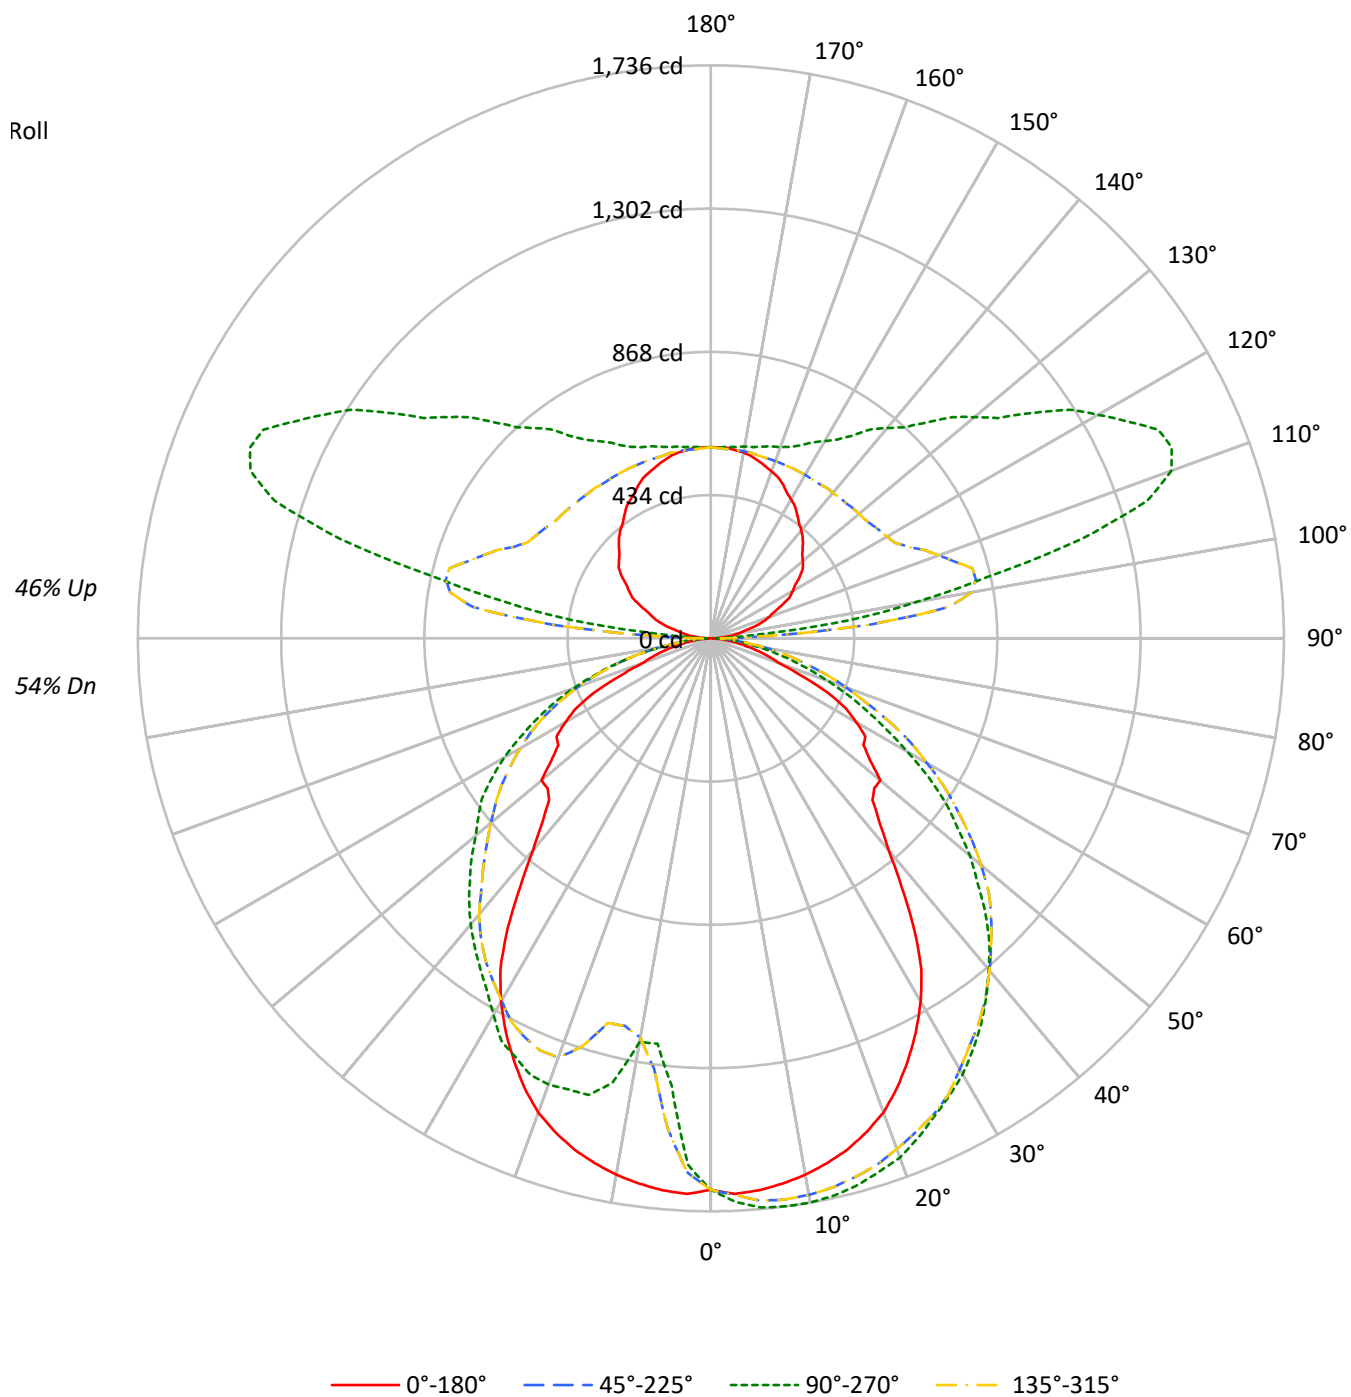

TEST NUMBER: P935386

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	59	59	59
1	99	94	90	87	91	88	84	81	75	73	70	63	62	60	53	51	50
2	90	82	76	71	83	77	71	67	66	62	58	56	53	50	46	44	42
3	82	72	65	59	76	67	61	56	58	53	49	49	46	42	41	38	36
4	75	64	56	50	69	60	53	47	51	46	42	44	40	36	37	34	31
5	69	57	49	43	64	53	46	41	46	40	36	39	35	31	33	30	27
6	63	51	43	37	59	48	41	35	41	36	31	35	31	28	30	26	24
7	59	46	38	33	54	43	36	31	38	32	28	32	28	24	27	24	21
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	22	19
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	15503	15503	15503	15503
5°	15602	15650	15602	12305
10°	15481	15416	15481	11021
15°	15294	15082	15294	12593
20°	14957	14686	14957	12620
25°	14285	14109	14285	12352
30°	13423	13630	13423	11766
35°	11949	13024	11949	11120
40°	9939	12310	9939	10632
45°	8863	11475	8863	10072
50°	9394	10479	9394	9509
55°	8814	9407	8814	9183
60°	9052	7989	9052	8411
65°	8169	6604	8169	7383
70°	5618	5263	5618	6187
75°	4873	3891	4873	4659
80°	3847	2571	3847	2801
85°	2095	1362	2095	1157

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 20°

Vertical Angle: 45°

Luminance: 13610 cd/sqm

TEST NUMBER: P935386

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	150.8	1.9
10°-20°	428.2	5.3
20°-30°	661.9	8.2
30°-40°	790.2	9.8
40°-50°	794.8	9.8
50°-60°	691.6	8.6
60°-70°	490.3	6.1
70°-80°	259.4	3.2
80°-90°	66.8	0.8
90°-100°	282.1	3.5
100°-110°	741.8	9.2
110°-120°	769.2	9.5
120°-130°	617.0	7.6
130°-140°	484.1	6.0
140°-150°	371.6	4.6
150°-160°	267.6	3.3
160°-170°	163.7	2.0
170°-180°	55.3	0.7
0°-30°	1240.9	15.3
0°-40°	2031.1	25.1
0°-60°	3517.5	43.5
0°-90°	4334.1	53.6
90°-120°	1793.2	22.2
90°-150°	3265.8	40.4
90°-180°	3752.0	46.4
0°-180°	8086.5	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1671	1671	1671	1671	1671	
5°	1679	1731	1679	1361	1679	159
15°	1603	1715	1603	1432	1603	451
25°	1412	1600	1412	1400	1412	648
35°	1073	1427	1073	1219	1073	664
45°	692	1176	692	1032	692	555
55°	564	868	564	847	564	519
65°	392	523	392	585	392	375
75°	149	248	149	297	149	156
85°	25	63	25	54	25	34
90°	4	15	4	15	4	4
95°	37	170	37	170	37	41
105°	134	1162	134	1162	134	142
115°	237	1496	237	1496	237	234
125°	330	1191	330	1191	330	293
135°	394	924	394	924	394	304
145°	456	750	456	750	456	286
155°	516	646	516	646	516	237
165°	557	601	557	601	557	157
175°	579	583	579	583	579	55
180°	579	579	579	579	579	

TEST NUMBER: P935386

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-5000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7
2.5°	1684.9	1684.9	1694.5	1697.6	1697.6	1692.9	1688.1	1692.9	1707.1	1711.8	1710.2
5°	1678.6	1691.3	1708.7	1711.8	1715.0	1713.4	1710.2	1713.4	1729.2	1732.4	1734.0
7.5°	1666.0	1689.7	1711.8	1716.6	1721.3	1716.6	1715.0	1718.2	1734.0	1737.1	1737.1
10°	1650.2	1683.3	1708.7	1711.8	1716.6	1711.8	1711.8	1718.2	1734.0	1737.1	1738.7
12.5°	1628.1	1673.9	1697.6	1700.7	1707.1	1705.5	1703.9	1710.2	1726.0	1729.2	1729.2
15°	1602.7	1656.5	1678.6	1681.8	1692.9	1689.7	1689.7	1696.1	1713.4	1718.2	1716.6
17.5°	1568.0	1634.4	1659.6	1664.4	1672.3	1670.7	1672.3	1678.6	1694.5	1697.6	1699.1
20°	1528.5	1604.3	1634.4	1639.1	1647.0	1647.0	1647.0	1655.0	1670.7	1677.1	1677.1
22.5°	1474.7	1572.8	1604.3	1607.5	1616.9	1616.9	1620.1	1631.2	1645.4	1647.0	1647.0
25°	1411.5	1537.9	1564.8	1574.4	1583.8	1588.5	1593.3	1599.6	1604.3	1602.7	1604.3
27.5°	1345.1	1493.7	1528.5	1534.7	1547.5	1552.2	1558.5	1560.1	1561.6	1566.4	1563.2
30°	1270.8	1432.0	1484.2	1490.6	1511.1	1514.2	1507.9	1511.1	1519.0	1522.1	1525.3
32.5°	1187.0	1340.4	1438.4	1452.6	1471.6	1462.1	1460.5	1465.3	1477.9	1477.9	1481.0
35°	1073.3	1269.2	1395.7	1408.4	1422.6	1411.5	1417.8	1419.4	1427.3	1432.0	1430.5
37.5°	948.4	1207.6	1351.4	1360.9	1372.0	1357.8	1367.3	1372.0	1378.3	1375.1	1375.1
40°	837.7	1111.2	1299.3	1305.6	1315.1	1304.1	1313.5	1316.7	1319.8	1316.7	1315.1
42.5°	755.5	1005.3	1244.0	1251.8	1245.5	1253.4	1256.6	1263.0	1258.2	1251.8	1251.8
45°	692.3	976.9	1183.8	1193.4	1183.8	1196.5	1201.3	1201.3	1187.0	1183.8	1182.4
47.5°	671.7	919.9	1123.8	1123.8	1119.1	1134.9	1142.7	1131.7	1117.5	1112.8	1112.8
50°	670.1	856.7	1041.6	1035.3	1057.5	1076.4	1068.5	1057.5	1046.4	1029.0	1029.0
52.5°	608.5	779.2	935.8	959.4	994.2	1005.3	992.7	981.5	962.6	954.7	948.4
55°	564.3	698.6	839.3	886.7	923.1	937.3	913.6	902.5	874.1	869.4	866.2
57.5°	554.8	581.7	750.8	810.9	855.1	853.6	839.3	818.7	795.0	790.4	788.8
60°	508.9	420.5	655.9	727.1	772.9	768.2	755.5	736.6	714.4	711.2	708.2
62.5°	461.6	305.0	548.4	629.0	693.9	692.3	681.3	652.8	637.0	629.0	622.8
65°	392.0	256.1	390.4	523.2	616.4	619.6	595.9	575.3	558.0	548.4	546.9
67.5°	298.7	208.7	263.9	436.3	542.2	539.0	508.9	499.5	477.4	472.6	463.2
70°	221.3	139.1	183.3	354.1	469.4	461.6	437.9	426.7	406.2	395.2	388.8
72.5°	183.3	112.3	134.3	275.1	395.2	385.6	365.1	352.5	335.1	325.6	319.2
75°	148.6	118.5	102.7	203.9	320.8	314.6	295.6	282.9	268.7	256.1	257.6
77.5°	109.1	110.7	82.2	150.2	254.5	245.0	234.0	218.1	211.8	199.1	199.1
80°	82.2	87.0	61.6	102.7	183.3	183.3	173.9	162.8	151.8	145.4	145.4
82.5°	55.3	55.3	45.9	64.8	124.9	120.1	113.8	110.7	104.3	101.2	101.2
85°	25.3	31.6	28.5	39.5	68.0	71.2	71.2	68.0	66.4	63.2	64.8
87.5°	7.9	14.2	17.4	22.1	34.7	36.3	37.9	37.9	37.9	39.5	39.5
90°	3.9	7.0	10.1	10.8	17.1	25.4	29.5	26.2	19.7	14.8	14.8
92.5°	15.5	41.9	68.4	75.0	105.4	146.0	166.3	145.7	104.6	73.8	70.9
95°	37.3	85.6	134.0	146.1	259.4	410.4	486.0	433.7	329.0	250.6	241.7
97.5°	64.4	107.1	149.8	160.5	349.4	601.3	727.2	694.1	628.0	578.4	561.5
100°	85.5	124.1	162.8	172.5	382.2	661.7	801.5	803.9	808.7	812.3	792.1
102.5°	103.3	139.4	175.5	184.6	397.2	680.7	822.5	864.6	948.9	1012.0	994.7
105°	133.7	164.2	194.7	202.4	408.3	682.8	820.1	914.6	1103.4	1245.1	1235.9
107.5°	164.8	193.2	221.7	228.8	410.4	652.4	773.4	905.2	1168.7	1366.3	1368.6
110°	185.7	211.5	237.1	243.6	407.2	625.5	734.6	881.9	1176.5	1397.4	1407.1

TEST NUMBER: P935386

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-5000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	206.3	230.8	255.3	261.4	407.4	602.0	699.3	850.0	1151.4	1377.6	1392.4
115°	237.3	259.9	282.5	288.2	411.1	575.1	657.0	802.2	1092.6	1310.4	1331.0
117.5°	268.1	288.6	309.2	314.3	418.8	558.2	627.8	758.9	1021.0	1217.6	1240.4
120°	285.9	305.2	324.6	329.4	425.0	552.5	616.2	735.9	975.4	1155.0	1177.2
122.5°	303.5	323.0	342.5	347.4	433.9	549.5	607.2	715.0	930.6	1092.4	1114.3
125°	330.3	348.0	365.8	370.2	446.0	547.0	597.5	689.1	872.3	1009.7	1029.8
127.5°	351.9	369.9	387.9	392.4	458.0	545.5	589.4	668.0	825.3	943.2	960.2
130°	363.6	382.9	402.3	407.1	466.8	546.5	586.3	656.3	796.3	901.3	917.0
132.5°	375.7	395.0	414.3	419.2	473.9	547.0	583.5	646.1	771.5	865.5	879.6
135°	393.6	411.1	428.8	433.2	481.8	546.5	578.9	631.4	736.3	815.0	827.2
137.5°	411.8	429.3	446.6	451.0	493.3	549.8	578.1	622.4	711.1	777.7	787.6
140°	426.9	443.0	459.1	463.1	500.5	550.4	575.3	613.6	690.3	747.9	757.1
142.5°	438.6	453.5	468.3	472.0	506.5	552.4	575.3	609.0	676.3	726.8	734.9
145°	456.4	469.4	482.3	485.6	514.3	552.5	571.5	599.1	654.1	695.4	701.4
147.5°	474.4	487.0	499.5	502.7	525.7	556.2	571.5	593.2	636.5	669.0	674.1
150°	486.0	497.4	508.7	511.6	531.6	558.3	571.5	589.8	626.3	653.8	657.8
152.5°	498.0	506.6	515.3	517.4	535.5	559.5	571.5	587.1	618.3	641.8	644.8
155°	515.9	522.3	528.7	530.3	544.1	562.4	571.5	583.9	608.8	627.4	629.4
157.5°	529.1	535.4	541.5	543.1	552.6	565.2	571.5	581.1	600.5	614.9	616.3
160°	538.1	542.9	547.7	548.9	556.5	566.5	571.5	579.8	596.4	608.8	609.6
162.5°	547.0	550.6	554.2	555.2	560.6	567.9	571.5	578.5	592.4	602.9	603.6
165°	556.7	559.9	563.2	564.0	566.6	569.8	571.5	576.6	586.6	594.0	594.9
167.5°	565.6	567.2	568.8	569.2	571.2	573.9	575.3	578.6	585.2	590.1	590.5
170°	571.5	573.0	574.6	575.0	575.1	575.3	575.3	578.6	585.2	590.1	590.1
172.5°	574.6	575.0	575.3	575.3	575.3	575.3	575.3	578.0	583.1	587.0	586.7
175°	578.9	578.9	578.9	578.9	577.7	576.1	575.3	577.0	580.3	582.7	582.7
177.5°	578.9	578.9	578.9	578.9	578.0	576.7	576.1	577.4	580.0	582.0	581.6
180°	578.9	578.9	578.9	578.9	578.9	578.9	578.9	578.9	578.9	578.9	578.9

TEST NUMBER: P935386

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-5000K

CANDELA DISTRIBUTION (continued):

	80°	90°	100°	110°	112.5°	120°	130°	135°	140°	150°	157.5°
0°	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7
2.5°	1713.4	1708.7	1713.4	1710.2	1711.8	1707.1	1692.9	1688.1	1692.9	1697.6	1697.6
5°	1734.0	1730.8	1734.0	1734.0	1732.4	1729.2	1713.4	1710.2	1713.4	1715.0	1711.8
7.5°	1740.2	1735.6	1740.2	1737.1	1737.1	1734.0	1718.2	1715.0	1716.6	1721.3	1716.6
10°	1740.2	1735.6	1740.2	1738.7	1737.1	1734.0	1718.2	1711.8	1711.8	1716.6	1711.8
12.5°	1732.4	1729.2	1732.4	1729.2	1729.2	1726.0	1710.2	1703.9	1705.5	1707.1	1700.7
15°	1719.7	1715.0	1719.7	1716.6	1718.2	1713.4	1696.1	1689.7	1689.7	1692.9	1681.8
17.5°	1700.7	1694.5	1700.7	1699.1	1697.6	1694.5	1678.6	1672.3	1670.7	1672.3	1664.4
20°	1678.6	1673.9	1678.6	1677.1	1677.1	1670.7	1655.0	1647.0	1647.0	1647.0	1639.1
22.5°	1643.8	1639.1	1643.8	1647.0	1647.0	1645.4	1631.2	1620.1	1616.9	1616.9	1607.5
25°	1604.3	1599.6	1604.3	1604.3	1602.7	1604.3	1599.6	1593.3	1588.5	1583.8	1574.4
27.5°	1566.4	1563.2	1566.4	1563.2	1566.4	1561.6	1560.1	1558.5	1552.2	1547.5	1534.7
30°	1528.5	1525.3	1528.5	1525.3	1522.1	1519.0	1511.1	1507.9	1514.2	1511.1	1490.6
32.5°	1481.0	1477.9	1481.0	1481.0	1477.9	1477.9	1465.3	1460.5	1462.1	1471.6	1452.6
35°	1432.0	1427.3	1432.0	1430.5	1432.0	1427.3	1419.4	1417.8	1411.5	1422.6	1408.4
37.5°	1375.1	1370.4	1375.1	1375.1	1375.1	1378.3	1372.0	1367.3	1357.8	1372.0	1360.9
40°	1316.7	1310.3	1316.7	1315.1	1316.7	1319.8	1316.7	1313.5	1304.1	1315.1	1305.6
42.5°	1250.3	1248.7	1250.3	1251.8	1251.8	1258.2	1263.0	1256.6	1253.4	1245.5	1251.8
45°	1179.2	1176.0	1179.2	1182.4	1183.8	1187.0	1201.3	1201.3	1196.5	1183.8	1193.4
47.5°	1103.2	1095.4	1103.2	1112.8	1112.8	1117.5	1131.7	1142.7	1134.9	1119.1	1123.8
50°	1022.6	1024.2	1022.6	1029.0	1029.0	1046.4	1057.5	1068.5	1076.4	1057.5	1035.3
52.5°	943.6	942.0	943.6	948.4	954.7	962.6	981.5	992.7	1005.3	994.2	959.4
55°	864.6	867.8	864.6	866.2	869.4	874.1	902.5	913.6	937.3	923.1	886.7
57.5°	785.6	780.8	785.6	788.8	790.4	795.0	818.7	839.3	853.6	855.1	810.9
60°	693.9	687.6	693.9	708.2	711.2	714.4	736.6	755.5	768.2	772.9	727.1
62.5°	613.3	602.2	613.3	622.8	629.0	637.0	652.8	681.3	692.3	693.9	629.0
65°	527.9	523.2	527.9	546.9	548.4	558.0	575.3	595.9	619.6	616.4	523.2
67.5°	450.5	450.5	450.5	463.2	472.6	477.4	499.5	508.9	539.0	542.2	436.3
70°	379.4	377.8	379.4	388.8	395.2	406.2	426.7	437.9	461.6	469.4	354.1
72.5°	311.4	309.8	311.4	319.2	325.6	335.1	352.5	365.1	385.6	395.2	275.1
75°	251.3	248.2	251.3	257.6	256.1	268.7	282.9	295.6	314.6	320.8	203.9
77.5°	192.9	192.9	192.9	199.1	199.1	211.8	218.1	234.0	245.0	254.5	150.2
80°	143.8	142.2	143.8	145.4	145.4	151.8	162.8	173.9	183.3	183.3	102.7
82.5°	101.2	98.0	101.2	101.2	101.2	104.3	110.7	113.8	120.1	124.9	64.8
85°	63.2	63.2	63.2	64.8	63.2	66.4	68.0	71.2	71.2	68.0	39.5
87.5°	41.1	39.5	41.1	39.5	39.5	37.9	37.9	37.9	36.3	34.7	22.1
90°	14.8	14.8	14.8	14.8	14.8	19.7	26.2	29.5	25.4	17.1	10.8
92.5°	59.1	47.4	59.1	70.9	73.8	104.6	145.7	166.3	146.0	105.4	75.0
95°	206.1	170.5	206.1	241.7	250.6	329.0	433.7	486.0	410.4	259.4	146.1
97.5°	493.8	426.2	493.8	561.5	578.4	628.0	694.1	727.2	601.3	349.4	160.5
100°	711.5	630.9	711.5	792.1	812.3	808.7	803.9	801.5	661.7	382.2	172.5
102.5°	925.7	856.7	925.7	994.7	1012.0	948.9	864.6	822.5	680.7	397.2	184.6
105°	1198.7	1161.6	1198.7	1235.9	1245.1	1103.4	914.6	820.1	682.8	408.3	202.4
107.5°	1377.6	1386.5	1377.6	1368.6	1366.3	1168.7	905.2	773.4	652.4	410.4	228.8
110°	1445.7	1484.4	1445.7	1407.1	1397.4	1176.5	881.9	734.6	625.5	407.2	243.6

TEST NUMBER: P935386

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-5000K

CANDELA DISTRIBUTION (continued):

	80°	90°	100°	110°	112.5°	120°	130°	135°	140°	150°	157.5°
112.5°	1451.8	1511.2	1451.8	1392.4	1377.6	1151.4	850.0	699.3	602.0	407.4	261.4
115°	1413.3	1495.7	1413.3	1331.0	1310.4	1092.6	802.2	657.0	575.1	411.1	288.2
117.5°	1331.7	1423.0	1331.7	1240.4	1217.6	1021.0	758.9	627.8	558.2	418.8	314.3
120°	1265.9	1354.7	1265.9	1177.2	1155.0	975.4	735.9	616.2	552.5	425.0	329.4
122.5°	1201.9	1289.4	1201.9	1114.3	1092.4	930.6	715.0	607.2	549.5	433.9	347.4
125°	1110.4	1191.1	1110.4	1029.8	1009.7	872.3	689.1	597.5	547.0	446.0	370.2
127.5°	1028.3	1096.3	1028.3	960.2	943.2	825.3	668.0	589.4	545.5	458.0	392.4
130°	979.9	1042.7	979.9	917.0	901.3	796.3	656.3	586.3	546.5	466.8	407.1
132.5°	935.9	992.2	935.9	879.6	865.5	771.5	646.1	583.5	547.0	473.9	419.2
135°	875.6	924.2	875.6	827.2	815.0	736.3	631.4	578.9	546.5	481.8	433.2
137.5°	827.4	867.1	827.4	787.6	777.7	711.1	622.4	578.1	549.8	493.3	451.0
140°	794.3	831.4	794.3	757.1	747.9	690.3	613.6	575.3	550.4	500.5	463.1
142.5°	766.8	798.8	766.8	734.9	726.8	676.3	609.0	575.3	552.4	506.5	472.0
145°	725.6	749.8	725.6	701.4	695.4	654.1	599.1	571.5	552.5	514.3	485.6
147.5°	694.1	714.0	694.1	674.1	669.0	636.5	593.2	571.5	556.2	525.7	502.7
150°	674.1	690.3	674.1	657.8	653.8	626.3	589.8	571.5	558.3	531.6	511.6
152.5°	657.1	669.4	657.1	644.8	641.8	618.3	587.1	571.5	559.5	535.5	517.4
155°	637.5	645.7	637.5	629.4	627.4	608.8	583.9	571.5	562.4	544.1	530.3
157.5°	622.1	627.8	622.1	616.3	614.9	600.5	581.1	571.5	565.2	552.6	543.1
160°	612.9	616.2	612.9	609.6	608.8	596.4	579.8	571.5	566.5	556.5	548.9
162.5°	606.8	609.9	606.8	603.6	602.9	592.4	578.5	571.5	567.9	560.6	555.2
165°	598.1	601.4	598.1	594.9	594.0	586.6	576.6	571.5	569.8	566.6	564.0
167.5°	591.8	593.2	591.8	590.5	590.1	585.2	578.6	575.3	573.9	571.2	569.2
170°	590.1	590.1	590.1	590.1	590.1	585.2	578.6	575.3	575.3	575.1	575.0
172.5°	585.5	584.3	585.5	586.7	587.0	583.1	578.0	575.3	575.3	575.3	575.3
175°	582.7	582.7	582.7	582.7	582.7	580.3	577.0	575.3	576.1	577.7	578.9
177.5°	580.3	578.9	580.3	581.6	582.0	580.0	577.4	576.1	576.7	578.0	578.9
180°	578.9	578.9	578.9	578.9	578.9	578.9	578.9	578.9	578.9	578.9	578.9

TEST NUMBER: P935386

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-5000K

CANDELA DISTRIBUTION (continued):

	160°	170°	180°	190°	200°	202.5°	210°	220°	225°	230°	240°
0°	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7
2.5°	1694.5	1684.9	1684.9	1669.2	1662.8	1658.0	1650.2	1626.5	1620.1	1613.9	1623.3
5°	1708.7	1691.3	1678.6	1650.2	1626.5	1616.9	1587.0	1530.1	1492.2	1463.7	1447.9
7.5°	1711.8	1689.7	1666.0	1621.7	1564.8	1539.5	1447.9	1343.6	1315.1	1289.8	1274.0
10°	1708.7	1683.3	1650.2	1583.8	1449.5	1405.2	1313.5	1245.5	1228.1	1223.4	1228.1
12.5°	1697.6	1673.9	1628.1	1517.4	1329.3	1299.3	1245.5	1206.0	1202.9	1210.7	1253.4
15°	1678.6	1656.5	1602.7	1428.9	1263.0	1240.8	1202.9	1188.6	1206.0	1261.4	1389.4
17.5°	1659.6	1634.4	1568.0	1342.0	1212.3	1196.5	1169.6	1198.1	1296.1	1370.4	1413.0
20°	1634.4	1604.3	1528.5	1278.7	1176.0	1161.8	1149.1	1277.2	1351.4	1378.3	1402.0
22.5°	1604.3	1572.8	1474.7	1234.5	1138.1	1127.0	1134.9	1321.4	1351.4	1370.4	1390.9
25°	1564.8	1537.9	1411.5	1199.7	1108.0	1095.4	1125.4	1316.7	1334.0	1338.8	1379.9
27.5°	1528.5	1493.7	1345.1	1168.1	1071.7	1066.9	1133.3	1296.1	1308.7	1313.5	1357.8
30°	1484.2	1432.0	1270.8	1134.9	1033.8	1032.2	1134.9	1270.8	1267.6	1280.3	1324.6
32.5°	1438.4	1340.4	1187.0	1093.8	997.4	995.8	1123.8	1232.9	1229.7	1247.1	1280.3
35°	1395.7	1269.2	1073.3	1046.4	951.6	953.1	1097.0	1188.6	1190.2	1206.0	1226.5
37.5°	1351.4	1207.6	948.4	994.2	907.3	907.3	1060.6	1147.5	1144.3	1149.1	1177.6
40°	1299.3	1111.2	837.7	926.2	866.2	861.4	1016.4	1103.2	1092.2	1090.6	1130.1
42.5°	1244.0	1005.3	755.5	836.1	818.7	812.5	962.6	1049.5	1029.0	1033.8	1084.3
45°	1183.8	976.9	692.3	706.6	769.8	765.0	904.1	987.9	973.7	986.3	1038.5
47.5°	1123.8	919.9	671.7	586.5	717.6	716.0	839.3	927.8	919.9	932.6	987.9
50°	1041.6	856.7	670.1	502.7	659.1	665.5	761.9	869.4	869.4	880.4	938.9
52.5°	935.8	779.2	608.5	455.2	591.1	610.1	693.9	818.7	821.9	833.0	885.2
55°	839.3	698.6	564.3	418.9	510.5	551.6	627.6	766.6	772.9	784.0	831.4
57.5°	750.8	581.7	554.8	376.2	436.3	475.8	569.0	716.0	719.2	728.7	774.5
60°	655.9	420.5	508.9	330.4	371.5	401.4	515.3	655.9	667.1	673.3	712.8
62.5°	548.4	305.0	461.6	298.7	339.8	346.1	471.0	599.1	613.3	618.0	641.8
65°	390.4	256.1	392.0	271.9	306.6	308.2	423.6	540.6	553.2	561.1	578.5
67.5°	263.9	208.7	298.7	246.6	281.3	282.9	377.8	472.6	490.0	496.3	507.3
70°	183.3	139.1	221.3	219.7	252.9	256.1	328.8	411.0	426.7	431.5	437.9
72.5°	134.3	112.3	183.3	197.5	222.9	226.0	278.1	341.4	357.3	361.9	365.1
75°	102.7	118.5	148.6	172.3	189.7	191.3	227.6	278.1	289.3	292.4	294.0
77.5°	82.2	110.7	109.1	139.1	154.9	151.8	178.6	215.0	224.4	224.4	224.4
80°	61.6	87.0	82.2	99.6	113.8	110.7	128.1	153.4	156.4	159.6	158.0
82.5°	45.9	55.3	55.3	63.2	75.8	72.7	85.4	99.6	99.6	99.6	102.7
85°	28.5	31.6	25.3	33.2	42.7	41.1	47.4	53.7	55.3	55.3	52.1
87.5°	17.4	14.2	7.9	12.6	19.0	19.0	22.1	23.7	22.1	22.1	22.1
90°	10.1	7.0	3.9	7.0	10.1	10.8	17.1	25.4	29.5	26.2	19.7
92.5°	68.4	41.9	15.5	41.9	68.4	75.0	105.4	146.0	166.3	145.7	104.6
95°	134.0	85.6	37.3	85.6	134.0	146.1	259.4	410.4	486.0	433.7	329.0
97.5°	149.8	107.1	64.4	107.1	149.8	160.5	349.4	601.3	727.2	694.1	628.0
100°	162.8	124.1	85.5	124.1	162.8	172.5	382.2	661.7	801.5	803.9	808.7
102.5°	175.5	139.4	103.3	139.4	175.5	184.6	397.2	680.7	822.5	864.6	948.9
105°	194.7	164.2	133.7	164.2	194.7	202.4	408.3	682.8	820.1	914.6	1103.4
107.5°	221.7	193.2	164.8	193.2	221.7	228.8	410.4	652.4	773.4	905.2	1168.7
110°	237.1	211.5	185.7	211.5	237.1	243.6	407.2	625.5	734.6	881.9	1176.5

TEST NUMBER: P935386

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-5000K

CANDELA DISTRIBUTION (continued):

	160°	170°	180°	190°	200°	202.5°	210°	220°	225°	230°	240°
112.5°	255.3	230.8	206.3	230.8	255.3	261.4	407.4	602.0	699.3	850.0	1151.4
115°	282.5	259.9	237.3	259.9	282.5	288.2	411.1	575.1	657.0	802.2	1092.6
117.5°	309.2	288.6	268.1	288.6	309.2	314.3	418.8	558.2	627.8	758.9	1021.0
120°	324.6	305.2	285.9	305.2	324.6	329.4	425.0	552.5	616.2	735.9	975.4
122.5°	342.5	323.0	303.5	323.0	342.5	347.4	433.9	549.5	607.2	715.0	930.6
125°	365.8	348.0	330.3	348.0	365.8	370.2	446.0	547.0	597.5	689.1	872.3
127.5°	387.9	369.9	351.9	369.9	387.9	392.4	458.0	545.5	589.4	668.0	825.3
130°	402.3	382.9	363.6	382.9	402.3	407.1	466.8	546.5	586.3	656.3	796.3
132.5°	414.3	395.0	375.7	395.0	414.3	419.2	473.9	547.0	583.5	646.1	771.5
135°	428.8	411.1	393.6	411.1	428.8	433.2	481.8	546.5	578.9	631.4	736.3
137.5°	446.6	429.3	411.8	429.3	446.6	451.0	493.3	549.8	578.1	622.4	711.1
140°	459.1	443.0	426.9	443.0	459.1	463.1	500.5	550.4	575.3	613.6	690.3
142.5°	468.3	453.5	438.6	453.5	468.3	472.0	506.5	552.4	575.3	609.0	676.3
145°	482.3	469.4	456.4	469.4	482.3	485.6	514.3	552.5	571.5	599.1	654.1
147.5°	499.5	487.0	474.4	487.0	499.5	502.7	525.7	556.2	571.5	593.2	636.5
150°	508.7	497.4	486.0	497.4	508.7	511.6	531.6	558.3	571.5	589.8	626.3
152.5°	515.3	506.6	498.0	506.6	515.3	517.4	535.5	559.5	571.5	587.1	618.3
155°	528.7	522.3	515.9	522.3	528.7	530.3	544.1	562.4	571.5	583.9	608.8
157.5°	541.5	535.4	529.1	535.4	541.5	543.1	552.6	565.2	571.5	581.1	600.5
160°	547.7	542.9	538.1	542.9	547.7	548.9	556.5	566.5	571.5	579.8	596.4
162.5°	554.2	550.6	547.0	550.6	554.2	555.2	560.6	567.9	571.5	578.5	592.4
165°	563.2	559.9	556.7	559.9	563.2	564.0	566.6	569.8	571.5	576.6	586.6
167.5°	568.8	567.2	565.6	567.2	568.8	569.2	571.2	573.9	575.3	578.6	585.2
170°	574.6	573.0	571.5	573.0	574.6	575.0	575.1	575.3	575.3	578.6	585.2
172.5°	575.3	575.0	574.6	575.0	575.3	575.3	575.3	575.3	575.3	578.0	583.1
175°	578.9	578.9	578.9	578.9	578.9	578.9	577.7	576.1	575.3	577.0	580.3
177.5°	578.9	578.9	578.9	578.9	578.9	578.9	578.0	576.7	576.1	577.4	580.0
180°	578.9	578.9	578.9	578.9	578.9	578.9	578.9	578.9	578.9	578.9	578.9

TEST NUMBER: P935386

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-5000K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	260°	270°	280°	290°	292.5°	300°	310°	315°	320°
0°	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7	1670.7
2.5°	1612.3	1607.5	1613.9	1596.4	1613.9	1607.5	1612.3	1623.3	1613.9	1620.1	1626.5
5°	1414.6	1406.8	1381.5	1360.9	1381.5	1406.8	1414.6	1447.9	1463.7	1492.2	1530.1
7.5°	1264.5	1258.2	1251.8	1239.2	1251.8	1258.2	1264.5	1274.0	1289.8	1315.1	1343.6
10°	1231.3	1232.9	1242.4	1240.8	1242.4	1232.9	1231.3	1228.1	1223.4	1228.1	1245.5
12.5°	1316.7	1330.9	1383.1	1379.9	1383.1	1330.9	1316.7	1253.4	1210.7	1202.9	1206.0
15°	1414.6	1419.4	1430.5	1432.0	1430.5	1419.4	1414.6	1389.4	1261.4	1206.0	1188.6
17.5°	1424.2	1425.8	1433.6	1433.6	1433.6	1425.8	1424.2	1413.0	1370.4	1296.1	1198.1
20°	1416.2	1419.4	1435.2	1438.4	1435.2	1419.4	1416.2	1402.0	1378.3	1351.4	1277.2
22.5°	1413.0	1419.4	1432.0	1430.5	1432.0	1419.4	1413.0	1390.9	1370.4	1351.4	1321.4
25°	1397.3	1397.3	1398.9	1400.4	1398.9	1397.3	1397.3	1379.9	1338.8	1334.0	1316.7
27.5°	1364.1	1367.3	1376.7	1375.1	1376.7	1367.3	1364.1	1357.8	1313.5	1308.7	1296.1
30°	1334.0	1330.9	1323.0	1316.7	1323.0	1330.9	1334.0	1324.6	1280.3	1267.6	1270.8
32.5°	1283.5	1275.6	1267.6	1263.0	1267.6	1275.6	1283.5	1280.3	1247.1	1229.7	1232.9
35°	1223.4	1224.9	1223.4	1218.7	1223.4	1224.9	1223.4	1226.5	1206.0	1190.2	1188.6
37.5°	1180.8	1183.8	1182.4	1176.0	1182.4	1183.8	1180.8	1177.6	1149.1	1144.3	1147.5
40°	1136.5	1138.1	1136.5	1131.7	1136.5	1138.1	1136.5	1130.1	1090.6	1092.2	1103.2
42.5°	1093.8	1092.2	1087.5	1084.3	1087.5	1092.2	1093.8	1084.3	1033.8	1029.0	1049.5
45°	1044.8	1046.4	1036.9	1032.2	1036.9	1046.4	1044.8	1038.5	986.3	973.7	987.9
47.5°	995.8	995.8	987.9	983.1	987.9	995.8	995.8	987.9	932.6	919.9	927.8
50°	943.6	942.0	931.0	929.4	931.0	942.0	943.6	938.9	880.4	869.4	869.4
52.5°	883.6	883.6	885.2	888.3	885.2	883.6	883.6	885.2	833.0	821.9	818.7
55°	831.4	833.0	844.1	847.2	844.1	833.0	831.4	831.4	784.0	772.9	766.6
57.5°	777.6	777.6	785.6	785.6	785.6	777.6	777.6	774.5	728.7	719.2	716.0
60°	716.0	719.2	725.5	723.9	725.5	719.2	716.0	712.8	673.3	667.1	655.9
62.5°	651.2	654.4	655.9	652.8	655.9	654.4	651.2	641.8	618.0	613.3	599.1
65°	583.3	586.5	588.0	584.9	588.0	586.5	583.3	578.5	561.1	553.2	540.6
67.5°	513.7	512.1	510.5	516.9	510.5	512.1	513.7	507.3	496.3	490.0	472.6
70°	442.5	442.5	441.0	444.1	441.0	442.5	442.5	437.9	431.5	426.7	411.0
72.5°	366.7	365.1	371.5	366.7	371.5	365.1	366.7	365.1	361.9	357.3	341.4
75°	292.4	295.6	292.4	297.2	292.4	295.6	292.4	294.0	292.4	289.3	278.1
77.5°	222.9	226.0	222.9	222.9	222.9	226.0	222.9	224.4	224.4	224.4	215.0
80°	158.0	156.4	156.4	154.9	156.4	156.4	158.0	158.0	159.6	156.4	153.4
82.5°	101.2	99.6	99.6	102.7	99.6	99.6	101.2	102.7	99.6	99.6	99.6
85°	55.3	56.9	53.7	53.7	53.7	56.9	55.3	52.1	55.3	55.3	53.7
87.5°	20.5	19.0	19.0	19.0	19.0	19.0	20.5	22.1	22.1	22.1	23.7
90°	14.8	14.8	14.8	14.8	14.8	14.8	14.8	19.7	26.2	29.5	25.4
92.5°	73.8	70.9	59.1	47.4	59.1	70.9	73.8	104.6	145.7	166.3	146.0
95°	250.6	241.7	206.1	170.5	206.1	241.7	250.6	329.0	433.7	486.0	410.4
97.5°	578.4	561.5	493.8	426.2	493.8	561.5	578.4	628.0	694.1	727.2	601.3
100°	812.3	792.1	711.5	630.9	711.5	792.1	812.3	808.7	803.9	801.5	661.7
102.5°	1012.0	994.7	925.7	856.7	925.7	994.7	1012.0	948.9	864.6	822.5	680.7
105°	1245.1	1235.9	1198.7	1161.6	1198.7	1235.9	1245.1	1103.4	914.6	820.1	682.8
107.5°	1366.3	1368.6	1377.6	1386.5	1377.6	1368.6	1366.3	1168.7	905.2	773.4	652.4
110°	1397.4	1407.1	1445.7	1484.4	1445.7	1407.1	1397.4	1176.5	881.9	734.6	625.5

TEST NUMBER: P935386

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-5000K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	260°	270°	280°	290°	292.5°	300°	310°	315°	320°
112.5°	1377.6	1392.4	1451.8	1511.2	1451.8	1392.4	1377.6	1151.4	850.0	699.3	602.0
115°	1310.4	1331.0	1413.3	1495.7	1413.3	1331.0	1310.4	1092.6	802.2	657.0	575.1
117.5°	1217.6	1240.4	1331.7	1423.0	1331.7	1240.4	1217.6	1021.0	758.9	627.8	558.2
120°	1155.0	1177.2	1265.9	1354.7	1265.9	1177.2	1155.0	975.4	735.9	616.2	552.5
122.5°	1092.4	1114.3	1201.9	1289.4	1201.9	1114.3	1092.4	930.6	715.0	607.2	549.5
125°	1009.7	1029.8	1110.4	1191.1	1110.4	1029.8	1009.7	872.3	689.1	597.5	547.0
127.5°	943.2	960.2	1028.3	1096.3	1028.3	960.2	943.2	825.3	668.0	589.4	545.5
130°	901.3	917.0	979.9	1042.7	979.9	917.0	901.3	796.3	656.3	586.3	546.5
132.5°	865.5	879.6	935.9	992.2	935.9	879.6	865.5	771.5	646.1	583.5	547.0
135°	815.0	827.2	875.6	924.2	875.6	827.2	815.0	736.3	631.4	578.9	546.5
137.5°	777.7	787.6	827.4	867.1	827.4	787.6	777.7	711.1	622.4	578.1	549.8
140°	747.9	757.1	794.3	831.4	794.3	757.1	747.9	690.3	613.6	575.3	550.4
142.5°	726.8	734.9	766.8	798.8	766.8	734.9	726.8	676.3	609.0	575.3	552.4
145°	695.4	701.4	725.6	749.8	725.6	701.4	695.4	654.1	599.1	571.5	552.5
147.5°	669.0	674.1	694.1	714.0	694.1	674.1	669.0	636.5	593.2	571.5	556.2
150°	653.8	657.8	674.1	690.3	674.1	657.8	653.8	626.3	589.8	571.5	558.3
152.5°	641.8	644.8	657.1	669.4	657.1	644.8	641.8	618.3	587.1	571.5	559.5
155°	627.4	629.4	637.5	645.7	637.5	629.4	627.4	608.8	583.9	571.5	562.4
157.5°	614.9	616.3	622.1	627.8	622.1	616.3	614.9	600.5	581.1	571.5	565.2
160°	608.8	609.6	612.9	616.2	612.9	609.6	608.8	596.4	579.8	571.5	566.5
162.5°	602.9	603.6	606.8	609.9	606.8	603.6	602.9	592.4	578.5	571.5	567.9
165°	594.0	594.9	598.1	601.4	598.1	594.9	594.0	586.6	576.6	571.5	569.8
167.5°	590.1	590.5	591.8	593.2	591.8	590.5	590.1	585.2	578.6	575.3	573.9
170°	590.1	590.1	590.1	590.1	590.1	590.1	590.1	585.2	578.6	575.3	575.3
172.5°	587.0	586.7	585.5	584.3	585.5	586.7	587.0	583.1	578.0	575.3	575.3
175°	582.7	582.7	582.7	582.7	582.7	582.7	582.7	580.3	577.0	575.3	576.1
177.5°	582.0	581.6	580.3	578.9	580.3	581.6	582.0	580.0	577.4	576.1	576.7
180°	578.9	578.9	578.9	578.9	578.9	578.9	578.9	578.9	578.9	578.9	578.9

TEST NUMBER: P935386

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-5000K

CANDELA DISTRIBUTION (continued):

	330°	337.5°	340°	350°	360°
0°	1670.7	1670.7	1670.7	1670.7	1670.7
2.5°	1650.2	1658.0	1662.8	1669.2	1684.9
5°	1587.0	1616.9	1626.5	1650.2	1678.6
7.5°	1447.9	1539.5	1564.8	1621.7	1666.0
10°	1313.5	1405.2	1449.5	1583.8	1650.2
12.5°	1245.5	1299.3	1329.3	1517.4	1628.1
15°	1202.9	1240.8	1263.0	1428.9	1602.7
17.5°	1169.6	1196.5	1212.3	1342.0	1568.0
20°	1149.1	1161.8	1176.0	1278.7	1528.5
22.5°	1134.9	1127.0	1138.1	1234.5	1474.7
25°	1125.4	1095.4	1108.0	1199.7	1411.5
27.5°	1133.3	1066.9	1071.7	1168.1	1345.1
30°	1134.9	1032.2	1033.8	1134.9	1270.8
32.5°	1123.8	995.8	997.4	1093.8	1187.0
35°	1097.0	953.1	951.6	1046.4	1073.3
37.5°	1060.6	907.3	907.3	994.2	948.4
40°	1016.4	861.4	866.2	926.2	837.7
42.5°	962.6	812.5	818.7	836.1	755.5
45°	904.1	765.0	769.8	706.6	692.3
47.5°	839.3	716.0	717.6	586.5	671.7
50°	761.9	665.5	659.1	502.7	670.1
52.5°	693.9	610.1	591.1	455.2	608.5
55°	627.6	551.6	510.5	418.9	564.3
57.5°	569.0	475.8	436.3	376.2	554.8
60°	515.3	401.4	371.5	330.4	508.9
62.5°	471.0	346.1	339.8	298.7	461.6
65°	423.6	308.2	306.6	271.9	392.0
67.5°	377.8	282.9	281.3	246.6	298.7
70°	328.8	256.1	252.9	219.7	221.3
72.5°	278.1	226.0	222.9	197.5	183.3
75°	227.6	191.3	189.7	172.3	148.6
77.5°	178.6	151.8	154.9	139.1	109.1
80°	128.1	110.7	113.8	99.6	82.2
82.5°	85.4	72.7	75.8	63.2	55.3
85°	47.4	41.1	42.7	33.2	25.3
87.5°	22.1	19.0	19.0	12.6	7.9
90°	17.1	10.8	10.1	7.0	3.9
92.5°	105.4	75.0	68.4	41.9	15.5
95°	259.4	146.1	134.0	85.6	37.3
97.5°	349.4	160.5	149.8	107.1	64.4
100°	382.2	172.5	162.8	124.1	85.5
102.5°	397.2	184.6	175.5	139.4	103.3
105°	408.3	202.4	194.7	164.2	133.7
107.5°	410.4	228.8	221.7	193.2	164.8
110°	407.2	243.6	237.1	211.5	185.7



TEST NUMBER: P935386

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-5000K

CANDELA DISTRIBUTION (continued):

	330°	337.5°	340°	350°	360°
112.5°	407.4	261.4	255.3	230.8	206.3
115°	411.1	288.2	282.5	259.9	237.3
117.5°	418.8	314.3	309.2	288.6	268.1
120°	425.0	329.4	324.6	305.2	285.9
122.5°	433.9	347.4	342.5	323.0	303.5
125°	446.0	370.2	365.8	348.0	330.3
127.5°	458.0	392.4	387.9	369.9	351.9
130°	466.8	407.1	402.3	382.9	363.6
132.5°	473.9	419.2	414.3	395.0	375.7
135°	481.8	433.2	428.8	411.1	393.6
137.5°	493.3	451.0	446.6	429.3	411.8
140°	500.5	463.1	459.1	443.0	426.9
142.5°	506.5	472.0	468.3	453.5	438.6
145°	514.3	485.6	482.3	469.4	456.4
147.5°	525.7	502.7	499.5	487.0	474.4
150°	531.6	511.6	508.7	497.4	486.0
152.5°	535.5	517.4	515.3	506.6	498.0
155°	544.1	530.3	528.7	522.3	515.9
157.5°	552.6	543.1	541.5	535.4	529.1
160°	556.5	548.9	547.7	542.9	538.1
162.5°	560.6	555.2	554.2	550.6	547.0
165°	566.6	564.0	563.2	559.9	556.7
167.5°	571.2	569.2	568.8	567.2	565.6
170°	575.1	575.0	574.6	573.0	571.5
172.5°	575.3	575.3	575.3	575.0	574.6
175°	577.7	578.9	578.9	578.9	578.9
177.5°	578.0	578.9	578.9	578.9	578.9
180°	578.9	578.9	578.9	578.9	578.9

TEST NUMBER: P935386

CATALOG NUMBER: SQ4-FA-100U-125D-B2750-1D-UNV-W2A-W-4-5000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.64	15.54	15.57	16.48	17.70	17.44	18.34	18.37	19.28	20.50
	3H	15.12	15.92	16.06	16.88	18.12	18.78	19.58	19.72	20.53	21.78
	4H	15.32	16.07	16.27	17.03	18.28	19.22	19.98	20.17	20.93	22.19
	6H	15.44	16.14	16.40	17.10	18.36	19.50	20.20	20.46	21.16	22.42
	8H	15.44	16.10	16.41	17.08	18.35	19.57	20.23	20.54	21.21	22.48
	12H	15.41	16.04	16.39	17.02	18.31	19.60	20.24	20.58	21.21	22.50
4H	2H	15.67	16.43	16.63	17.39	18.64	17.86	18.61	18.81	19.57	20.82
	3H	16.70	17.33	17.67	18.32	19.59	19.36	19.99	20.32	20.97	22.24
	4H	16.98	17.56	17.96	18.54	19.83	19.88	20.46	20.86	21.44	22.73
	6H	17.11	17.60	18.10	18.61	19.90	20.24	20.73	21.23	21.74	23.03
	8H	17.11	17.58	18.10	18.58	19.88	20.34	20.80	21.33	21.80	23.11
	12H	17.08	17.50	18.09	18.52	19.82	20.39	20.81	21.40	21.83	23.13
8H	4H	17.43	17.90	18.42	18.89	20.20	20.01	20.47	21.00	21.47	22.77
	6H	17.69	18.08	18.71	19.12	20.42	20.44	20.82	21.45	21.86	23.16
	8H	17.74	18.08	18.76	19.10	20.42	20.58	20.92	21.61	21.95	23.27
	12H	17.72	18.02	18.75	19.04	20.41	20.68	20.98	21.71	22.00	23.36
12H	4H	17.44	17.86	18.45	18.87	20.18	19.97	20.39	20.98	21.41	22.71
	6H	17.75	18.09	18.78	19.12	20.44	20.43	20.77	21.46	21.80	23.12
	8H	17.82	18.12	18.85	19.14	20.50	20.59	20.89	21.62	21.91	23.27

END OF REPORT