

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937696

Luminaire Tested: SQ4-FB-100U-100D-B2750-1D-UNV-W2A-W-8-5000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P937696
REPORT IS A COMBINATION OF REPORTS P933583 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-100U-100D-B2750-1D-UNV-W2A-W-8-5000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13447.8 lumens
Efficiency: N/A
Efficacy: 115.9 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 116
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P937696

CATALOG NUMBER: SQ4-FB-100U-100D-B2750-1D-UNV-W2A-W-8-5000K

Luminous Intensity Polar Plot

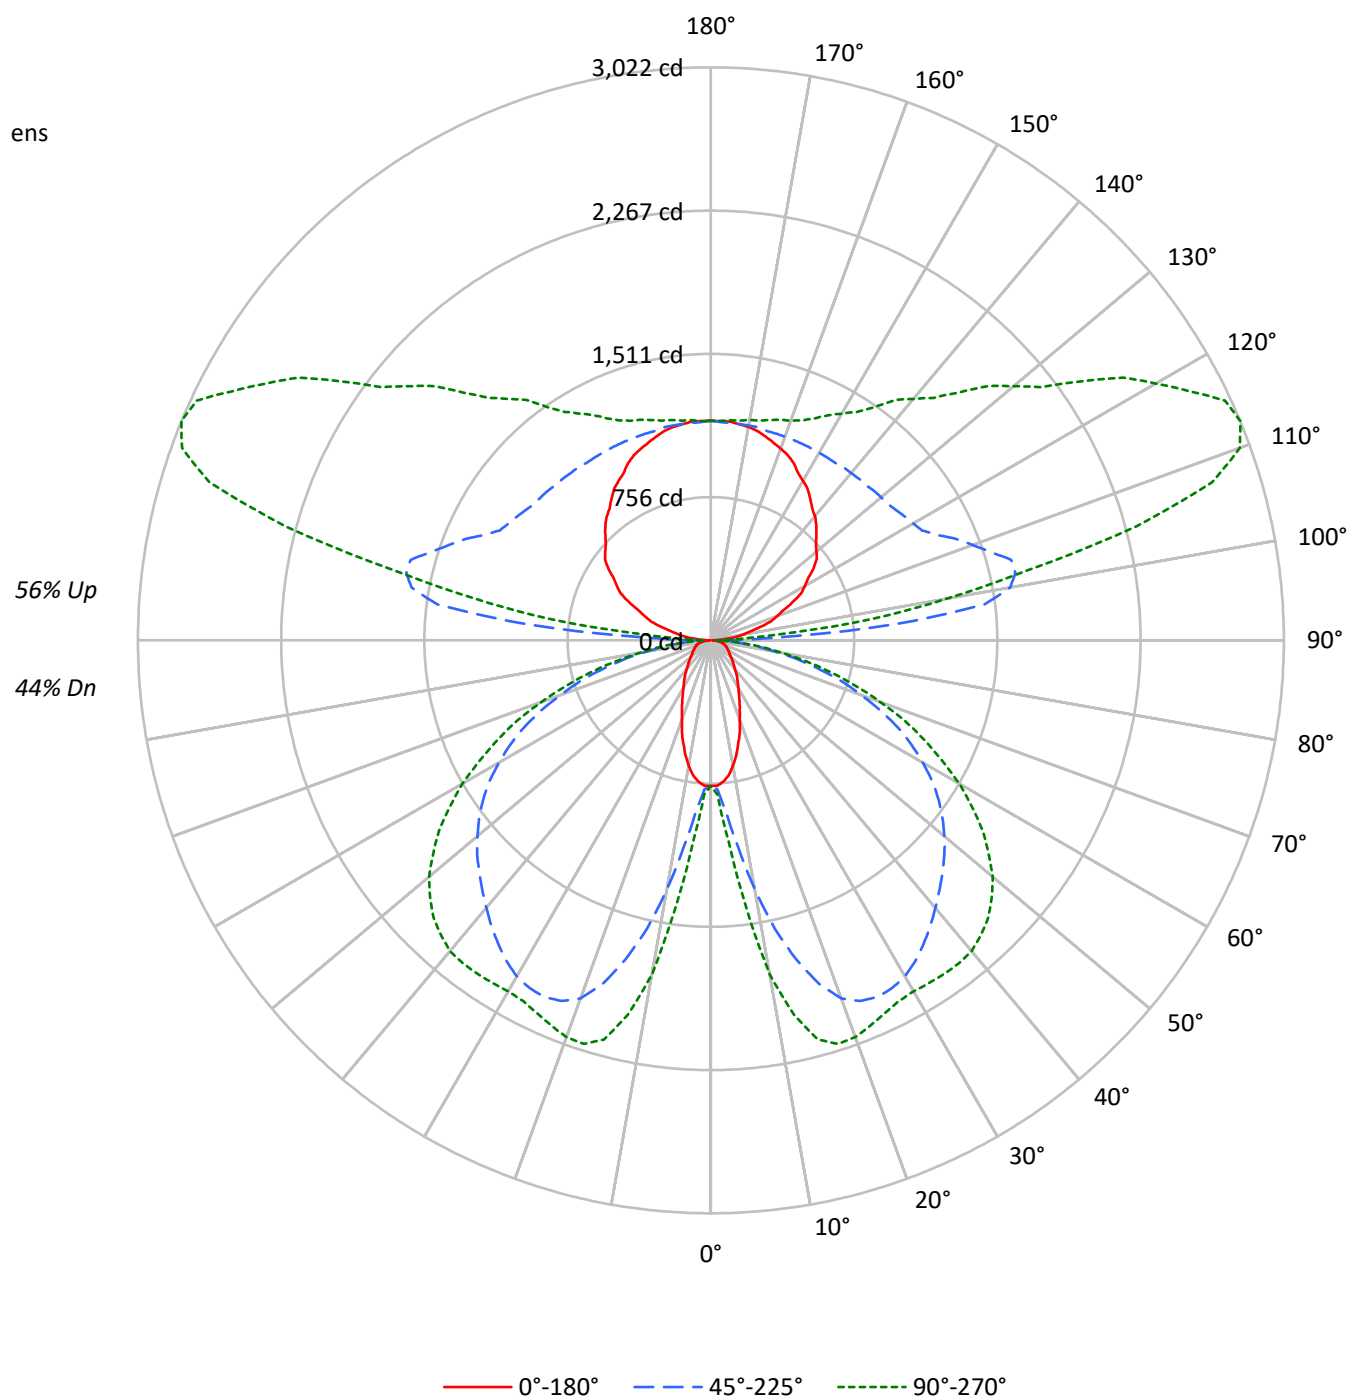

TEST NUMBER: P937696

CATALOG NUMBER: SQ4-FB-100U-100D-B2750-1D-UNV-W2A-W-8-5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51
1	96	91	87	84	88	84	80	77	69	67	65	56	55	53	44	43	42
2	87	79	73	68	79	73	67	63	60	56	53	49	46	43	38	36	34
3	79	69	62	56	72	63	57	52	53	48	44	43	39	36	33	31	29
4	72	61	53	46	65	56	49	43	46	41	37	38	34	30	29	27	24
5	66	54	46	39	60	49	42	37	41	36	31	33	29	26	26	23	21
6	60	48	40	34	55	44	37	31	37	31	27	30	26	22	24	20	18
7	56	43	35	29	51	40	32	27	33	27	23	27	23	19	21	18	16
8	51	39	31	26	47	36	29	24	30	24	20	25	20	17	19	16	14
9	48	35	28	23	44	33	26	21	27	22	18	22	18	15	18	15	12
10	44	32	25	20	41	30	23	19	25	20	16	21	16	14	16	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3562	3562	3562
5°	3479	4116	4787
10°	3156	6000	7936
15°	2682	7839	9583
20°	2184	9084	9767
25°	1822	9506	9568
30°	1536	9567	9551
35°	1358	9408	9797
40°	1183	9201	10052
45°	1072	9050	10092
50°	983	8914	9924
55°	941	8715	9485
60°	964	8332	8790
65°	1003	7750	7836
70°	1068	6759	6620
75°	1183	5511	5166
80°	1292	3822	3481
85°	1150	2028	1782

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 45°

Luminance: 10092 cd/sqm

TEST NUMBER: P937696

CATALOG NUMBER: SQ4-FB-100U-100D-B2750-1D-UNV-W2A-W-8-5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	99.3	0.7
10°-20°	440.1	3.3
20°-30°	769.8	5.7
30°-40°	990.9	7.4
40°-50°	1106.8	8.2
50°-60°	1060.1	7.9
60°-70°	840.1	6.2
70°-80°	494.0	3.7
80°-90°	141.7	1.1
90°-100°	564.3	4.2
100°-110°	1483.6	11.0
110°-120°	1538.4	11.4
120°-130°	1234.0	9.2
130°-140°	968.2	7.2
140°-150°	743.1	5.5
150°-160°	535.2	4.0
160°-170°	327.5	2.4
170°-180°	110.6	0.8
0°-30°	1309.2	9.7
0°-40°	2300.1	17.1
0°-60°	4467.0	33.2
0°-90°	5942.8	44.2
90°-120°	3586.3	26.7
90°-150°	6531.7	48.6
90°-180°	7505.0	55.8
0°-180°	13447.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	768	768	768	768	768	
5°	748	802	903	1022	1059	69
15°	560	1034	1743	2113	2180	156
25°	358	1172	2076	2167	2170	165
35°	242	1121	1955	2066	2147	151
45°	165	894	1728	1980	2068	128
55°	118	568	1466	1703	1750	108
65°	94	301	1088	1224	1242	93
75°	69	185	597	657	659	72
85°	25	57	148	163	165	26
90°	8	22	59	30	30	8
95°	75	292	972	501	341	83
105°	267	405	1640	2490	2323	283
115°	475	577	1314	2621	2991	469
125°	660	740	1195	2019	2382	586
135°	787	866	1158	1630	1848	609
145°	913	971	1143	1391	1500	572
155°	1032	1061	1143	1255	1291	474
165°	1113	1128	1143	1188	1203	314
175°	1158	1158	1151	1165	1165	110
180°	1158	1158	1158	1158	1158	

TEST NUMBER: P937696

CATALOG NUMBER: SQ4-FB-100U-100D-B2750-1D-UNV-W2A-W-8-5000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	767.7	767.7	767.7	767.7	767.7	767.7	767.7	767.7	767.7	767.7	767.7
2.5°	767.7	767.7	772.6	775.0	780.0	782.4	787.4	792.3	807.2	809.6	814.5
5°	747.9	757.8	789.9	802.2	836.8	883.7	903.4	935.5	1002.1	1021.9	1034.2
7.5°	718.2	740.5	819.5	839.2	925.6	1049.0	1100.8	1169.9	1276.1	1328.0	1369.9
10°	671.4	718.2	859.0	905.9	1046.5	1234.1	1330.4	1426.7	1587.1	1658.7	1685.8
12.5°	619.5	696.0	900.9	965.1	1167.5	1441.4	1557.4	1663.6	1846.2	1942.5	1957.3
15°	560.3	664.0	940.4	1034.2	1295.8	1614.2	1742.6	1873.4	2043.7	2112.8	2130.1
17.5°	508.5	639.3	977.4	1076.2	1394.6	1769.7	1900.6	2009.1	2147.4	2194.2	2206.7
20°	444.3	599.8	1002.1	1130.4	1498.2	1883.3	2009.1	2093.1	2186.9	2216.5	2221.4
22.5°	397.4	557.8	1016.9	1150.2	1567.3	1952.4	2058.5	2125.1	2189.4	2199.2	2201.7
25°	357.9	510.9	1014.4	1172.5	1626.6	1994.4	2075.8	2125.1	2162.2	2167.2	2167.2
27.5°	320.8	459.1	1004.6	1177.4	1671.0	2004.3	2068.4	2103.0	2120.3	2130.1	2130.1
30°	288.8	409.7	979.9	1167.5	1690.7	1994.4	2046.2	2063.5	2080.8	2095.5	2103.0
32.5°	264.1	362.9	942.9	1147.7	1693.2	1969.7	2006.7	2016.6	2041.3	2075.8	2088.1
35°	241.9	316.0	900.9	1120.6	1678.4	1930.2	1954.9	1964.8	2014.1	2065.9	2083.2
37.5°	219.7	281.4	846.6	1073.7	1656.2	1883.3	1900.6	1917.9	1994.4	2056.0	2075.8
40°	197.4	251.8	782.4	1021.9	1621.6	1826.5	1841.3	1868.5	1969.7	2041.3	2061.0
42.5°	180.2	227.1	713.3	967.5	1577.2	1762.4	1784.6	1824.0	1940.0	2016.6	2038.8
45°	165.4	202.4	639.3	893.5	1520.5	1695.7	1727.8	1782.1	1905.5	1979.5	1999.3
47.5°	150.6	185.1	562.7	817.0	1458.7	1629.1	1671.0	1732.8	1858.6	1930.2	1947.5
50°	138.2	167.8	486.2	735.5	1392.1	1557.4	1606.9	1671.0	1799.4	1866.0	1888.2
52.5°	128.3	153.0	414.7	654.1	1315.5	1483.4	1540.2	1606.9	1727.8	1792.0	1806.7
55°	118.4	140.7	353.0	567.7	1236.6	1404.5	1466.1	1530.4	1648.8	1703.1	1713.0
57.5°	113.6	130.9	301.1	486.2	1152.6	1315.5	1384.7	1444.0	1555.0	1597.0	1606.9
60°	106.1	123.4	261.6	417.1	1061.4	1231.7	1290.9	1350.1	1444.0	1478.5	1485.9
62.5°	98.7	118.4	232.0	350.5	967.5	1132.9	1192.2	1246.5	1325.4	1350.1	1360.0
65°	93.8	113.6	209.8	301.1	871.3	1029.3	1088.5	1135.4	1199.5	1224.3	1229.2
67.5°	88.8	108.6	192.5	259.2	775.0	925.6	970.1	1014.4	1063.8	1088.5	1091.0
70°	81.4	103.7	177.7	229.6	676.3	807.2	844.1	891.0	930.5	942.9	950.3
72.5°	76.5	96.3	167.8	207.3	575.1	693.6	728.1	755.3	789.9	802.2	802.2
75°	69.1	86.4	157.9	185.1	471.5	567.7	597.3	624.5	651.7	656.6	649.1
77.5°	61.7	76.5	135.7	155.5	367.8	449.3	473.9	488.7	510.9	515.8	518.4
80°	51.8	66.7	106.1	121.0	266.6	330.7	348.0	360.3	380.1	380.1	385.1
82.5°	39.5	51.8	76.5	86.4	180.2	227.1	241.9	249.3	261.6	261.6	261.6
85°	24.7	32.1	49.4	56.8	108.6	138.2	148.1	150.6	160.5	162.9	162.9
87.5°	12.3	17.3	32.1	34.6	56.8	71.5	71.5	76.5	76.5	74.1	71.5
90°	7.8	14.0	20.2	21.8	34.2	50.7	59.0	52.5	39.3	29.5	29.5
92.5°	31.1	84.0	136.8	150.0	210.8	292.0	332.5	291.4	209.3	147.7	141.8
95°	74.6	171.3	268.0	292.2	518.7	820.9	972.0	867.4	658.1	501.2	483.4
97.5°	129.0	214.3	299.6	320.9	698.8	1202.6	1454.5	1388.4	1256.1	1156.9	1123.1
100°	170.9	248.3	325.7	345.0	764.3	1323.4	1602.9	1607.8	1617.4	1624.7	1584.3
102.5°	206.7	278.8	351.0	369.0	794.3	1361.3	1644.9	1729.1	1897.7	2024.1	1989.5
105°	267.3	328.4	389.5	404.8	816.6	1365.7	1640.2	1829.1	2206.9	2490.2	2471.6
107.5°	329.4	386.4	443.4	457.7	820.8	1304.9	1547.0	1810.5	2337.4	2732.6	2737.1
110°	371.4	422.8	474.3	487.2	814.5	1251.0	1469.3	1763.9	2352.9	2794.8	2814.1

TEST NUMBER: P937696

CATALOG NUMBER: SQ4-FB-100U-100D-B2750-1D-UNV-W2A-W-8-5000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	412.5	461.6	510.7	522.9	814.8	1204.0	1398.6	1700.1	2303.0	2755.2	2784.9
115°	474.8	520.0	565.3	576.6	822.3	1150.0	1313.9	1604.3	2185.2	2620.8	2662.0
117.5°	536.1	577.2	618.3	628.6	837.6	1116.2	1255.6	1517.7	2041.9	2435.0	2480.7
120°	571.9	610.6	649.2	658.8	850.0	1104.9	1232.3	1471.8	1950.8	2310.0	2354.3
122.5°	606.8	645.9	684.9	694.6	867.9	1098.9	1214.4	1430.0	1861.4	2184.9	2228.7
125°	660.4	696.0	731.6	740.5	892.0	1094.0	1195.0	1378.2	1744.6	2019.4	2059.8
127.5°	704.0	739.8	775.8	784.7	916.1	1091.2	1178.7	1336.0	1650.6	1886.5	1920.5
130°	727.2	765.9	804.5	814.3	933.6	1092.9	1172.5	1312.5	1592.6	1802.6	1834.0
132.5°	751.3	790.0	828.6	838.4	947.9	1094.0	1167.0	1292.4	1543.1	1731.1	1759.2
135°	787.1	822.3	857.6	866.4	963.5	1093.0	1157.7	1262.7	1472.6	1630.1	1654.4
137.5°	823.6	858.4	893.4	902.1	986.8	1099.7	1156.1	1244.8	1422.4	1555.5	1575.4
140°	853.9	886.0	918.1	926.2	1001.0	1100.8	1150.7	1227.4	1380.7	1495.7	1514.3
142.5°	877.2	906.9	936.6	944.0	1012.9	1104.7	1150.7	1218.0	1352.7	1453.8	1469.7
145°	913.0	938.9	964.8	971.3	1028.5	1104.8	1142.9	1198.0	1308.2	1390.8	1402.9
147.5°	948.7	973.9	999.1	1005.5	1051.3	1112.4	1142.9	1186.3	1272.9	1338.0	1347.9
150°	972.0	994.8	1017.6	1023.3	1063.2	1116.3	1142.9	1179.5	1252.8	1307.7	1315.8
152.5°	996.1	1013.4	1030.7	1035.0	1070.9	1118.9	1142.9	1174.2	1236.7	1283.6	1289.8
155°	1031.8	1044.6	1057.4	1060.6	1088.0	1124.6	1142.9	1167.8	1217.6	1254.8	1258.8
157.5°	1058.2	1070.6	1083.2	1086.2	1105.1	1130.3	1142.9	1162.3	1200.9	1230.0	1232.8
160°	1076.2	1085.9	1095.5	1097.9	1113.0	1132.9	1142.9	1159.6	1192.7	1217.6	1219.2
162.5°	1094.0	1101.3	1108.6	1110.3	1121.2	1135.7	1142.9	1156.9	1184.9	1205.9	1207.5
165°	1113.4	1120.0	1126.5	1128.2	1133.1	1139.7	1142.9	1152.9	1173.0	1188.0	1189.7
167.5°	1131.3	1134.3	1137.5	1138.3	1142.4	1147.9	1150.7	1157.2	1170.4	1180.2	1180.9
170°	1142.9	1146.0	1149.2	1149.9	1150.2	1150.5	1150.7	1157.2	1170.4	1180.2	1180.2
172.5°	1149.2	1149.8	1150.5	1150.7	1150.7	1150.7	1150.7	1155.9	1166.3	1174.0	1173.5
175°	1157.7	1157.7	1157.7	1157.7	1155.4	1152.3	1150.7	1154.0	1160.5	1165.4	1165.4
177.5°	1157.7	1157.7	1157.7	1157.7	1155.9	1153.5	1152.3	1154.9	1160.0	1164.0	1163.3
180°	1157.7	1157.7	1157.7	1157.7	1157.7	1157.7	1157.7	1157.7	1157.7	1157.7	1157.7

TEST NUMBER: P937696

CATALOG NUMBER: SQ4-FB-100U-100D-B2750-1D-UNV-W2A-W-8-5000K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	767.7	767.7
2.5°	819.5	814.5
5°	1053.9	1058.9
7.5°	1419.2	1416.8
10°	1764.8	1787.0
12.5°	2016.6	2021.5
15°	2169.6	2179.5
17.5°	2228.8	2231.3
20°	2231.3	2226.4
22.5°	2204.1	2199.2
25°	2172.1	2169.6
27.5°	2142.4	2144.9
30°	2130.1	2137.6
32.5°	2130.1	2142.4
35°	2135.0	2147.4
37.5°	2132.6	2147.4
40°	2122.7	2140.0
42.5°	2095.5	2107.9
45°	2053.6	2068.4
47.5°	1999.3	2009.1
50°	1930.2	1940.0
52.5°	1843.8	1846.2
55°	1740.1	1750.0
57.5°	1629.1	1631.5
60°	1505.6	1513.1
62.5°	1374.8	1374.8
65°	1236.6	1241.6
67.5°	1093.4	1105.8
70°	947.8	950.3
72.5°	804.6	804.6
75°	656.6	659.0
77.5°	515.8	515.8
80°	382.6	385.1
82.5°	264.1	269.1
85°	165.4	165.4
87.5°	76.5	69.1
90°	29.5	29.5
92.5°	118.3	94.8
95°	412.3	341.1
97.5°	987.7	852.4
100°	1423.1	1261.8
102.5°	1851.4	1713.2
105°	2397.4	2323.1
107.5°	2755.1	2773.0
110°	2891.5	2968.8



TEST NUMBER: P937696

CATALOG NUMBER: SQ4-FB-100U-100D-B2750-1D-UNV-W2A-W-8-5000K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	2903.6	3022.4
115°	2826.7	2991.4
117.5°	2663.4	2846.1
120°	2531.9	2709.3
122.5°	2403.7	2578.8
125°	2221.0	2382.3
127.5°	2056.6	2192.7
130°	1959.7	2085.4
132.5°	1871.8	1984.4
135°	1751.4	1848.5
137.5°	1654.8	1734.3
140°	1588.5	1662.7
142.5°	1533.6	1597.5
145°	1451.2	1499.5
147.5°	1388.0	1428.1
150°	1348.2	1380.7
152.5°	1314.2	1338.7
155°	1275.1	1291.3
157.5°	1244.2	1255.6
160°	1225.8	1232.3
162.5°	1213.6	1219.9
165°	1196.3	1202.8
167.5°	1183.7	1186.5
170°	1180.2	1180.2
172.5°	1171.0	1168.6
175°	1165.4	1165.4
177.5°	1160.5	1157.7
180°	1157.7	1157.7

TEST NUMBER: P937696

CATALOG NUMBER: SQ4-FB-100U-100D-B2750-1D-UNV-W2A-W-8-5000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.86	5.71	5.86	6.72	8.07	18.04	18.89	19.04	19.90	21.25
	3H	5.57	6.33	6.58	7.35	8.72	19.88	20.64	20.89	21.66	23.03
	4H	5.87	6.58	6.89	7.61	8.99	20.52	21.24	21.55	22.27	23.65
	6H	6.11	6.78	7.15	7.81	9.20	20.95	21.62	21.99	22.65	24.04
	8H	6.18	6.81	7.22	7.86	9.25	21.07	21.71	22.11	22.75	24.14
	12H	6.20	6.80	7.24	7.84	9.25	21.14	21.74	22.19	22.78	24.19
4H	2H	12.08	12.80	13.10	13.82	15.20	18.31	19.03	19.34	20.06	21.44
	3H	13.64	14.25	14.68	15.30	16.69	20.36	20.96	21.39	22.01	23.41
	4H	13.74	14.29	14.78	15.33	16.75	21.12	21.68	22.17	22.72	24.14
	6H	13.75	14.22	14.80	15.29	16.70	21.66	22.14	22.72	23.21	24.62
	8H	13.72	14.17	14.78	15.23	16.65	21.82	22.27	22.88	23.33	24.76
	12H	13.68	14.08	14.75	15.16	16.59	21.92	22.32	22.99	23.40	24.83
8H	4H	15.18	15.62	16.23	16.69	18.11	21.18	21.63	22.24	22.69	24.11
	6H	15.42	15.79	16.50	16.89	18.31	21.81	22.18	22.89	23.28	24.70
	8H	15.44	15.76	16.53	16.85	18.29	22.03	22.36	23.12	23.44	24.88
	12H	15.41	15.69	16.50	16.77	18.25	22.18	22.46	23.27	23.54	25.02
12H	4H	15.32	15.73	16.40	16.80	18.23	21.14	21.54	22.21	22.61	24.04
	6H	15.68	16.00	16.77	17.09	18.53	21.79	22.12	22.88	23.21	24.65
	8H	15.75	16.03	16.84	17.12	18.60	22.02	22.31	23.11	23.39	24.87

END OF REPORT