

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937991

Luminaire Tested: SQ4-FB-125U-075D-B2750-1D-UNV-W2A-W-6-5000K

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P937991
REPORT IS A COMBINATION OF REPORTS P933606 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-125U-075D-B2750-1D-UNV-W2A-W-6-5000K
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10381.3 lumens
Efficiency: N/A
Efficacy: 124.5 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 6' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 83.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P937991

CATALOG NUMBER: SQ4-FB-125U-075D-B2750-1D-UNV-W2A-W-6-5000K

Luminous Intensity Polar Plot

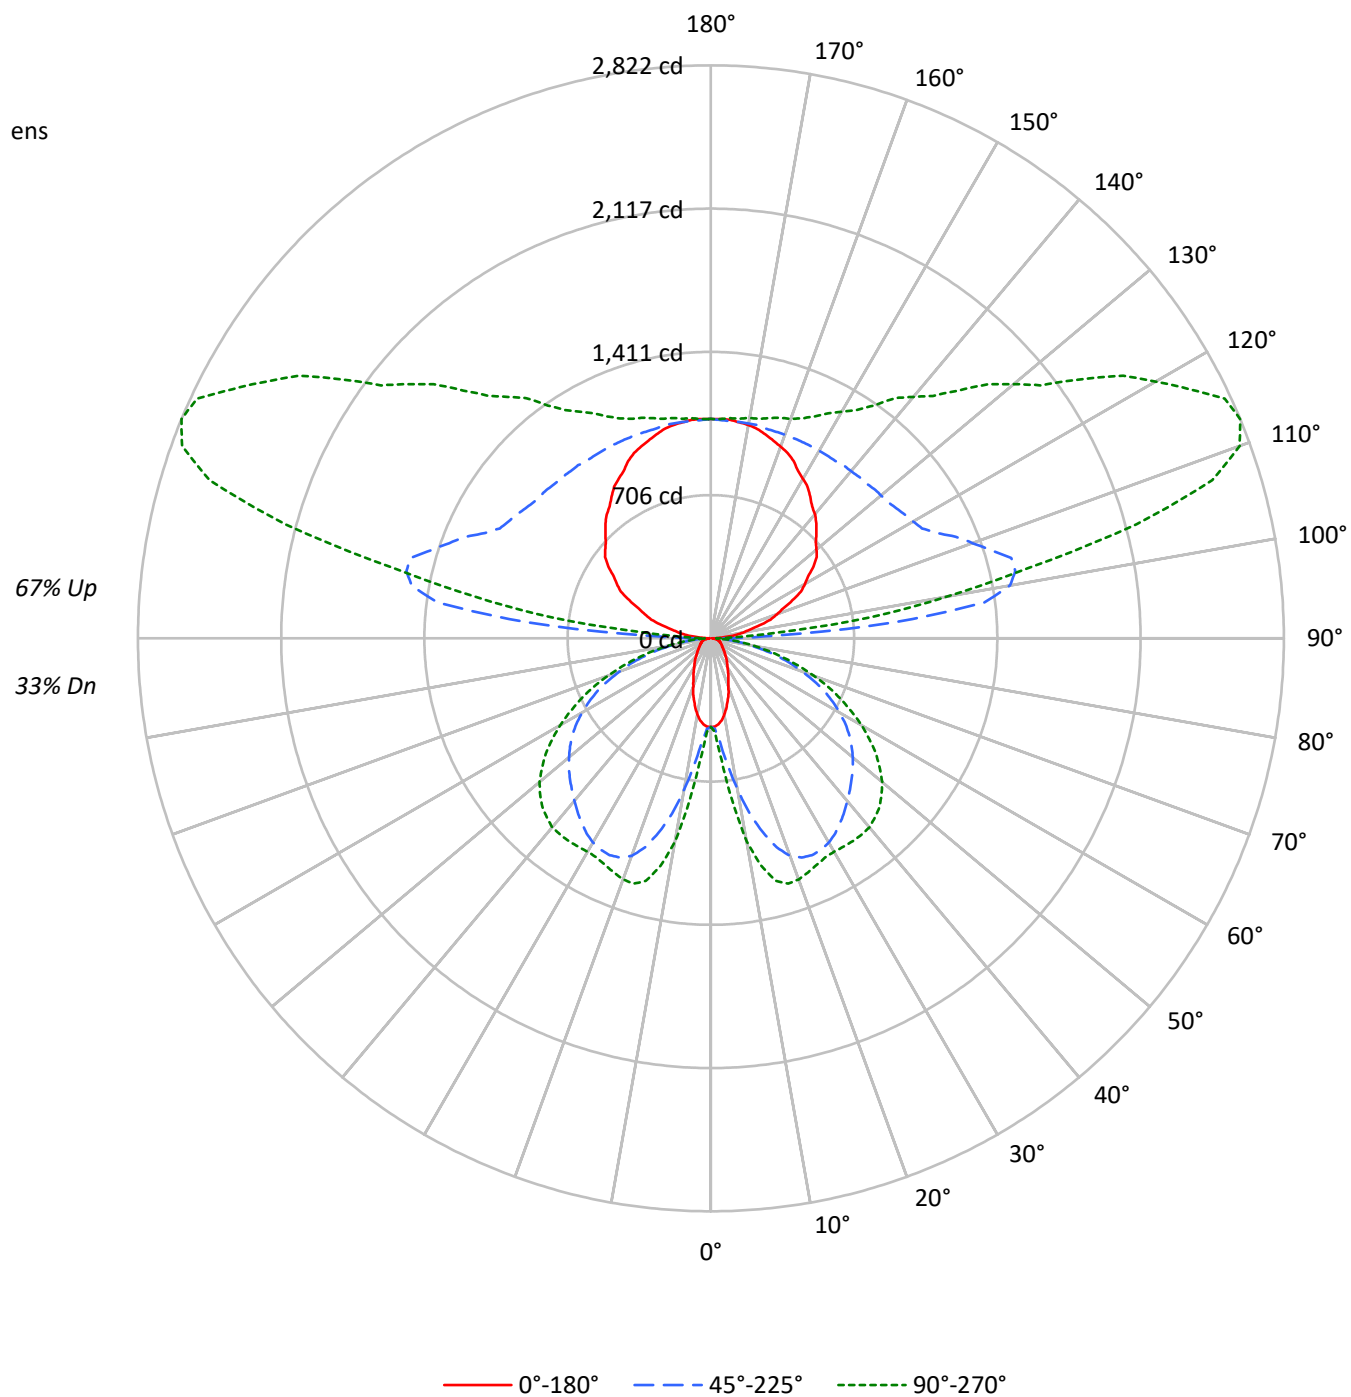

TEST NUMBER: P937991

CATALOG NUMBER: SQ4-FB-125U-075D-B2750-1D-UNV-W2A-W-6-5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40	33		
1	94	89	85	82	84	80	77	74	64	62	60	49	47	46	35	34	33	27		
2	85	77	71	66	76	70	65	60	55	52	49	42	40	38	30	29	27	22		
3	77	68	60	54	69	61	55	50	49	44	40	37	34	31	26	24	23	18		
4	70	59	52	46	63	54	47	42	43	38	34	33	29	26	23	21	19	15		
5	64	53	45	39	57	48	41	35	38	33	29	29	25	23	21	18	16	13		
6	59	47	39	33	53	42	35	30	34	29	25	26	22	19	19	16	14	11		
7	54	42	34	29	49	38	31	26	31	25	22	23	20	17	17	14	12	10		
8	50	38	30	25	45	34	28	23	28	23	19	21	18	15	15	13	11	8		
9	47	34	27	22	42	31	25	20	25	20	17	19	16	13	14	12	10	7		
10	43	31	24	19	39	28	22	18	23	18	15	18	14	12	13	10	9	7		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2695	2695	2695
5°	2632	3115	3623
10°	2387	4539	6006
15°	2028	5929	7253
20°	1650	6869	7392
25°	1376	7186	7242
30°	1160	7230	7228
35°	1025	7108	7415
40°	893	6949	7609
45°	808	6833	7638
50°	741	6728	7512
55°	708	6575	7178
60°	724	6283	6652
65°	752	5841	5930
70°	799	5090	5010
75°	882	4147	3910
80°	957	2872	2635
85°	835	1522	1349

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 45°

Luminance: 7638 cd/sqm

TEST NUMBER: P937991

CATALOG NUMBER: SQ4-FB-125U-075D-B2750-1D-UNV-W2A-W-6-5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	56.4	0.5
10°-20°	249.8	2.4
20°-30°	437.0	4.2
30°-40°	562.5	5.4
40°-50°	628.3	6.1
50°-60°	601.7	5.8
60°-70°	476.9	4.6
70°-80°	280.4	2.7
80°-90°	82.0	0.8
90°-100°	526.8	5.1
100°-110°	1385.1	13.3
110°-120°	1436.2	13.8
120°-130°	1152.0	11.1
130°-140°	903.9	8.7
140°-150°	693.8	6.7
150°-160°	499.6	4.8
160°-170°	305.7	2.9
170°-180°	103.3	1.0
0°-30°	743.1	7.2
0°-40°	1305.6	12.6
0°-60°	2535.6	24.4
0°-90°	3374.9	32.5
90°-120°	3348.1	32.3
90°-150°	6097.8	58.7
90°-180°	7006.0	67.5
0°-180°	10381.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	436	436	436	436	436	
5°	424	455	513	580	601	39
15°	318	587	989	1199	1237	89
25°	203	666	1178	1230	1232	94
35°	137	636	1110	1173	1219	86
45°	94	507	981	1124	1174	73
55°	67	322	832	967	993	61
65°	53	171	618	695	705	53
75°	39	105	339	373	374	41
85°	14	32	84	92	94	15
90°	7	20	55	28	28	7
95°	70	273	908	468	318	77
105°	250	378	1531	2325	2169	265
115°	443	538	1227	2447	2793	438
125°	616	691	1116	1885	2224	547
135°	735	809	1081	1522	1726	569
145°	852	907	1067	1298	1400	534
155°	963	990	1067	1172	1206	443
165°	1039	1053	1067	1109	1123	293
175°	1081	1081	1074	1088	1088	103
180°	1081	1081	1081	1081	1081	

TEST NUMBER: P937991

CATALOG NUMBER: SQ4-FB-125U-075D-B2750-1D-UNV-W2A-W-6-5000K

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	435.7	435.7	435.7	435.7	435.7	435.7	435.7	435.7	435.7	435.7	435.7
2.5°	435.7	435.7	438.5	439.9	442.7	444.1	446.9	449.7	458.1	459.5	462.3
5°	424.5	430.1	448.3	455.3	474.9	501.6	512.8	531.0	568.8	580.0	587.0
7.5°	407.7	420.3	465.1	476.3	525.4	595.4	624.8	664.1	724.3	753.7	777.6
10°	381.1	407.7	487.5	514.2	594.0	700.5	755.1	809.8	900.8	941.5	956.9
12.5°	351.7	395.1	511.4	547.8	662.7	818.2	884.0	944.3	1047.9	1102.7	1111.1
15°	318.0	376.9	533.8	587.0	735.5	916.3	989.1	1063.5	1160.1	1199.3	1209.2
17.5°	288.6	362.9	554.8	610.8	791.6	1004.5	1078.9	1140.5	1219.0	1245.6	1252.6
20°	252.2	340.4	568.8	641.7	850.4	1069.1	1140.5	1188.1	1241.4	1258.2	1261.0
22.5°	225.6	316.6	577.2	652.9	889.6	1108.3	1168.5	1206.4	1242.8	1248.4	1249.8
25°	203.1	290.0	575.8	665.5	923.3	1132.1	1178.3	1206.4	1227.4	1230.2	1230.2
27.5°	182.1	260.6	570.2	668.3	948.5	1137.7	1174.1	1193.7	1203.6	1209.2	1209.2
30°	163.9	232.6	556.2	662.7	959.7	1132.1	1161.5	1171.3	1181.1	1189.5	1193.7
32.5°	149.9	205.9	535.2	651.5	961.1	1118.1	1139.1	1144.7	1158.7	1178.3	1185.3
35°	137.3	179.3	511.4	636.1	952.7	1095.7	1109.7	1115.3	1143.3	1172.7	1182.5
37.5°	124.7	159.7	480.5	609.4	940.1	1069.1	1078.9	1088.7	1132.1	1167.1	1178.3
40°	112.1	142.9	444.1	580.0	920.5	1036.7	1045.1	1060.6	1118.1	1158.7	1169.9
42.5°	102.3	128.9	404.9	549.2	895.2	1000.3	1012.9	1035.3	1101.3	1144.7	1157.3
45°	93.9	114.9	362.9	507.2	863.0	962.5	980.7	1011.5	1081.7	1123.7	1134.9
47.5°	85.5	105.1	319.4	463.7	828.0	924.7	948.5	983.5	1055.0	1095.7	1105.5
50°	78.5	95.3	276.0	417.5	790.2	884.0	912.1	948.5	1021.3	1059.2	1071.9
52.5°	72.9	86.9	235.4	371.3	746.7	842.0	874.2	912.1	980.7	1017.1	1025.5
55°	67.2	79.9	200.3	322.2	701.9	797.2	832.2	868.6	935.9	966.7	972.3
57.5°	64.4	74.3	170.9	276.0	654.3	746.7	786.0	819.6	882.6	906.4	912.1
60°	60.2	70.0	148.5	236.8	602.4	699.1	732.7	766.3	819.6	839.2	843.4
62.5°	56.0	67.2	131.7	198.9	549.2	643.1	676.7	707.5	752.3	766.3	772.0
65°	53.2	64.4	119.1	170.9	494.6	584.2	617.8	644.5	680.9	694.9	697.7
67.5°	50.4	61.6	109.3	147.1	439.9	525.4	550.6	575.8	603.8	617.8	619.2
70°	46.2	58.8	100.9	130.3	383.9	458.1	479.1	505.8	528.2	535.2	539.4
72.5°	43.4	54.6	95.3	117.7	326.4	393.7	413.3	428.7	448.3	455.3	455.3
75°	39.2	49.0	89.7	105.1	267.6	322.2	339.0	354.5	369.9	372.7	368.5
77.5°	35.0	43.4	77.1	88.3	208.7	255.0	269.0	277.4	290.0	292.8	294.2
80°	29.4	37.8	60.2	68.6	151.3	187.7	197.5	204.5	215.8	215.8	218.6
82.5°	22.4	29.4	43.4	49.0	102.3	128.9	137.3	141.5	148.5	148.5	148.5
85°	14.0	18.2	28.0	32.2	61.6	78.5	84.1	85.5	91.1	92.5	92.5
87.5°	7.0	9.8	18.2	19.6	32.2	40.6	40.6	43.4	43.4	42.0	40.6
90°	7.3	13.1	18.9	20.3	31.8	47.4	55.1	48.9	36.7	27.6	27.6
92.5°	29.0	78.4	127.7	140.0	196.8	272.5	310.5	272.1	195.4	137.9	132.3
95°	69.7	159.9	250.1	272.7	484.3	766.4	907.5	809.8	614.4	467.8	451.2
97.5°	120.4	200.0	279.6	299.5	652.3	1122.8	1357.9	1296.2	1172.7	1080.1	1048.5
100°	159.6	231.8	304.0	322.0	713.5	1235.5	1496.5	1500.9	1510.0	1516.7	1479.1
102.5°	193.0	260.3	327.7	344.6	741.6	1270.9	1535.6	1614.2	1771.6	1889.6	1857.4
105°	249.6	306.6	363.6	377.9	762.3	1275.0	1531.3	1707.6	2060.3	2324.8	2307.4
107.5°	307.6	360.7	413.9	427.2	766.3	1218.2	1444.2	1690.3	2182.2	2551.1	2555.3
110°	346.7	394.7	442.7	454.8	760.4	1167.9	1371.7	1646.6	2196.7	2609.2	2627.2

TEST NUMBER: P937991

CATALOG NUMBER: SQ4-FB-125U-075D-B2750-1D-UNV-W2A-W-6-5000K

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	385.2	430.9	476.7	488.2	760.6	1124.0	1305.6	1587.1	2150.0	2572.1	2599.9
115°	443.2	485.4	527.7	538.3	767.7	1073.6	1226.6	1497.8	2040.0	2446.7	2485.2
117.5°	500.5	538.9	577.2	586.8	781.9	1042.1	1172.2	1416.9	1906.3	2273.4	2315.9
120°	533.9	570.0	606.1	615.1	793.5	1031.4	1150.4	1374.0	1821.1	2156.5	2198.0
122.5°	566.6	603.0	639.4	648.5	810.2	1025.9	1133.8	1335.2	1737.8	2039.8	2080.6
125°	616.5	649.8	682.9	691.3	832.8	1021.3	1115.7	1286.7	1628.7	1885.3	1922.9
127.5°	657.2	690.7	724.2	732.6	855.3	1018.7	1100.4	1247.3	1541.0	1761.2	1793.0
130°	678.9	715.1	751.1	760.2	871.6	1020.2	1094.6	1225.3	1486.7	1682.9	1712.2
132.5°	701.4	737.6	773.6	782.7	885.0	1021.3	1089.5	1206.5	1440.6	1616.1	1642.3
135°	734.8	767.7	800.5	808.8	899.4	1020.4	1080.8	1178.8	1374.8	1521.9	1544.5
137.5°	768.9	801.5	834.1	842.2	921.2	1026.7	1079.3	1162.2	1327.9	1452.2	1470.7
140°	797.2	827.2	857.1	864.6	934.5	1027.7	1074.3	1145.8	1289.0	1396.3	1413.7
142.5°	818.9	846.7	874.4	881.3	945.7	1031.4	1074.3	1137.1	1262.9	1357.2	1372.1
145°	852.3	876.5	900.7	906.7	960.2	1031.4	1067.0	1118.5	1221.3	1298.4	1309.7
147.5°	885.7	909.2	932.8	938.7	981.4	1038.5	1067.0	1107.4	1188.4	1249.1	1258.5
150°	907.5	928.8	950.0	955.3	992.6	1042.2	1067.0	1101.2	1169.6	1220.8	1228.4
152.5°	929.9	946.0	962.2	966.2	999.8	1044.6	1067.0	1096.1	1154.5	1198.3	1204.0
155°	963.3	975.3	987.1	990.1	1015.7	1049.9	1067.0	1090.3	1136.7	1171.5	1175.3
157.5°	988.0	999.6	1011.1	1014.0	1031.7	1055.2	1067.0	1085.0	1121.2	1148.3	1150.9
160°	1004.6	1013.7	1022.7	1025.0	1039.0	1057.7	1067.0	1082.5	1113.4	1136.7	1138.2
162.5°	1021.3	1028.1	1034.9	1036.6	1046.7	1060.3	1067.0	1080.1	1106.1	1125.8	1127.2
165°	1039.4	1045.6	1051.8	1053.3	1057.8	1063.9	1067.0	1076.3	1095.1	1109.1	1110.6
167.5°	1056.2	1059.1	1062.0	1062.7	1066.5	1071.7	1074.3	1080.5	1092.7	1101.8	1102.5
170°	1067.0	1069.9	1072.8	1073.5	1073.8	1074.1	1074.3	1080.5	1092.7	1101.8	1101.8
172.5°	1072.8	1073.4	1074.1	1074.3	1074.3	1074.3	1074.3	1079.1	1088.8	1096.0	1095.5
175°	1080.8	1080.8	1080.8	1080.8	1078.7	1075.8	1074.3	1077.4	1083.5	1088.1	1088.1
177.5°	1080.8	1080.8	1080.8	1080.8	1079.1	1076.8	1075.7	1078.1	1083.0	1086.6	1086.0
180°	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8

TEST NUMBER: P937991

CATALOG NUMBER: SQ4-FB-125U-075D-B2750-1D-UNV-W2A-W-6-5000K

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	435.7	435.7
2.5°	465.1	462.3
5°	598.2	601.0
7.5°	805.6	804.2
10°	1001.7	1014.3
12.5°	1144.7	1147.5
15°	1231.6	1237.2
17.5°	1265.2	1266.6
20°	1266.6	1263.8
22.5°	1251.2	1248.4
25°	1233.0	1231.6
27.5°	1216.2	1217.6
30°	1209.2	1213.4
32.5°	1209.2	1216.2
35°	1212.0	1219.0
37.5°	1210.6	1219.0
40°	1205.0	1214.8
42.5°	1189.5	1196.5
45°	1165.7	1174.1
47.5°	1134.9	1140.5
50°	1095.7	1101.3
52.5°	1046.5	1047.9
55°	987.7	993.3
57.5°	924.7	926.1
60°	854.6	858.8
62.5°	780.4	780.4
65°	701.9	704.7
67.5°	620.6	627.6
70°	538.0	539.4
72.5°	456.7	456.7
75°	372.7	374.1
77.5°	292.8	292.8
80°	217.2	218.6
82.5°	149.9	152.7
85°	93.9	93.9
87.5°	43.4	39.2
90°	27.6	27.6
92.5°	110.4	88.4
95°	384.8	318.4
97.5°	922.1	795.8
100°	1328.6	1178.1
102.5°	1728.4	1599.5
105°	2238.1	2168.8
107.5°	2572.0	2588.9
110°	2699.4	2771.6

TEST NUMBER: P937991

CATALOG NUMBER: SQ4-FB-125U-075D-B2750-1D-UNV-W2A-W-6-5000K

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	2710.7	2821.7
115°	2638.9	2792.7
117.5°	2486.5	2657.0
120°	2363.7	2529.4
122.5°	2244.0	2407.5
125°	2073.5	2224.0
127.5°	1920.0	2047.0
130°	1829.6	1946.9
132.5°	1747.5	1852.6
135°	1635.1	1725.7
137.5°	1544.8	1619.0
140°	1483.0	1552.3
142.5°	1431.7	1491.4
145°	1354.9	1400.0
147.5°	1295.9	1333.3
150°	1258.8	1289.0
152.5°	1226.9	1249.8
155°	1190.5	1205.6
157.5°	1161.5	1172.2
160°	1144.3	1150.4
162.5°	1133.0	1138.8
165°	1116.8	1122.9
167.5°	1105.0	1107.6
170°	1101.8	1101.8
172.5°	1093.2	1091.0
175°	1088.1	1088.1
177.5°	1083.4	1080.8
180°	1080.8	1080.8

TEST NUMBER: P937991

CATALOG NUMBER: SQ4-FB-125U-075D-B2750-1D-UNV-W2A-W-6-5000K

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	2.58	3.33	3.67	4.42	5.92	15.75	16.49	16.84	17.58	19.08
	3H	3.28	3.95	4.38	5.05	6.56	17.57	18.24	18.67	19.34	20.86
	4H	3.57	4.21	4.68	5.31	6.83	18.21	18.85	19.32	19.95	21.47
	6H	3.82	4.40	4.93	5.50	7.04	18.63	19.22	19.75	20.32	21.85
	8H	3.88	4.44	5.00	5.56	7.08	18.75	19.30	19.87	20.42	21.95
	12H	3.89	4.42	5.02	5.54	7.09	18.81	19.34	19.93	20.45	22.00
4H	2H	9.78	10.41	10.89	11.51	13.03	16.01	16.64	17.12	17.75	19.27
	3H	11.33	11.86	12.45	12.99	14.53	18.04	18.57	19.16	19.70	21.23
	4H	11.42	11.91	12.55	13.03	14.58	18.80	19.29	19.92	20.40	21.96
	6H	11.43	11.85	12.56	12.99	14.53	19.32	19.74	20.46	20.88	22.43
	8H	11.40	11.79	12.53	12.92	14.49	19.48	19.87	20.61	21.00	22.57
	12H	11.35	11.71	12.50	12.85	14.42	19.57	19.92	20.72	21.06	22.63
8H	4H	12.85	13.25	13.99	14.38	15.94	18.85	19.24	19.98	20.37	21.93
	6H	13.09	13.41	14.24	14.59	16.15	19.47	19.79	20.62	20.96	22.52
	8H	13.11	13.39	14.27	14.54	16.12	19.68	19.97	20.84	21.12	22.70
	12H	13.07	13.32	14.23	14.47	16.08	19.82	20.07	20.98	21.22	22.83
12H	4H	12.99	13.35	14.14	14.49	16.06	18.79	19.15	19.94	20.29	21.86
	6H	13.35	13.63	14.51	14.78	16.36	19.45	19.73	20.61	20.88	22.46
	8H	13.41	13.66	14.57	14.81	16.42	19.67	19.92	20.83	21.07	22.68

END OF REPORT