

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P937804

Luminaire Tested: SQ4-FB-100U-125D-B40-1D-UNV-STD-W-8

Issue Date: 12/17/2024

Test Information

Test Method: LM-79-2019
Report Number: P937804
REPORT IS A COMBINATION OF REPORTS P933584 AND P933786
Test Lab: INNOVATION CENTER
Issue Date: 12/17/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ4-FB-100U-125D-B40-1D-UNV-STD-W-8
Description: CORELITE SQ4 SUSPENDED INDIRECT LED LUMINAIRE WITH Batwing Frosted Continuous Roll L
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 15454.8 lumens
Efficiency: N/A
Efficacy: 112.3 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 2.69 / 2.33
Luminous Opening: Rectangular w/ Sides (W: 0.29' x L: 8' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 137.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P937804
CATALOG NUMBER: SQ4-FB-100U-125D-B40-1D-UNV-STD-W-8

Luminous Intensity Polar Plot

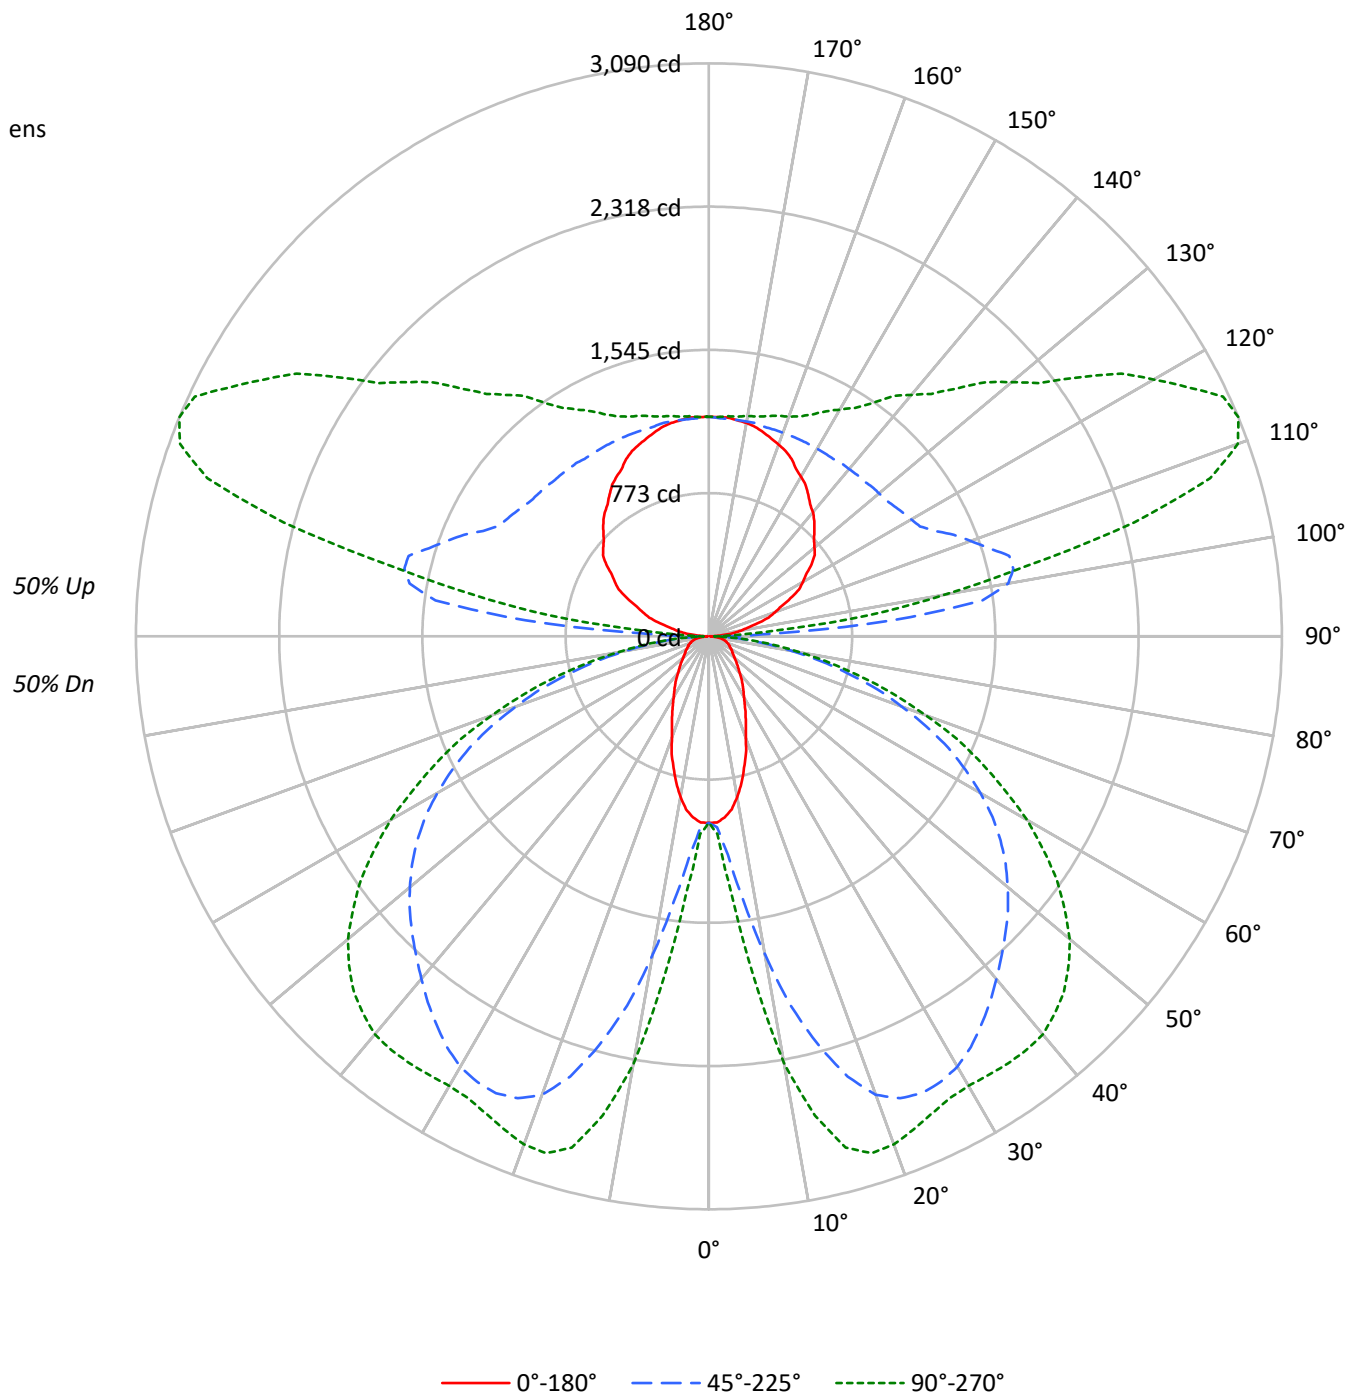



TEST NUMBER: P937804

CATALOG NUMBER: SQ4-FB-100U-125D-B40-1D-UNV-STD-W-8

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	107	107	107	107	99	99	99	99	84	84	84	69	69	69	56	56	56	56	56	56	50
1	97	93	89	85	90	86	82	79	72	70	67	60	58	57	49	48	47	49	48	47	41
2	88	80	74	68	81	74	69	64	63	59	55	52	49	46	42	40	38	42	40	38	34
3	80	70	62	56	73	65	58	53	55	50	45	46	42	39	37	34	32	37	34	32	28
4	73	62	53	47	67	57	50	44	48	43	38	40	36	32	33	30	27	33	30	27	23
5	67	54	46	40	61	50	43	37	43	37	32	36	31	28	29	26	23	29	26	23	20
6	61	49	40	34	56	45	37	32	38	32	28	32	27	24	26	23	20	26	23	20	17
7	56	44	35	30	52	40	33	28	34	29	24	29	24	21	24	20	17	24	20	17	15
8	52	39	31	26	48	37	29	24	31	25	21	26	22	18	22	18	15	22	18	15	13
9	48	36	28	23	44	33	26	21	28	23	19	24	19	16	20	16	14	20	16	14	11
10	45	33	25	20	41	30	24	19	26	21	17	22	18	15	18	15	12	18	15	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4664	4664	4664
5°	4556	5391	6269
10°	4133	7858	10393
15°	3512	10266	12550
20°	2860	11897	12790
25°	2385	12449	12530
30°	2012	12528	12506
35°	1779	12320	12830
40°	1550	12050	13164
45°	1404	11851	13216
50°	1287	11673	12997
55°	1233	11413	12421
60°	1262	10911	11511
65°	1313	10149	10261
70°	1399	8851	8669
75°	1550	7217	6765
80°	1694	5004	4558
85°	1504	2656	2333

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 13216 cd/sqm



TEST NUMBER: P937804

CATALOG NUMBER: SQ4-FB-100U-125D-B40-1D-UNV-STD-W-8

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	130.0	0.8
10°-20°	576.3	3.7
20°-30°	1008.1	6.5
30°-40°	1297.7	8.4
40°-50°	1449.4	9.4
50°-60°	1388.2	9.0
60°-70°	1100.2	7.1
70°-80°	646.9	4.2
80°-90°	184.3	1.2
90°-100°	577.0	3.7
100°-110°	1517.0	9.8
110°-120°	1573.0	10.2
120°-130°	1261.7	8.2
130°-140°	990.0	6.4
140°-150°	759.9	4.9
150°-160°	547.2	3.5
160°-170°	334.8	2.2
170°-180°	113.1	0.7
0°-30°	1714.4	11.1
0°-40°	3012.1	19.5
0°-60°	5849.7	37.9
0°-90°	7781.1	50.3
90°-120°	3667.0	23.7
90°-150°	6678.5	43.2
90°-180°	7674.0	49.7
0°-180°	15454.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1005	1005	1005	1005	1005	
5°	979	1050	1183	1338	1387	90
15°	734	1354	2282	2767	2854	204
25°	469	1535	2718	2838	2841	216
35°	317	1468	2560	2705	2812	198
45°	217	1170	2263	2592	2709	168
55°	155	744	1920	2230	2292	141
65°	123	394	1425	1603	1626	122
75°	90	242	782	860	863	95
85°	32	74	194	213	217	34
90°	8	22	60	30	30	9
95°	76	299	994	512	349	85
105°	273	414	1677	2546	2375	290
115°	485	590	1343	2680	3059	479
125°	675	757	1222	2065	2436	600
135°	805	886	1184	1667	1890	623
145°	934	993	1169	1422	1533	585
155°	1055	1084	1169	1283	1320	485
165°	1138	1154	1169	1215	1230	321
175°	1184	1184	1177	1192	1192	112
180°	1184	1184	1184	1184	1184	



TEST NUMBER: P937804
 CATALOG NUMBER: SQ4-FB-100U-125D-B40-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
0°	1005.2	1005.2	1005.2	1005.2	1005.2	1005.2	1005.2	1005.2	1005.2	1005.2	1005.2
2.5°	1005.2	1005.2	1011.7	1015.0	1021.4	1024.6	1031.1	1037.6	1057.0	1060.2	1066.6
5°	979.4	992.3	1034.4	1050.5	1095.8	1157.2	1183.1	1225.1	1312.3	1338.1	1354.3
7.5°	940.6	969.7	1073.1	1099.0	1212.1	1373.8	1441.6	1532.1	1671.1	1739.0	1794.0
10°	879.2	940.6	1124.8	1186.2	1370.5	1616.1	1742.2	1868.3	2078.4	2172.1	2207.7
12.5°	811.3	911.5	1179.8	1263.8	1528.9	1887.7	2039.6	2178.5	2417.8	2543.8	2563.2
15°	733.7	869.5	1231.5	1354.3	1696.9	2113.9	2282.0	2453.3	2676.4	2766.8	2789.5
17.5°	665.8	837.2	1280.0	1409.3	1826.2	2317.6	2488.8	2631.1	2812.1	2873.5	2889.6
20°	581.8	785.5	1312.3	1480.3	1962.0	2466.3	2631.1	2740.9	2863.9	2902.6	2909.0
22.5°	520.4	730.5	1331.7	1506.2	2052.5	2556.7	2695.8	2783.0	2867.0	2880.0	2883.2
25°	468.7	669.1	1328.5	1535.4	2130.1	2611.7	2718.4	2783.0	2831.5	2838.0	2838.0
27.5°	420.2	601.2	1315.5	1541.8	2188.3	2624.6	2708.7	2753.9	2776.6	2789.5	2789.5
30°	378.2	536.5	1283.2	1528.9	2214.2	2611.7	2679.5	2702.2	2724.8	2744.2	2753.9
32.5°	345.9	475.1	1234.7	1503.0	2217.3	2579.4	2627.9	2640.8	2673.1	2718.4	2734.5
35°	316.8	413.7	1179.8	1467.5	2197.9	2527.7	2560.0	2572.9	2637.5	2705.4	2728.1
37.5°	287.6	368.4	1108.7	1406.0	2168.9	2466.3	2488.8	2511.5	2611.7	2692.5	2718.4
40°	258.6	329.7	1024.6	1338.1	2123.6	2391.9	2411.3	2446.8	2579.4	2673.1	2698.9
42.5°	236.0	297.4	934.2	1267.1	2065.5	2307.9	2337.0	2388.6	2540.6	2640.8	2669.9
45°	216.6	265.0	837.2	1170.1	1991.1	2220.6	2262.6	2333.7	2495.3	2592.3	2618.1
47.5°	197.2	242.4	737.0	1069.9	1910.3	2133.3	2188.3	2269.1	2433.9	2527.7	2550.3
50°	181.0	219.8	636.8	963.2	1823.0	2039.6	2104.2	2188.3	2356.4	2443.7	2472.7
52.5°	168.1	200.4	543.0	856.5	1722.8	1942.6	2017.0	2104.2	2262.6	2346.6	2366.0
55°	155.2	184.2	462.2	743.5	1619.4	1839.1	1920.0	2004.1	2159.2	2230.3	2243.2
57.5°	148.7	171.3	394.3	636.8	1509.5	1722.8	1813.4	1890.9	2036.3	2091.3	2104.2
60°	139.0	161.6	342.7	546.3	1389.9	1612.9	1690.4	1768.1	1890.9	1936.2	1945.8
62.5°	129.3	155.2	303.9	459.0	1267.1	1483.6	1561.2	1632.3	1735.7	1768.1	1781.0
65°	122.8	148.7	274.8	394.3	1141.0	1347.9	1425.4	1486.8	1570.9	1603.3	1609.7
67.5°	116.3	142.2	252.1	339.4	1015.0	1212.1	1270.2	1328.5	1393.2	1425.4	1428.7
70°	106.7	135.8	232.7	300.6	885.7	1057.0	1105.4	1166.8	1218.6	1234.7	1244.5
72.5°	100.2	126.1	219.8	271.5	753.1	908.3	953.6	989.1	1034.4	1050.5	1050.5
75°	90.5	113.2	206.9	242.4	617.4	743.5	782.2	817.8	853.3	859.8	850.1
77.5°	80.8	100.2	177.8	203.6	481.6	588.3	620.6	640.0	669.1	675.6	678.8
80°	67.9	87.3	139.0	158.3	349.1	433.1	455.7	472.0	497.7	497.7	504.2
82.5°	51.8	67.9	100.2	113.2	236.0	297.4	316.8	326.4	342.7	342.7	342.7
85°	32.3	42.0	64.7	74.3	142.2	181.0	194.0	197.2	210.1	213.3	213.3
87.5°	16.1	22.6	42.0	45.3	74.3	93.8	93.8	100.2	100.2	96.9	93.8
90°	7.9	14.3	20.6	22.3	35.0	51.9	60.4	53.7	40.2	30.2	30.2
92.5°	31.8	85.9	139.9	153.4	215.5	298.5	340.0	298.0	214.0	151.0	145.0
95°	76.3	175.1	274.0	298.7	530.4	839.3	993.9	886.9	672.9	512.5	494.3
97.5°	131.9	219.1	306.4	328.1	714.5	1229.7	1487.2	1419.6	1284.4	1183.0	1148.4
100°	174.8	253.8	333.0	352.8	781.5	1353.1	1639.0	1643.9	1653.8	1661.2	1620.0
102.5°	211.3	285.1	358.9	377.3	812.1	1391.9	1681.9	1768.0	1940.4	2069.6	2034.2
105°	273.3	335.8	398.2	413.9	835.0	1396.4	1677.1	1870.2	2256.5	2546.2	2527.2
107.5°	336.8	395.1	453.3	468.0	839.3	1334.2	1581.8	1851.2	2390.0	2794.0	2798.6
110°	379.7	432.3	484.9	498.1	832.9	1279.1	1502.3	1803.5	2405.8	2857.6	2877.4



TEST NUMBER: P937804

CATALOG NUMBER: SQ4-FB-100U-125D-B40-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	22.5°	30°	40°	45°	50°	60°	67.5°	70°
112.5°	421.8	472.0	522.2	534.7	833.1	1231.1	1430.0	1738.3	2354.7	2817.2	2847.5
115°	485.4	531.6	578.0	589.5	840.8	1175.9	1343.4	1640.4	2234.3	2679.7	2721.8
117.5°	548.2	590.2	632.2	642.7	856.4	1141.3	1283.8	1551.8	2087.8	2489.8	2536.5
120°	584.7	624.3	663.8	673.7	869.1	1129.8	1260.0	1504.9	1994.6	2361.9	2407.3
122.5°	620.5	660.4	700.3	710.2	887.4	1123.6	1241.7	1462.2	1903.2	2234.0	2278.8
125°	675.3	711.7	748.1	757.1	912.0	1118.6	1221.8	1409.2	1783.8	2064.8	2106.1
127.5°	719.8	756.5	793.2	802.4	936.7	1115.7	1205.2	1366.0	1687.7	1928.9	1963.7
130°	743.6	783.1	822.6	832.6	954.6	1117.4	1198.8	1342.0	1628.4	1843.2	1875.2
132.5°	768.2	807.7	847.3	857.2	969.2	1118.6	1193.3	1321.4	1577.8	1770.0	1798.7
135°	804.8	840.8	876.9	885.9	985.2	1117.5	1183.7	1291.1	1505.7	1666.8	1691.6
137.5°	842.1	877.7	913.5	922.3	1009.0	1124.4	1182.1	1272.8	1454.4	1590.5	1610.8
140°	873.1	905.9	938.8	947.0	1023.5	1125.6	1176.6	1255.0	1411.8	1529.3	1548.3
142.5°	896.9	927.3	957.7	965.2	1035.7	1129.6	1176.6	1245.4	1383.1	1486.5	1502.8
145°	933.5	960.0	986.5	993.1	1051.6	1129.7	1168.6	1225.0	1337.6	1422.1	1434.4
147.5°	970.0	995.8	1021.6	1028.1	1074.9	1137.4	1168.6	1212.9	1301.6	1368.0	1378.3
150°	993.9	1017.2	1040.5	1046.3	1087.1	1141.4	1168.6	1206.1	1280.9	1337.1	1345.4
152.5°	1018.5	1036.2	1053.8	1058.2	1095.0	1144.1	1168.6	1200.6	1264.5	1312.5	1318.8
155°	1055.0	1068.1	1081.2	1084.4	1112.5	1149.9	1168.6	1194.0	1244.9	1283.0	1287.1
157.5°	1082.0	1094.7	1107.5	1110.7	1130.0	1155.7	1168.6	1188.4	1227.9	1257.6	1260.5
160°	1100.4	1110.3	1120.1	1122.6	1138.0	1158.4	1168.6	1185.6	1219.5	1244.9	1246.7
162.5°	1118.6	1126.0	1133.5	1135.3	1146.4	1161.2	1168.6	1183.0	1211.5	1233.0	1234.6
165°	1138.5	1145.1	1151.8	1153.5	1158.6	1165.3	1168.6	1178.9	1199.4	1214.8	1216.5
167.5°	1156.7	1159.8	1163.1	1163.9	1168.1	1173.7	1176.6	1183.2	1196.7	1206.7	1207.4
170°	1168.6	1171.8	1175.0	1175.8	1176.1	1176.4	1176.6	1183.2	1196.7	1206.7	1206.7
172.5°	1175.0	1175.7	1176.4	1176.6	1176.6	1176.6	1176.6	1181.9	1192.5	1200.4	1199.9
175°	1183.7	1183.7	1183.7	1183.7	1181.3	1178.2	1176.6	1179.9	1186.6	1191.6	1191.6
177.5°	1183.7	1183.7	1183.7	1183.7	1181.9	1179.4	1178.2	1180.9	1186.1	1190.1	1189.5
180°	1183.7	1183.7	1183.7	1183.7	1183.7	1183.7	1183.7	1183.7	1183.7	1183.7	1183.7



TEST NUMBER: P937804

CATALOG NUMBER: SQ4-FB-100U-125D-B40-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	80°	90°
0°	1005.2	1005.2
2.5°	1073.1	1066.6
5°	1380.2	1386.7
7.5°	1858.5	1855.4
10°	2311.1	2340.2
12.5°	2640.8	2647.3
15°	2841.2	2854.1
17.5°	2918.8	2922.0
20°	2922.0	2915.5
22.5°	2886.5	2880.0
25°	2844.5	2841.2
27.5°	2805.6	2808.8
30°	2789.5	2799.2
32.5°	2789.5	2805.6
35°	2796.0	2812.1
37.5°	2792.7	2812.1
40°	2779.8	2802.4
42.5°	2744.2	2760.4
45°	2689.3	2708.7
47.5°	2618.1	2631.1
50°	2527.7	2540.6
52.5°	2414.5	2417.8
55°	2278.7	2291.7
57.5°	2133.3	2136.5
60°	1971.7	1981.4
62.5°	1800.4	1800.4
65°	1619.4	1625.9
67.5°	1431.9	1448.1
70°	1241.2	1244.5
72.5°	1053.7	1053.7
75°	859.8	863.0
77.5°	675.6	675.6
80°	501.0	504.2
82.5°	345.9	352.3
85°	216.6	216.6
87.5°	100.2	90.5
90°	30.2	30.2
92.5°	121.0	96.9
95°	421.5	348.8
97.5°	1009.9	871.5
100°	1455.1	1290.2
102.5°	1893.0	1751.8
105°	2451.3	2375.4
107.5°	2817.1	2835.4
110°	2956.5	3035.6



TEST NUMBER: P937804

CATALOG NUMBER: SQ4-FB-100U-125D-B40-1D-UNV-STD-W-8

CANDELA DISTRIBUTION (continued):

	80°	90°
112.5°	2968.9	3090.4
115°	2890.2	3058.7
117.5°	2723.3	2910.1
120°	2588.8	2770.3
122.5°	2457.8	2636.8
125°	2270.9	2435.8
127.5°	2102.8	2242.0
130°	2003.8	2132.3
132.5°	1913.9	2029.0
135°	1790.8	1890.0
137.5°	1692.0	1773.2
140°	1624.2	1700.1
142.5°	1568.1	1633.4
145°	1483.9	1533.3
147.5°	1419.2	1460.2
150°	1378.5	1411.8
152.5°	1343.8	1368.8
155°	1303.8	1320.4
157.5°	1272.2	1283.8
160°	1253.3	1260.0
162.5°	1240.9	1247.3
165°	1223.2	1229.8
167.5°	1210.3	1213.1
170°	1206.7	1206.7
172.5°	1197.4	1194.9
175°	1191.6	1191.6
177.5°	1186.6	1183.7
180°	1183.7	1183.7



TEST NUMBER: P937804
 CATALOG NUMBER: SQ4-FB-100U-125D-B40-1D-UNV-STD-W-8

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.39	7.29	7.33	8.26	9.52	19.57	20.47	20.51	21.44	22.70
	3H	7.10	7.91	8.05	8.88	10.17	21.41	22.22	22.37	23.20	24.48
	4H	7.40	8.17	8.37	9.15	10.44	22.06	22.83	23.03	23.81	25.10
	6H	7.65	8.36	8.63	9.35	10.65	22.49	23.20	23.47	24.18	25.49
	8H	7.72	8.40	8.71	9.40	10.70	22.61	23.29	23.60	24.29	25.60
	12H	7.74	8.38	8.73	9.38	10.71	22.68	23.32	23.68	24.32	25.65
4H	2H	13.61	14.38	14.58	15.36	16.65	19.85	20.61	20.82	21.60	22.89
	3H	15.18	15.82	16.17	16.83	18.14	21.89	22.54	22.88	23.55	24.86
	4H	15.28	15.87	16.27	16.87	18.20	22.66	23.25	23.66	24.26	25.59
	6H	15.29	15.80	16.30	16.83	18.15	23.21	23.72	24.21	24.74	26.07
	8H	15.27	15.74	16.28	16.76	18.11	23.37	23.85	24.38	24.87	26.21
	12H	15.23	15.66	16.25	16.69	18.04	23.46	23.90	24.49	24.93	26.28
8H	4H	16.72	17.20	17.73	18.22	19.57	22.73	23.20	23.74	24.22	25.57
	6H	16.97	17.36	18.00	18.43	19.77	23.36	23.75	24.39	24.82	26.16
	8H	16.99	17.34	18.03	18.38	19.74	23.58	23.93	24.62	24.98	26.34
	12H	16.96	17.26	18.00	18.31	19.71	23.73	24.03	24.77	25.08	26.48
12H	4H	16.87	17.30	17.90	18.34	19.69	22.68	23.11	23.71	24.15	25.50
	6H	17.23	17.58	18.27	18.62	19.98	23.34	23.69	24.38	24.74	26.10
	8H	17.30	17.61	18.35	18.65	20.05	23.57	23.88	24.62	24.92	26.33