

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1435781

Luminaire Tested: SQ2W-FA-K-050U-125D-L830-UNV-STD-W-WM-4

Issue Date: 3/24/2026

Test Information

Test Method: LM-79-2024
Report Number: P1435781
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2502-345-2)
Test Lab: INNOVATION CENTER
Issue Date: 3/24/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-FA-K-050U-125D-L830-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - FROSTED CONTINUOUS ASYMMETRIC ROLL LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 1250 LUMENS PER FOOT
UPLIGHT 500 LUMENS PER FOOT
Light Source: 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7430.5 lumens
Efficiency: N/A
Efficacy: 115.9 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.23 / 1.34
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 64.1
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1435781

CATALOG NUMBER: SQ2W-FA-K-050U-125D-L830-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

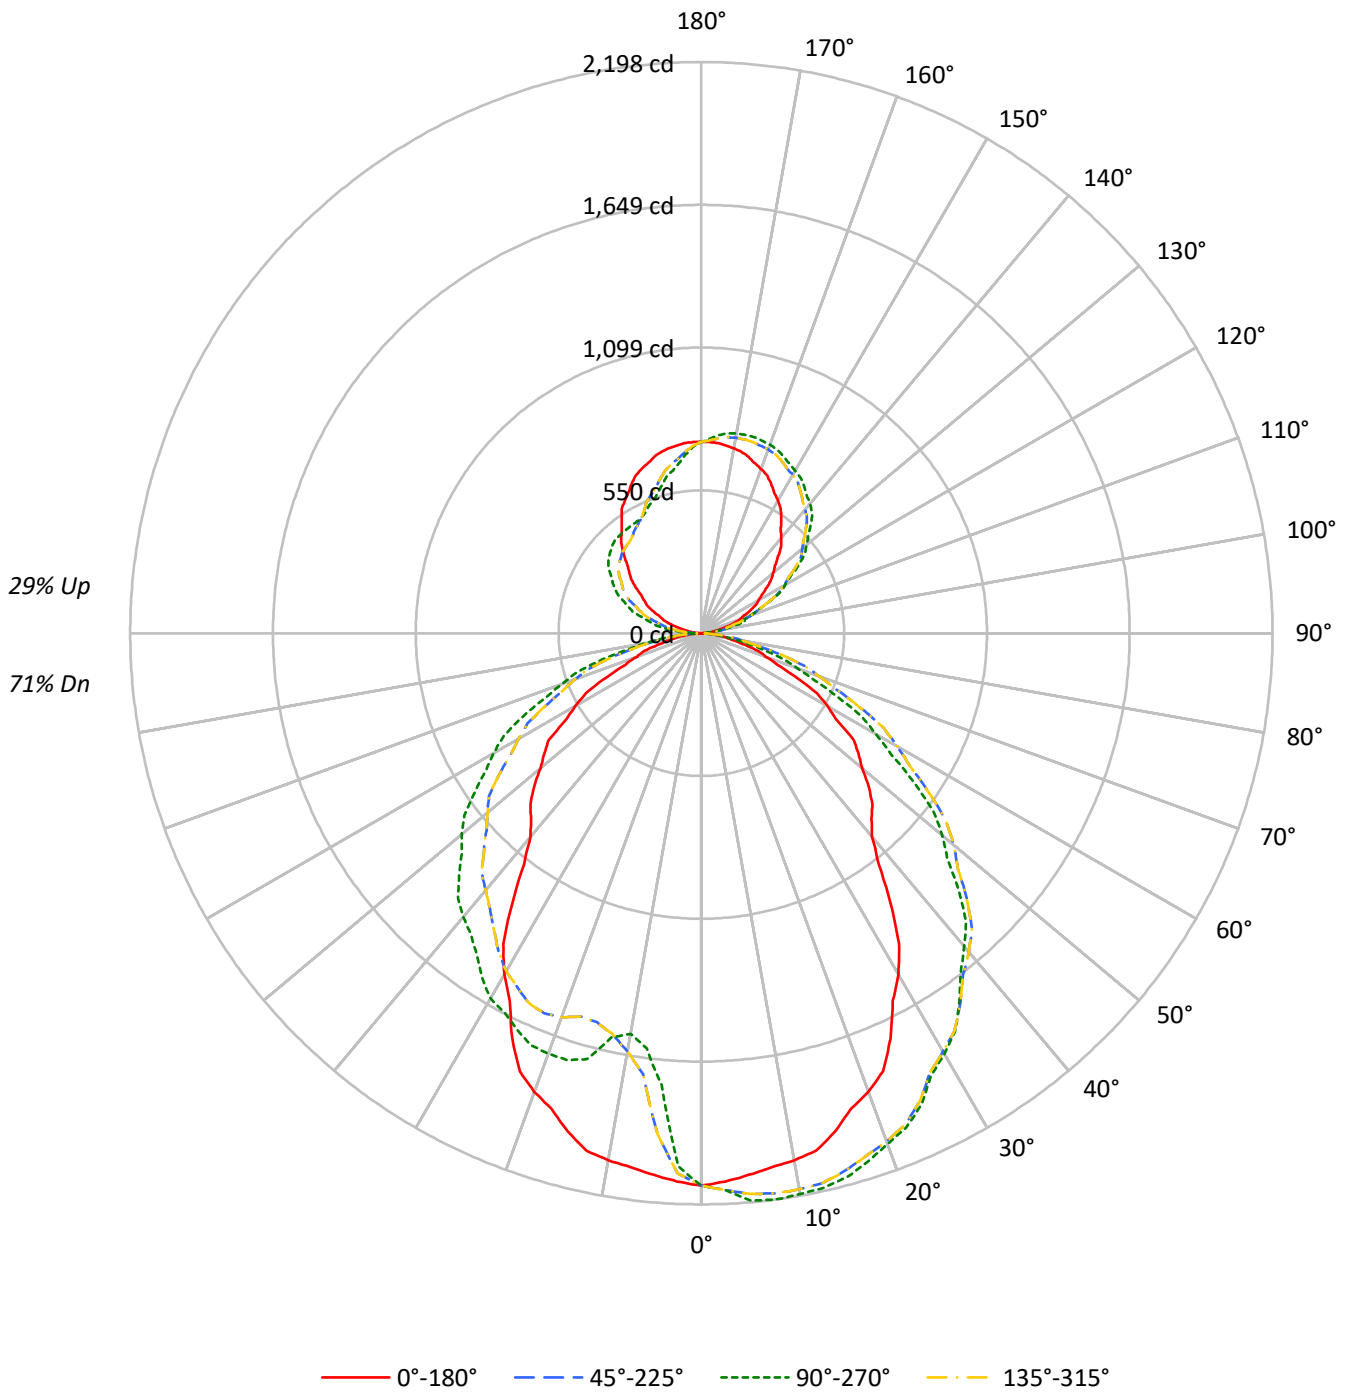



TEST NUMBER: P1435781

CATALOG NUMBER: SQ2W-FA-K-050U-125D-L830-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	106	106	106	106	95	95	95	85	85	85	75	75	75	71
1	103	98	94	91	97	93	90	87	84	81	79	75	73	71	67	66	64	60
2	94	86	80	74	88	82	76	71	74	69	65	66	63	60	59	56	54	51
3	85	76	68	62	81	72	65	60	65	59	55	58	54	50	52	49	46	43
4	78	67	59	53	74	64	56	51	58	52	47	52	47	43	47	43	40	37
5	72	60	51	45	68	57	49	44	52	45	41	47	42	38	42	38	35	32
6	66	54	45	39	63	51	44	38	47	40	35	42	37	33	38	34	31	28
7	61	49	40	35	58	47	39	34	42	36	31	39	33	29	35	31	27	25
8	57	44	36	31	54	42	35	30	39	32	28	35	30	26	32	28	24	22
9	53	41	33	28	50	39	32	27	36	29	25	33	27	24	30	25	22	20
10	50	37	30	25	47	36	29	24	33	27	23	30	25	21	27	23	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	34317	34317	34317	34317
5°	33914	35517	33914	28306
10°	33766	35927	33766	25662
15°	33188	36217	33188	28367
20°	32274	35953	32274	29584
25°	30673	35663	30673	29939
30°	28261	34865	28261	30258
35°	25006	34100	25006	29715
40°	21532	33164	21532	30038
45°	21255	31978	21255	30097
50°	20280	30418	20280	30212
55°	20174	28059	20174	29917
60°	18089	25006	18089	29795
65°	15423	22032	15423	28955
70°	12444	18665	12444	26832
75°	10792	15421	10792	24666
80°	9196	11492	9196	19916
85°	6113	6113	6113	12208

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 40°
 Vertical Angle: 45°
 Luminance: 32983 cd/sqm



TEST NUMBER: P1435781

CATALOG NUMBER: SQ2W-FA-K-050U-125D-L830-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	191.2	2.6
10°-20°	534.4	7.2
20°-30°	811.5	10.9
30°-40°	952.8	12.8
40°-50°	966.9	13.0
50°-60°	846.9	11.4
60°-70°	600.7	8.1
70°-80°	309.3	4.2
80°-90°	67.9	0.9
90°-100°	58.6	0.8
100°-110°	170.8	2.3
110°-120°	278.8	3.8
120°-130°	353.7	4.8
130°-140°	378.5	5.1
140°-150°	353.4	4.8
150°-160°	290.8	3.9
160°-170°	195.1	2.6
170°-180°	69.3	0.9
0°-30°	1537.1	20.7
0°-40°	2489.9	33.5
0°-60°	4303.7	57.9
0°-90°	5281.6	71.1
90°-120°	508.2	6.8
90°-150°	1593.8	21.4
90°-180°	2149.0	28.9
0°-180°	7430.5	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	2126	2126	2126	2126	2126	
5°	2092	2191	2092	1746	2092	199
15°	1986	2167	1986	1697	1986	558
25°	1722	2002	1722	1681	1722	786
35°	1269	1730	1269	1508	1269	790
45°	931	1400	931	1318	931	712
55°	717	997	717	1063	717	620
65°	404	577	404	758	404	403
75°	173	247	173	395	173	187
85°	33	33	33	66	33	41
90°	2	16	2	32	2	3
95°	23	17	23	100	23	28
105°	108	174	108	239	108	115
115°	208	288	208	355	208	205
125°	308	457	308	436	308	275
135°	418	598	418	482	418	323
145°	534	690	534	493	534	334
155°	635	749	635	512	635	292
165°	702	781	702	589	702	198
175°	734	765	734	691	734	70
180°	736	736	736	736	736	



TEST NUMBER: P1435781

CATALOG NUMBER: SQ2W-FA-K-050U-125D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	2125.5	2125.5	2125.5	2125.5	2125.5	2125.5	2125.5	2125.5	2125.5	2125.5	2125.5
2.5°	2112.3	2127.0	2141.6	2145.3	2145.3	2145.3	2145.3	2145.3	2145.3	2145.3	2145.3
5°	2092.5	2118.2	2143.8	2155.7	2163.0	2168.5	2172.2	2176.8	2184.1	2191.4	2184.1
7.5°	2072.8	2107.2	2141.6	2158.5	2169.4	2178.2	2184.8	2190.7	2194.3	2198.0	2194.3
10°	2059.6	2099.9	2140.1	2158.5	2169.4	2176.8	2180.4	2184.1	2187.7	2191.4	2187.7
12.5°	2039.8	2083.0	2126.2	2147.5	2161.4	2170.2	2173.8	2177.5	2181.2	2184.8	2181.2
15°	1985.5	2044.0	2102.6	2125.5	2136.5	2145.6	2153.0	2159.4	2163.0	2166.7	2163.0
17.5°	1917.9	1988.9	2060.0	2088.7	2103.4	2114.0	2120.6	2126.2	2129.2	2132.1	2129.2
20°	1878.4	1955.2	2032.1	2062.3	2077.0	2086.1	2089.8	2092.5	2092.5	2092.5	2092.5
22.5°	1825.6	1911.3	1997.0	2029.4	2044.0	2051.7	2052.5	2053.7	2056.7	2059.6	2056.7
25°	1721.8	1820.7	1919.5	1960.7	1982.7	1991.9	1988.2	1987.3	1994.6	2001.9	1994.6
27.5°	1595.0	1719.4	1843.9	1886.0	1900.7	1909.8	1913.5	1916.2	1916.2	1916.2	1916.2
30°	1515.9	1655.0	1794.1	1839.9	1854.6	1863.7	1867.4	1870.1	1870.1	1870.1	1870.1
32.5°	1417.0	1582.5	1748.0	1798.2	1809.9	1816.1	1816.8	1817.4	1817.4	1817.4	1817.4
35°	1268.7	1470.1	1671.5	1727.3	1734.6	1738.3	1738.3	1737.4	1733.7	1730.1	1733.7
37.5°	1120.4	1348.9	1577.4	1642.7	1653.7	1656.6	1651.5	1646.8	1643.1	1639.4	1643.1
40°	1021.6	1270.5	1519.5	1590.0	1601.0	1601.0	1590.0	1580.9	1577.2	1573.5	1577.2
42.5°	968.8	1214.9	1460.9	1530.7	1541.7	1540.2	1526.3	1514.9	1511.3	1507.6	1511.3
45°	930.9	1150.6	1370.3	1433.5	1444.5	1442.6	1428.0	1415.2	1407.8	1400.5	1407.8
47.5°	873.3	1066.6	1259.9	1322.0	1340.3	1338.5	1316.5	1298.2	1290.9	1283.5	1290.9
50°	807.4	997.8	1188.2	1249.5	1267.8	1266.0	1244.0	1225.7	1218.4	1211.0	1218.4
52.5°	761.2	939.9	1118.6	1174.8	1190.2	1185.4	1160.5	1140.0	1132.7	1125.4	1132.7
55°	716.7	866.9	1017.0	1062.8	1073.7	1066.4	1040.8	1018.8	1007.8	996.8	1007.8
57.5°	612.9	755.7	898.5	943.0	954.7	945.9	916.7	891.6	879.1	866.7	879.1
60°	560.2	688.4	816.5	859.5	874.2	866.9	837.6	811.0	792.7	774.4	792.7
62.5°	500.9	614.4	727.9	771.7	792.2	787.8	758.5	731.9	713.6	695.3	713.6
65°	403.7	502.5	601.4	645.3	671.0	669.1	639.8	613.3	595.0	576.7	595.0
67.5°	316.4	401.3	486.2	529.5	558.7	557.3	525.1	497.2	482.6	467.9	482.6
70°	263.6	336.9	410.1	450.4	479.7	479.7	450.4	424.7	410.1	395.4	410.1
72.5°	230.7	286.3	342.0	380.1	412.3	412.3	380.1	353.0	341.3	329.5	341.3
75°	173.0	206.0	238.9	274.6	311.2	314.9	285.6	261.8	254.5	247.2	254.5
77.5°	125.2	140.6	156.0	184.0	216.2	219.9	195.0	175.6	172.6	169.7	172.6
80°	98.9	102.5	106.2	129.1	158.4	162.0	140.1	123.6	123.6	123.6	123.6
82.5°	65.9	69.6	73.2	89.5	110.0	112.2	96.1	83.3	80.4	77.4	80.4
85°	33.0	33.0	33.0	38.4	45.8	45.8	38.4	33.0	33.0	33.0	33.0
87.5°	7.0	7.6	8.4	11.2	14.5	14.7	11.8	9.7	9.9	9.9	9.9
90°	2.2	5.2	8.9	11.9	14.1	14.9	14.9	15.6	16.4	16.4	16.4
92.5°	8.2	12.9	13.1	13.1	15.9	17.2	18.4	18.6	19.3	19.3	19.3
95°	23.0	25.3	37.9	37.2	25.3	20.1	17.1	17.1	17.1	17.1	17.1
97.5°	44.0	47.3	49.4	66.2	69.9	67.5	55.0	46.2	41.3	39.1	41.3
100°	62.4	63.9	68.4	69.1	87.7	105.6	96.6	85.5	81.8	79.5	81.8
102.5°	80.9	81.8	88.6	91.7	96.1	106.2	137.1	133.7	131.1	130.7	131.1
105°	108.5	109.3	121.9	127.9	130.8	130.8	130.1	145.0	168.8	174.0	168.8
107.5°	138.1	141.5	156.4	172.3	175.7	176.6	172.8	170.5	169.6	170.2	169.6
110°	158.3	163.6	181.4	201.5	206.7	208.2	206.7	204.4	203.0	203.0	203.0

TEST NUMBER: P1435781

CATALOG NUMBER: SQ2W-FA-K-050U-125D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	178.0	185.6	205.8	228.8	237.6	242.1	238.8	237.2	235.7	236.9	235.7
115°	208.2	219.3	246.1	269.9	287.7	289.9	289.2	289.2	288.4	288.4	288.4
117.5°	236.1	254.0	284.0	311.6	332.3	338.3	341.2	340.3	339.4	340.9	339.4
120°	255.7	276.6	310.8	342.0	362.0	371.0	373.9	372.5	373.9	372.5	373.9
122.5°	276.6	302.1	335.7	368.1	391.8	401.9	405.5	405.8	406.1	405.2	406.1
125°	307.8	339.0	378.4	411.9	436.4	448.3	451.3	452.0	453.5	457.2	453.5
127.5°	339.3	374.7	418.0	450.2	475.3	489.8	494.4	496.0	499.1	500.8	499.1
130°	361.3	401.4	445.3	475.8	500.3	515.9	524.1	526.3	530.1	529.3	530.1
132.5°	384.5	426.4	470.9	502.6	525.3	542.1	549.1	555.5	556.8	557.9	556.8
135°	418.5	463.9	508.5	539.7	561.3	577.6	586.6	592.5	596.2	598.5	596.2
137.5°	454.4	502.3	545.1	572.9	594.6	608.7	618.8	625.1	628.9	630.7	628.9
140°	478.8	524.9	566.5	595.5	614.8	628.9	637.9	645.3	649.8	649.8	649.8
142.5°	502.0	547.5	587.9	616.9	633.8	646.8	656.3	661.9	667.0	667.0	667.0
145°	534.5	579.9	617.0	646.0	660.2	672.1	682.5	686.9	689.9	689.9	689.9
147.5°	568.6	608.7	642.6	670.4	682.3	696.3	704.5	708.0	711.8	710.1	711.8
150°	588.8	626.0	658.7	684.7	696.6	710.0	718.1	721.1	724.8	722.6	724.8
152.5°	608.4	643.8	673.5	697.8	707.9	721.3	730.6	733.6	736.1	734.5	736.1
155°	634.9	666.1	693.6	715.9	724.8	737.5	746.4	750.1	753.1	749.4	753.1
157.5°	658.5	685.4	709.4	729.9	739.4	750.3	758.6	763.2	766.2	764.5	766.2
160°	672.8	697.3	718.9	738.2	747.1	756.8	765.7	770.9	773.9	771.7	773.9
162.5°	684.7	706.8	727.2	744.8	752.5	761.0	771.7	776.3	779.3	776.4	779.3
165°	701.8	719.6	737.5	752.3	759.0	765.7	776.9	782.1	784.3	781.3	784.3
167.5°	714.7	728.4	742.8	755.6	760.5	767.1	778.2	782.5	785.4	781.6	785.4
170°	721.9	733.8	746.4	756.8	760.5	766.5	777.6	781.3	783.6	779.9	783.6
172.5°	727.8	736.7	747.0	756.2	758.1	762.9	773.5	777.2	778.8	775.7	778.8
175°	733.8	739.0	746.4	752.3	751.6	754.6	763.5	766.5	769.4	765.0	769.4
177.5°	736.6	739.0	741.3	744.9	742.5	742.5	749.1	750.9	751.5	749.1	751.5
180°	736.0	736.0	736.0	736.0	736.0	736.0	736.0	736.0	736.0	736.0	736.0



TEST NUMBER: P1435781

CATALOG NUMBER: SQ2W-FA-K-050U-125D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	2125.5	2125.5	2125.5	2125.5	2125.5	2125.5	2125.5	2125.5	2125.5	2125.5	2125.5
2.5°	2145.3	2145.3	2145.3	2145.3	2145.3	2141.6	2127.0	2112.3	2112.3	2112.3	2101.3
5°	2176.8	2172.2	2168.5	2163.0	2155.7	2143.8	2118.2	2092.5	2081.6	2070.6	2023.9
7.5°	2190.7	2184.8	2178.2	2169.4	2158.5	2141.6	2107.2	2072.8	2023.7	1974.6	1870.7
10°	2184.1	2180.4	2176.8	2169.4	2158.5	2140.1	2099.9	2059.6	1960.7	1861.9	1763.0
12.5°	2177.5	2173.8	2170.2	2161.4	2147.5	2126.2	2083.0	2039.8	1900.0	1760.1	1670.7
15°	2159.4	2153.0	2145.6	2136.5	2125.5	2102.6	2044.0	1985.5	1828.0	1670.6	1595.5
17.5°	2126.2	2120.6	2114.0	2103.4	2088.7	2060.0	1988.9	1917.9	1753.1	1588.4	1540.0
20°	2092.5	2089.8	2086.1	2077.0	2062.3	2032.1	1955.2	1878.4	1713.6	1548.8	1526.8
22.5°	2053.7	2052.5	2051.7	2044.0	2029.4	1997.0	1911.3	1825.6	1663.8	1501.9	1502.7
25°	1987.3	1988.2	1991.9	1982.7	1960.7	1919.5	1820.7	1721.8	1579.0	1436.2	1460.9
27.5°	1916.2	1913.5	1909.8	1900.7	1886.0	1843.9	1719.4	1595.0	1482.2	1369.4	1410.4
30°	1870.1	1867.4	1863.7	1854.6	1839.9	1794.1	1655.0	1515.9	1420.7	1325.5	1373.1
32.5°	1817.4	1816.8	1816.1	1809.9	1798.2	1748.0	1582.5	1417.0	1348.2	1279.3	1329.1
35°	1737.4	1738.3	1738.3	1734.6	1727.3	1671.5	1470.1	1268.7	1239.4	1210.1	1268.7
37.5°	1646.8	1651.5	1656.6	1653.7	1642.7	1577.4	1348.9	1120.4	1129.9	1139.5	1210.5
40°	1580.9	1590.0	1601.0	1601.0	1590.0	1519.5	1270.5	1021.6	1054.5	1087.5	1164.4
42.5°	1514.9	1526.3	1540.2	1541.7	1530.7	1460.9	1214.9	968.8	1004.7	1040.6	1120.4
45°	1415.2	1428.0	1442.6	1444.5	1433.5	1370.3	1150.6	930.9	952.9	974.9	1051.8
47.5°	1298.2	1316.5	1338.5	1340.3	1322.0	1259.9	1066.6	873.3	889.4	905.5	984.2
50°	1225.7	1244.0	1266.0	1267.8	1249.5	1188.2	997.8	807.4	829.3	851.3	933.7
52.5°	1140.0	1160.5	1185.4	1190.2	1174.8	1118.6	939.9	761.2	774.4	787.6	876.6
55°	1018.8	1040.8	1066.4	1073.7	1062.8	1017.0	866.9	716.7	705.8	694.8	785.4
57.5°	891.6	916.7	945.9	954.7	943.0	898.5	755.7	612.9	603.4	593.9	692.0
60°	811.0	837.6	866.9	874.2	859.5	816.5	688.4	560.2	541.9	523.6	626.1
62.5°	731.9	758.5	787.8	792.2	771.7	727.9	614.4	500.9	488.4	476.0	575.6
65°	613.3	639.8	669.1	671.0	645.3	601.4	502.5	403.7	411.0	418.3	508.0
67.5°	497.2	525.1	557.3	558.7	529.5	486.2	401.3	316.4	340.5	364.7	445.4
70°	424.7	450.4	479.7	479.7	450.4	410.1	336.9	263.6	296.6	329.5	403.7
72.5°	353.0	380.1	412.3	412.3	380.1	342.0	286.3	230.7	263.6	296.6	357.5
75°	261.8	285.6	314.9	311.2	274.6	238.9	206.0	173.0	206.0	238.9	285.6
77.5°	175.6	195.0	219.9	216.2	184.0	156.0	140.6	125.2	152.3	179.4	212.0
80°	123.6	140.1	162.0	158.4	129.1	106.2	102.5	98.9	117.2	135.5	159.3
82.5°	83.3	96.1	112.2	110.0	89.5	73.2	69.6	65.9	81.3	96.7	113.1
85°	33.0	38.4	45.8	45.8	38.4	33.0	33.0	33.0	40.3	47.6	54.9
87.5°	9.7	11.8	14.7	14.5	11.2	8.4	7.6	7.0	10.6	14.1	15.9
90°	15.6	14.9	14.9	14.1	11.9	8.9	5.2	2.2	5.2	8.2	13.4
92.5°	18.6	18.4	17.2	15.9	13.1	13.1	12.9	8.2	14.1	20.1	28.8
95°	17.1	17.1	20.1	25.3	37.2	37.9	25.3	23.0	32.7	46.1	58.0
97.5°	46.2	55.0	67.5	69.9	66.2	49.4	47.3	44.0	59.9	73.2	92.3
100°	85.5	96.6	105.6	87.7	69.1	68.4	63.9	62.4	79.5	92.2	110.8
102.5°	133.7	137.1	106.2	96.1	91.7	88.6	81.8	80.9	98.0	115.4	131.0
105°	145.0	130.1	130.8	130.8	127.9	121.9	109.3	108.5	127.9	147.9	167.3
107.5°	170.5	172.8	176.6	175.7	172.3	156.4	141.5	138.1	155.5	179.6	200.9
110°	204.4	206.7	208.2	206.7	201.5	181.4	163.6	158.3	174.0	199.2	222.3



TEST NUMBER: P1435781

CATALOG NUMBER: SQ2W-FA-K-050U-125D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	237.2	238.8	242.1	237.6	228.8	205.8	185.6	178.0	193.6	219.5	243.1
115°	289.2	289.2	289.9	287.7	269.9	246.1	219.3	208.2	221.5	245.3	271.4
117.5°	340.3	341.2	338.3	332.3	311.6	284.0	254.0	236.1	246.7	271.8	298.6
120°	372.5	373.9	371.0	362.0	342.0	310.8	276.6	255.7	263.9	288.4	315.2
122.5°	405.8	405.5	401.9	391.8	368.1	335.7	302.1	276.6	280.0	302.7	328.9
125°	452.0	451.3	448.3	436.4	411.9	378.4	339.0	307.8	303.3	322.6	349.4
127.5°	496.0	494.4	489.8	475.3	450.2	418.0	374.7	339.3	329.3	341.5	366.1
130°	526.3	524.1	515.9	500.3	475.8	445.3	401.4	361.3	347.2	354.6	376.2
132.5°	555.5	549.1	542.1	525.3	502.6	470.9	426.4	384.5	365.0	368.3	385.1
135°	592.5	586.6	577.6	561.3	539.7	508.5	463.9	418.5	391.8	388.8	398.5
137.5°	625.1	618.8	608.7	594.6	572.9	545.1	502.3	454.4	420.6	410.7	414.4
140°	645.3	637.9	628.9	614.8	595.5	566.5	524.9	478.8	440.9	426.7	424.5
142.5°	661.9	656.3	646.8	633.8	616.9	587.9	547.5	502.0	461.7	443.4	438.2
145°	686.9	682.5	672.1	660.2	646.0	617.0	579.9	534.5	494.4	470.6	459.4
147.5°	708.0	704.5	696.3	682.3	670.4	642.6	608.7	568.6	527.4	497.9	483.5
150°	721.1	718.1	710.0	696.6	684.7	658.7	626.0	588.8	549.4	518.2	499.6
152.5°	733.6	730.6	721.3	707.9	697.8	673.5	643.8	608.4	568.4	537.2	518.0
155°	750.1	746.4	737.5	724.8	715.9	693.6	666.1	634.9	600.7	568.0	546.4
157.5°	763.2	758.6	750.3	739.4	729.9	709.4	685.4	658.5	628.6	597.4	575.4
160°	770.9	765.7	756.8	747.1	738.2	718.9	697.3	672.8	645.3	617.0	593.3
162.5°	776.3	771.7	761.0	752.5	744.8	727.2	706.8	684.7	660.2	635.5	613.5
165°	782.1	776.9	765.7	759.0	752.3	737.5	719.6	701.8	681.0	660.9	643.1
167.5°	782.5	778.2	767.1	760.5	755.6	742.8	728.4	714.7	698.5	682.8	667.9
170°	781.3	777.6	766.5	760.5	756.8	746.4	733.8	721.9	709.2	695.8	684.0
172.5°	777.2	773.5	762.9	758.1	756.2	747.0	736.7	727.8	717.0	707.1	697.6
175°	766.5	763.5	754.6	751.6	752.3	746.4	739.0	733.8	727.1	721.1	715.9
177.5°	750.9	749.1	742.5	742.5	744.9	741.3	739.0	736.6	733.6	731.8	730.0
180°	736.0	736.0	736.0	736.0	736.0	736.0	736.0	736.0	736.0	736.0	736.0



TEST NUMBER: P1435781

CATALOG NUMBER: SQ2W-FA-K-050U-125D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	2125.5	2125.5	2125.5	2125.5	2125.5	2125.5	2125.5	2125.5	2125.5	2125.5	2125.5
2.5°	2086.7	2075.0	2066.2	2058.9	2055.9	2053.0	2055.9	2058.9	2066.2	2075.0	2086.7
5°	1965.3	1903.1	1837.2	1783.2	1764.8	1746.5	1764.8	1783.2	1837.2	1903.1	1965.3
7.5°	1748.4	1673.3	1645.5	1623.1	1617.3	1611.4	1617.3	1623.1	1645.5	1673.3	1748.4
10°	1664.2	1603.7	1581.8	1565.3	1565.3	1565.3	1565.3	1565.3	1581.8	1603.7	1664.2
12.5°	1598.2	1561.3	1559.8	1562.4	1577.0	1591.7	1577.0	1562.4	1559.8	1561.3	1598.2
15°	1547.9	1553.4	1612.0	1660.5	1678.8	1697.1	1678.8	1660.5	1612.0	1553.4	1547.9
17.5°	1530.5	1562.0	1634.5	1692.5	1707.2	1721.8	1707.2	1692.5	1634.5	1562.0	1530.5
20°	1552.5	1592.8	1647.7	1692.5	1707.2	1721.8	1707.2	1692.5	1647.7	1592.8	1552.5
22.5°	1557.6	1606.7	1649.9	1685.9	1700.6	1715.2	1700.6	1685.9	1649.9	1606.7	1557.6
25°	1541.5	1600.1	1636.7	1666.0	1673.3	1680.6	1673.3	1666.0	1636.7	1600.1	1541.5
27.5°	1502.7	1567.1	1603.7	1632.5	1637.6	1642.7	1637.6	1632.5	1603.7	1567.1	1502.7
30°	1468.3	1534.2	1570.8	1601.0	1612.0	1623.0	1612.0	1601.0	1570.8	1534.2	1468.3
32.5°	1418.5	1485.8	1531.2	1565.8	1568.0	1570.2	1568.0	1565.8	1531.2	1485.8	1418.5
35°	1356.6	1426.2	1477.4	1514.9	1511.3	1507.6	1511.3	1514.9	1477.4	1426.2	1356.6
37.5°	1302.0	1370.1	1414.8	1449.4	1453.8	1458.2	1453.8	1449.4	1414.8	1370.1	1302.0
40°	1255.9	1325.5	1373.1	1410.6	1417.9	1425.2	1417.9	1410.6	1373.1	1325.5	1255.9
42.5°	1214.9	1285.9	1333.5	1371.1	1378.4	1385.7	1378.4	1371.1	1333.5	1285.9	1214.9
45°	1147.0	1220.2	1271.5	1310.8	1314.5	1318.1	1314.5	1310.8	1271.5	1220.2	1147.0
47.5°	1083.8	1157.4	1205.0	1241.6	1245.3	1248.9	1245.3	1241.6	1205.0	1157.4	1083.8
50°	1036.2	1111.3	1158.9	1195.5	1199.1	1202.8	1199.1	1195.5	1158.9	1111.3	1036.2
52.5°	990.8	1068.8	1110.5	1142.8	1146.4	1150.1	1146.4	1142.8	1110.5	1068.8	990.8
55°	909.9	992.3	1032.5	1062.8	1062.8	1062.8	1062.8	1062.8	1032.5	992.3	909.9
57.5°	826.0	910.6	945.8	973.2	977.6	982.0	977.6	973.2	945.8	910.6	826.0
60°	768.9	855.0	884.3	908.1	915.4	922.7	915.4	908.1	884.3	855.0	768.9
62.5°	712.5	795.6	824.9	848.0	852.4	856.8	852.4	848.0	824.9	795.6	712.5
65°	625.2	698.4	727.7	750.6	754.3	757.9	754.3	750.6	727.7	698.4	625.2
67.5°	545.0	605.1	625.6	641.7	644.6	647.5	644.6	641.7	625.6	605.1	545.0
70°	491.6	542.8	557.5	568.4	568.4	568.4	568.4	568.4	557.5	542.8	491.6
72.5°	427.8	470.3	485.0	496.7	499.6	502.5	499.6	496.7	485.0	470.3	427.8
75°	336.9	368.0	379.0	388.1	391.8	395.4	391.8	388.1	379.0	368.0	336.9
77.5°	246.4	266.9	273.5	279.4	283.0	286.7	283.0	279.4	273.5	266.9	246.4
80°	184.9	199.6	203.2	206.9	210.5	214.2	210.5	206.9	203.2	199.6	184.9
82.5°	130.0	140.2	143.9	146.8	147.6	148.3	147.6	146.8	143.9	140.2	130.0
85°	62.2	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	65.9	62.2
87.5°	16.6	17.6	18.7	19.3	19.9	19.6	19.9	19.3	18.7	17.6	16.6
90°	17.1	22.3	27.5	30.5	33.5	32.0	33.5	30.5	22.3	17.1	17.1
92.5°	34.3	43.1	49.5	54.9	57.2	56.9	57.2	54.9	49.5	43.1	34.3
95°	69.1	79.5	90.0	97.4	101.8	100.4	101.8	97.4	90.0	79.5	69.1
97.5°	106.6	120.6	132.2	139.2	143.6	146.6	143.6	139.2	132.2	120.6	106.6
100°	131.6	145.0	158.3	166.5	174.0	176.9	174.0	166.5	158.3	145.0	131.6
102.5°	151.8	169.4	183.9	192.7	198.9	201.9	198.9	192.7	183.9	169.4	151.8
105°	185.1	203.7	219.3	230.5	237.2	239.4	237.2	230.5	219.3	203.7	185.1
107.5°	218.4	237.6	252.0	264.4	272.5	277.3	272.5	264.4	252.0	237.6	218.4
110°	244.6	260.2	275.8	287.0	295.1	298.1	295.1	287.0	275.8	260.2	244.6



TEST NUMBER: P1435781

CATALOG NUMBER: SQ2W-FA-K-050U-125D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	266.6	284.0	299.6	310.8	320.1	324.3	320.1	310.8	299.6	284.0	266.6
115°	297.4	320.4	334.5	344.9	351.6	355.4	351.6	344.9	334.5	320.4	297.4
117.5°	322.9	347.0	362.5	370.5	373.6	376.3	373.6	370.5	362.5	347.0	322.9
120°	339.0	361.3	379.1	389.6	393.3	394.8	393.3	389.6	379.1	361.3	339.0
122.5°	353.9	375.0	392.2	405.0	411.1	412.6	411.1	405.0	392.2	375.0	353.9
125°	374.7	394.8	412.6	425.2	431.9	435.6	431.9	425.2	412.6	394.8	374.7
127.5°	392.8	414.5	430.9	442.3	448.9	451.9	448.9	442.3	430.9	414.5	392.8
130°	402.9	425.2	441.6	454.2	460.2	463.2	460.2	454.2	441.6	425.2	402.9
132.5°	410.7	434.2	451.1	462.6	469.1	472.1	469.1	462.6	451.1	434.2	410.7
135°	420.0	444.6	462.4	473.6	479.5	482.5	479.5	473.6	462.4	444.6	420.0
137.5°	428.2	450.5	469.1	480.8	486.2	488.1	486.2	480.8	469.1	450.5	428.2
140°	434.2	453.5	472.1	483.2	489.2	489.9	489.2	483.2	472.1	453.5	434.2
142.5°	441.9	457.1	473.3	484.4	490.4	491.7	490.4	484.4	473.3	457.1	441.9
145°	455.7	464.6	475.8	486.2	491.4	492.9	491.4	486.2	475.8	464.6	455.7
147.5°	473.1	475.9	481.7	488.6	493.6	494.7	493.6	488.6	481.7	475.9	473.1
150°	486.2	485.5	487.7	492.1	496.6	495.9	496.6	492.1	487.7	485.5	486.2
152.5°	501.1	496.8	496.6	498.7	500.8	500.6	500.8	498.7	496.6	496.8	501.1
155°	526.3	518.2	513.7	512.2	512.2	511.5	512.2	512.2	513.7	518.2	526.3
157.5°	554.1	542.7	536.0	532.4	531.4	529.8	531.4	532.4	536.0	542.7	554.1
160°	573.2	560.5	553.9	547.9	545.7	543.4	545.7	547.9	553.9	560.5	573.2
162.5°	591.0	579.0	571.7	566.3	564.1	560.7	564.1	566.3	571.7	579.0	591.0
165°	620.0	607.4	599.2	594.7	591.8	588.8	591.8	594.7	599.2	607.4	620.0
167.5°	649.0	635.2	629.8	624.8	621.9	616.6	621.9	624.8	629.8	635.2	649.0
170°	666.9	654.2	651.2	646.8	641.6	635.6	641.6	646.8	651.2	654.2	666.9
172.5°	682.3	673.8	670.9	666.4	664.8	660.0	664.8	666.4	670.9	673.8	682.3
175°	704.8	698.1	698.1	697.3	695.1	690.6	695.1	697.3	698.1	698.1	704.8
177.5°	723.5	719.9	722.3	722.3	721.7	717.6	721.7	722.3	722.3	719.9	723.5
180°	736.0	736.0	736.0	736.0	736.0	736.0	736.0	736.0	736.0	736.0	736.0



TEST NUMBER: P1435781

CATALOG NUMBER: SQ2W-FA-K-050U-125D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	2125.5	2125.5	2125.5	2125.5
2.5°	2101.3	2112.3	2112.3	2112.3
5°	2023.9	2070.6	2081.6	2092.5
7.5°	1870.7	1974.6	2023.7	2072.8
10°	1763.0	1861.9	1960.7	2059.6
12.5°	1670.7	1760.1	1900.0	2039.8
15°	1595.5	1670.6	1828.0	1985.5
17.5°	1540.0	1588.4	1753.1	1917.9
20°	1526.8	1548.8	1713.6	1878.4
22.5°	1502.7	1501.9	1663.8	1825.6
25°	1460.9	1436.2	1579.0	1721.8
27.5°	1410.4	1369.4	1482.2	1595.0
30°	1373.1	1325.5	1420.7	1515.9
32.5°	1329.1	1279.3	1348.2	1417.0
35°	1268.7	1210.1	1239.4	1268.7
37.5°	1210.5	1139.5	1129.9	1120.4
40°	1164.4	1087.5	1054.5	1021.6
42.5°	1120.4	1040.6	1004.7	968.8
45°	1051.8	974.9	952.9	930.9
47.5°	984.2	905.5	889.4	873.3
50°	933.7	851.3	829.3	807.4
52.5°	876.6	787.6	774.4	761.2
55°	785.4	694.8	705.8	716.7
57.5°	692.0	593.9	603.4	612.9
60°	626.1	523.6	541.9	560.2
62.5°	575.6	476.0	488.4	500.9
65°	508.0	418.3	411.0	403.7
67.5°	445.4	364.7	340.5	316.4
70°	403.7	329.5	296.6	263.6
72.5°	357.5	296.6	263.6	230.7
75°	285.6	238.9	206.0	173.0
77.5°	212.0	179.4	152.3	125.2
80°	159.3	135.5	117.2	98.9
82.5°	113.1	96.7	81.3	65.9
85°	54.9	47.6	40.3	33.0
87.5°	15.9	14.1	10.6	7.0
90°	13.4	8.2	5.2	2.2
92.5°	28.8	20.1	14.1	8.2
95°	58.0	46.1	32.7	23.0
97.5°	92.3	73.2	59.9	44.0
100°	110.8	92.2	79.5	62.4
102.5°	131.0	115.4	98.0	80.9
105°	167.3	147.9	127.9	108.5
107.5°	200.9	179.6	155.5	138.1
110°	222.3	199.2	174.0	158.3



TEST NUMBER: P1435781

CATALOG NUMBER: SQ2W-FA-K-050U-125D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	243.1	219.5	193.6	178.0
115°	271.4	245.3	221.5	208.2
117.5°	298.6	271.8	246.7	236.1
120°	315.2	288.4	263.9	255.7
122.5°	328.9	302.7	280.0	276.6
125°	349.4	322.6	303.3	307.8
127.5°	366.1	341.5	329.3	339.3
130°	376.2	354.6	347.2	361.3
132.5°	385.1	368.3	365.0	384.5
135°	398.5	388.8	391.8	418.5
137.5°	414.4	410.7	420.6	454.4
140°	424.5	426.7	440.9	478.8
142.5°	438.2	443.4	461.7	502.0
145°	459.4	470.6	494.4	534.5
147.5°	483.5	497.9	527.4	568.6
150°	499.6	518.2	549.4	588.8
152.5°	518.0	537.2	568.4	608.4
155°	546.4	568.0	600.7	634.9
157.5°	575.4	597.4	628.6	658.5
160°	593.3	617.0	645.3	672.8
162.5°	613.5	635.5	660.2	684.7
165°	643.1	660.9	681.0	701.8
167.5°	667.9	682.8	698.5	714.7
170°	684.0	695.8	709.2	721.9
172.5°	697.6	707.1	717.0	727.8
175°	715.9	721.1	727.1	733.8
177.5°	730.0	731.8	733.6	736.6
180°	736.0	736.0	736.0	736.0



TEST NUMBER: P1435781
 CATALOG NUMBER: SQ2W-FA-K-050U-125D-L830-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	20.42	21.50	21.17	22.28	23.21	21.61	22.70	22.37	23.48	24.41
	3H	21.52	22.50	22.29	23.28	24.25	22.88	23.85	23.64	24.63	25.60
	4H	21.88	22.80	22.67	23.60	24.57	23.28	24.20	24.06	24.99	25.97
	6H	22.06	22.91	22.85	23.71	24.70	23.45	24.30	24.24	25.10	26.09
	8H	22.10	22.91	22.90	23.73	24.72	23.48	24.29	24.29	25.11	26.10
	12H	22.10	22.87	22.91	23.69	24.71	23.47	24.24	24.28	25.06	26.07
4H	2H	21.31	22.23	22.10	23.02	24.00	22.23	23.14	23.01	23.94	24.92
	3H	22.72	23.49	23.52	24.31	25.31	23.71	24.48	24.51	25.30	26.30
	4H	23.18	23.88	24.00	24.71	25.73	24.20	24.89	25.01	25.72	26.74
	6H	23.43	24.03	24.26	24.88	25.91	24.43	25.03	25.26	25.88	26.91
	8H	23.49	24.05	24.33	24.90	25.94	24.48	25.05	25.32	25.89	26.93
	12H	23.50	24.01	24.36	24.88	25.92	24.48	24.99	25.34	25.86	26.90
8H	4H	23.59	24.15	24.42	24.99	26.03	24.41	24.97	25.24	25.82	26.86
	6H	23.95	24.41	24.81	25.30	26.34	24.73	25.20	25.60	26.09	27.13
	8H	24.07	24.48	24.94	25.36	26.42	24.83	25.24	25.71	26.13	27.18
	12H	24.11	24.48	24.99	25.35	26.46	24.86	25.22	25.73	26.09	27.21
12H	4H	23.60	24.11	24.46	24.97	26.02	24.39	24.89	25.24	25.76	26.81
	6H	24.02	24.43	24.89	25.32	26.37	24.75	25.17	25.63	26.05	27.11
	8H	24.17	24.54	25.05	25.41	26.52	24.88	25.24	25.75	26.12	27.23