

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1435835

Luminaire Tested: SQ2W-FA-K-125U-050D-L830-UNV-STD-W-WM-4

Issue Date: 3/24/2026

Test Information

Test Method: LM-79-2019
Report Number: P1435835
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2502-345-2)
Test Lab: INNOVATION CENTER
Issue Date: 3/24/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-FA-K-125U-050D-L830-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - FROSTED CONTINUOUS ASYMMETRIC ROLL LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7735.9 lumens
Efficiency: N/A
Efficacy: 125.2 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.23 / 1.34
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 61.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1435835

CATALOG NUMBER: SQ2W-FA-K-125U-050D-L830-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

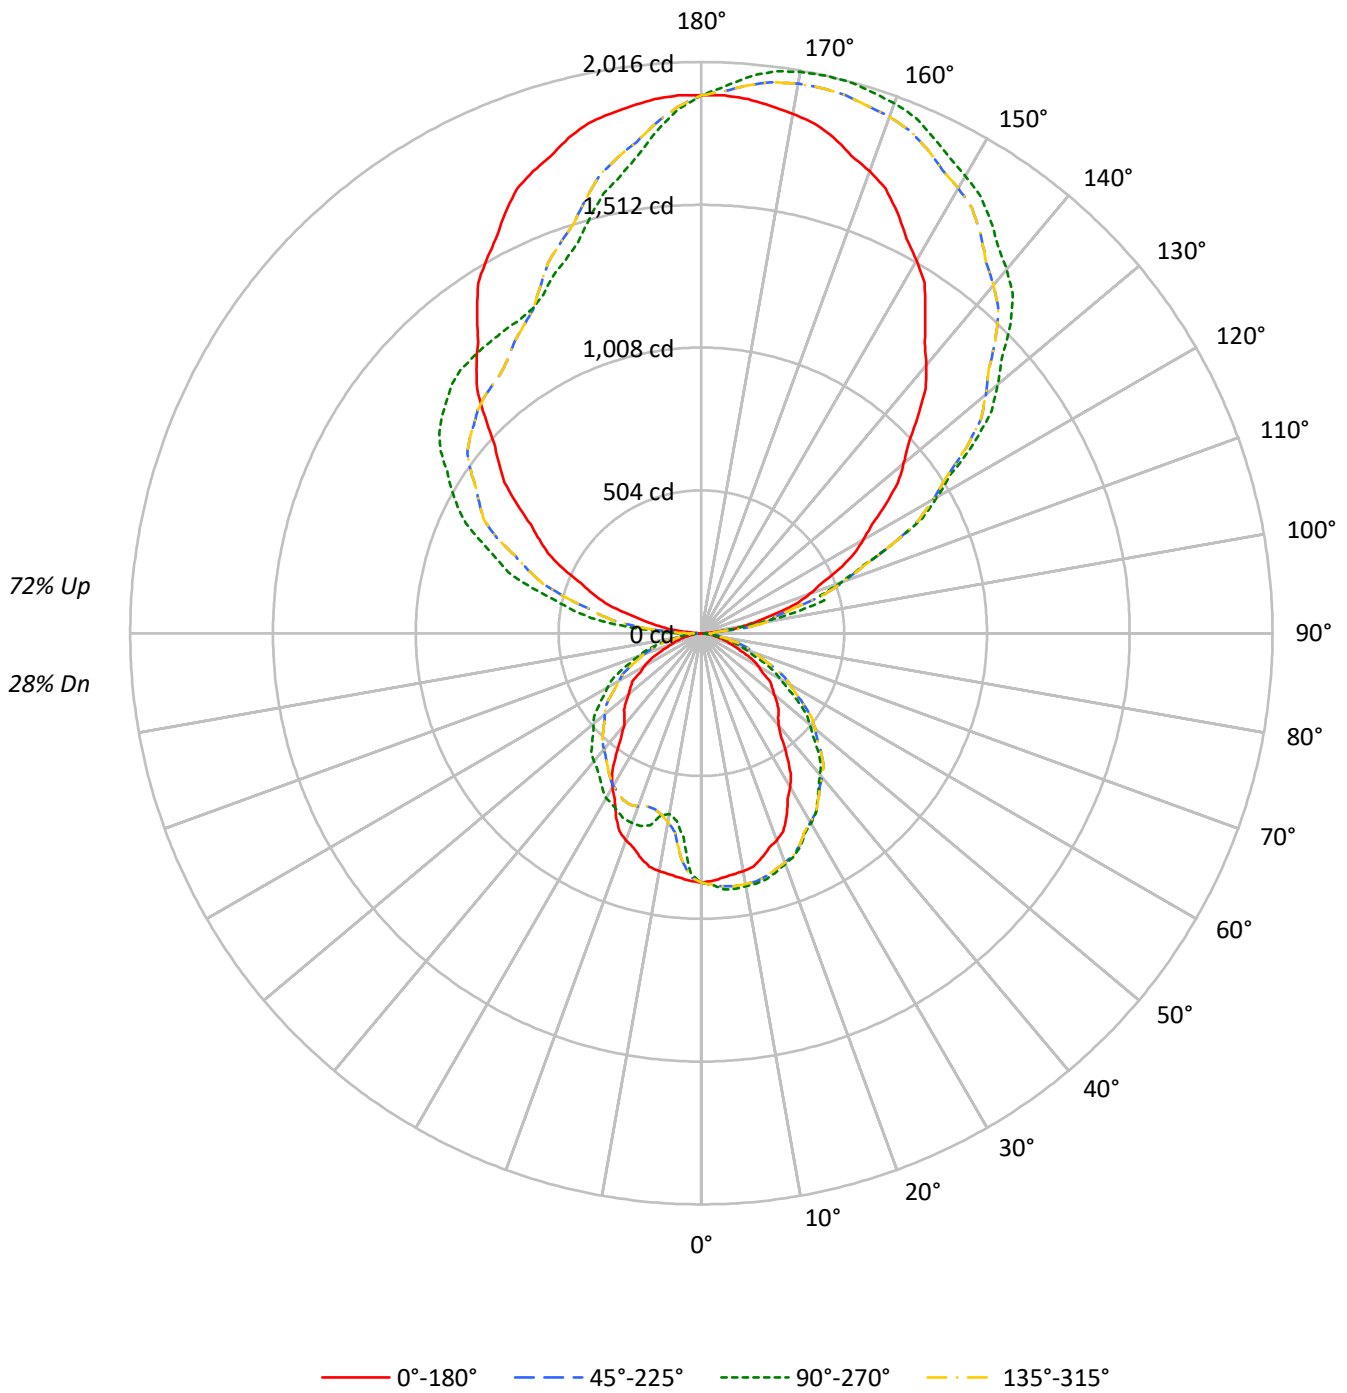



TEST NUMBER: P1435835

CATALOG NUMBER: SQ2W-FA-K-125U-050D-L830-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36	28				
1	93	89	85	82	83	80	77	74	62	60	58	47	45	44	32	31	31	24				
2	85	78	72	67	76	70	65	60	55	51	48	41	39	37	28	27	26	20				
3	77	68	61	55	69	61	55	50	48	44	41	36	33	31	25	23	22	17				
4	71	60	53	47	63	54	48	43	43	38	34	32	29	27	22	20	19	15				
5	65	53	46	40	58	48	41	36	38	33	30	29	25	23	20	18	16	13				
6	59	48	40	34	53	43	36	31	34	29	26	26	23	20	18	16	14	11				
7	55	43	35	30	49	39	32	27	31	26	22	23	20	18	17	14	13	10				
8	51	39	31	26	45	35	29	24	28	23	20	21	18	16	15	13	11	9				
9	47	35	28	23	42	32	26	21	26	21	18	20	16	14	14	12	10	8				
10	44	32	25	21	39	29	23	19	23	19	16	18	15	12	13	11	9	7				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	14210	14210	14210	14210
5°	14044	14706	14044	11721
10°	13981	14876	13981	10625
15°	13741	14997	13741	11746
20°	13364	14888	13364	12251
25°	12702	14767	12702	12397
30°	11702	14437	11702	12528
35°	10354	14120	10354	12305
40°	8915	13733	8915	12439
45°	8802	13241	8802	12462
50°	8397	12597	8397	12509
55°	8355	11620	8355	12388
60°	7492	10356	7492	12338
65°	6388	9123	6388	11988
70°	5155	7728	5155	11112
75°	4467	6382	4467	10212
80°	3803	4760	3803	8247
85°	2519	2519	2519	5057

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 40°
 Vertical Angle: 45°
 Luminance: 13657 cd/sqm



TEST NUMBER: P1435835

CATALOG NUMBER: SQ2W-FA-K-125U-050D-L830-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.2	1.0
10°-20°	221.3	2.9
20°-30°	336.0	4.3
30°-40°	394.5	5.1
40°-50°	400.4	5.2
50°-60°	350.7	4.5
60°-70°	248.7	3.2
70°-80°	128.1	1.7
80°-90°	34.7	0.4
90°-100°	151.1	2.0
100°-110°	440.5	5.7
110°-120°	719.0	9.3
120°-130°	912.3	11.8
130°-140°	976.2	12.6
140°-150°	911.5	11.8
150°-160°	750.1	9.7
160°-170°	503.1	6.5
170°-180°	178.6	2.3
0°-30°	636.5	8.2
0°-40°	1031.0	13.3
0°-60°	1782.0	23.0
0°-90°	2193.6	28.4
90°-120°	1310.6	16.9
90°-150°	4110.6	53.1
90°-180°	5542.0	71.6
0°-180°	7735.9	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	880	880	880	880	880	
5°	866	907	866	723	866	82
15°	822	897	822	703	822	231
25°	713	829	713	696	713	325
35°	525	716	525	624	525	327
45°	386	580	386	546	386	295
55°	297	413	297	440	297	257
65°	167	239	167	314	167	167
75°	72	102	72	164	72	77
85°	14	14	14	27	14	17
90°	6	42	6	82	6	5
95°	59	44	59	259	59	72
105°	280	449	280	617	280	298
115°	537	744	537	916	537	529
125°	794	1179	794	1124	794	710
135°	1080	1544	1080	1244	1080	834
145°	1379	1779	1379	1271	1379	863
155°	1637	1933	1637	1319	1637	753
165°	1810	2015	1810	1519	1810	510
175°	1892	1973	1892	1781	1892	180
180°	1898	1898	1898	1898	1898	



TEST NUMBER: P1435835

CATALOG NUMBER: SQ2W-FA-K-125U-050D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	880.1	880.1	880.1	880.1	880.1	880.1	880.1	880.1	880.1	880.1	880.1
2.5°	874.7	880.7	886.8	888.3	888.3	888.3	888.3	888.3	888.3	888.3	888.3
5°	866.5	877.1	887.7	892.6	895.7	897.9	899.4	901.3	904.4	907.4	904.4
7.5°	858.3	872.5	886.8	893.8	898.3	901.9	904.7	907.1	908.6	910.1	908.6
10°	852.8	869.5	886.2	893.8	898.3	901.3	902.9	904.4	905.9	907.4	905.9
12.5°	844.6	862.5	880.4	889.2	895.0	898.6	900.1	901.6	903.2	904.7	903.2
15°	822.1	846.4	870.6	880.1	884.7	888.5	891.5	894.1	895.7	897.2	895.7
17.5°	794.1	823.6	853.0	864.9	870.9	875.3	878.1	880.4	881.6	882.8	881.6
20°	777.8	809.6	841.5	854.0	860.0	863.8	865.3	866.5	866.5	866.5	866.5
22.5°	755.9	791.4	826.9	840.3	846.4	849.6	849.9	850.4	851.6	852.8	851.6
25°	713.0	753.9	794.8	811.9	821.0	824.8	823.3	822.9	825.9	828.9	825.9
27.5°	660.4	712.0	763.5	781.0	787.0	790.8	792.3	793.5	793.5	793.5	793.5
30°	627.7	685.3	742.9	761.9	767.9	771.7	773.2	774.4	774.4	774.4	774.4
32.5°	586.7	655.3	723.8	744.6	749.4	752.0	752.3	752.5	752.5	752.5	752.5
35°	525.3	608.7	692.1	715.2	718.3	719.8	719.8	719.4	717.9	716.4	717.9
37.5°	463.9	558.5	653.1	680.2	684.8	686.0	683.8	681.9	680.4	678.8	680.4
40°	423.0	526.1	629.2	658.4	662.9	662.9	658.4	654.6	653.1	651.6	653.1
42.5°	401.2	503.1	604.9	633.8	638.4	637.8	632.0	627.3	625.8	624.3	625.8
45°	385.5	476.4	567.4	593.6	598.1	597.4	591.3	586.0	583.0	579.9	583.0
47.5°	361.6	441.6	521.7	547.4	555.0	554.2	545.1	537.5	534.5	531.5	534.5
50°	334.3	413.1	492.0	517.4	525.0	524.2	515.1	507.5	504.5	501.5	504.5
52.5°	315.2	389.2	463.2	486.4	492.8	490.8	480.5	472.0	469.0	466.0	469.0
55°	296.8	358.9	421.1	440.1	444.6	441.6	431.0	421.9	417.3	412.8	417.3
57.5°	253.8	312.9	372.1	390.5	395.3	391.7	379.6	369.2	364.0	358.9	364.0
60°	232.0	285.0	338.1	355.9	362.0	358.9	346.8	335.8	328.2	320.7	328.2
62.5°	207.4	254.4	301.4	319.5	328.0	326.2	314.1	303.1	295.5	287.9	295.5
65°	167.2	208.1	249.0	267.2	277.8	277.1	264.9	254.0	246.4	238.8	246.4
67.5°	131.0	166.2	201.3	219.2	231.4	230.8	217.4	205.9	199.8	193.8	199.8
70°	109.2	139.5	169.8	186.5	198.6	198.6	186.5	175.9	169.8	163.7	169.8
72.5°	95.5	118.6	141.6	157.4	170.7	170.7	157.4	146.2	141.3	136.5	141.3
75°	71.6	85.3	98.9	113.7	128.9	130.4	118.3	108.4	105.4	102.3	105.4
77.5°	51.9	58.2	64.6	76.2	89.5	91.0	80.7	72.7	71.5	70.3	71.5
80°	40.9	42.5	44.0	53.4	65.6	67.1	58.0	51.2	51.2	51.2	51.2
82.5°	27.3	28.8	30.3	37.1	45.6	46.5	39.8	34.5	33.3	32.1	33.3
85°	13.6	13.6	13.6	15.9	19.0	19.0	15.9	13.6	13.6	13.6	13.6
87.5°	3.9	5.4	7.3	9.8	12.1	12.5	11.3	10.8	11.2	11.2	11.2
90°	5.8	13.4	23.0	30.7	36.4	38.3	38.3	40.3	42.2	42.2	42.2
92.5°	21.1	33.4	33.7	33.7	41.0	44.5	47.6	47.9	49.9	49.9	49.9
95°	59.4	65.2	97.8	95.9	65.2	51.8	44.1	44.1	44.1	44.1	44.1
97.5°	113.5	121.9	127.3	170.6	180.2	174.1	141.9	119.3	106.6	100.9	106.6
100°	161.1	164.9	176.4	178.3	226.2	272.3	249.3	220.5	210.9	205.2	210.9
102.5°	208.6	210.9	228.5	236.6	247.7	273.8	353.6	344.7	338.2	337.1	338.2
105°	279.9	281.9	314.4	329.8	337.5	337.5	335.5	373.9	435.2	448.7	435.2
107.5°	356.2	365.1	403.4	444.4	453.3	455.6	445.6	439.8	437.5	439.1	437.5
110°	408.4	421.8	467.8	519.6	533.0	536.9	533.0	527.3	523.4	523.4	523.4



TEST NUMBER: P1435835

CATALOG NUMBER: SQ2W-FA-K-125U-050D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	459.0	478.6	530.7	590.2	612.8	624.3	615.9	611.6	607.8	610.9	607.8
115°	536.9	565.6	634.6	696.0	742.0	747.8	745.9	745.9	743.9	743.9	743.9
117.5°	609.0	655.0	732.4	803.8	857.1	872.4	880.1	877.8	875.5	879.3	875.5
120°	659.6	713.3	801.5	882.0	933.8	956.8	964.4	960.6	964.4	960.6	964.4
122.5°	713.3	779.2	865.9	949.5	1010.5	1036.5	1045.7	1046.5	1047.3	1045.0	1047.3
125°	793.8	874.3	975.9	1062.2	1125.5	1156.2	1163.8	1165.8	1169.6	1179.2	1169.6
127.5°	875.1	966.4	1077.9	1161.2	1226.0	1263.2	1275.0	1279.3	1287.3	1291.5	1287.3
130°	931.8	1035.4	1148.5	1227.1	1290.4	1330.7	1351.7	1357.5	1367.1	1365.2	1367.1
132.5°	991.7	1099.8	1214.5	1296.1	1354.8	1398.1	1416.2	1432.7	1436.1	1438.8	1436.1
135°	1079.5	1196.4	1311.5	1392.0	1447.6	1489.8	1512.8	1528.1	1537.7	1543.5	1537.7
137.5°	1171.9	1295.4	1405.8	1477.5	1533.5	1569.9	1596.0	1612.1	1622.1	1626.7	1622.1
140°	1234.8	1353.7	1461.0	1535.8	1585.7	1622.1	1645.1	1664.3	1675.8	1675.8	1675.8
142.5°	1294.6	1411.9	1516.3	1591.0	1634.7	1668.1	1692.6	1707.2	1720.3	1720.3	1720.3
145°	1378.6	1495.5	1591.4	1666.2	1702.6	1733.3	1760.1	1771.6	1779.3	1779.3	1779.3
147.5°	1466.4	1569.9	1657.4	1729.1	1759.8	1795.8	1816.9	1826.1	1835.7	1831.5	1835.7
150°	1518.6	1614.4	1698.8	1765.9	1796.6	1831.1	1852.2	1859.8	1869.4	1863.7	1869.4
152.5°	1569.2	1660.4	1737.1	1799.6	1825.7	1860.2	1884.4	1892.1	1898.6	1894.4	1898.6
155°	1637.4	1718.0	1788.9	1846.4	1869.4	1902.0	1925.0	1934.6	1942.3	1932.7	1942.3
157.5°	1698.4	1767.8	1829.5	1882.5	1907.0	1935.0	1956.5	1968.4	1976.0	1971.8	1976.0
160°	1735.2	1798.5	1854.1	1903.9	1927.0	1951.9	1974.9	1988.3	1996.0	1990.2	1996.0
162.5°	1765.9	1823.0	1875.6	1920.8	1940.8	1962.6	1990.2	2002.1	2009.8	2002.5	2009.8
165°	1810.0	1856.0	1902.0	1940.4	1957.6	1974.9	2003.6	2017.1	2022.8	2015.1	2022.8
167.5°	1843.4	1878.6	1915.8	1948.8	1961.5	1978.3	2007.1	2018.2	2025.5	2015.9	2025.5
170°	1861.8	1892.4	1925.0	1951.9	1961.5	1976.8	2005.6	2015.1	2020.9	2011.3	2020.9
172.5°	1877.1	1900.1	1926.6	1950.3	1955.3	1967.6	1994.8	2004.4	2008.6	2000.6	2008.6
175°	1892.4	1905.9	1925.0	1940.4	1938.5	1946.1	1969.1	1976.8	1984.5	1973.0	1984.5
177.5°	1899.7	1905.9	1912.0	1921.2	1915.1	1915.1	1931.9	1936.5	1938.1	1931.9	1938.1
180°	1898.2	1898.2	1898.2	1898.2	1898.2	1898.2	1898.2	1898.2	1898.2	1898.2	1898.2



TEST NUMBER: P1435835

CATALOG NUMBER: SQ2W-FA-K-125U-050D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	880.1	880.1	880.1	880.1	880.1	880.1	880.1	880.1	880.1	880.1	880.1
2.5°	888.3	888.3	888.3	888.3	888.3	886.8	880.7	874.7	874.7	874.7	870.1
5°	901.3	899.4	897.9	895.7	892.6	887.7	877.1	866.5	861.9	857.4	838.0
7.5°	907.1	904.7	901.9	898.3	893.8	886.8	872.5	858.3	838.0	817.6	774.6
10°	904.4	902.9	901.3	898.3	893.8	886.2	869.5	852.8	811.9	771.0	730.0
12.5°	901.6	900.1	898.6	895.0	889.2	880.4	862.5	844.6	786.7	728.8	691.8
15°	894.1	891.5	888.5	884.7	880.1	870.6	846.4	822.1	756.9	691.7	660.7
17.5°	880.4	878.1	875.3	870.9	864.9	853.0	823.6	794.1	725.9	657.7	637.7
20°	866.5	865.3	863.8	860.0	854.0	841.5	809.6	777.8	709.5	641.3	632.2
22.5°	850.4	849.9	849.6	846.4	840.3	826.9	791.4	755.9	688.9	621.9	622.2
25°	822.9	823.3	824.8	821.0	811.9	794.8	753.9	713.0	653.8	594.7	604.9
27.5°	793.5	792.3	790.8	787.0	781.0	763.5	712.0	660.4	613.7	567.0	584.0
30°	774.4	773.2	771.7	767.9	761.9	742.9	685.3	627.7	588.3	548.8	568.5
32.5°	752.5	752.3	752.0	749.4	744.6	723.8	655.3	586.7	558.2	529.7	550.4
35°	719.4	719.8	719.8	718.3	715.2	692.1	608.7	525.3	513.2	501.1	525.3
37.5°	681.9	683.8	686.0	684.8	680.2	653.1	558.5	463.9	467.9	471.8	501.2
40°	654.6	658.4	662.9	662.9	658.4	629.2	526.1	423.0	436.6	450.3	482.1
42.5°	627.3	632.0	637.8	638.4	633.8	604.9	503.1	401.2	416.0	430.9	463.9
45°	586.0	591.3	597.4	598.1	593.6	567.4	476.4	385.5	394.6	403.7	435.5
47.5°	537.5	545.1	554.2	555.0	547.4	521.7	441.6	361.6	368.3	374.9	407.5
50°	507.5	515.1	524.2	525.0	517.4	492.0	413.1	334.3	343.4	352.5	386.6
52.5°	472.0	480.5	490.8	492.8	486.4	463.2	389.2	315.2	320.7	326.1	363.0
55°	421.9	431.0	441.6	444.6	440.1	421.1	358.9	296.8	292.2	287.7	325.2
57.5°	369.2	379.6	391.7	395.3	390.5	372.1	312.9	253.8	249.9	245.9	286.5
60°	335.8	346.8	358.9	362.0	355.9	338.1	285.0	232.0	224.4	216.8	259.3
62.5°	303.1	314.1	326.2	328.0	319.5	301.4	254.4	207.4	202.3	197.1	238.3
65°	254.0	264.9	277.1	277.8	267.2	249.0	208.1	167.2	170.2	173.2	210.4
67.5°	205.9	217.4	230.8	231.4	219.2	201.3	166.2	131.0	141.0	151.0	184.4
70°	175.9	186.5	198.6	198.6	186.5	169.8	139.5	109.2	122.8	136.5	167.2
72.5°	146.2	157.4	170.7	170.7	157.4	141.6	118.6	95.5	109.2	122.8	148.0
75°	108.4	118.3	130.4	128.9	113.7	98.9	85.3	71.6	85.3	98.9	118.3
77.5°	72.7	80.7	91.0	89.5	76.2	64.6	58.2	51.9	63.1	74.3	87.8
80°	51.2	58.0	67.1	65.6	53.4	44.0	42.5	40.9	48.5	56.1	66.0
82.5°	34.5	39.8	46.5	45.6	37.1	30.3	28.8	27.3	33.7	40.0	46.8
85°	13.6	15.9	19.0	19.0	15.9	13.6	13.6	13.6	16.7	19.7	22.7
87.5°	10.8	11.3	12.5	12.1	9.8	7.3	5.4	3.9	6.6	9.4	12.4
90°	40.3	38.3	38.3	36.4	30.7	23.0	13.4	5.8	13.4	21.1	34.5
92.5°	47.9	47.6	44.5	41.0	33.7	33.7	33.4	21.1	36.4	51.8	74.4
95°	44.1	44.1	51.8	65.2	95.9	97.8	65.2	59.4	84.4	118.9	149.6
97.5°	119.3	141.9	174.1	180.2	170.6	127.3	121.9	113.5	154.5	188.7	238.1
100°	220.5	249.3	272.3	226.2	178.3	176.4	164.9	161.1	205.2	237.8	285.7
102.5°	344.7	353.6	273.8	247.7	236.6	228.5	210.9	208.6	252.7	297.6	337.8
105°	373.9	335.5	337.5	337.5	329.8	314.4	281.9	279.9	329.8	381.6	431.4
107.5°	439.8	445.6	455.6	453.3	444.4	403.4	365.1	356.2	401.1	463.2	518.1
110°	527.3	533.0	536.9	533.0	519.6	467.8	421.8	408.4	448.7	513.9	573.3



TEST NUMBER: P1435835

CATALOG NUMBER: SQ2W-FA-K-125U-050D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	611.6	615.9	624.3	612.8	590.2	530.7	478.6	459.0	499.3	566.0	627.0
115°	745.9	745.9	747.8	742.0	696.0	634.6	565.6	536.9	571.4	632.7	699.8
117.5°	877.8	880.1	872.4	857.1	803.8	732.4	655.0	609.0	636.2	701.0	770.0
120°	960.6	964.4	956.8	933.8	882.0	801.5	713.3	659.6	680.7	743.9	813.0
122.5°	1046.5	1045.7	1036.5	1010.5	949.5	865.9	779.2	713.3	722.1	780.8	848.2
125°	1165.8	1163.8	1156.2	1125.5	1062.2	975.9	874.3	793.8	782.3	832.1	901.2
127.5°	1279.3	1275.0	1263.2	1226.0	1161.2	1077.9	966.4	875.1	849.4	880.8	944.1
130°	1357.5	1351.7	1330.7	1290.4	1227.1	1148.5	1035.4	931.8	895.4	914.6	970.2
132.5°	1432.7	1416.2	1398.1	1354.8	1296.1	1214.5	1099.8	991.7	941.4	949.9	993.2
135°	1528.1	1512.8	1489.8	1447.6	1392.0	1311.5	1196.4	1079.5	1010.5	1002.8	1027.7
137.5°	1612.1	1596.0	1569.9	1533.5	1477.5	1405.8	1295.4	1171.9	1084.8	1059.2	1068.7
140°	1664.3	1645.1	1622.1	1585.7	1535.8	1461.0	1353.7	1234.8	1137.0	1100.6	1094.8
142.5°	1707.2	1692.6	1668.1	1634.7	1591.0	1516.3	1411.9	1294.6	1190.7	1143.5	1130.1
145°	1771.6	1760.1	1733.3	1702.6	1666.2	1591.4	1495.5	1378.6	1275.0	1213.7	1184.9
147.5°	1826.1	1816.9	1795.8	1759.8	1729.1	1657.4	1569.9	1466.4	1360.2	1284.3	1247.1
150°	1859.8	1852.2	1831.1	1796.6	1765.9	1698.8	1614.4	1518.6	1416.9	1336.4	1288.5
152.5°	1892.1	1884.4	1860.2	1825.7	1799.6	1737.1	1660.4	1569.2	1466.0	1385.5	1336.0
155°	1934.6	1925.0	1902.0	1869.4	1846.4	1788.9	1718.0	1637.4	1549.2	1464.9	1409.3
157.5°	1968.4	1956.5	1935.0	1907.0	1882.5	1829.5	1767.8	1698.4	1621.3	1540.8	1484.0
160°	1988.3	1974.9	1951.9	1927.0	1903.9	1854.1	1798.5	1735.2	1664.3	1591.4	1530.1
162.5°	2002.1	1990.2	1962.6	1940.8	1920.8	1875.6	1823.0	1765.9	1702.6	1639.0	1582.2
165°	2017.1	2003.6	1974.9	1957.6	1940.4	1902.0	1856.0	1810.0	1756.3	1704.5	1658.5
167.5°	2018.2	2007.1	1978.3	1961.5	1948.8	1915.8	1878.6	1843.4	1801.6	1760.9	1722.6
170°	2015.1	2005.6	1976.8	1961.5	1951.9	1925.0	1892.4	1861.8	1829.2	1794.7	1764.0
172.5°	2004.4	1994.8	1967.6	1955.3	1950.3	1926.6	1900.1	1877.1	1849.1	1823.8	1799.3
175°	1976.8	1969.1	1946.1	1938.5	1940.4	1925.0	1905.9	1892.4	1875.2	1859.8	1846.4
177.5°	1936.5	1931.9	1915.1	1915.1	1921.2	1912.0	1905.9	1899.7	1892.1	1887.5	1882.9
180°	1898.2	1898.2	1898.2	1898.2	1898.2	1898.2	1898.2	1898.2	1898.2	1898.2	1898.2



TEST NUMBER: P1435835

CATALOG NUMBER: SQ2W-FA-K-125U-050D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	880.1	880.1	880.1	880.1	880.1	880.1	880.1	880.1	880.1	880.1	880.1
2.5°	864.0	859.2	855.6	852.5	851.3	850.1	851.3	852.5	855.6	859.2	864.0
5°	813.8	788.0	760.7	738.4	730.8	723.2	730.8	738.4	760.7	788.0	813.8
7.5°	724.0	692.9	681.3	672.1	669.7	667.2	669.7	672.1	681.3	692.9	724.0
10°	689.1	664.1	655.0	648.1	648.1	648.1	648.1	648.1	655.0	664.1	689.1
12.5°	661.8	646.5	645.9	646.9	653.0	659.1	653.0	646.9	645.9	646.5	661.8
15°	640.9	643.2	667.5	687.6	695.1	702.7	695.1	687.6	667.5	643.2	640.9
17.5°	633.7	646.8	676.8	700.8	706.9	713.0	706.9	700.8	676.8	646.8	633.7
20°	642.8	659.5	682.3	700.8	706.9	713.0	706.9	700.8	682.3	659.5	642.8
22.5°	645.0	665.3	683.2	698.1	704.2	710.2	704.2	698.1	683.2	665.3	645.0
25°	638.3	662.5	677.7	689.8	692.9	695.9	692.9	689.8	677.7	662.5	638.3
27.5°	622.2	648.9	664.1	676.0	678.1	680.2	678.1	676.0	664.1	648.9	622.2
30°	608.0	635.3	650.4	662.9	667.5	672.0	667.5	662.9	650.4	635.3	608.0
32.5°	587.3	615.2	634.0	648.4	649.3	650.2	649.3	648.4	634.0	615.2	587.3
35°	561.7	590.5	611.8	627.3	625.8	624.3	625.8	627.3	611.8	590.5	561.7
37.5°	539.1	567.3	585.8	600.2	602.0	603.8	602.0	600.2	585.8	567.3	539.1
40°	520.0	548.8	568.5	584.1	587.1	590.2	587.1	584.1	568.5	548.8	520.0
42.5°	503.1	532.5	552.2	567.7	570.7	573.8	570.7	567.7	552.2	532.5	503.1
45°	474.9	505.2	526.5	542.8	544.3	545.8	544.3	542.8	526.5	505.2	474.9
47.5°	448.8	479.2	499.0	514.1	515.6	517.2	515.6	514.1	499.0	479.2	448.8
50°	429.1	460.1	479.9	495.0	496.5	498.0	496.5	495.0	479.9	460.1	429.1
52.5°	410.3	442.6	459.8	473.2	474.7	476.2	474.7	473.2	459.8	442.6	410.3
55°	376.8	410.9	427.5	440.1	440.1	440.1	440.1	427.5	410.9	376.8	
57.5°	342.0	377.1	391.6	403.0	404.8	406.6	404.8	403.0	391.6	377.1	342.0
60°	318.4	354.0	366.1	376.0	379.0	382.1	379.0	376.0	366.1	354.0	318.4
62.5°	295.0	329.5	341.6	351.1	353.0	354.8	353.0	351.1	341.6	329.5	295.0
65°	258.9	289.2	301.3	310.8	312.3	313.8	312.3	310.8	301.3	289.2	258.9
67.5°	225.7	250.5	259.0	265.7	266.9	268.1	266.9	265.7	259.0	250.5	225.7
70°	203.5	224.8	230.8	235.4	235.4	235.4	235.4	230.8	224.8	203.5	
72.5°	177.2	194.7	200.8	205.7	206.9	208.1	206.9	205.7	200.8	194.7	177.2
75°	139.5	152.4	156.9	160.7	162.2	163.7	162.2	160.7	156.9	152.4	139.5
77.5°	102.0	110.5	113.3	115.7	117.2	118.7	117.2	115.7	113.3	110.5	102.0
80°	76.6	82.6	84.1	85.7	87.2	88.7	87.2	85.7	84.1	82.6	76.6
82.5°	53.8	58.1	59.6	60.8	61.1	61.4	61.1	60.8	59.6	58.1	53.8
85°	25.8	27.3	27.3	27.3	27.3	27.3	27.3	27.3	27.3	27.3	25.8
87.5°	14.3	17.0	19.6	21.2	22.7	21.9	22.7	21.2	19.6	17.0	14.3
90°	44.1	57.5	70.9	78.6	86.3	82.4	86.3	78.6	70.9	57.5	44.1
92.5°	88.6	111.2	127.7	141.5	147.6	146.9	147.6	141.5	127.7	111.2	88.6
95°	178.3	205.2	232.0	251.2	262.7	258.8	262.7	251.2	232.0	205.2	178.3
97.5°	275.0	311.0	340.9	358.9	370.4	378.1	370.4	358.9	340.9	311.0	275.0
100°	339.4	373.9	408.4	429.5	448.7	456.3	448.7	429.5	408.4	373.9	339.4
102.5°	391.5	436.8	474.4	497.0	513.1	520.8	513.1	497.0	474.4	436.8	391.5
105°	477.4	525.4	565.6	594.4	611.6	617.4	611.6	594.4	565.6	525.4	477.4
107.5°	563.3	612.8	650.0	681.8	702.9	715.2	702.9	681.8	650.0	612.8	563.3
110°	630.8	671.1	711.3	740.1	761.2	768.9	761.2	740.1	711.3	671.1	630.8



TEST NUMBER: P1435835

CATALOG NUMBER: SQ2W-FA-K-125U-050D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	687.6	732.4	772.7	801.5	825.6	836.4	825.6	801.5	772.7	732.4	687.6
115°	766.9	826.4	862.8	889.7	906.9	916.5	906.9	889.7	862.8	826.4	766.9
117.5°	832.9	895.0	934.9	955.6	963.7	970.6	963.7	955.6	934.9	895.0	832.9
120°	874.3	931.8	977.9	1004.7	1014.3	1018.1	1014.3	1004.7	977.9	931.8	874.3
122.5°	912.7	967.1	1011.6	1044.6	1060.3	1064.1	1060.3	1044.6	1011.6	967.1	912.7
125°	966.4	1018.1	1064.1	1096.7	1114.0	1123.6	1114.0	1096.7	1064.1	1018.1	966.4
127.5°	1013.1	1069.1	1111.3	1140.8	1157.7	1165.4	1157.7	1140.8	1111.3	1069.1	1013.1
130°	1039.2	1096.7	1138.9	1171.5	1186.8	1194.5	1186.8	1171.5	1138.9	1096.7	1039.2
132.5°	1059.2	1119.7	1163.5	1193.0	1209.9	1217.5	1209.9	1193.0	1163.5	1119.7	1059.2
135°	1083.3	1146.6	1192.6	1221.4	1236.7	1244.4	1236.7	1221.4	1192.6	1146.6	1083.3
137.5°	1104.4	1161.9	1209.9	1240.2	1254.0	1258.9	1254.0	1240.2	1209.9	1161.9	1104.4
140°	1119.7	1169.6	1217.5	1246.3	1261.6	1263.5	1261.6	1246.3	1217.5	1169.6	1119.7
142.5°	1139.7	1178.8	1220.6	1249.4	1264.7	1268.1	1264.7	1249.4	1220.6	1178.8	1139.7
145°	1175.3	1198.4	1227.1	1254.0	1267.4	1271.2	1267.4	1254.0	1227.1	1198.4	1175.3
147.5°	1220.2	1227.5	1242.5	1260.1	1273.1	1275.8	1273.1	1260.1	1242.5	1227.5	1220.2
150°	1254.0	1252.0	1257.8	1269.3	1280.8	1278.9	1280.8	1269.3	1257.8	1252.0	1254.0
152.5°	1292.3	1281.2	1280.8	1286.2	1291.5	1291.2	1291.5	1286.2	1280.8	1281.2	1292.3
155°	1357.5	1336.4	1324.9	1321.1	1321.1	1319.1	1321.1	1321.1	1324.9	1336.4	1357.5
157.5°	1429.2	1399.7	1382.4	1373.2	1370.5	1366.3	1370.5	1373.2	1382.4	1399.7	1429.2
160°	1478.3	1445.7	1428.4	1413.1	1407.3	1401.6	1407.3	1413.1	1428.4	1445.7	1478.3
162.5°	1524.3	1493.2	1474.5	1460.6	1454.9	1446.1	1454.9	1460.6	1474.5	1493.2	1524.3
165°	1599.1	1566.5	1545.4	1533.9	1526.2	1518.6	1526.2	1533.9	1545.4	1566.5	1599.1
167.5°	1673.9	1638.2	1624.4	1611.4	1604.1	1590.3	1604.1	1611.4	1624.4	1638.2	1673.9
170°	1719.9	1687.3	1679.6	1668.1	1654.7	1639.3	1654.7	1668.1	1679.6	1687.3	1719.9
172.5°	1759.8	1737.9	1730.2	1718.7	1714.5	1702.2	1714.5	1718.7	1730.2	1737.9	1759.8
175°	1817.7	1800.4	1800.4	1798.5	1792.7	1781.2	1792.7	1798.5	1800.4	1800.4	1817.7
177.5°	1866.0	1856.8	1862.9	1862.9	1861.4	1850.6	1861.4	1862.9	1862.9	1856.8	1866.0
180°	1898.2	1898.2	1898.2	1898.2	1898.2	1898.2	1898.2	1898.2	1898.2	1898.2	1898.2



TEST NUMBER: P1435835

CATALOG NUMBER: SQ2W-FA-K-125U-050D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	880.1	880.1	880.1	880.1
2.5°	870.1	874.7	874.7	874.7
5°	838.0	857.4	861.9	866.5
7.5°	774.6	817.6	838.0	858.3
10°	730.0	771.0	811.9	852.8
12.5°	691.8	728.8	786.7	844.6
15°	660.7	691.7	756.9	822.1
17.5°	637.7	657.7	725.9	794.1
20°	632.2	641.3	709.5	777.8
22.5°	622.2	621.9	688.9	755.9
25°	604.9	594.7	653.8	713.0
27.5°	584.0	567.0	613.7	660.4
30°	568.5	548.8	588.3	627.7
32.5°	550.4	529.7	558.2	586.7
35°	525.3	501.1	513.2	525.3
37.5°	501.2	471.8	467.9	463.9
40°	482.1	450.3	436.6	423.0
42.5°	463.9	430.9	416.0	401.2
45°	435.5	403.7	394.6	385.5
47.5°	407.5	374.9	368.3	361.6
50°	386.6	352.5	343.4	334.3
52.5°	363.0	326.1	320.7	315.2
55°	325.2	287.7	292.2	296.8
57.5°	286.5	245.9	249.9	253.8
60°	259.3	216.8	224.4	232.0
62.5°	238.3	197.1	202.3	207.4
65°	210.4	173.2	170.2	167.2
67.5°	184.4	151.0	141.0	131.0
70°	167.2	136.5	122.8	109.2
72.5°	148.0	122.8	109.2	95.5
75°	118.3	98.9	85.3	71.6
77.5°	87.8	74.3	63.1	51.9
80°	66.0	56.1	48.5	40.9
82.5°	46.8	40.0	33.7	27.3
85°	22.7	19.7	16.7	13.6
87.5°	12.4	9.4	6.6	3.9
90°	34.5	21.1	13.4	5.8
92.5°	74.4	51.8	36.4	21.1
95°	149.6	118.9	84.4	59.4
97.5°	238.1	188.7	154.5	113.5
100°	285.7	237.8	205.2	161.1
102.5°	337.8	297.6	252.7	208.6
105°	431.4	381.6	329.8	279.9
107.5°	518.1	463.2	401.1	356.2
110°	573.3	513.9	448.7	408.4



TEST NUMBER: P1435835

CATALOG NUMBER: SQ2W-FA-K-125U-050D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	627.0	566.0	499.3	459.0
115°	699.8	632.7	571.4	536.9
117.5°	770.0	701.0	636.2	609.0
120°	813.0	743.9	680.7	659.6
122.5°	848.2	780.8	722.1	713.3
125°	901.2	832.1	782.3	793.8
127.5°	944.1	880.8	849.4	875.1
130°	970.2	914.6	895.4	931.8
132.5°	993.2	949.9	941.4	991.7
135°	1027.7	1002.8	1010.5	1079.5
137.5°	1068.7	1059.2	1084.8	1171.9
140°	1094.8	1100.6	1137.0	1234.8
142.5°	1130.1	1143.5	1190.7	1294.6
145°	1184.9	1213.7	1275.0	1378.6
147.5°	1247.1	1284.3	1360.2	1466.4
150°	1288.5	1336.4	1416.9	1518.6
152.5°	1336.0	1385.5	1466.0	1569.2
155°	1409.3	1464.9	1549.2	1637.4
157.5°	1484.0	1540.8	1621.3	1698.4
160°	1530.1	1591.4	1664.3	1735.2
162.5°	1582.2	1639.0	1702.6	1765.9
165°	1658.5	1704.5	1756.3	1810.0
167.5°	1722.6	1760.9	1801.6	1843.4
170°	1764.0	1794.7	1829.2	1861.8
172.5°	1799.3	1823.8	1849.1	1877.1
175°	1846.4	1859.8	1875.2	1892.4
177.5°	1882.9	1887.5	1892.1	1899.7
180°	1898.2	1898.2	1898.2	1898.2



TEST NUMBER: P1435835
 CATALOG NUMBER: SQ2W-FA-K-125U-050D-L830-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.15	13.84	14.27	14.96	16.51	14.35	15.04	15.47	16.16	17.71
	3H	14.22	14.85	15.36	15.97	17.54	15.58	16.20	16.71	17.32	18.89
	4H	14.57	15.16	15.71	16.28	17.86	15.96	16.55	17.10	17.68	19.25
	6H	14.72	15.26	15.87	16.39	17.98	16.11	16.66	17.26	17.78	19.37
	8H	14.75	15.27	15.90	16.41	17.99	16.13	16.65	17.28	17.79	19.37
	12H	14.74	15.23	15.90	16.37	17.97	16.11	16.60	17.27	17.74	19.34
4H	2H	14.00	14.59	15.14	15.71	17.28	14.91	15.50	16.06	16.63	18.20
	3H	15.37	15.86	16.52	17.01	18.60	16.36	16.85	17.51	18.00	19.58
	4H	15.82	16.27	16.97	17.41	19.01	16.83	17.28	17.98	18.42	20.02
	6H	16.04	16.42	17.20	17.59	19.18	17.04	17.43	18.20	18.59	20.18
	8H	16.09	16.45	17.25	17.61	19.22	17.08	17.45	18.24	18.60	20.21
	12H	16.08	16.41	17.26	17.58	19.19	17.06	17.39	18.24	18.56	20.17
8H	4H	16.19	16.55	17.35	17.70	19.31	17.01	17.37	18.17	18.52	20.13
	6H	16.53	16.83	17.71	18.02	19.63	17.32	17.61	18.50	18.81	20.42
	8H	16.65	16.91	17.83	18.08	19.71	17.41	17.67	18.60	18.84	20.47
	12H	16.68	16.90	17.87	18.08	19.74	17.42	17.65	18.61	18.82	20.48
12H	4H	16.18	16.51	17.36	17.67	19.29	16.97	17.30	18.15	18.46	20.08
	6H	16.60	16.86	17.79	18.03	19.66	17.33	17.59	18.52	18.77	20.39
	8H	16.74	16.96	17.93	18.14	19.80	17.44	17.67	18.63	18.84	20.50