

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1435961

Luminaire Tested: SQ2W-FB-K-075U-075D-L830-UNV-STD-W-WM-4

Issue Date: 3/24/2026

Test Information

Test Method: LM-79-2019
Report Number: P1435961
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-12)
Test Lab: INNOVATION CENTER
Issue Date: 3/24/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-FB-K-075U-075D-L830-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - FROSTED CONTINUOUS BATWING ROLL LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 750 LUMENS PER FOOT
UPLIGHT 750 LUMENS PER FOOT
Light Source: 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6620.2 lumens
Efficiency: N/A
Efficacy: 131.6 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 2.98 / 2.52
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 50.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1435961

CATALOG NUMBER: SQ2W-FB-K-075U-075D-L830-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

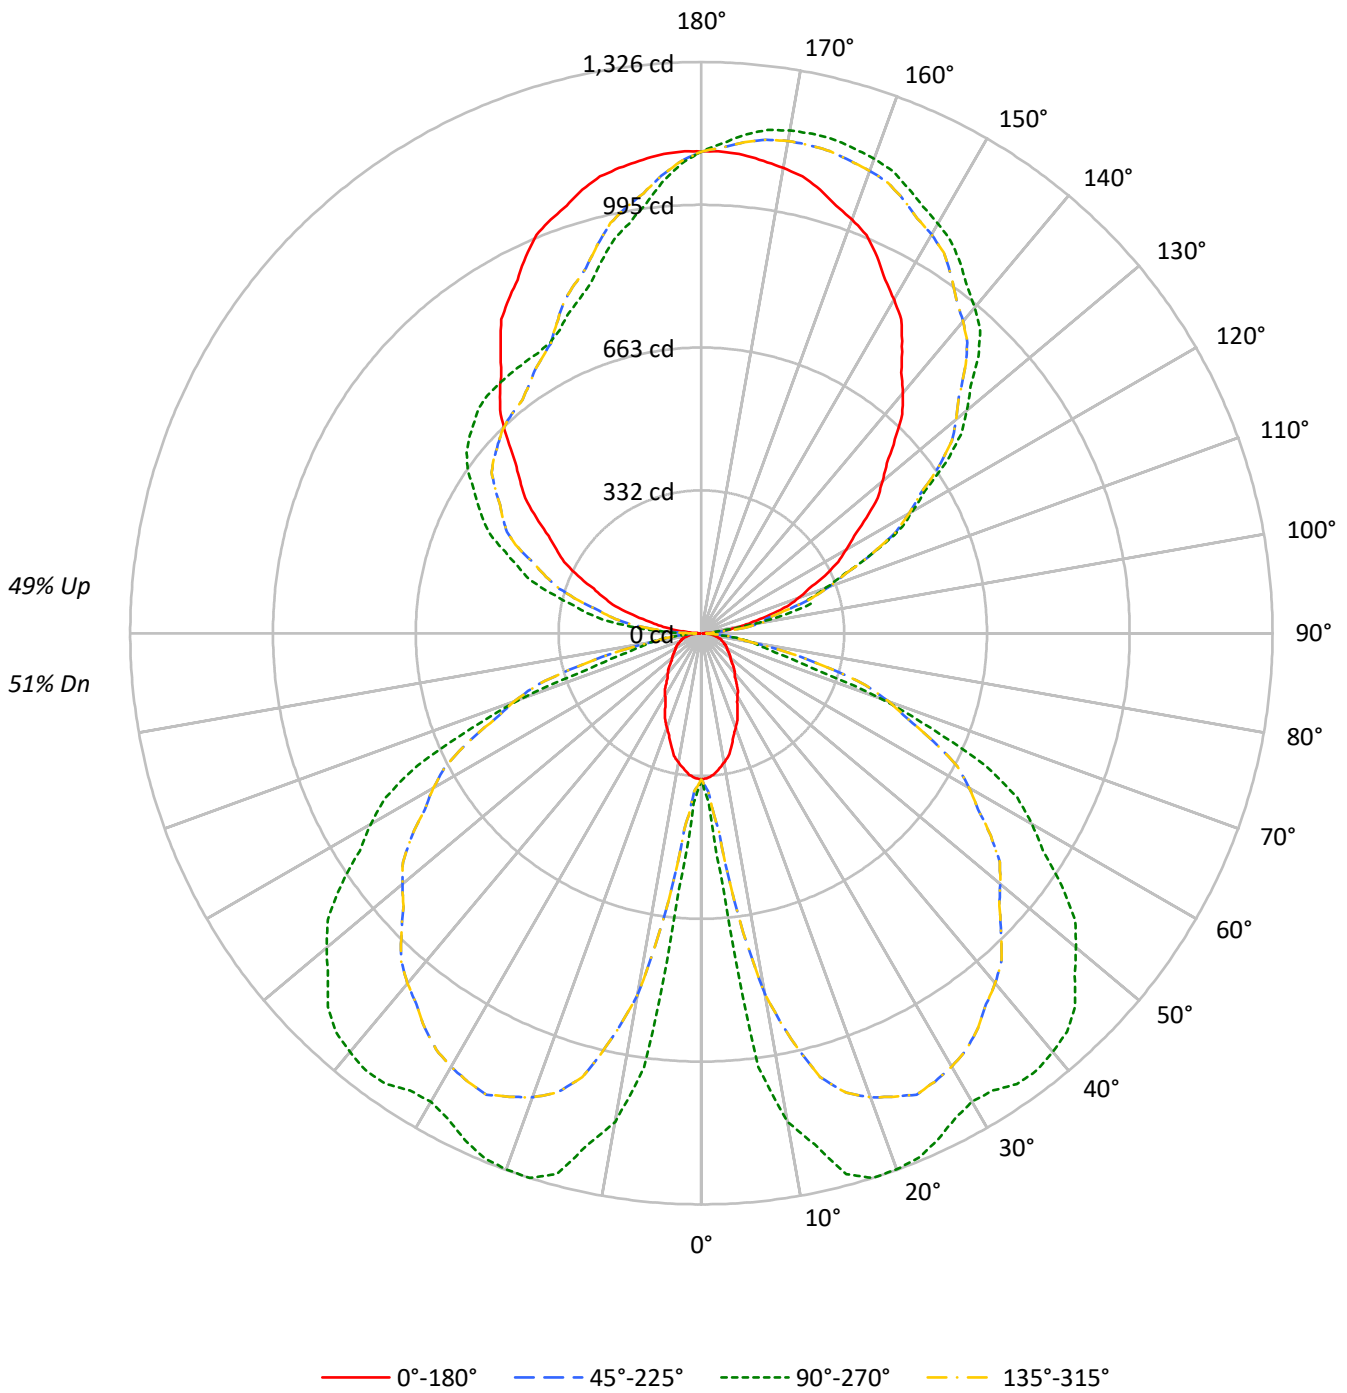



TEST NUMBER: P1435961

CATALOG NUMBER: SQ2W-FB-K-075U-075D-L830-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	51				
1	98	93	89	86	90	86	83	80	73	71	68	61	59	58	50	49	48	42				
2	89	81	75	69	82	75	70	65	64	60	56	53	50	48	43	41	39	35				
3	81	71	63	57	74	66	59	54	56	51	46	46	43	40	38	35	33	29				
4	73	62	54	48	67	58	50	45	49	44	39	41	37	33	34	30	28	24				
5	67	55	47	41	62	51	44	38	44	38	33	36	32	29	30	27	24	21				
6	62	49	41	35	57	46	38	33	39	33	29	33	28	25	27	23	21	18				
7	57	44	36	30	52	41	34	28	35	29	25	30	25	22	24	21	18	15				
8	53	40	32	26	48	37	30	25	32	26	22	27	22	19	22	19	16	14				
9	49	36	29	23	45	34	27	22	29	23	19	24	20	17	20	17	14	12				
10	45	33	26	21	42	31	24	20	27	21	17	22	18	15	19	15	13	11				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	5478	5478	5478	5478
5°	5340	9702	5340	9702
10°	5000	18878	5000	18878
15°	4526	21728	4526	21728
20°	4007	22755	4007	22755
25°	3545	23129	3545	23129
30°	3132	23414	3132	23414
35°	2797	25172	2797	25172
40°	2544	26746	2544	26746
45°	2347	28005	2347	28005
50°	2213	28514	2213	28514
55°	2159	28740	2159	28740
60°	2212	28600	2212	28600
65°	2304	27789	2304	27789
70°	2389	21021	2389	21021
75°	2645	11597	2645	11597
80°	2734	10767	2734	10767
85°	2723	4539	2723	4539

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 52.5°
 Luminance: 29002 cd/sqm



TEST NUMBER: P1435961

CATALOG NUMBER: SQ2W-FB-K-075U-075D-L830-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	56.8	0.9
10°-20°	259.3	3.9
20°-30°	456.4	6.9
30°-40°	590.8	8.9
40°-50°	651.5	9.8
50°-60°	608.1	9.2
60°-70°	469.8	7.1
70°-80°	216.6	3.3
80°-90°	46.0	0.7
90°-100°	89.0	1.3
100°-110°	259.5	3.9
110°-120°	423.5	6.4
120°-130°	537.4	8.1
130°-140°	575.1	8.7
140°-150°	537.0	8.1
150°-160°	441.9	6.7
160°-170°	296.3	4.5
170°-180°	105.2	1.6
0°-30°	772.6	11.7
0°-40°	1363.3	20.6
0°-60°	2622.9	39.6
0°-90°	3355.3	50.7
90°-120°	772.0	11.7
90°-150°	2421.5	36.6
90°-180°	3265.0	49.3
0°-180°	6620.2	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	339	339	339	339	339	
5°	330	599	330	599	330	31
15°	271	1300	271	1300	271	75
25°	199	1298	199	1298	199	91
35°	142	1277	142	1277	142	89
45°	103	1226	103	1226	103	80
55°	77	1021	77	1021	77	69
65°	60	727	60	727	60	59
75°	42	186	42	186	42	44
85°	15	24	15	24	15	15
90°	3	25	3	49	3	3
95°	35	26	35	152	35	42
105°	165	264	165	364	165	175
115°	316	438	316	540	316	312
125°	468	695	468	662	468	418
135°	636	909	636	733	636	491
145°	812	1048	812	749	812	508
155°	965	1138	965	777	965	443
165°	1066	1187	1066	894	1066	300
175°	1115	1162	1115	1049	1115	106
180°	1118	1118	1118	1118	1118	



TEST NUMBER: P1435961

CATALOG NUMBER: SQ2W-FB-K-075U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	339.3	339.3	339.3	339.3	339.3	339.3	339.3	339.3	339.3	339.3	339.3
2.5°	336.6	343.0	349.4	356.2	363.2	370.7	378.8	385.8	389.3	392.8	389.3
5°	329.5	351.2	373.0	404.5	439.3	478.8	523.0	560.9	579.7	598.6	579.7
7.5°	316.7	361.0	405.2	498.9	609.1	723.5	842.1	940.4	978.1	1015.8	978.1
10°	305.0	366.6	428.2	587.2	778.6	925.7	1028.6	1110.9	1131.2	1151.5	1131.2
12.5°	292.0	375.6	459.3	655.5	889.2	1042.1	1114.3	1173.7	1194.6	1215.5	1194.6
15°	270.8	390.4	510.0	731.8	987.7	1145.0	1203.7	1253.5	1276.7	1299.9	1276.7
17.5°	248.9	408.1	567.3	793.6	1042.2	1195.6	1253.7	1300.5	1313.1	1325.7	1313.1
20°	233.2	420.3	607.3	834.0	1074.0	1218.9	1269.0	1308.5	1316.4	1324.4	1316.4
22.5°	218.9	427.9	637.0	864.0	1097.0	1232.4	1270.3	1300.8	1309.3	1317.9	1309.3
25°	199.0	434.6	670.2	896.5	1119.8	1243.4	1267.3	1286.7	1292.5	1298.3	1292.5
27.5°	179.7	428.7	677.6	901.1	1116.1	1231.4	1247.1	1260.3	1265.9	1271.6	1265.9
30°	168.0	421.0	674.0	895.4	1106.4	1217.7	1229.3	1240.0	1247.9	1255.9	1247.9
32.5°	157.6	411.7	665.9	884.6	1091.5	1200.4	1211.4	1224.0	1241.3	1258.5	1241.3
35°	141.9	392.0	642.1	858.5	1063.6	1174.9	1192.3	1213.3	1245.2	1277.1	1245.2
37.5°	128.5	366.7	604.9	819.1	1025.3	1146.5	1182.9	1217.9	1248.7	1279.4	1248.7
40°	120.7	349.0	577.4	790.0	997.3	1125.2	1173.8	1216.8	1242.9	1269.0	1242.9
42.5°	112.9	329.0	545.2	756.0	965.1	1098.0	1154.7	1203.7	1229.8	1255.9	1229.8
45°	102.8	297.0	491.3	700.3	914.1	1054.4	1121.1	1177.2	1201.9	1226.5	1201.9
47.5°	93.3	262.1	430.8	640.7	864.2	1011.4	1082.1	1139.7	1157.7	1175.7	1157.7
50°	88.1	238.9	389.6	600.2	830.7	980.8	1050.4	1106.2	1120.7	1135.2	1120.7
52.5°	82.9	216.2	349.6	560.6	797.5	948.8	1014.3	1066.8	1080.1	1093.5	1080.1
55°	76.7	185.4	294.1	502.9	745.0	894.7	952.0	997.8	1009.4	1021.0	1009.4
57.5°	71.1	158.8	246.5	448.8	689.1	833.8	882.6	921.6	931.0	940.5	931.0
60°	68.5	144.6	220.7	414.8	648.2	787.1	831.3	866.8	876.2	885.7	876.2
62.5°	64.6	130.8	197.1	380.9	603.9	735.7	776.5	809.3	818.1	826.9	818.1
65°	60.3	114.0	167.6	333.3	536.3	654.8	688.8	715.8	721.6	727.4	721.6
67.5°	54.5	100.0	145.5	289.7	466.7	565.8	587.0	600.1	589.2	578.4	589.2
70°	50.6	92.6	134.7	263.1	420.4	502.7	510.0	507.6	476.4	445.3	476.4
72.5°	48.0	85.4	122.8	234.0	369.8	429.8	413.8	387.1	328.1	269.1	328.1
75°	42.4	72.9	103.3	187.0	288.5	304.5	234.9	183.0	184.5	185.9	184.5
77.5°	34.6	57.3	80.1	131.6	192.6	204.7	167.9	140.6	141.9	143.2	141.9
80°	29.4	47.5	65.6	85.9	106.9	116.7	115.3	114.4	115.1	115.8	115.1
82.5°	24.1	37.6	51.1	63.3	75.0	81.6	83.1	83.9	82.9	81.9	82.9
85°	14.7	22.7	30.6	35.3	39.0	37.9	32.1	27.4	25.9	24.5	25.9
87.5°	5.9	9.7	13.7	13.6	12.0	11.0	11.0	11.3	11.5	11.5	11.5
90°	3.4	7.9	13.6	18.1	21.5	22.6	22.6	23.7	24.8	24.8	24.8
92.5°	12.4	19.7	19.9	19.9	24.2	26.2	28.0	28.2	29.4	29.4	29.4
95°	35.0	38.4	57.6	56.5	38.4	30.5	26.0	26.0	26.0	26.0	26.0
97.5°	66.9	71.8	75.0	100.5	106.2	102.6	83.6	70.3	62.8	59.4	62.8
100°	94.9	97.1	103.9	105.0	133.3	160.4	146.8	129.9	124.2	120.9	124.2
102.5°	122.9	124.2	134.6	139.4	145.9	161.3	208.3	203.1	199.2	198.6	199.2
105°	164.9	166.0	185.2	194.3	198.8	198.8	197.7	220.2	256.4	264.3	256.4
107.5°	209.9	215.1	237.6	261.8	267.0	268.4	262.5	259.1	257.7	258.7	257.7
110°	240.6	248.5	275.6	306.1	314.0	316.3	314.0	310.6	308.3	308.3	308.3



TEST NUMBER: P1435961

CATALOG NUMBER: SQ2W-FB-K-075U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	270.4	281.9	312.6	347.7	361.0	367.8	362.8	360.3	358.0	359.9	358.0
115°	316.3	333.2	373.9	410.0	437.1	440.5	439.4	439.4	438.2	438.2	438.2
117.5°	358.7	385.8	431.5	473.5	504.9	513.9	518.4	517.1	515.7	518.0	515.7
120°	388.5	420.2	472.1	519.6	550.1	563.6	568.1	565.9	568.1	565.9	568.1
122.5°	420.2	459.0	510.1	559.3	595.2	610.6	616.0	616.5	616.9	615.6	616.9
125°	467.6	515.0	574.9	625.7	663.0	681.1	685.6	686.7	689.0	694.6	689.0
127.5°	515.5	569.3	635.0	684.0	722.2	744.1	751.1	753.6	758.3	760.8	758.3
130°	548.9	609.9	676.6	722.9	760.1	783.9	796.3	799.7	805.3	804.2	805.3
132.5°	584.2	647.9	715.4	763.5	798.1	823.6	834.2	843.9	846.0	847.6	846.0
135°	635.9	704.8	772.6	820.0	852.8	877.6	891.2	900.2	905.8	909.2	905.8
137.5°	690.3	763.1	828.1	870.4	903.4	924.8	940.2	949.7	955.5	958.2	955.5
140°	727.4	797.4	860.7	904.7	934.1	955.5	969.1	980.4	987.2	987.2	987.2
142.5°	762.6	831.7	893.2	937.2	963.0	982.6	997.1	1005.7	1013.4	1013.4	1013.4
145°	812.1	881.0	937.5	981.5	1003.0	1021.0	1036.9	1043.6	1048.2	1048.2	1048.2
147.5°	863.8	924.8	976.3	1018.6	1036.6	1057.9	1070.3	1075.7	1081.4	1078.9	1081.4
150°	894.5	951.0	1000.7	1040.2	1058.3	1078.7	1091.1	1095.6	1101.2	1097.9	1101.2
152.5°	924.4	978.1	1023.3	1060.1	1075.5	1095.8	1110.1	1114.6	1118.4	1115.9	1118.4
155°	964.6	1012.0	1053.8	1087.7	1101.2	1120.4	1134.0	1139.6	1144.2	1138.5	1144.2
157.5°	1000.5	1041.4	1077.7	1108.9	1123.4	1139.9	1152.5	1159.5	1164.0	1161.6	1164.0
160°	1022.2	1059.4	1092.2	1121.6	1135.1	1149.8	1163.4	1171.3	1175.8	1172.4	1175.8
162.5°	1040.2	1073.9	1104.9	1131.5	1143.3	1156.1	1172.4	1179.4	1183.9	1179.6	1183.9
165°	1066.2	1093.3	1120.4	1143.0	1153.2	1163.4	1180.3	1188.2	1191.6	1187.1	1191.6
167.5°	1085.9	1106.7	1128.6	1148.0	1155.5	1165.4	1182.3	1188.9	1193.2	1187.5	1193.2
170°	1096.7	1114.8	1134.0	1149.8	1155.5	1164.5	1181.4	1187.1	1190.5	1184.8	1190.5
172.5°	1105.8	1119.3	1134.9	1148.9	1151.8	1159.1	1175.1	1180.8	1183.2	1178.5	1183.2
175°	1114.8	1122.7	1134.0	1143.0	1141.9	1146.4	1160.0	1164.5	1169.0	1162.2	1169.0
177.5°	1119.1	1122.7	1126.3	1131.7	1128.1	1128.1	1138.1	1140.8	1141.7	1138.1	1141.7
180°	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2

TEST NUMBER: P1435961

CATALOG NUMBER: SQ2W-FB-K-075U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	339.3	339.3	339.3	339.3	339.3	339.3	339.3	339.3	339.3	339.3	339.3
2.5°	385.8	378.8	370.7	363.2	356.2	349.4	343.0	336.6	343.0	349.4	356.2
5°	560.9	523.0	478.8	439.3	404.5	373.0	351.2	329.5	351.2	373.0	404.5
7.5°	940.4	842.1	723.5	609.1	498.9	405.2	361.0	316.7	361.0	405.2	498.9
10°	1110.9	1028.6	925.7	778.6	587.2	428.2	366.6	305.0	366.6	428.2	587.2
12.5°	1173.7	1114.3	1042.1	889.2	655.5	459.3	375.6	292.0	375.6	459.3	655.5
15°	1253.5	1203.7	1145.0	987.7	731.8	510.0	390.4	270.8	390.4	510.0	731.8
17.5°	1300.5	1253.7	1195.6	1042.2	793.6	567.3	408.1	248.9	408.1	567.3	793.6
20°	1308.5	1269.0	1218.9	1074.0	834.0	607.3	420.3	233.2	420.3	607.3	834.0
22.5°	1300.8	1270.3	1232.4	1097.0	864.0	637.0	427.9	218.9	427.9	637.0	864.0
25°	1286.7	1267.3	1243.4	1119.8	896.5	670.2	434.6	199.0	434.6	670.2	896.5
27.5°	1260.3	1247.1	1231.4	1116.1	901.1	677.6	428.7	179.7	428.7	677.6	901.1
30°	1240.0	1229.3	1217.7	1106.4	895.4	674.0	421.0	168.0	421.0	674.0	895.4
32.5°	1224.0	1211.4	1200.4	1091.5	884.6	665.9	411.7	157.6	411.7	665.9	884.6
35°	1213.3	1192.3	1174.9	1063.6	858.5	642.1	392.0	141.9	392.0	642.1	858.5
37.5°	1217.9	1182.9	1146.5	1025.3	819.1	604.9	366.7	128.5	366.7	604.9	819.1
40°	1216.8	1173.8	1125.2	997.3	790.0	577.4	349.0	120.7	349.0	577.4	790.0
42.5°	1203.7	1154.7	1098.0	965.1	756.0	545.2	329.0	112.9	329.0	545.2	756.0
45°	1177.2	1121.1	1054.4	914.1	700.3	491.3	297.0	102.8	297.0	491.3	700.3
47.5°	1139.7	1082.1	1011.4	864.2	640.7	430.8	262.1	93.3	262.1	430.8	640.7
50°	1106.2	1050.4	980.8	830.7	600.2	389.6	238.9	88.1	238.9	389.6	600.2
52.5°	1066.8	1014.3	948.8	797.5	560.6	349.6	216.2	82.9	216.2	349.6	560.6
55°	997.8	952.0	894.7	745.0	502.9	294.1	185.4	76.7	185.4	294.1	502.9
57.5°	921.6	882.6	833.8	689.1	448.8	246.5	158.8	71.1	158.8	246.5	448.8
60°	866.8	831.3	787.1	648.2	414.8	220.7	144.6	68.5	144.6	220.7	414.8
62.5°	809.3	776.5	735.7	603.9	380.9	197.1	130.8	64.6	130.8	197.1	380.9
65°	715.8	688.8	654.8	536.3	333.3	167.6	114.0	60.3	114.0	167.6	333.3
67.5°	600.1	587.0	565.8	466.7	289.7	145.5	100.0	54.5	100.0	145.5	289.7
70°	507.6	510.0	502.7	420.4	263.1	134.7	92.6	50.6	92.6	134.7	263.1
72.5°	387.1	413.8	429.8	369.8	234.0	122.8	85.4	48.0	85.4	122.8	234.0
75°	183.0	234.9	304.5	288.5	187.0	103.3	72.9	42.4	72.9	103.3	187.0
77.5°	140.6	167.9	204.7	192.6	131.6	80.1	57.3	34.6	57.3	80.1	131.6
80°	114.4	115.3	116.7	106.9	85.9	65.6	47.5	29.4	47.5	65.6	85.9
82.5°	83.9	83.1	81.6	75.0	63.3	51.1	37.6	24.1	37.6	51.1	63.3
85°	27.4	32.1	37.9	39.0	35.3	30.6	22.7	14.7	22.7	30.6	35.3
87.5°	11.3	11.0	11.0	12.0	13.6	13.7	9.7	5.9	9.7	13.5	14.1
90°	23.7	22.6	22.6	21.5	18.1	13.6	7.9	3.4	7.9	12.4	20.3
92.5°	28.2	28.0	26.2	24.2	19.9	19.9	19.7	12.4	21.5	30.5	43.8
95°	26.0	26.0	30.5	38.4	56.5	57.6	38.4	35.0	49.7	70.0	88.1
97.5°	70.3	83.6	102.6	106.2	100.5	75.0	71.8	66.9	91.0	111.1	140.3
100°	129.9	146.8	160.4	133.3	105.0	103.9	97.1	94.9	120.9	140.1	168.3
102.5°	203.1	208.3	161.3	145.9	139.4	134.6	124.2	122.9	148.9	175.3	199.0
105°	220.2	197.7	198.8	198.8	194.3	185.2	166.0	164.9	194.3	224.8	254.1
107.5°	259.1	262.5	268.4	267.0	261.8	237.6	215.1	209.9	236.3	272.9	305.2
110°	310.6	314.0	316.3	314.0	306.1	275.6	248.5	240.6	264.3	302.7	337.7



TEST NUMBER: P1435961

CATALOG NUMBER: SQ2W-FB-K-075U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	360.3	362.8	367.8	361.0	347.7	312.6	281.9	270.4	294.1	333.4	369.3
115°	439.4	439.4	440.5	437.1	410.0	373.9	333.2	316.3	336.6	372.7	412.3
117.5°	517.1	518.4	513.9	504.9	473.5	431.5	385.8	358.7	374.8	412.9	453.6
120°	565.9	568.1	563.6	550.1	519.6	472.1	420.2	388.5	401.0	438.2	478.9
122.5°	616.5	616.0	610.6	595.2	559.3	510.1	459.0	420.2	425.4	459.9	499.7
125°	686.7	685.6	681.1	663.0	625.7	574.9	515.0	467.6	460.8	490.2	530.9
127.5°	753.6	751.1	744.1	722.2	684.0	635.0	569.3	515.5	500.4	518.9	556.2
130°	799.7	796.3	783.9	760.1	722.9	676.6	609.9	548.9	527.5	538.8	571.5
132.5°	843.9	834.2	823.6	798.1	763.5	715.4	647.9	584.2	554.6	559.5	585.1
135°	900.2	891.2	877.6	852.8	820.0	772.6	704.8	635.9	595.2	590.7	605.4
137.5°	949.7	940.2	924.8	903.4	870.4	828.1	763.1	690.3	639.1	623.9	629.6
140°	980.4	969.1	955.5	934.1	904.7	860.7	797.4	727.4	669.8	648.3	644.9
142.5°	1005.7	997.1	982.6	963.0	937.2	893.2	831.7	762.6	701.4	673.6	665.7
145°	1043.6	1036.9	1021.0	1003.0	981.5	937.5	881.0	812.1	751.1	715.0	698.0
147.5°	1075.7	1070.3	1057.9	1036.6	1018.6	976.3	924.8	863.8	801.3	756.5	734.6
150°	1095.6	1091.1	1078.7	1058.3	1040.2	1000.7	951.0	894.5	834.7	787.2	759.0
152.5°	1114.6	1110.1	1095.8	1075.5	1060.1	1023.3	978.1	924.4	863.6	816.2	787.0
155°	1139.6	1134.0	1120.4	1101.2	1087.7	1053.8	1012.0	964.6	912.6	862.9	830.2
157.5°	1159.5	1152.5	1139.9	1123.4	1108.9	1077.7	1041.4	1000.5	955.1	907.6	874.2
160°	1171.3	1163.4	1149.8	1135.1	1121.6	1092.2	1059.4	1022.2	980.4	937.5	901.3
162.5°	1179.4	1172.4	1156.1	1143.3	1131.5	1104.9	1073.9	1040.2	1003.0	965.5	932.0
165°	1188.2	1180.3	1163.4	1153.2	1143.0	1120.4	1093.3	1066.2	1034.6	1004.1	977.0
167.5°	1188.9	1182.3	1165.4	1155.5	1148.0	1128.6	1106.7	1085.9	1061.3	1037.3	1014.7
170°	1187.1	1181.4	1164.5	1155.5	1149.8	1134.0	1114.8	1096.7	1077.5	1057.2	1039.1
172.5°	1180.8	1175.1	1159.1	1151.8	1148.9	1134.9	1119.3	1105.8	1089.3	1074.4	1059.9
175°	1164.5	1160.0	1146.4	1141.9	1143.0	1134.0	1122.7	1114.8	1104.6	1095.6	1087.7
177.5°	1140.8	1138.1	1128.1	1128.1	1131.7	1126.3	1122.7	1119.1	1114.6	1111.9	1109.1
180°	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2



TEST NUMBER: P1435961

CATALOG NUMBER: SQ2W-FB-K-075U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	339.3	339.3	339.3	339.3	339.3	339.3	339.3	339.3	339.3	339.3	339.3
2.5°	363.2	370.7	378.8	385.8	389.3	392.8	389.3	385.8	378.8	370.7	363.2
5°	439.3	478.8	523.0	560.9	579.7	598.6	579.7	560.9	523.0	478.8	439.3
7.5°	609.1	723.5	842.1	940.4	978.1	1015.8	978.1	940.4	842.1	723.5	609.1
10°	778.6	925.7	1028.6	1110.9	1131.2	1151.5	1131.2	1110.9	1028.6	925.7	778.6
12.5°	889.2	1042.1	1114.3	1173.7	1194.6	1215.5	1194.6	1173.7	1114.3	1042.1	889.2
15°	987.7	1145.0	1203.7	1253.5	1276.7	1299.9	1276.7	1253.5	1203.7	1145.0	987.7
17.5°	1042.2	1195.6	1253.7	1300.5	1313.1	1325.7	1313.1	1300.5	1253.7	1195.6	1042.2
20°	1074.0	1218.9	1269.0	1308.5	1316.4	1324.4	1316.4	1308.5	1269.0	1218.9	1074.0
22.5°	1097.0	1232.4	1270.3	1300.8	1309.3	1317.9	1309.3	1300.8	1270.3	1232.4	1097.0
25°	1119.8	1243.4	1267.3	1286.7	1292.5	1298.3	1292.5	1286.7	1267.3	1243.4	1119.8
27.5°	1116.1	1231.4	1247.1	1260.3	1265.9	1271.6	1265.9	1260.3	1247.1	1231.4	1116.1
30°	1106.4	1217.7	1229.3	1240.0	1247.9	1255.9	1247.9	1240.0	1229.3	1217.7	1106.4
32.5°	1091.5	1200.4	1211.4	1224.0	1241.3	1258.5	1241.3	1224.0	1211.4	1200.4	1091.5
35°	1063.6	1174.9	1192.3	1213.3	1245.2	1277.1	1245.2	1213.3	1192.3	1174.9	1063.6
37.5°	1025.3	1146.5	1182.9	1217.9	1248.7	1279.4	1248.7	1217.9	1182.9	1146.5	1025.3
40°	997.3	1125.2	1173.8	1216.8	1242.9	1269.0	1242.9	1216.8	1173.8	1125.2	997.3
42.5°	965.1	1098.0	1154.7	1203.7	1229.8	1255.9	1229.8	1203.7	1154.7	1098.0	965.1
45°	914.1	1054.4	1121.1	1177.2	1201.9	1226.5	1201.9	1177.2	1121.1	1054.4	914.1
47.5°	864.2	1011.4	1082.1	1139.7	1157.7	1175.7	1157.7	1139.7	1082.1	1011.4	864.2
50°	830.7	980.8	1050.4	1106.2	1120.7	1135.2	1120.7	1106.2	1050.4	980.8	830.7
52.5°	797.5	948.8	1014.3	1066.8	1080.1	1093.5	1080.1	1066.8	1014.3	948.8	797.5
55°	745.0	894.7	952.0	997.8	1009.4	1021.0	1009.4	997.8	952.0	894.7	745.0
57.5°	689.1	833.8	882.6	921.6	931.0	940.5	931.0	921.6	882.6	833.8	689.1
60°	648.2	787.1	831.3	866.8	876.2	885.7	876.2	866.8	831.3	787.1	648.2
62.5°	603.9	735.7	776.5	809.3	818.1	826.9	818.1	809.3	776.5	735.7	603.9
65°	536.3	654.8	688.8	715.8	721.6	727.4	721.6	715.8	688.8	654.8	536.3
67.5°	466.7	565.8	587.0	600.1	589.2	578.4	589.2	600.1	587.0	565.8	466.7
70°	420.4	502.7	510.0	507.6	476.4	445.3	476.4	507.6	510.0	502.7	420.4
72.5°	369.8	429.8	413.8	387.1	328.1	269.1	328.1	413.8	429.8	413.8	369.8
75°	288.5	304.5	234.9	183.0	184.5	185.9	184.5	234.9	304.5	288.5	288.5
77.5°	192.6	204.7	167.9	140.6	141.9	143.2	141.9	167.9	204.7	192.6	192.6
80°	106.9	116.7	115.3	114.4	115.1	115.8	115.1	114.4	115.3	116.7	106.9
82.5°	75.0	81.6	83.1	83.9	82.9	81.9	82.9	83.1	81.6	75.0	75.0
85°	39.0	37.9	32.1	27.4	25.9	24.5	25.9	32.1	37.9	39.0	39.0
87.5°	12.9	13.3	14.9	15.8	16.7	16.2	16.7	14.9	13.3	12.9	12.9
90°	26.0	33.9	41.8	46.3	50.8	48.6	50.8	41.8	33.9	26.0	26.0
92.5°	52.2	65.5	75.2	83.4	87.0	86.5	87.0	75.2	65.5	52.2	52.2
95°	105.0	120.9	136.7	148.0	154.7	152.5	154.7	136.7	120.9	105.0	105.0
97.5°	162.0	183.2	200.8	211.4	218.2	222.7	218.2	200.8	183.2	162.0	162.0
100°	199.9	220.2	240.6	253.0	264.3	268.8	264.3	240.6	220.2	199.9	199.9
102.5°	230.6	257.3	279.4	292.8	302.2	306.8	302.2	279.4	257.3	230.6	230.6
105°	281.2	309.5	333.2	350.1	360.3	363.7	360.3	309.5	333.2	309.5	281.2
107.5°	331.8	361.0	382.9	401.6	414.1	421.3	414.1	361.0	382.9	361.0	331.8
110°	371.6	395.3	419.0	436.0	448.4	452.9	448.4	419.0	395.3	371.6	371.6

TEST NUMBER: P1435961

CATALOG NUMBER: SQ2W-FB-K-075U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	405.0	431.5	455.2	472.1	486.4	492.7	486.4	472.1	455.2	431.5	405.0
115°	451.8	486.8	508.3	524.1	534.2	539.9	534.2	524.1	508.3	486.8	451.8
117.5°	490.6	527.2	550.7	562.9	567.7	571.7	567.7	562.9	550.7	527.2	490.6
120°	515.0	548.9	576.0	591.8	597.5	599.8	597.5	591.8	576.0	548.9	515.0
122.5°	537.6	569.7	595.9	615.3	624.6	626.9	624.6	615.3	595.9	569.7	537.6
125°	569.3	599.8	626.9	646.1	656.2	661.9	656.2	646.1	626.9	599.8	569.3
127.5°	596.8	629.8	654.6	672.0	682.0	686.5	682.0	672.0	654.6	629.8	596.8
130°	612.2	646.1	670.9	690.1	699.1	703.7	699.1	690.1	670.9	646.1	612.2
132.5°	623.9	659.6	685.4	702.8	712.7	717.2	712.7	702.8	685.4	659.6	623.9
135°	638.2	675.4	702.5	719.5	728.5	733.0	728.5	719.5	702.5	675.4	638.2
137.5°	650.6	684.5	712.7	730.5	738.7	741.6	738.7	730.5	712.7	684.5	650.6
140°	659.6	689.0	717.2	734.2	743.2	744.3	743.2	734.2	717.2	689.0	659.6
142.5°	671.4	694.4	719.0	736.0	745.0	747.0	745.0	736.0	719.0	694.4	671.4
145°	692.4	705.9	722.9	738.7	746.6	748.8	746.6	738.7	722.9	705.9	692.4
147.5°	718.8	723.1	731.9	742.3	750.0	751.6	750.0	742.3	731.9	723.1	718.8
150°	738.7	737.5	740.9	747.7	754.5	753.4	754.5	747.7	740.9	737.5	738.7
152.5°	761.3	754.7	754.5	757.7	760.8	760.6	760.8	757.7	754.5	754.7	761.3
155°	799.7	787.2	780.5	778.2	778.2	777.1	778.2	778.2	780.5	787.2	799.7
157.5°	841.9	824.5	814.4	808.9	807.4	804.9	807.4	808.9	814.4	824.5	841.9
160°	870.8	851.6	841.5	832.4	829.0	825.6	829.0	832.4	841.5	851.6	870.8
162.5°	897.9	879.6	868.6	860.4	857.0	851.9	857.0	860.4	868.6	879.6	897.9
165°	942.0	922.8	910.4	903.6	899.1	894.5	899.1	903.6	910.4	922.8	942.0
167.5°	986.0	965.0	956.9	949.2	944.9	936.8	944.9	949.2	956.9	965.0	986.0
170°	1013.1	993.9	989.4	982.6	974.7	965.7	974.7	982.6	989.4	993.9	1013.1
172.5°	1036.6	1023.8	1019.2	1012.5	1010.0	1002.7	1010.0	1012.5	1019.2	1023.8	1036.6
175°	1070.7	1060.6	1060.6	1059.4	1056.1	1049.3	1056.1	1059.4	1060.6	1060.6	1070.7
177.5°	1099.2	1093.8	1097.4	1097.4	1096.5	1090.2	1096.5	1097.4	1097.4	1093.8	1099.2
180°	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2



TEST NUMBER: P1435961

CATALOG NUMBER: SQ2W-FB-K-075U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	339.3	339.3	339.3	339.3
2.5°	356.2	349.4	343.0	336.6
5°	404.5	373.0	351.2	329.5
7.5°	498.9	405.2	361.0	316.7
10°	587.2	428.2	366.6	305.0
12.5°	655.5	459.3	375.6	292.0
15°	731.8	510.0	390.4	270.8
17.5°	793.6	567.3	408.1	248.9
20°	834.0	607.3	420.3	233.2
22.5°	864.0	637.0	427.9	218.9
25°	896.5	670.2	434.6	199.0
27.5°	901.1	677.6	428.7	179.7
30°	895.4	674.0	421.0	168.0
32.5°	884.6	665.9	411.7	157.6
35°	858.5	642.1	392.0	141.9
37.5°	819.1	604.9	366.7	128.5
40°	790.0	577.4	349.0	120.7
42.5°	756.0	545.2	329.0	112.9
45°	700.3	491.3	297.0	102.8
47.5°	640.7	430.8	262.1	93.3
50°	600.2	389.6	238.9	88.1
52.5°	560.6	349.6	216.2	82.9
55°	502.9	294.1	185.4	76.7
57.5°	448.8	246.5	158.8	71.1
60°	414.8	220.7	144.6	68.5
62.5°	380.9	197.1	130.8	64.6
65°	333.3	167.6	114.0	60.3
67.5°	289.7	145.5	100.0	54.5
70°	263.1	134.7	92.6	50.6
72.5°	234.0	122.8	85.4	48.0
75°	187.0	103.3	72.9	42.4
77.5°	131.6	80.1	57.3	34.6
80°	85.9	65.6	47.5	29.4
82.5°	63.3	51.1	37.6	24.1
85°	35.3	30.6	22.7	14.7
87.5°	14.1	13.5	9.7	5.9
90°	20.3	12.4	7.9	3.4
92.5°	43.8	30.5	21.5	12.4
95°	88.1	70.0	49.7	35.0
97.5°	140.3	111.1	91.0	66.9
100°	168.3	140.1	120.9	94.9
102.5°	199.0	175.3	148.9	122.9
105°	254.1	224.8	194.3	164.9
107.5°	305.2	272.9	236.3	209.9
110°	337.7	302.7	264.3	240.6



TEST NUMBER: P1435961

CATALOG NUMBER: SQ2W-FB-K-075U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	369.3	333.4	294.1	270.4
115°	412.3	372.7	336.6	316.3
117.5°	453.6	412.9	374.8	358.7
120°	478.9	438.2	401.0	388.5
122.5°	499.7	459.9	425.4	420.2
125°	530.9	490.2	460.8	467.6
127.5°	556.2	518.9	500.4	515.5
130°	571.5	538.8	527.5	548.9
132.5°	585.1	559.5	554.6	584.2
135°	605.4	590.7	595.2	635.9
137.5°	629.6	623.9	639.1	690.3
140°	644.9	648.3	669.8	727.4
142.5°	665.7	673.6	701.4	762.6
145°	698.0	715.0	751.1	812.1
147.5°	734.6	756.5	801.3	863.8
150°	759.0	787.2	834.7	894.5
152.5°	787.0	816.2	863.6	924.4
155°	830.2	862.9	912.6	964.6
157.5°	874.2	907.6	955.1	1000.5
160°	901.3	937.5	980.4	1022.2
162.5°	932.0	965.5	1003.0	1040.2
165°	977.0	1004.1	1034.6	1066.2
167.5°	1014.7	1037.3	1061.3	1085.9
170°	1039.1	1057.2	1077.5	1096.7
172.5°	1059.9	1074.4	1089.3	1105.8
175°	1087.7	1095.6	1104.6	1114.8
177.5°	1109.1	1111.9	1114.6	1119.1
180°	1118.2	1118.2	1118.2	1118.2



TEST NUMBER: P1435961
 CATALOG NUMBER: SQ2W-FB-K-075U-075D-L830-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.14	13.04	13.09	14.00	15.26	21.74	22.64	22.69	23.60	24.86
	3H	13.09	13.89	14.04	14.86	16.15	23.35	24.15	24.31	25.13	26.41
	4H	13.49	14.25	14.46	15.22	16.51	23.53	24.29	24.50	25.27	26.56
	6H	13.74	14.44	14.72	15.43	16.73	23.61	24.31	24.59	25.29	26.59
	8H	13.84	14.50	14.82	15.50	16.80	23.62	24.29	24.61	25.29	26.59
	12H	13.89	14.52	14.88	15.52	16.84	23.60	24.24	24.60	25.23	26.56
4H	2H	16.87	17.63	17.85	18.61	19.90	22.11	22.87	23.09	23.85	25.14
	3H	18.00	18.63	18.99	19.64	20.95	24.00	24.64	24.99	25.64	26.95
	4H	18.28	18.86	19.28	19.86	21.19	24.23	24.80	25.22	25.81	27.13
	6H	18.42	18.92	19.43	19.94	21.27	24.36	24.86	25.37	25.88	27.21
	8H	18.46	18.93	19.47	19.95	21.29	24.41	24.87	25.42	25.89	27.23
	12H	18.47	18.89	19.49	19.92	21.27	24.39	24.81	25.42	25.84	27.19
8H	4H	19.48	19.94	20.49	20.96	22.30	24.32	24.78	25.33	25.80	27.14
	6H	19.74	20.12	20.77	21.18	22.52	24.52	24.90	25.55	25.96	27.30
	8H	19.84	20.18	20.88	21.22	22.58	24.61	24.95	25.65	25.99	27.35
	12H	19.88	20.18	20.93	21.22	22.62	24.62	24.91	25.66	25.95	27.35
12H	4H	19.51	19.93	20.54	20.96	22.31	24.27	24.69	25.30	25.73	27.07
	6H	19.85	20.19	20.89	21.23	22.59	24.50	24.84	25.54	25.89	27.24
	8H	19.99	20.28	21.03	21.32	22.72	24.60	24.90	25.65	25.94	27.34