

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1427921

Luminaire Tested: SQ2W-PH1-K-100U-075D-L830-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1427921
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-10)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-PH1-K-100U-075D-L830-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - PERCEIVE HEX LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 750 LUMENS PER FOOT
UPLIGHT 1000 LUMENS PER FOOT
Light Source: 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8167.9 lumens
Efficiency: N/A
Efficacy: 136.6 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.02 / 1.23
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 59.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1427921

CATALOG NUMBER: SQ2W-PH1-K-100U-075D-L830-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

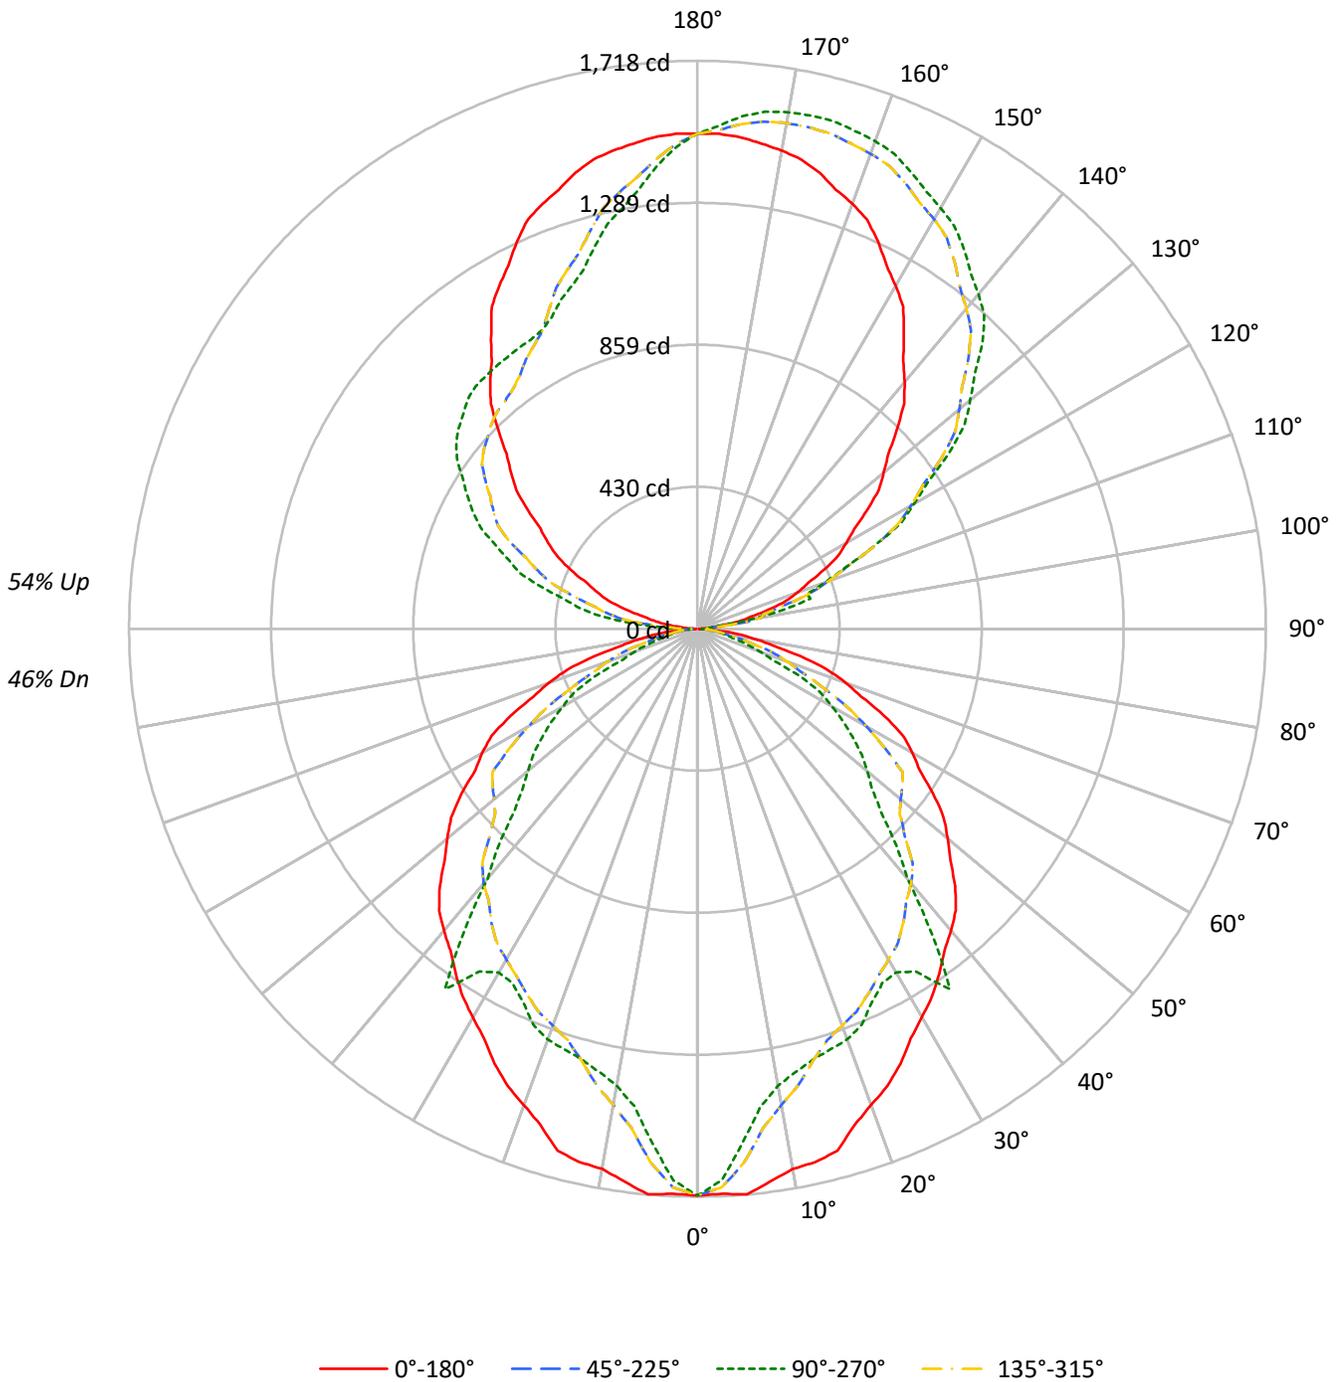



TEST NUMBER: P1427921

CATALOG NUMBER: SQ2W-PH1-K-100U-075D-L830-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	98	98	98	98	81	81	81	67	67	67	53	53	53	46
1	97	93	89	86	89	86	82	79	72	69	67	59	57	56	47	46	45	40
2	89	81	75	70	81	75	70	65	63	59	56	52	49	47	42	40	38	33
3	81	72	64	59	74	66	60	55	56	51	47	46	43	40	37	35	33	28
4	74	63	56	50	68	59	52	46	49	44	40	41	37	34	33	30	28	24
5	68	56	48	43	62	52	45	40	44	39	35	37	33	30	30	27	25	21
6	63	51	43	37	57	47	40	35	40	34	30	33	29	26	27	24	22	19
7	58	46	38	32	53	42	35	30	36	31	27	30	26	23	25	22	19	17
8	54	41	34	29	49	39	32	27	33	27	24	28	23	20	23	20	17	15
9	50	38	30	25	46	35	29	24	30	25	21	25	21	18	21	18	16	13
10	47	35	28	23	43	32	26	22	28	23	19	23	19	17	19	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	27677	27677	27677	27677
5°	27836	25298	27836	25298
10°	27195	22997	27195	22997
15°	27317	22547	27317	22547
20°	26343	22728	26343	22728
25°	25860	22199	25860	22199
30°	25299	22379	25299	22379
35°	25107	26232	25107	26232
40°	25130	20798	25130	20798
45°	25139	17913	25139	17913
50°	24786	16796	24786	16796
55°	24470	16115	24470	16115
60°	24228	15115	24228	15115
65°	23805	13146	23805	13146
70°	22484	9394	22484	9394
75°	20043	7124	20043	7124
80°	16383	6676	16383	6676
85°	10281	4539	10281	4539

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 25139 cd/sqm



TEST NUMBER: P1427921

CATALOG NUMBER: SQ2W-PH1-K-100U-075D-L830-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	150.8	1.8
10°-20°	396.8	4.9
20°-30°	581.7	7.1
30°-40°	704.4	8.6
40°-50°	692.6	8.5
50°-60°	602.5	7.4
60°-70°	419.0	5.1
70°-80°	198.7	2.4
80°-90°	50.0	0.6
90°-100°	119.2	1.5
100°-110°	347.5	4.3
110°-120°	567.1	6.9
120°-130°	719.6	8.8
130°-140°	770.0	9.4
140°-150°	719.0	8.8
150°-160°	591.6	7.2
160°-170°	396.8	4.9
170°-180°	140.9	1.7
0°-30°	1129.3	13.8
0°-40°	1833.6	22.4
0°-60°	3128.7	38.3
0°-90°	3796.5	46.5
90°-120°	1033.7	12.7
90°-150°	3242.2	39.7
90°-180°	4371.0	53.5
0°-180°	8167.9	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1714	1714	1714	1714	1714	
5°	1718	1561	1718	1561	1718	162
15°	1634	1349	1634	1349	1634	456
25°	1452	1246	1452	1246	1452	668
35°	1274	1331	1274	1331	1274	798
45°	1101	784	1101	784	1101	846
55°	869	572	869	572	869	777
65°	623	344	623	344	623	612
75°	321	114	321	114	321	340
85°	56	24	56	24	56	74
90°	4	33	4	65	4	5
95°	47	35	47	204	47	57
105°	221	354	221	487	221	235
115°	423	587	423	723	423	417
125°	626	930	626	886	626	560
135°	851	1217	851	982	851	658
145°	1087	1403	1087	1003	1087	680
155°	1292	1524	1292	1040	1292	594
165°	1428	1589	1428	1198	1428	402
175°	1493	1556	1493	1405	1493	142
180°	1497	1497	1497	1497	1497	



TEST NUMBER: P1427921

CATALOG NUMBER: SQ2W-PH1-K-100U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2
2.5°	1710.3	1718.4	1726.5	1715.1	1697.1	1684.6	1677.7	1672.2	1671.0	1669.9	1671.0
5°	1717.5	1716.8	1716.0	1682.1	1637.2	1603.5	1581.0	1563.8	1562.4	1560.9	1562.4
7.5°	1686.2	1663.7	1641.2	1595.7	1542.5	1503.5	1478.7	1459.8	1458.7	1457.5	1458.7
10°	1658.8	1624.7	1590.6	1539.2	1481.9	1442.0	1419.6	1402.7	1402.7	1402.7	1402.7
12.5°	1652.2	1598.5	1544.7	1488.3	1431.0	1394.0	1377.4	1365.7	1369.2	1372.7	1369.2
15°	1634.3	1553.1	1471.9	1414.7	1365.4	1338.5	1334.2	1332.9	1340.9	1348.9	1340.9
17.5°	1574.9	1487.5	1400.1	1349.7	1311.8	1297.4	1306.7	1316.0	1325.2	1334.5	1325.2
20°	1533.2	1446.9	1360.7	1314.1	1280.7	1272.8	1290.2	1305.4	1314.1	1322.8	1314.1
22.5°	1497.9	1410.5	1323.1	1281.9	1256.1	1252.7	1271.9	1287.4	1292.0	1296.7	1292.0
25°	1451.6	1353.0	1254.5	1224.4	1217.1	1221.8	1238.5	1250.5	1248.3	1246.1	1248.3
27.5°	1396.2	1293.2	1190.3	1171.0	1179.5	1188.9	1199.0	1207.0	1208.3	1209.6	1208.3
30°	1357.0	1254.1	1151.2	1135.7	1149.5	1161.5	1171.6	1181.6	1191.0	1200.4	1191.0
32.5°	1319.2	1212.8	1106.4	1095.3	1116.0	1138.4	1162.5	1185.9	1207.6	1229.2	1207.6
35°	1273.8	1162.9	1052.0	1043.3	1068.7	1101.3	1141.2	1188.8	1259.9	1330.9	1259.9
37.5°	1226.2	1107.3	988.4	984.5	1018.9	1053.2	1087.6	1119.0	1141.6	1164.2	1141.6
40°	1192.3	1067.6	942.9	942.7	984.1	1026.8	1071.1	1091.2	1039.0	986.8	1039.0
42.5°	1155.8	1031.1	906.4	902.7	939.4	986.5	1044.1	1065.2	977.1	888.9	977.1
45°	1101.0	971.2	841.4	836.7	873.7	899.8	915.0	910.7	847.6	784.5	847.6
47.5°	1036.4	912.7	789.0	788.0	827.9	830.8	796.7	765.0	740.3	715.7	740.3
50°	986.8	870.1	753.4	758.4	804.1	799.8	745.4	700.6	684.7	668.7	684.7
52.5°	938.5	827.6	716.7	730.2	785.1	776.4	704.1	647.1	636.4	625.7	636.4
55°	869.3	762.8	656.2	686.7	762.8	751.2	651.9	576.8	574.7	572.5	574.7
57.5°	795.9	695.2	594.4	615.6	677.3	665.1	579.0	515.4	519.1	522.9	519.1
60°	750.3	652.4	554.6	557.3	593.5	581.9	522.5	476.8	472.5	468.1	472.5
62.5°	702.0	608.8	515.6	502.0	515.1	501.5	461.2	429.8	425.5	421.1	425.5
65°	623.1	538.2	453.4	427.9	422.1	402.5	369.2	344.1	344.1	344.1	344.1
67.5°	536.3	462.3	388.4	359.8	346.3	326.9	301.5	278.1	260.7	243.4	260.7
70°	476.3	411.0	345.8	315.9	297.8	274.6	246.3	222.2	210.6	199.0	210.6
72.5°	412.3	356.4	300.4	269.8	247.6	225.0	201.9	181.3	168.0	154.6	168.0
75°	321.3	276.4	231.4	201.7	177.1	154.2	133.2	117.1	115.6	114.2	115.6
77.5°	232.3	199.5	166.7	142.7	121.5	105.6	95.0	87.1	87.3	87.4	87.3
80°	176.2	151.5	126.9	104.4	82.6	71.4	70.7	70.3	71.0	71.8	71.0
82.5°	124.0	105.7	87.4	73.1	60.0	54.0	55.0	55.8	56.0	56.1	56.0
85°	55.5	46.8	38.1	34.8	33.3	31.2	28.3	25.9	25.2	24.5	25.2
87.5°	12.7	13.3	14.2	14.0	13.1	12.6	12.6	12.9	13.2	13.2	13.2
90°	4.5	10.6	18.1	24.2	28.7	30.2	30.2	31.8	33.3	33.3	33.3
92.5°	16.6	26.3	26.6	26.6	32.4	35.1	37.5	37.8	39.3	39.3	39.3
95°	46.9	51.4	77.1	75.6	51.4	40.8	34.8	34.8	34.8	34.8	34.8
97.5°	89.5	96.2	100.4	134.6	142.2	137.3	111.9	94.1	84.1	79.5	84.1
100°	127.0	130.1	139.1	140.6	178.4	214.7	196.6	173.9	166.4	161.8	166.4
102.5°	164.5	166.4	180.3	186.6	195.4	216.0	278.9	271.9	266.8	265.9	266.8
105°	220.8	222.3	248.0	260.1	266.2	266.2	264.7	294.9	343.3	353.9	343.3
107.5°	281.0	287.9	318.2	350.5	357.5	359.3	351.5	346.9	345.1	346.3	345.1
110°	322.1	332.7	369.0	409.8	420.4	423.4	420.4	415.9	412.9	412.9	412.9



TEST NUMBER: P1427921

CATALOG NUMBER: SQ2W-PH1-K-100U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	362.0	377.5	418.6	465.5	483.3	492.4	485.7	482.4	479.4	481.8	479.4
115°	423.4	446.1	500.6	549.0	585.3	589.8	588.3	588.3	586.8	586.8	586.8
117.5°	480.3	516.6	577.7	634.0	676.0	688.1	694.1	692.3	690.5	693.5	690.5
120°	520.2	562.6	632.1	695.7	736.5	754.6	760.7	757.7	760.7	757.7	760.7
122.5°	562.6	614.6	682.9	748.9	797.0	817.5	824.8	825.4	826.0	824.2	826.0
125°	626.1	689.6	769.8	837.8	887.7	911.9	918.0	919.5	922.5	930.1	922.5
127.5°	690.2	762.2	850.2	915.8	967.0	996.3	1005.7	1009.0	1015.3	1018.7	1015.3
130°	735.0	816.6	905.9	967.9	1017.8	1049.5	1066.2	1070.7	1078.3	1076.7	1078.3
132.5°	782.2	867.4	957.9	1022.3	1068.6	1102.8	1117.0	1130.0	1132.7	1134.8	1132.7
135°	851.4	943.7	1034.4	1097.9	1141.8	1175.0	1193.2	1205.3	1212.9	1217.4	1212.9
137.5°	924.3	1021.7	1108.8	1165.4	1209.5	1238.3	1258.8	1271.5	1279.4	1283.0	1279.4
140°	973.9	1067.7	1152.4	1211.3	1250.7	1279.4	1297.5	1312.7	1321.7	1321.7	1321.7
142.5°	1021.1	1113.6	1195.9	1254.9	1289.4	1315.7	1335.0	1346.5	1356.8	1356.8	1356.8
145°	1087.3	1179.6	1255.2	1314.2	1342.9	1367.1	1388.3	1397.4	1403.4	1403.4	1403.4
147.5°	1156.6	1238.3	1307.2	1363.8	1388.0	1416.4	1433.0	1440.3	1447.9	1444.5	1447.9
150°	1197.7	1273.3	1339.9	1392.8	1417.0	1444.2	1460.9	1466.9	1474.5	1469.9	1474.5
152.5°	1237.7	1309.6	1370.1	1419.4	1440.0	1467.2	1486.3	1492.3	1497.5	1494.1	1497.5
155°	1291.5	1355.0	1411.0	1456.3	1474.5	1500.2	1518.3	1525.9	1531.9	1524.4	1531.9
157.5°	1339.6	1394.3	1443.0	1484.8	1504.1	1526.2	1543.1	1552.5	1558.6	1555.2	1558.6
160°	1368.6	1418.5	1462.4	1501.7	1519.8	1539.5	1557.7	1568.2	1574.3	1569.8	1574.3
162.5°	1392.8	1437.9	1479.3	1515.0	1530.7	1548.0	1569.8	1579.1	1585.2	1579.4	1585.2
165°	1427.6	1463.9	1500.2	1530.4	1544.0	1557.7	1580.3	1590.9	1595.5	1589.4	1595.5
167.5°	1453.9	1481.7	1511.1	1537.1	1547.1	1560.4	1583.1	1591.8	1597.6	1590.0	1597.6
170°	1468.4	1492.6	1518.3	1539.5	1547.1	1559.2	1581.9	1589.4	1593.9	1586.4	1593.9
172.5°	1480.5	1498.7	1519.5	1538.3	1542.2	1551.9	1573.4	1580.9	1584.3	1577.9	1584.3
175°	1492.6	1503.2	1518.3	1530.4	1528.9	1535.0	1553.1	1559.2	1565.2	1556.1	1565.2
177.5°	1498.4	1503.2	1508.1	1515.3	1510.5	1510.5	1523.8	1527.4	1528.6	1523.8	1528.6
180°	1497.2	1497.2	1497.2	1497.2	1497.2	1497.2	1497.2	1497.2	1497.2	1497.2	1497.2



TEST NUMBER: P1427921

CATALOG NUMBER: SQ2W-PH1-K-100U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2
2.5°	1672.2	1677.7	1684.6	1697.1	1715.1	1726.5	1718.4	1710.3	1718.4	1726.5	1715.1
5°	1563.8	1581.0	1603.5	1637.2	1682.1	1716.0	1716.8	1717.5	1716.8	1716.0	1682.1
7.5°	1459.8	1478.7	1503.5	1542.5	1595.7	1641.2	1663.7	1686.2	1663.7	1641.2	1595.7
10°	1402.7	1419.6	1442.0	1481.9	1539.2	1590.6	1624.7	1658.8	1624.7	1590.6	1539.2
12.5°	1365.7	1377.4	1394.0	1431.0	1488.3	1544.7	1598.5	1652.2	1598.5	1544.7	1488.3
15°	1332.9	1334.2	1338.5	1365.4	1414.7	1471.9	1553.1	1634.3	1553.1	1471.9	1414.7
17.5°	1316.0	1306.7	1297.4	1311.8	1349.7	1400.1	1487.5	1574.9	1487.5	1400.1	1349.7
20°	1305.4	1290.2	1272.8	1280.7	1314.1	1360.7	1446.9	1533.2	1446.9	1360.7	1314.1
22.5°	1287.4	1271.9	1252.7	1256.1	1281.9	1323.1	1410.5	1497.9	1410.5	1323.1	1281.9
25°	1250.5	1238.5	1221.8	1217.1	1224.4	1254.5	1353.0	1451.6	1353.0	1254.5	1224.4
27.5°	1207.0	1199.0	1188.9	1179.5	1171.0	1190.3	1293.2	1396.2	1293.2	1190.3	1171.0
30°	1181.6	1171.6	1161.5	1149.5	1135.7	1151.2	1254.1	1357.0	1254.1	1151.2	1135.7
32.5°	1185.9	1162.5	1138.4	1116.0	1095.3	1106.4	1212.8	1319.2	1212.8	1106.4	1095.3
35°	1188.8	1141.2	1101.3	1068.7	1043.3	1052.0	1162.9	1273.8	1162.9	1052.0	1043.3
37.5°	1119.0	1087.6	1053.2	1018.9	984.5	988.4	1107.3	1226.2	1107.3	988.4	984.5
40°	1091.2	1071.1	1026.8	984.1	942.7	942.9	1067.6	1192.3	1067.6	942.9	942.7
42.5°	1065.2	1044.1	986.5	939.4	902.7	906.4	1031.1	1155.8	1031.1	906.4	902.7
45°	910.7	915.0	899.8	873.7	836.7	841.4	971.2	1101.0	971.2	841.4	836.7
47.5°	765.0	796.7	830.8	827.9	788.0	789.0	912.7	1036.4	912.7	789.0	788.0
50°	700.6	745.4	799.8	804.1	758.4	753.4	870.1	986.8	870.1	753.4	758.4
52.5°	647.1	704.1	776.4	785.1	730.2	716.7	827.6	938.5	827.6	716.7	730.2
55°	576.8	651.9	751.2	762.8	686.7	656.2	762.8	869.3	762.8	656.2	686.7
57.5°	515.4	579.0	665.1	677.3	615.6	594.4	695.2	795.9	695.2	594.4	615.6
60°	476.8	522.5	581.9	593.5	557.3	554.6	652.4	750.3	652.4	554.6	557.3
62.5°	429.8	461.2	501.5	515.1	502.0	515.6	608.8	702.0	608.8	515.6	502.0
65°	344.1	369.2	402.5	422.1	427.9	453.4	538.2	623.1	538.2	453.4	427.9
67.5°	278.1	301.5	326.9	346.3	359.8	388.4	462.3	536.3	462.3	388.4	359.8
70°	222.2	246.3	274.6	297.8	315.9	345.8	411.0	476.3	411.0	345.8	315.9
72.5°	181.3	201.9	225.0	247.6	269.8	300.4	356.4	412.3	356.4	300.4	269.8
75°	117.1	133.2	154.2	177.1	201.7	231.4	276.4	321.3	276.4	231.4	201.7
77.5°	87.1	95.0	105.6	121.5	142.7	166.7	199.5	232.3	199.5	166.7	142.7
80°	70.3	70.7	71.4	82.6	104.4	126.9	151.5	176.2	151.5	126.9	104.4
82.5°	55.8	55.0	54.0	60.0	73.1	87.4	105.7	124.0	105.7	87.4	73.1
85°	25.9	28.3	31.2	33.3	34.8	38.1	46.8	55.5	46.8	38.1	34.8
87.5°	12.9	12.6	12.6	13.1	14.0	14.2	13.3	12.7	13.3	13.9	14.6
90°	31.8	30.2	30.2	28.7	24.2	18.1	10.6	4.5	10.6	16.6	27.2
92.5°	37.8	37.5	35.1	32.4	26.6	26.6	26.3	16.6	28.7	40.8	58.7
95°	34.8	34.8	40.8	51.4	75.6	77.1	51.4	46.9	66.5	93.8	118.0
97.5°	94.1	111.9	137.3	142.2	134.6	100.4	96.2	89.5	121.9	148.8	187.8
100°	173.9	196.6	214.7	178.4	140.6	139.1	130.1	127.0	161.8	187.5	225.3
102.5°	271.9	278.9	216.0	195.4	186.6	180.3	166.4	164.5	199.3	234.7	266.5
105°	294.9	264.7	266.2	266.2	260.1	248.0	222.3	220.8	260.1	300.9	340.3
107.5°	346.9	351.5	359.3	357.5	350.5	318.2	287.9	281.0	316.4	365.4	408.6
110°	415.9	420.4	423.4	420.4	409.8	369.0	332.7	322.1	353.9	405.3	452.2



TEST NUMBER: P1427921

CATALOG NUMBER: SQ2W-PH1-K-100U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	482.4	485.7	492.4	483.3	465.5	418.6	377.5	362.0	393.8	446.4	494.5
115°	588.3	588.3	589.8	585.3	549.0	500.6	446.1	423.4	450.7	499.1	552.0
117.5°	692.3	694.1	688.1	676.0	634.0	577.7	516.6	480.3	501.8	552.9	607.3
120°	757.7	760.7	754.6	736.5	695.7	632.1	562.6	520.2	536.9	586.8	641.2
122.5°	825.4	824.8	817.5	797.0	748.9	682.9	614.6	562.6	569.5	615.8	669.0
125°	919.5	918.0	911.9	887.7	837.8	769.8	689.6	626.1	617.0	656.3	710.8
127.5°	1009.0	1005.7	996.3	967.0	915.8	850.2	762.2	690.2	669.9	694.7	744.6
130°	1070.7	1066.2	1049.5	1017.8	967.9	905.9	816.6	735.0	706.2	721.4	765.2
132.5°	1130.0	1117.0	1102.8	1068.6	1022.3	957.9	867.4	782.2	742.5	749.2	783.4
135°	1205.3	1193.2	1175.0	1141.8	1097.9	1034.4	943.7	851.4	797.0	790.9	810.6
137.5°	1271.5	1258.8	1238.3	1209.5	1165.4	1108.8	1021.7	924.3	855.7	835.4	842.9
140°	1312.7	1297.5	1279.4	1250.7	1211.3	1152.4	1067.7	973.9	896.8	868.1	863.5
142.5°	1346.5	1335.0	1315.7	1289.4	1254.9	1195.9	1113.6	1021.1	939.1	901.9	891.3
145°	1397.4	1388.3	1367.1	1342.9	1314.2	1255.2	1179.6	1087.3	1005.7	957.3	934.6
147.5°	1440.3	1433.0	1416.4	1388.0	1363.8	1307.2	1238.3	1156.6	1072.8	1012.9	983.6
150°	1466.9	1460.9	1444.2	1417.0	1392.8	1339.9	1273.3	1197.7	1117.6	1054.1	1016.3
152.5°	1492.3	1486.3	1467.2	1440.0	1419.4	1370.1	1309.6	1237.7	1156.3	1092.8	1053.8
155°	1525.9	1518.3	1500.2	1474.5	1456.3	1411.0	1355.0	1291.5	1221.9	1155.4	1111.5
157.5°	1552.5	1543.1	1526.2	1504.1	1484.8	1443.0	1394.3	1339.6	1278.8	1215.3	1170.5
160°	1568.2	1557.7	1539.5	1519.8	1501.7	1462.4	1418.5	1368.6	1312.7	1255.2	1206.8
162.5°	1579.1	1569.8	1548.0	1530.7	1515.0	1479.3	1437.9	1392.8	1342.9	1292.7	1247.9
165°	1590.9	1580.3	1557.7	1544.0	1530.4	1500.2	1463.9	1427.6	1385.3	1344.4	1308.1
167.5°	1591.8	1583.1	1560.4	1547.1	1537.1	1511.1	1481.7	1453.9	1420.9	1388.9	1358.6
170°	1589.4	1581.9	1559.2	1547.1	1539.5	1518.3	1492.6	1468.4	1442.7	1415.5	1391.3
172.5°	1580.9	1573.4	1551.9	1542.2	1538.3	1519.5	1498.7	1480.5	1458.4	1438.5	1419.1
175°	1559.2	1553.1	1535.0	1528.9	1530.4	1518.3	1503.2	1492.6	1479.0	1466.9	1456.3
177.5°	1527.4	1523.8	1510.5	1510.5	1515.3	1508.1	1503.2	1498.4	1492.3	1488.7	1485.1
180°	1497.2	1497.2	1497.2	1497.2	1497.2	1497.2	1497.2	1497.2	1497.2	1497.2	1497.2



TEST NUMBER: P1427921

CATALOG NUMBER: SQ2W-PH1-K-100U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2
2.5°	1697.1	1684.6	1677.7	1672.2	1671.0	1669.9	1671.0	1672.2	1677.7	1684.6	1697.1
5°	1637.2	1603.5	1581.0	1563.8	1562.4	1560.9	1562.4	1563.8	1581.0	1603.5	1637.2
7.5°	1542.5	1503.5	1478.7	1459.8	1458.7	1457.5	1458.7	1459.8	1478.7	1503.5	1542.5
10°	1481.9	1442.0	1419.6	1402.7	1402.7	1402.7	1402.7	1402.7	1419.6	1442.0	1481.9
12.5°	1431.0	1394.0	1377.4	1365.7	1369.2	1372.7	1369.2	1365.7	1377.4	1394.0	1431.0
15°	1365.4	1338.5	1334.2	1332.9	1340.9	1348.9	1340.9	1332.9	1334.2	1338.5	1365.4
17.5°	1311.8	1297.4	1306.7	1316.0	1325.2	1334.5	1325.2	1316.0	1306.7	1297.4	1311.8
20°	1280.7	1272.8	1290.2	1305.4	1314.1	1322.8	1314.1	1305.4	1290.2	1272.8	1280.7
22.5°	1256.1	1252.7	1271.9	1287.4	1292.0	1296.7	1292.0	1287.4	1271.9	1252.7	1256.1
25°	1217.1	1221.8	1238.5	1250.5	1248.3	1246.1	1248.3	1250.5	1238.5	1221.8	1217.1
27.5°	1179.5	1188.9	1199.0	1207.0	1208.3	1209.6	1208.3	1207.0	1199.0	1188.9	1179.5
30°	1149.5	1161.5	1171.6	1181.6	1191.0	1200.4	1191.0	1181.6	1171.6	1161.5	1149.5
32.5°	1116.0	1138.4	1162.5	1185.9	1207.6	1229.2	1207.6	1185.9	1162.5	1138.4	1116.0
35°	1068.7	1101.3	1141.2	1188.8	1259.9	1330.9	1259.9	1188.8	1141.2	1101.3	1068.7
37.5°	1018.9	1053.2	1087.6	1119.0	1141.6	1164.2	1141.6	1119.0	1087.6	1053.2	1018.9
40°	984.1	1026.8	1071.1	1091.2	1039.0	986.8	1039.0	1091.2	1071.1	1026.8	984.1
42.5°	939.4	986.5	1044.1	1065.2	977.1	888.9	977.1	1065.2	1044.1	986.5	939.4
45°	873.7	899.8	915.0	910.7	847.6	784.5	847.6	910.7	915.0	899.8	873.7
47.5°	827.9	830.8	796.7	765.0	740.3	715.7	740.3	765.0	796.7	830.8	827.9
50°	804.1	799.8	745.4	700.6	684.7	668.7	684.7	700.6	745.4	799.8	804.1
52.5°	785.1	776.4	704.1	647.1	636.4	625.7	636.4	647.1	704.1	776.4	785.1
55°	762.8	751.2	651.9	576.8	574.7	572.5	574.7	576.8	651.9	751.2	762.8
57.5°	677.3	665.1	579.0	515.4	519.1	522.9	519.1	515.4	579.0	665.1	677.3
60°	593.5	581.9	522.5	476.8	472.5	468.1	472.5	476.8	522.5	581.9	593.5
62.5°	515.1	501.5	461.2	429.8	425.5	421.1	425.5	429.8	461.2	501.5	515.1
65°	422.1	402.5	369.2	344.1	344.1	344.1	344.1	344.1	369.2	402.5	422.1
67.5°	346.3	326.9	301.5	278.1	260.7	243.4	260.7	278.1	301.5	326.9	346.3
70°	297.8	274.6	246.3	222.2	210.6	199.0	210.6	222.2	246.3	274.6	297.8
72.5°	247.6	225.0	201.9	181.3	168.0	154.6	168.0	181.3	201.9	225.0	247.6
75°	177.1	154.2	133.2	117.1	115.6	114.2	115.6	117.1	133.2	154.2	177.1
77.5°	121.5	105.6	95.0	87.1	87.3	87.4	87.3	87.1	95.0	105.6	121.5
80°	82.6	71.4	70.7	70.3	71.0	71.8	71.0	70.3	70.7	71.4	82.6
82.5°	60.0	54.0	55.0	55.8	56.0	56.1	56.0	55.8	55.0	54.0	60.0
85°	33.3	31.2	28.3	25.9	25.2	24.5	25.2	25.9	28.3	31.2	33.3
87.5°	14.4	15.6	17.7	18.9	20.1	19.5	20.1	18.9	17.7	15.6	14.4
90°	34.8	45.4	56.0	62.0	68.1	65.0	68.1	62.0	56.0	45.4	34.8
92.5°	69.9	87.7	100.7	111.6	116.4	115.8	116.4	111.6	100.7	87.7	69.9
95°	140.6	161.8	183.0	198.1	207.2	204.2	207.2	198.1	183.0	161.8	140.6
97.5°	216.9	245.3	268.9	283.1	292.2	298.2	292.2	283.1	268.9	245.3	216.9
100°	267.7	294.9	322.1	338.8	353.9	359.9	353.9	338.8	322.1	294.9	267.7
102.5°	308.8	344.5	374.1	392.0	404.7	410.7	404.7	392.0	374.1	344.5	308.8
105°	376.6	414.4	446.1	468.8	482.4	487.0	482.4	468.8	446.1	414.4	376.6
107.5°	444.3	483.3	512.7	537.8	554.4	564.1	554.4	537.8	512.7	483.3	444.3
110°	497.5	529.3	561.1	583.7	600.4	606.4	600.4	583.7	561.1	529.3	497.5



TEST NUMBER: P1427921

CATALOG NUMBER: SQ2W-PH1-K-100U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	542.3	577.7	609.5	632.1	651.2	659.7	651.2	632.1	609.5	577.7	542.3
115°	604.9	651.8	680.5	701.7	715.3	722.9	715.3	701.7	680.5	651.8	604.9
117.5°	656.9	705.9	737.4	753.7	760.1	765.5	760.1	753.7	737.4	705.9	656.9
120°	689.6	735.0	771.3	792.4	800.0	803.0	800.0	792.4	771.3	735.0	689.6
122.5°	719.8	762.8	797.9	823.9	836.3	839.3	836.3	823.9	797.9	762.8	719.8
125°	762.2	803.0	839.3	865.0	878.6	886.2	878.6	865.0	839.3	803.0	762.2
127.5°	799.1	843.3	876.5	899.8	913.1	919.2	913.1	899.8	876.5	843.3	799.1
130°	819.7	865.0	898.3	924.0	936.1	942.2	936.1	924.0	898.3	865.0	819.7
132.5°	835.4	883.2	917.7	940.9	954.3	960.3	954.3	940.9	917.7	883.2	835.4
135°	854.4	904.3	940.6	963.3	975.4	981.5	975.4	963.3	940.6	904.3	854.4
137.5°	871.1	916.4	954.3	978.1	989.0	993.0	989.0	978.1	954.3	916.4	871.1
140°	883.2	922.5	960.3	983.0	995.1	996.6	995.1	983.0	960.3	922.5	883.2
142.5°	898.9	929.8	962.7	985.4	997.5	1000.2	997.5	985.4	962.7	929.8	898.9
145°	927.0	945.2	967.9	989.0	999.6	1002.6	999.6	989.0	967.9	945.2	927.0
147.5°	962.4	968.2	980.0	993.9	1004.2	1006.3	1004.2	993.9	980.0	968.2	962.4
150°	989.0	987.5	992.1	1001.1	1010.2	1008.7	1010.2	1001.1	992.1	987.5	989.0
152.5°	1019.3	1010.5	1010.2	1014.4	1018.7	1018.4	1018.7	1014.4	1010.2	1010.5	1019.3
155°	1070.7	1054.1	1045.0	1042.0	1042.0	1040.5	1042.0	1042.0	1045.0	1054.1	1070.7
157.5°	1127.3	1104.0	1090.4	1083.1	1081.0	1077.7	1081.0	1083.1	1090.4	1104.0	1127.3
160°	1166.0	1140.3	1126.7	1114.6	1110.0	1105.5	1110.0	1114.6	1126.7	1140.3	1166.0
162.5°	1202.3	1177.8	1162.9	1152.1	1147.5	1140.6	1147.5	1152.1	1162.9	1177.8	1202.3
165°	1261.2	1235.5	1218.9	1209.8	1203.8	1197.7	1203.8	1209.8	1218.9	1235.5	1261.2
167.5°	1320.2	1292.1	1281.2	1270.9	1265.2	1254.3	1265.2	1270.9	1281.2	1292.1	1320.2
170°	1356.5	1330.8	1324.8	1315.7	1305.1	1293.0	1305.1	1315.7	1324.8	1330.8	1356.5
172.5°	1388.0	1370.7	1364.7	1355.6	1352.3	1342.6	1352.3	1355.6	1364.7	1370.7	1388.0
175°	1433.6	1420.0	1420.0	1418.5	1414.0	1404.9	1414.0	1418.5	1420.0	1420.0	1433.6
177.5°	1471.8	1464.5	1469.3	1469.3	1468.1	1459.7	1468.1	1469.3	1469.3	1464.5	1471.8
180°	1497.2	1497.2	1497.2	1497.2	1497.2	1497.2	1497.2	1497.2	1497.2	1497.2	1497.2



TEST NUMBER: P1427921

CATALOG NUMBER: SQ2W-PH1-K-100U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	1714.2	1714.2	1714.2	1714.2
2.5°	1715.1	1726.5	1718.4	1710.3
5°	1682.1	1716.0	1716.8	1717.5
7.5°	1595.7	1641.2	1663.7	1686.2
10°	1539.2	1590.6	1624.7	1658.8
12.5°	1488.3	1544.7	1598.5	1652.2
15°	1414.7	1471.9	1553.1	1634.3
17.5°	1349.7	1400.1	1487.5	1574.9
20°	1314.1	1360.7	1446.9	1533.2
22.5°	1281.9	1323.1	1410.5	1497.9
25°	1224.4	1254.5	1353.0	1451.6
27.5°	1171.0	1190.3	1293.2	1396.2
30°	1135.7	1151.2	1254.1	1357.0
32.5°	1095.3	1106.4	1212.8	1319.2
35°	1043.3	1052.0	1162.9	1273.8
37.5°	984.5	988.4	1107.3	1226.2
40°	942.7	942.9	1067.6	1192.3
42.5°	902.7	906.4	1031.1	1155.8
45°	836.7	841.4	971.2	1101.0
47.5°	788.0	789.0	912.7	1036.4
50°	758.4	753.4	870.1	986.8
52.5°	730.2	716.7	827.6	938.5
55°	686.7	656.2	762.8	869.3
57.5°	615.6	594.4	695.2	795.9
60°	557.3	554.6	652.4	750.3
62.5°	502.0	515.6	608.8	702.0
65°	427.9	453.4	538.2	623.1
67.5°	359.8	388.4	462.3	536.3
70°	315.9	345.8	411.0	476.3
72.5°	269.8	300.4	356.4	412.3
75°	201.7	231.4	276.4	321.3
77.5°	142.7	166.7	199.5	232.3
80°	104.4	126.9	151.5	176.2
82.5°	73.1	87.4	105.7	124.0
85°	34.8	38.1	46.8	55.5
87.5°	14.6	13.9	13.3	12.7
90°	27.2	16.6	10.6	4.5
92.5°	58.7	40.8	28.7	16.6
95°	118.0	93.8	66.5	46.9
97.5°	187.8	148.8	121.9	89.5
100°	225.3	187.5	161.8	127.0
102.5°	266.5	234.7	199.3	164.5
105°	340.3	300.9	260.1	220.8
107.5°	408.6	365.4	316.4	281.0
110°	452.2	405.3	353.9	322.1



TEST NUMBER: P1427921

CATALOG NUMBER: SQ2W-PH1-K-100U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	494.5	446.4	393.8	362.0
115°	552.0	499.1	450.7	423.4
117.5°	607.3	552.9	501.8	480.3
120°	641.2	586.8	536.9	520.2
122.5°	669.0	615.8	569.5	562.6
125°	710.8	656.3	617.0	626.1
127.5°	744.6	694.7	669.9	690.2
130°	765.2	721.4	706.2	735.0
132.5°	783.4	749.2	742.5	782.2
135°	810.6	790.9	797.0	851.4
137.5°	842.9	835.4	855.7	924.3
140°	863.5	868.1	896.8	973.9
142.5°	891.3	901.9	939.1	1021.1
145°	934.6	957.3	1005.7	1087.3
147.5°	983.6	1012.9	1072.8	1156.6
150°	1016.3	1054.1	1117.6	1197.7
152.5°	1053.8	1092.8	1156.3	1237.7
155°	1111.5	1155.4	1221.9	1291.5
157.5°	1170.5	1215.3	1278.8	1339.6
160°	1206.8	1255.2	1312.7	1368.6
162.5°	1247.9	1292.7	1342.9	1392.8
165°	1308.1	1344.4	1385.3	1427.6
167.5°	1358.6	1388.9	1420.9	1453.9
170°	1391.3	1415.5	1442.7	1468.4
172.5°	1419.1	1438.5	1458.4	1480.5
175°	1456.3	1466.9	1479.0	1492.6
177.5°	1485.1	1488.7	1492.3	1498.4
180°	1497.2	1497.2	1497.2	1497.2



TEST NUMBER: P1427921
 CATALOG NUMBER: SQ2W-PH1-K-100U-075D-L830-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.08	18.90	19.06	19.90	21.22	16.90	17.73	17.89	18.73	20.05
	3H	20.25	20.99	21.25	21.99	23.34	17.95	18.69	18.95	19.70	21.04
	4H	21.06	21.76	22.07	22.77	24.12	18.19	18.89	19.21	19.90	21.25
	6H	21.52	22.17	22.55	23.18	24.55	18.33	18.98	19.36	19.99	21.36
	8H	21.68	22.29	22.70	23.32	24.68	18.39	19.00	19.42	20.04	21.39
	12H	21.73	22.31	22.77	23.34	24.72	18.40	18.98	19.43	20.01	21.39
4H	2H	18.51	19.20	19.53	20.22	21.57	17.58	18.28	18.60	19.29	20.64
	3H	20.75	21.34	21.78	22.38	23.74	18.81	19.39	19.84	20.43	21.80
	4H	21.63	22.16	22.66	23.19	24.58	19.10	19.63	20.13	20.66	22.05
	6H	22.18	22.64	23.23	23.70	25.08	19.30	19.75	20.34	20.81	22.19
	8H	22.39	22.81	23.43	23.86	25.26	19.39	19.81	20.43	20.86	22.26
	12H	22.47	22.85	23.53	23.92	25.32	19.41	19.79	20.47	20.86	22.26
8H	4H	21.65	22.07	22.69	23.12	24.52	19.33	19.75	20.37	20.80	22.20
	6H	22.27	22.63	23.34	23.72	25.11	19.59	19.94	20.66	21.03	22.43
	8H	22.54	22.85	23.61	23.92	25.33	19.74	20.05	20.82	21.12	22.54
	12H	22.67	22.94	23.75	24.01	25.46	19.80	20.07	20.88	21.14	22.60
12H	4H	21.60	21.98	22.66	23.04	24.45	19.32	19.71	20.38	20.77	22.17
	6H	22.25	22.56	23.33	23.63	25.05	19.63	19.94	20.70	21.01	22.43
	8H	22.52	22.79	23.60	23.86	25.32	19.79	20.06	20.87	21.13	22.58