

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1427969

Luminaire Tested: SQ2W-PH1-K-150U-075D-L830-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1427969
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-10)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-PH1-K-150U-075D-L830-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - PERCEIVE HEX LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 750 LUMENS PER FOOT
UPLIGHT 1500 LUMENS PER FOOT
Light Source: 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10373.6 lumens
Efficiency: N/A
Efficacy: 126.8 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.02 / 1.23
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 81.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1427969

CATALOG NUMBER: SQ2W-PH1-K-150U-075D-L830-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

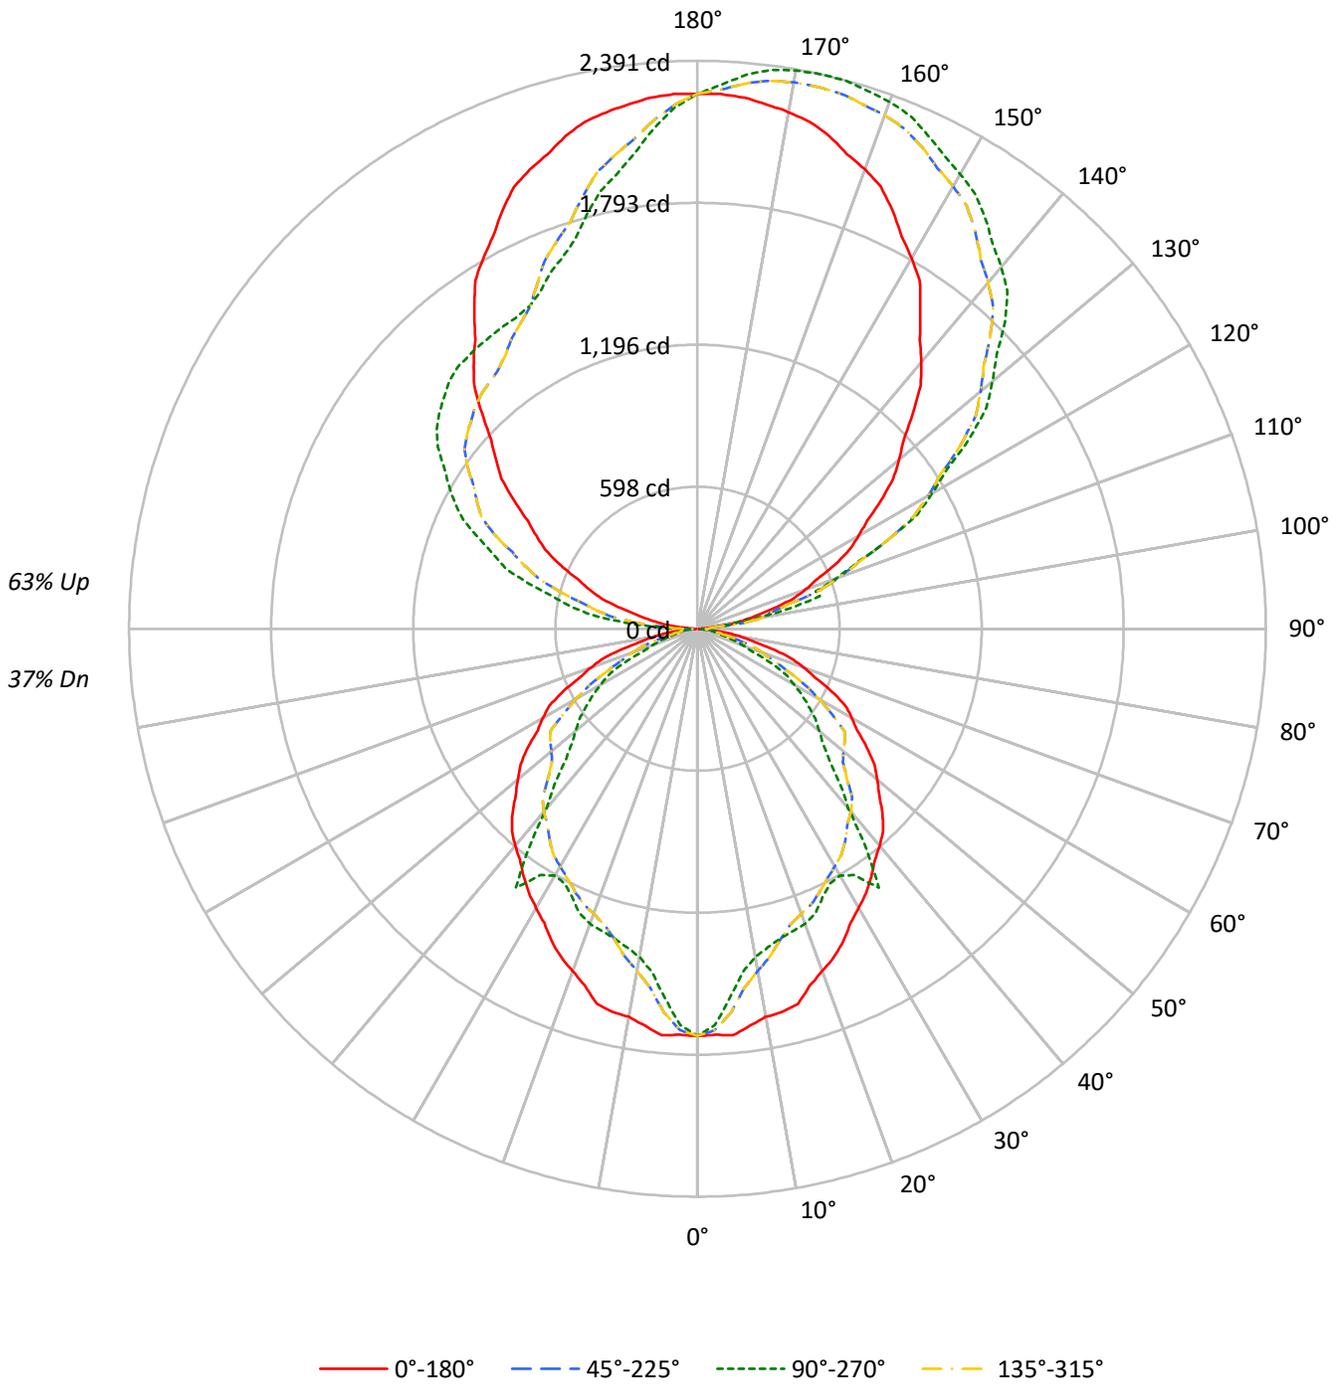



TEST NUMBER: P1427969

CATALOG NUMBER: SQ2W-PH1-K-150U-075D-L830-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	44	44	44	37
1	95	91	87	84	86	82	79	76	67	64	62	52	51	50	39	38	37	31
2	87	79	73	68	78	72	67	63	59	55	52	46	44	41	34	33	32	26
3	79	70	63	57	71	63	57	52	52	47	44	41	38	35	31	29	27	22
4	72	62	54	48	65	56	50	44	46	41	37	36	33	30	27	25	23	19
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	22	20	17
6	61	49	41	36	55	45	38	33	37	32	28	29	26	23	22	20	18	15
7	56	44	37	31	51	41	34	29	33	28	24	27	23	20	20	18	16	13
8	52	40	33	27	47	37	30	25	30	25	22	24	21	18	19	16	14	12
9	48	37	29	24	44	34	27	23	28	23	19	22	19	16	17	15	13	11
10	45	33	26	22	41	31	24	20	26	21	17	21	17	14	16	13	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	27677	27677	27677	27677
5°	27836	25298	27836	25298
10°	27195	22997	27195	22997
15°	27317	22547	27317	22547
20°	26343	22728	26343	22728
25°	25860	22199	25860	22199
30°	25299	22379	25299	22379
35°	25107	26232	25107	26232
40°	25130	20798	25130	20798
45°	25139	17913	25139	17913
50°	24786	16796	24786	16796
55°	24470	16115	24470	16115
60°	24228	15115	24228	15115
65°	23805	13146	23805	13146
70°	22484	9394	22484	9394
75°	20043	7124	20043	7124
80°	16383	6676	16383	6676
85°	10281	4539	10281	4539

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 25139 cd/sqm



TEST NUMBER: P1427969

CATALOG NUMBER: SQ2W-PH1-K-150U-075D-L830-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	150.8	1.5
10°-20°	396.8	3.8
20°-30°	581.7	5.6
30°-40°	704.4	6.8
40°-50°	692.6	6.7
50°-60°	602.5	5.8
60°-70°	419.0	4.0
70°-80°	198.7	1.9
80°-90°	53.1	0.5
90°-100°	179.2	1.7
100°-110°	522.6	5.0
110°-120°	852.8	8.2
120°-130°	1082.1	10.4
130°-140°	1157.9	11.2
140°-150°	1081.2	10.4
150°-160°	889.7	8.6
160°-170°	596.7	5.8
170°-180°	211.9	2.0
0°-30°	1129.3	10.9
0°-40°	1833.6	17.7
0°-60°	3128.7	30.2
0°-90°	3799.6	36.6
90°-120°	1554.5	15.0
90°-150°	4875.8	47.0
90°-180°	6574.0	63.4
0°-180°	10373.6	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1714	1714	1714	1714	1714	
5°	1718	1561	1718	1561	1718	162
15°	1634	1349	1634	1349	1634	456
25°	1452	1246	1452	1246	1452	668
35°	1274	1331	1274	1331	1274	798
45°	1101	784	1101	784	1101	846
55°	869	572	869	572	869	777
65°	623	344	623	344	623	612
75°	321	114	321	114	321	340
85°	56	24	56	24	56	75
90°	7	50	7	98	7	7
95°	70	52	70	307	70	85
105°	332	532	332	732	332	353
115°	637	882	637	1087	637	628
125°	942	1399	942	1333	942	842
135°	1280	1831	1280	1476	1280	989
145°	1635	2110	1635	1508	1635	1023
155°	1942	2292	1942	1565	1942	893
165°	2147	2390	2147	1801	2147	604
175°	2245	2340	2245	2113	2245	213
180°	2252	2252	2252	2252	2252	



TEST NUMBER: P1427969

CATALOG NUMBER: SQ2W-PH1-K-150U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2
2.5°	1710.3	1718.4	1726.5	1715.1	1697.1	1684.6	1677.7	1672.2	1671.0	1669.9	1671.0
5°	1717.5	1716.8	1716.0	1682.1	1637.2	1603.5	1581.0	1563.8	1562.4	1560.9	1562.4
7.5°	1686.2	1663.7	1641.2	1595.7	1542.5	1503.5	1478.7	1459.8	1458.7	1457.5	1458.7
10°	1658.8	1624.7	1590.6	1539.2	1481.9	1442.0	1419.6	1402.7	1402.7	1402.7	1402.7
12.5°	1652.2	1598.5	1544.7	1488.3	1431.0	1394.0	1377.4	1365.7	1369.2	1372.7	1369.2
15°	1634.3	1553.1	1471.9	1414.7	1365.4	1338.5	1334.2	1332.9	1340.9	1348.9	1340.9
17.5°	1574.9	1487.5	1400.1	1349.7	1311.8	1297.4	1306.7	1316.0	1325.2	1334.5	1325.2
20°	1533.2	1446.9	1360.7	1314.1	1280.7	1272.8	1290.2	1305.4	1314.1	1322.8	1314.1
22.5°	1497.9	1410.5	1323.1	1281.9	1256.1	1252.7	1271.9	1287.4	1292.0	1296.7	1292.0
25°	1451.6	1353.0	1254.5	1224.4	1217.1	1221.8	1238.5	1250.5	1248.3	1246.1	1248.3
27.5°	1396.2	1293.2	1190.3	1171.0	1179.5	1188.9	1199.0	1207.0	1208.3	1209.6	1208.3
30°	1357.0	1254.1	1151.2	1135.7	1149.5	1161.5	1171.6	1181.6	1191.0	1200.4	1191.0
32.5°	1319.2	1212.8	1106.4	1095.3	1116.0	1138.4	1162.5	1185.9	1207.6	1229.2	1207.6
35°	1273.8	1162.9	1052.0	1043.3	1068.7	1101.3	1141.2	1188.8	1259.9	1330.9	1259.9
37.5°	1226.2	1107.3	988.4	984.5	1018.9	1053.2	1087.6	1119.0	1141.6	1164.2	1141.6
40°	1192.3	1067.6	942.9	942.7	984.1	1026.8	1071.1	1091.2	1039.0	986.8	1039.0
42.5°	1155.8	1031.1	906.4	902.7	939.4	986.5	1044.1	1065.2	977.1	888.9	977.1
45°	1101.0	971.2	841.4	836.7	873.7	899.8	915.0	910.7	847.6	784.5	847.6
47.5°	1036.4	912.7	789.0	788.0	827.9	830.8	796.7	765.0	740.3	715.7	740.3
50°	986.8	870.1	753.4	758.4	804.1	799.8	745.4	700.6	684.7	668.7	684.7
52.5°	938.5	827.6	716.7	730.2	785.1	776.4	704.1	647.1	636.4	625.7	636.4
55°	869.3	762.8	656.2	686.7	762.8	751.2	651.9	576.8	574.7	572.5	574.7
57.5°	795.9	695.2	594.4	615.6	677.3	665.1	579.0	515.4	519.1	522.9	519.1
60°	750.3	652.4	554.6	557.3	593.5	581.9	522.5	476.8	472.5	468.1	472.5
62.5°	702.0	608.8	515.6	502.0	515.1	501.5	461.2	429.8	425.5	421.1	425.5
65°	623.1	538.2	453.4	427.9	422.1	402.5	369.2	344.1	344.1	344.1	344.1
67.5°	536.3	462.3	388.4	359.8	346.3	326.9	301.5	278.1	260.7	243.4	260.7
70°	476.3	411.0	345.8	315.9	297.8	274.6	246.3	222.2	210.6	199.0	210.6
72.5°	412.3	356.4	300.4	269.8	247.6	225.0	201.9	181.3	168.0	154.6	168.0
75°	321.3	276.4	231.4	201.7	177.1	154.2	133.2	117.1	115.6	114.2	115.6
77.5°	232.3	199.5	166.7	142.7	121.5	105.6	95.0	87.1	87.3	87.4	87.3
80°	176.2	151.5	126.9	104.4	82.6	71.4	70.7	70.3	71.0	71.8	71.0
82.5°	124.0	105.7	87.4	73.1	60.0	54.0	55.0	55.8	56.0	56.1	56.0
85°	55.5	46.8	38.1	34.8	33.3	31.2	28.3	25.9	25.2	24.5	25.2
87.5°	13.1	14.3	16.0	16.4	16.0	15.6	15.6	16.1	16.5	16.5	16.5
90°	6.8	15.9	27.3	36.4	43.2	45.5	45.5	47.8	50.0	50.0	50.0
92.5°	25.0	39.6	40.0	40.0	48.7	52.8	56.4	56.9	59.1	59.1	59.1
95°	70.5	77.3	116.0	113.7	77.3	61.4	52.3	52.3	52.3	52.3	52.3
97.5°	134.6	144.6	151.0	202.4	213.8	206.5	168.3	141.5	126.4	119.6	126.4
100°	191.0	195.6	209.2	211.5	268.4	322.9	295.7	261.5	250.2	243.3	250.2
102.5°	247.4	250.2	271.1	280.6	293.8	324.8	419.4	408.9	401.2	399.8	401.2
105°	332.0	334.3	373.0	391.2	400.3	400.3	398.0	443.5	516.3	532.2	516.3
107.5°	422.6	433.0	478.5	527.2	537.6	540.4	528.5	521.7	519.0	520.8	519.0
110°	484.4	500.3	554.9	616.3	632.2	636.8	632.2	625.4	620.9	620.9	620.9



TEST NUMBER: P1427969

CATALOG NUMBER: SQ2W-PH1-K-150U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	544.5	567.7	629.5	700.0	726.9	740.5	730.5	725.5	720.9	724.6	720.9
115°	636.8	670.9	752.8	825.6	880.1	887.0	884.7	884.7	882.4	882.4	882.4
117.5°	722.3	776.9	868.8	953.4	1016.6	1034.8	1043.9	1041.2	1038.4	1043.0	1038.4
120°	782.3	846.0	950.6	1046.2	1107.6	1134.9	1144.0	1139.4	1144.0	1139.4	1144.0
122.5°	846.0	924.3	1027.1	1126.2	1198.5	1229.5	1240.4	1241.3	1242.2	1239.5	1242.2
125°	941.5	1037.1	1157.6	1259.9	1335.0	1371.4	1380.5	1382.8	1387.3	1398.7	1387.3
127.5°	1038.0	1146.2	1278.6	1377.3	1454.2	1498.3	1512.4	1517.4	1526.9	1531.9	1526.9
130°	1105.3	1228.1	1362.3	1455.5	1530.6	1578.3	1603.4	1610.2	1621.6	1619.3	1621.6
132.5°	1176.3	1304.5	1440.5	1537.4	1607.0	1658.4	1679.8	1699.3	1703.4	1706.6	1703.4
135°	1280.4	1419.1	1555.6	1651.1	1717.1	1767.1	1794.4	1812.6	1824.0	1830.8	1824.0
137.5°	1390.0	1536.5	1667.5	1752.6	1819.0	1862.2	1893.1	1912.2	1924.0	1929.5	1924.0
140°	1464.6	1605.6	1733.0	1821.7	1880.8	1924.0	1951.3	1974.1	1987.7	1987.7	1987.7
142.5°	1535.6	1674.8	1798.5	1887.2	1939.0	1978.6	2007.7	2025.0	2040.5	2040.5	2040.5
145°	1635.2	1773.9	1887.6	1976.3	2019.6	2055.9	2087.8	2101.4	2110.5	2110.5	2110.5
147.5°	1739.4	1862.2	1965.9	2050.9	2087.3	2130.1	2155.1	2166.0	2177.4	2172.4	2177.4
150°	1801.2	1914.9	2015.0	2094.6	2131.0	2171.9	2196.9	2206.0	2217.4	2210.6	2217.4
152.5°	1861.3	1969.5	2060.5	2134.6	2165.6	2206.5	2235.2	2244.2	2252.0	2247.0	2252.0
155°	1942.2	2037.7	2121.9	2190.1	2217.4	2256.1	2283.4	2294.7	2303.8	2292.5	2303.8
157.5°	2014.5	2096.9	2170.1	2232.9	2262.0	2295.2	2320.7	2334.8	2343.9	2338.9	2343.9
160°	2058.2	2133.3	2199.2	2258.3	2285.6	2315.2	2342.5	2358.4	2367.5	2360.7	2367.5
162.5°	2094.6	2162.4	2224.7	2278.4	2302.0	2327.9	2360.7	2374.8	2383.9	2375.2	2383.9
165°	2146.9	2201.5	2256.1	2301.6	2322.0	2342.5	2376.6	2392.5	2399.4	2390.3	2399.4
167.5°	2186.5	2228.3	2272.5	2311.6	2326.6	2346.6	2380.7	2393.9	2402.5	2391.2	2402.5
170°	2208.3	2244.7	2283.4	2315.2	2326.6	2344.8	2378.9	2390.3	2397.1	2385.7	2397.1
172.5°	2226.5	2253.8	2285.2	2313.4	2319.3	2333.9	2366.2	2377.5	2382.5	2373.0	2382.5
175°	2244.7	2260.6	2283.4	2301.6	2299.3	2308.4	2335.7	2344.8	2353.9	2340.2	2353.9
177.5°	2253.3	2260.6	2267.9	2278.8	2271.5	2271.5	2291.6	2297.0	2298.8	2291.6	2298.8
180°	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5



TEST NUMBER: P1427969

CATALOG NUMBER: SQ2W-PH1-K-150U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2
2.5°	1672.2	1677.7	1684.6	1697.1	1715.1	1726.5	1718.4	1710.3	1718.4	1726.5	1715.1
5°	1563.8	1581.0	1603.5	1637.2	1682.1	1716.0	1716.8	1717.5	1716.8	1716.0	1682.1
7.5°	1459.8	1478.7	1503.5	1542.5	1595.7	1641.2	1663.7	1686.2	1663.7	1641.2	1595.7
10°	1402.7	1419.6	1442.0	1481.9	1539.2	1590.6	1624.7	1658.8	1624.7	1590.6	1539.2
12.5°	1365.7	1377.4	1394.0	1431.0	1488.3	1544.7	1598.5	1652.2	1598.5	1544.7	1488.3
15°	1332.9	1334.2	1338.5	1365.4	1414.7	1471.9	1553.1	1634.3	1553.1	1471.9	1414.7
17.5°	1316.0	1306.7	1297.4	1311.8	1349.7	1400.1	1487.5	1574.9	1487.5	1400.1	1349.7
20°	1305.4	1290.2	1272.8	1280.7	1314.1	1360.7	1446.9	1533.2	1446.9	1360.7	1314.1
22.5°	1287.4	1271.9	1252.7	1256.1	1281.9	1323.1	1410.5	1497.9	1410.5	1323.1	1281.9
25°	1250.5	1238.5	1221.8	1217.1	1224.4	1254.5	1353.0	1451.6	1353.0	1254.5	1224.4
27.5°	1207.0	1199.0	1188.9	1179.5	1171.0	1190.3	1293.2	1396.2	1293.2	1190.3	1171.0
30°	1181.6	1171.6	1161.5	1149.5	1135.7	1151.2	1254.1	1357.0	1254.1	1151.2	1135.7
32.5°	1185.9	1162.5	1138.4	1116.0	1095.3	1106.4	1212.8	1319.2	1212.8	1106.4	1095.3
35°	1188.8	1141.2	1101.3	1068.7	1043.3	1052.0	1162.9	1273.8	1162.9	1052.0	1043.3
37.5°	1119.0	1087.6	1053.2	1018.9	984.5	988.4	1107.3	1226.2	1107.3	988.4	984.5
40°	1091.2	1071.1	1026.8	984.1	942.7	942.9	1067.6	1192.3	1067.6	942.9	942.7
42.5°	1065.2	1044.1	986.5	939.4	902.7	906.4	1031.1	1155.8	1031.1	906.4	902.7
45°	910.7	915.0	899.8	873.7	836.7	841.4	971.2	1101.0	971.2	841.4	836.7
47.5°	765.0	796.7	830.8	827.9	788.0	789.0	912.7	1036.4	912.7	789.0	788.0
50°	700.6	745.4	799.8	804.1	758.4	753.4	870.1	986.8	870.1	753.4	758.4
52.5°	647.1	704.1	776.4	785.1	730.2	716.7	827.6	938.5	827.6	716.7	730.2
55°	576.8	651.9	751.2	762.8	686.7	656.2	762.8	869.3	762.8	656.2	686.7
57.5°	515.4	579.0	665.1	677.3	615.6	594.4	695.2	795.9	695.2	594.4	615.6
60°	476.8	522.5	581.9	593.5	557.3	554.6	652.4	750.3	652.4	554.6	557.3
62.5°	429.8	461.2	501.5	515.1	502.0	515.6	608.8	702.0	608.8	515.6	502.0
65°	344.1	369.2	402.5	422.1	427.9	453.4	538.2	623.1	538.2	453.4	427.9
67.5°	278.1	301.5	326.9	346.3	359.8	388.4	462.3	536.3	462.3	388.4	359.8
70°	222.2	246.3	274.6	297.8	315.9	345.8	411.0	476.3	411.0	345.8	315.9
72.5°	181.3	201.9	225.0	247.6	269.8	300.4	356.4	412.3	356.4	300.4	269.8
75°	117.1	133.2	154.2	177.1	201.7	231.4	276.4	321.3	276.4	231.4	201.7
77.5°	87.1	95.0	105.6	121.5	142.7	166.7	199.5	232.3	199.5	166.7	142.7
80°	70.3	70.7	71.4	82.6	104.4	126.9	151.5	176.2	151.5	126.9	104.4
82.5°	55.8	55.0	54.0	60.0	73.1	87.4	105.7	124.0	105.7	87.4	73.1
85°	25.9	28.3	31.2	33.3	34.8	38.1	46.8	55.5	46.8	38.1	34.8
87.5°	16.1	15.6	15.6	16.0	16.4	16.0	14.3	13.1	14.3	15.6	17.3
90°	47.8	45.5	45.5	43.2	36.4	27.3	15.9	6.8	15.9	25.0	40.9
92.5°	56.9	56.4	52.8	48.7	40.0	40.0	39.6	25.0	43.2	61.4	88.2
95°	52.3	52.3	61.4	77.3	113.7	116.0	77.3	70.5	100.1	141.0	177.4
97.5°	141.5	168.3	206.5	213.8	202.4	151.0	144.6	134.6	183.3	223.8	282.5
100°	261.5	295.7	322.9	268.4	211.5	209.2	195.6	191.0	243.3	282.0	338.9
102.5°	408.9	419.4	324.8	293.8	280.6	271.1	250.2	247.4	299.7	353.0	400.7
105°	443.5	398.0	400.3	400.3	391.2	373.0	334.3	332.0	391.2	452.6	511.7
107.5°	521.7	528.5	540.4	537.6	527.2	478.5	433.0	422.6	475.8	549.5	614.5
110°	625.4	632.2	636.8	632.2	616.3	554.9	500.3	484.4	532.2	609.5	680.0



TEST NUMBER: P1427969

CATALOG NUMBER: SQ2W-PH1-K-150U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	725.5	730.5	740.5	726.9	700.0	629.5	567.7	544.5	592.2	671.4	743.7
115°	884.7	884.7	887.0	880.1	825.6	752.8	670.9	636.8	677.7	750.5	830.1
117.5°	1041.2	1043.9	1034.8	1016.6	953.4	868.8	776.9	722.3	754.6	831.5	913.3
120°	1139.4	1144.0	1134.9	1107.6	1046.2	950.6	846.0	782.3	807.4	882.4	964.3
122.5°	1241.3	1240.4	1229.5	1198.5	1126.2	1027.1	924.3	846.0	856.5	926.1	1006.1
125°	1382.8	1380.5	1371.4	1335.0	1259.9	1157.6	1037.1	941.5	927.9	987.0	1068.9
127.5°	1517.4	1512.4	1498.3	1454.2	1377.3	1278.6	1146.2	1038.0	1007.5	1044.8	1119.9
130°	1610.2	1603.4	1578.3	1530.6	1455.5	1362.3	1228.1	1105.3	1062.1	1084.8	1150.8
132.5°	1699.3	1679.8	1658.4	1607.0	1537.4	1440.5	1304.5	1176.3	1116.7	1126.7	1178.1
135°	1812.6	1794.4	1767.1	1717.1	1651.1	1555.6	1419.1	1280.4	1198.5	1189.4	1219.0
137.5°	1912.2	1893.1	1862.2	1819.0	1752.6	1667.5	1536.5	1390.0	1286.8	1256.3	1267.7
140°	1974.1	1951.3	1924.0	1880.8	1821.7	1733.0	1605.6	1464.6	1348.6	1305.4	1298.6
142.5°	2025.0	2007.7	1978.6	1939.0	1887.2	1798.5	1674.8	1535.6	1412.3	1356.4	1340.5
145°	2101.4	2087.8	2055.9	2019.6	1976.3	1887.6	1773.9	1635.2	1512.4	1439.6	1405.5
147.5°	2166.0	2155.1	2130.1	2087.3	2050.9	1965.9	1862.2	1739.4	1613.4	1523.3	1479.2
150°	2206.0	2196.9	2171.9	2131.0	2094.6	2015.0	1914.9	1801.2	1680.7	1585.2	1528.3
152.5°	2244.2	2235.2	2206.5	2165.6	2134.6	2060.5	1969.5	1861.3	1738.9	1643.4	1584.7
155°	2294.7	2283.4	2256.1	2217.4	2190.1	2121.9	2037.7	1942.2	1837.6	1737.5	1671.6
157.5°	2334.8	2320.7	2295.2	2262.0	2232.9	2170.1	2096.9	2014.5	1923.1	1827.6	1760.3
160°	2358.4	2342.5	2315.2	2285.6	2258.3	2199.2	2133.3	2058.2	1974.1	1887.6	1814.9
162.5°	2374.8	2360.7	2327.9	2302.0	2278.4	2224.7	2162.4	2094.6	2019.6	1944.0	1876.7
165°	2392.5	2376.6	2342.5	2322.0	2301.6	2256.1	2201.5	2146.9	2083.2	2021.8	1967.2
167.5°	2393.9	2380.7	2346.6	2326.6	2311.6	2272.5	2228.3	2186.5	2136.9	2088.7	2043.2
170°	2390.3	2378.9	2344.8	2326.6	2315.2	2283.4	2244.7	2208.3	2169.7	2128.7	2092.3
172.5°	2377.5	2366.2	2333.9	2319.3	2313.4	2285.2	2253.8	2226.5	2193.3	2163.3	2134.2
175°	2344.8	2335.7	2308.4	2299.3	2301.6	2283.4	2260.6	2244.7	2224.2	2206.0	2190.1
177.5°	2297.0	2291.6	2271.5	2271.5	2278.8	2267.9	2260.6	2253.3	2244.2	2238.8	2233.3
180°	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5



TEST NUMBER: P1427969

CATALOG NUMBER: SQ2W-PH1-K-150U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2	1714.2
2.5°	1697.1	1684.6	1677.7	1672.2	1671.0	1669.9	1671.0	1672.2	1677.7	1684.6	1697.1
5°	1637.2	1603.5	1581.0	1563.8	1562.4	1560.9	1562.4	1563.8	1581.0	1603.5	1637.2
7.5°	1542.5	1503.5	1478.7	1459.8	1458.7	1457.5	1458.7	1459.8	1478.7	1503.5	1542.5
10°	1481.9	1442.0	1419.6	1402.7	1402.7	1402.7	1402.7	1402.7	1419.6	1442.0	1481.9
12.5°	1431.0	1394.0	1377.4	1365.7	1369.2	1372.7	1369.2	1365.7	1377.4	1394.0	1431.0
15°	1365.4	1338.5	1334.2	1332.9	1340.9	1348.9	1340.9	1332.9	1334.2	1338.5	1365.4
17.5°	1311.8	1297.4	1306.7	1316.0	1325.2	1334.5	1325.2	1316.0	1306.7	1297.4	1311.8
20°	1280.7	1272.8	1290.2	1305.4	1314.1	1322.8	1314.1	1305.4	1290.2	1272.8	1280.7
22.5°	1256.1	1252.7	1271.9	1287.4	1292.0	1296.7	1292.0	1287.4	1271.9	1252.7	1256.1
25°	1217.1	1221.8	1238.5	1250.5	1248.3	1246.1	1248.3	1250.5	1238.5	1221.8	1217.1
27.5°	1179.5	1188.9	1199.0	1207.0	1208.3	1209.6	1208.3	1207.0	1199.0	1188.9	1179.5
30°	1149.5	1161.5	1171.6	1181.6	1191.0	1200.4	1191.0	1181.6	1171.6	1161.5	1149.5
32.5°	1116.0	1138.4	1162.5	1185.9	1207.6	1229.2	1207.6	1185.9	1162.5	1138.4	1116.0
35°	1068.7	1101.3	1141.2	1188.8	1259.9	1330.9	1259.9	1188.8	1141.2	1101.3	1068.7
37.5°	1018.9	1053.2	1087.6	1119.0	1141.6	1164.2	1141.6	1119.0	1087.6	1053.2	1018.9
40°	984.1	1026.8	1071.1	1091.2	1039.0	986.8	1039.0	1091.2	1071.1	1026.8	984.1
42.5°	939.4	986.5	1044.1	1065.2	977.1	888.9	977.1	1065.2	1044.1	986.5	939.4
45°	873.7	899.8	915.0	910.7	847.6	784.5	847.6	910.7	915.0	899.8	873.7
47.5°	827.9	830.8	796.7	765.0	740.3	715.7	740.3	765.0	796.7	830.8	827.9
50°	804.1	799.8	745.4	700.6	684.7	668.7	684.7	700.6	745.4	799.8	804.1
52.5°	785.1	776.4	704.1	647.1	636.4	625.7	636.4	647.1	704.1	776.4	785.1
55°	762.8	751.2	651.9	576.8	574.7	572.5	574.7	576.8	651.9	751.2	762.8
57.5°	677.3	665.1	579.0	515.4	519.1	522.9	519.1	515.4	579.0	665.1	677.3
60°	593.5	581.9	522.5	476.8	472.5	468.1	472.5	476.8	522.5	581.9	593.5
62.5°	515.1	501.5	461.2	429.8	425.5	421.1	425.5	429.8	461.2	501.5	515.1
65°	422.1	402.5	369.2	344.1	344.1	344.1	344.1	344.1	369.2	402.5	422.1
67.5°	346.3	326.9	301.5	278.1	260.7	243.4	260.7	278.1	301.5	326.9	346.3
70°	297.8	274.6	246.3	222.2	210.6	199.0	210.6	222.2	246.3	274.6	297.8
72.5°	247.6	225.0	201.9	181.3	168.0	154.6	168.0	181.3	201.9	225.0	247.6
75°	177.1	154.2	133.2	117.1	115.6	114.2	115.6	117.1	133.2	154.2	177.1
77.5°	121.5	105.6	95.0	87.1	87.3	87.4	87.3	87.1	95.0	105.6	121.5
80°	82.6	71.4	70.7	70.3	71.0	71.8	71.0	70.3	70.7	71.4	82.6
82.5°	60.0	54.0	55.0	55.8	56.0	56.1	56.0	55.8	55.0	54.0	60.0
85°	33.3	31.2	28.3	25.9	25.2	24.5	25.2	25.9	28.3	31.2	33.3
87.5°	17.9	20.2	23.4	25.2	27.0	26.1	27.0	25.2	23.4	20.2	17.9
90°	52.3	68.2	84.1	93.2	102.3	97.8	102.3	93.2	84.1	68.2	52.3
92.5°	105.1	131.9	151.5	167.8	175.1	174.2	175.1	167.8	151.5	131.9	105.1
95°	211.5	243.3	275.2	297.9	311.6	307.0	311.6	297.9	275.2	243.3	211.5
97.5°	326.1	368.9	404.4	425.7	439.4	448.5	439.4	425.7	404.4	368.9	326.1
100°	402.5	443.5	484.4	509.4	532.2	541.3	532.2	509.4	484.4	443.5	402.5
102.5°	464.4	518.1	562.7	589.5	608.6	617.7	608.6	589.5	562.7	518.1	464.4
105°	566.3	623.1	670.9	705.0	725.5	732.3	725.5	705.0	670.9	623.1	566.3
107.5°	668.2	726.9	771.0	808.7	833.7	848.3	833.7	808.7	771.0	726.9	668.2
110°	748.2	796.0	843.8	877.9	902.9	912.0	902.9	877.9	843.8	796.0	748.2



TEST NUMBER: P1427969

CATALOG NUMBER: SQ2W-PH1-K-150U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	815.6	868.8	916.5	950.6	979.3	992.0	979.3	950.6	916.5	868.8	815.6
115°	909.7	980.2	1023.4	1055.3	1075.7	1087.1	1075.7	1055.3	1023.4	980.2	909.7
117.5°	987.9	1061.6	1108.9	1133.5	1143.0	1151.2	1143.0	1133.5	1108.9	1061.6	987.9
120°	1037.1	1105.3	1159.9	1191.7	1203.1	1207.6	1203.1	1191.7	1159.9	1105.3	1037.1
122.5°	1082.6	1147.1	1199.9	1239.0	1257.7	1262.2	1257.7	1239.0	1199.9	1147.1	1082.6
125°	1146.2	1207.6	1262.2	1300.9	1321.4	1332.7	1321.4	1300.9	1262.2	1207.6	1146.2
127.5°	1201.7	1268.1	1318.2	1353.2	1373.2	1382.3	1373.2	1353.2	1318.2	1268.1	1201.7
130°	1232.7	1300.9	1350.9	1389.6	1407.8	1416.9	1407.8	1389.6	1350.9	1300.9	1232.7
132.5°	1256.3	1328.2	1380.0	1415.1	1435.1	1444.2	1435.1	1415.1	1380.0	1328.2	1256.3
135°	1285.0	1360.0	1414.6	1448.7	1466.9	1476.0	1466.9	1448.7	1414.6	1360.0	1285.0
137.5°	1310.0	1378.2	1435.1	1471.0	1487.4	1493.3	1487.4	1471.0	1435.1	1378.2	1310.0
140°	1328.2	1387.3	1444.2	1478.3	1496.5	1498.7	1496.5	1478.3	1444.2	1387.3	1328.2
142.5°	1351.8	1398.2	1447.8	1481.9	1500.1	1504.2	1500.1	1481.9	1447.8	1398.2	1351.8
145°	1394.1	1421.4	1455.5	1487.4	1503.3	1507.8	1503.3	1487.4	1455.5	1421.4	1394.1
147.5°	1447.3	1456.0	1473.7	1494.6	1510.1	1513.3	1510.1	1494.6	1473.7	1456.0	1447.3
150°	1487.4	1485.1	1491.9	1505.6	1519.2	1516.9	1519.2	1505.6	1491.9	1485.1	1487.4
152.5°	1532.9	1519.7	1519.2	1525.6	1531.9	1531.5	1531.9	1525.6	1519.2	1519.7	1532.9
155°	1610.2	1585.2	1571.5	1567.0	1567.0	1564.7	1567.0	1567.0	1571.5	1585.2	1610.2
157.5°	1695.2	1660.2	1639.7	1628.8	1625.6	1620.6	1625.6	1628.8	1639.7	1660.2	1695.2
160°	1753.5	1714.8	1694.3	1676.1	1669.3	1662.5	1669.3	1676.1	1694.3	1714.8	1753.5
162.5°	1808.0	1771.2	1748.9	1732.5	1725.7	1715.3	1725.7	1732.5	1748.9	1771.2	1808.0
165°	1896.7	1858.1	1833.1	1819.4	1810.3	1801.2	1810.3	1819.4	1833.1	1858.1	1896.7
167.5°	1985.4	1943.1	1926.8	1911.3	1902.7	1886.3	1902.7	1911.3	1926.8	1943.1	1985.4
170°	2040.0	2001.4	1992.3	1978.6	1962.7	1944.5	1962.7	1978.6	1992.3	2001.4	2040.0
172.5°	2087.3	2061.4	2052.3	2038.7	2033.7	2019.1	2033.7	2038.7	2052.3	2061.4	2087.3
175°	2156.0	2135.5	2135.5	2133.3	2126.4	2112.8	2126.4	2133.3	2135.5	2135.5	2156.0
177.5°	2213.3	2202.4	2209.7	2209.7	2207.9	2195.1	2207.9	2209.7	2209.7	2202.4	2213.3
180°	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5



TEST NUMBER: P1427969

CATALOG NUMBER: SQ2W-PH1-K-150U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	1714.2	1714.2	1714.2	1714.2
2.5°	1715.1	1726.5	1718.4	1710.3
5°	1682.1	1716.0	1716.8	1717.5
7.5°	1595.7	1641.2	1663.7	1686.2
10°	1539.2	1590.6	1624.7	1658.8
12.5°	1488.3	1544.7	1598.5	1652.2
15°	1414.7	1471.9	1553.1	1634.3
17.5°	1349.7	1400.1	1487.5	1574.9
20°	1314.1	1360.7	1446.9	1533.2
22.5°	1281.9	1323.1	1410.5	1497.9
25°	1224.4	1254.5	1353.0	1451.6
27.5°	1171.0	1190.3	1293.2	1396.2
30°	1135.7	1151.2	1254.1	1357.0
32.5°	1095.3	1106.4	1212.8	1319.2
35°	1043.3	1052.0	1162.9	1273.8
37.5°	984.5	988.4	1107.3	1226.2
40°	942.7	942.9	1067.6	1192.3
42.5°	902.7	906.4	1031.1	1155.8
45°	836.7	841.4	971.2	1101.0
47.5°	788.0	789.0	912.7	1036.4
50°	758.4	753.4	870.1	986.8
52.5°	730.2	716.7	827.6	938.5
55°	686.7	656.2	762.8	869.3
57.5°	615.6	594.4	695.2	795.9
60°	557.3	554.6	652.4	750.3
62.5°	502.0	515.6	608.8	702.0
65°	427.9	453.4	538.2	623.1
67.5°	359.8	388.4	462.3	536.3
70°	315.9	345.8	411.0	476.3
72.5°	269.8	300.4	356.4	412.3
75°	201.7	231.4	276.4	321.3
77.5°	142.7	166.7	199.5	232.3
80°	104.4	126.9	151.5	176.2
82.5°	73.1	87.4	105.7	124.0
85°	34.8	38.1	46.8	55.5
87.5°	17.3	15.6	14.3	13.1
90°	40.9	25.0	15.9	6.8
92.5°	88.2	61.4	43.2	25.0
95°	177.4	141.0	100.1	70.5
97.5°	282.5	223.8	183.3	134.6
100°	338.9	282.0	243.3	191.0
102.5°	400.7	353.0	299.7	247.4
105°	511.7	452.6	391.2	332.0
107.5°	614.5	549.5	475.8	422.6
110°	680.0	609.5	532.2	484.4



TEST NUMBER: P1427969

CATALOG NUMBER: SQ2W-PH1-K-150U-075D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	743.7	671.4	592.2	544.5
115°	830.1	750.5	677.7	636.8
117.5°	913.3	831.5	754.6	722.3
120°	964.3	882.4	807.4	782.3
122.5°	1006.1	926.1	856.5	846.0
125°	1068.9	987.0	927.9	941.5
127.5°	1119.9	1044.8	1007.5	1038.0
130°	1150.8	1084.8	1062.1	1105.3
132.5°	1178.1	1126.7	1116.7	1176.3
135°	1219.0	1189.4	1198.5	1280.4
137.5°	1267.7	1256.3	1286.8	1390.0
140°	1298.6	1305.4	1348.6	1464.6
142.5°	1340.5	1356.4	1412.3	1535.6
145°	1405.5	1439.6	1512.4	1635.2
147.5°	1479.2	1523.3	1613.4	1739.4
150°	1528.3	1585.2	1680.7	1801.2
152.5°	1584.7	1643.4	1738.9	1861.3
155°	1671.6	1737.5	1837.6	1942.2
157.5°	1760.3	1827.6	1923.1	2014.5
160°	1814.9	1887.6	1974.1	2058.2
162.5°	1876.7	1944.0	2019.6	2094.6
165°	1967.2	2021.8	2083.2	2146.9
167.5°	2043.2	2088.7	2136.9	2186.5
170°	2092.3	2128.7	2169.7	2208.3
172.5°	2134.2	2163.3	2193.3	2226.5
175°	2190.1	2206.0	2224.2	2244.7
177.5°	2233.3	2238.8	2244.2	2253.3
180°	2251.5	2251.5	2251.5	2251.5



TEST NUMBER: P1427969
 CATALOG NUMBER: SQ2W-PH1-K-150U-075D-L830-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	17.03	17.77	18.09	18.84	20.29	15.85	16.60	16.92	17.67	19.12
	3H	19.19	19.86	20.27	20.94	22.41	16.90	17.57	17.97	18.64	20.11
	4H	20.00	20.63	21.09	21.71	23.19	17.14	17.77	18.22	18.85	20.32
	6H	20.46	21.05	21.56	22.13	23.61	17.27	17.85	18.37	18.94	20.42
	8H	20.61	21.17	21.71	22.26	23.74	17.33	17.88	18.42	18.98	20.46
	12H	20.67	21.19	21.77	22.28	23.79	17.33	17.86	18.44	18.95	20.46
4H	2H	17.45	18.08	18.54	19.16	20.63	16.52	17.16	17.62	18.24	19.71
	3H	19.69	20.22	20.79	21.32	22.81	17.74	18.27	18.84	19.38	20.86
	4H	20.56	21.04	21.66	22.14	23.64	18.03	18.52	19.14	19.61	21.12
	6H	21.11	21.52	22.22	22.64	24.14	18.22	18.64	19.33	19.76	21.26
	8H	21.31	21.70	22.42	22.81	24.32	18.31	18.70	19.42	19.81	21.32
	12H	21.39	21.74	22.52	22.86	24.38	18.33	18.68	19.46	19.80	21.32
8H	4H	20.57	20.96	21.68	22.07	23.58	18.25	18.64	19.36	19.75	21.27
	6H	21.19	21.51	22.33	22.67	24.18	18.51	18.83	19.65	19.98	21.50
	8H	21.46	21.74	22.60	22.87	24.40	18.66	18.94	19.80	20.07	21.61
	12H	21.58	21.83	22.73	22.96	24.53	18.72	18.96	19.86	20.09	21.66
12H	4H	20.52	20.87	21.65	21.99	23.51	18.24	18.59	19.37	19.71	21.24
	6H	21.17	21.45	22.31	22.58	24.12	18.55	18.83	19.69	19.96	21.49
	8H	21.44	21.68	22.58	22.81	24.38	18.70	18.95	19.85	20.08	21.65