

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1428071

Luminaire Tested: SQ2W-PP3-K-075U-100D-L830-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1428071
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-7)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-PP3-K-075U-100D-L830-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - PERCEIVE PRISM LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 1000 LUMENS PER FOOT
UPLIGHT 750 LUMENS PER FOOT
Light Source: 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8494.2 lumens
Efficiency: N/A
Efficacy: 138.8 lumens/watt
Spacing Criteria (0/90/45): 1.26 / 1.41 / 1.4
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 61.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1428071

CATALOG NUMBER: SQ2W-PP3-K-075U-100D-L830-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

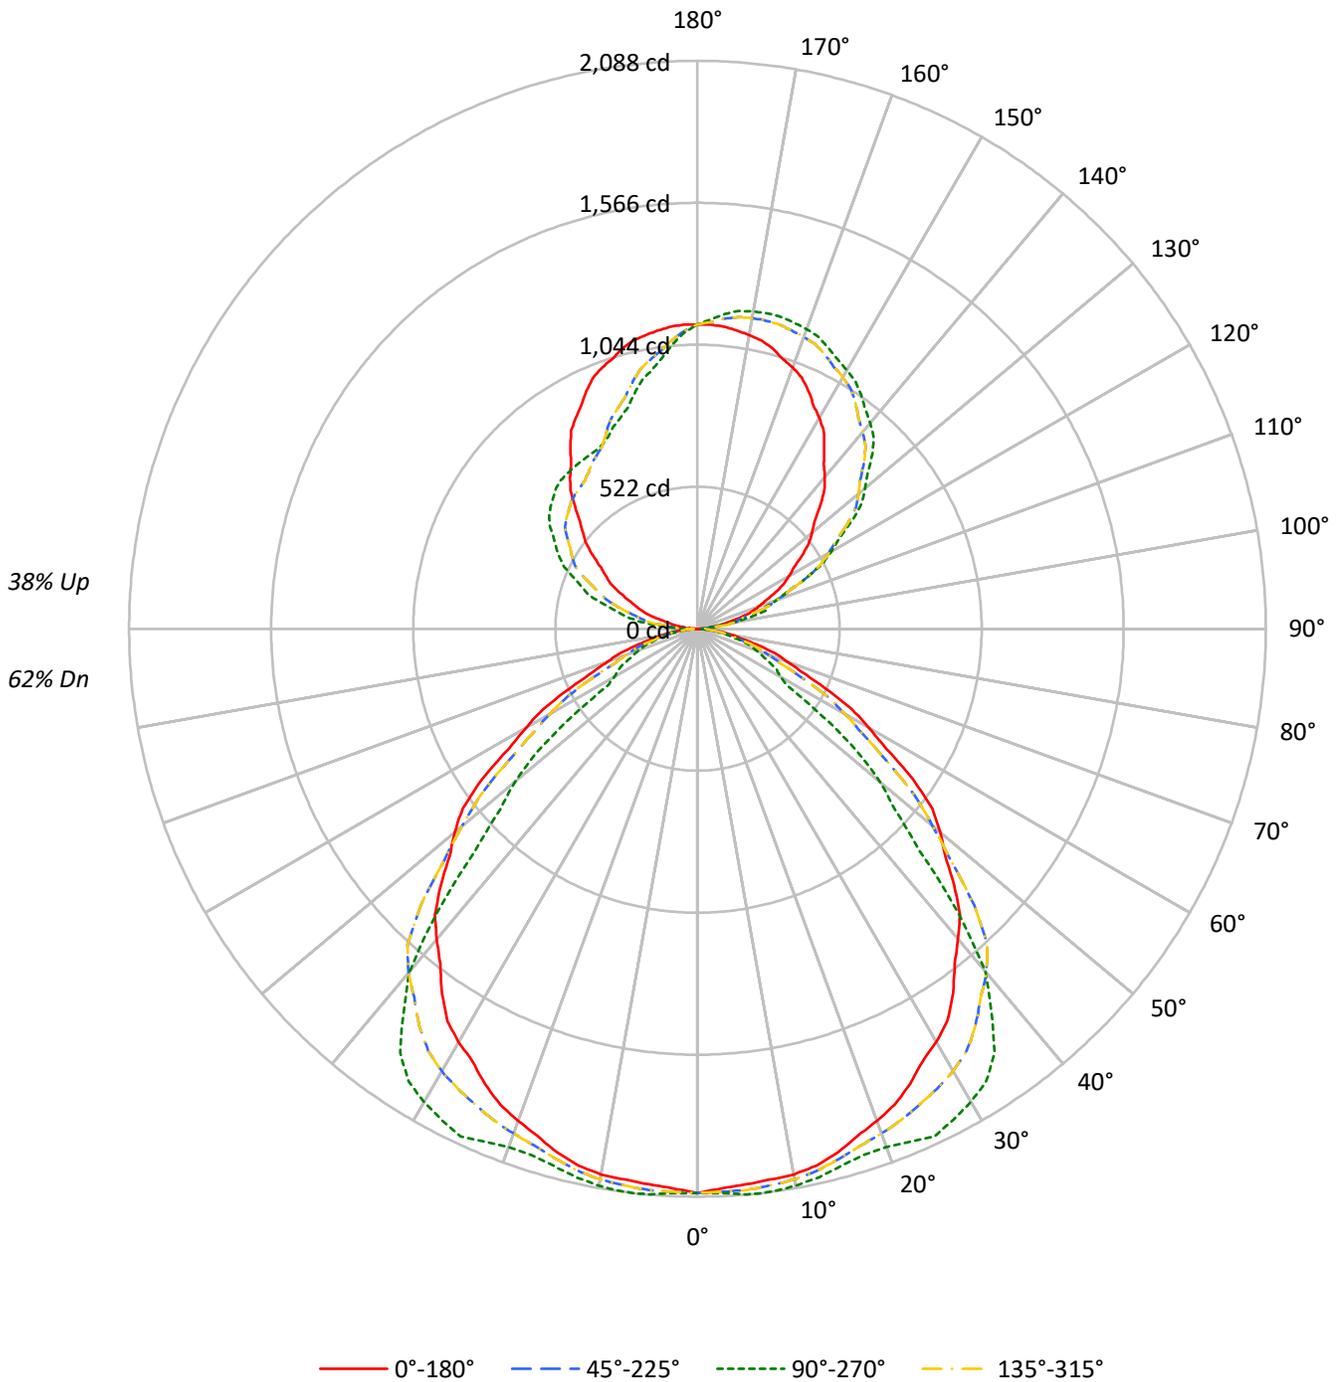



TEST NUMBER: P1428071

CATALOG NUMBER: SQ2W-PP3-K-075U-100D-L830-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20													
RC	80					70					50					30					10					0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0				
RCR																																		
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	67	67	67	62																
1	101	97	93	90	95	91	88	85	80	77	75	70	68	66	60	59	58	53																
2	93	85	79	74	86	80	75	71	71	67	63	62	59	56	54	51	50	46																
3	85	76	68	63	79	71	65	60	63	58	54	55	51	48	48	45	43	39																
4	78	67	59	54	73	63	56	51	56	51	46	49	45	42	43	40	37	34																
5	72	60	52	46	67	57	50	44	50	45	40	45	40	36	39	36	33	30																
6	66	54	46	40	62	51	44	39	46	40	35	40	36	32	36	32	29	26																
7	61	49	41	36	57	46	39	34	41	36	31	37	32	29	33	29	26	23																
8	57	45	37	32	53	42	35	30	38	32	28	34	29	26	30	26	23	21																
9	53	41	33	28	50	39	32	27	35	29	25	31	26	23	28	24	21	19																
10	50	37	30	25	47	36	29	24	32	27	23	29	24	21	26	22	19	17																

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	33494	33494	33494	33494
5°	33231	33836	33231	33836
10°	33401	34083	33401	34083
15°	33320	34162	33320	34162
20°	33082	34853	33082	34853
25°	32895	36684	32895	36684
30°	32708	37449	32708	37449
35°	32244	37518	32244	37518
40°	31383	34665	31383	34665
45°	30444	26388	30444	26388
50°	29250	21978	29250	21978
55°	27223	15803	27223	15803
60°	23440	11331	23440	11331
65°	19770	11144	19770	11144
70°	16461	10664	16461	10664
75°	13955	9987	13955	9987
80°	11827	8972	11827	8972
85°	9337	4872	9337	4872

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 40°
 Vertical Angle: 45°
 Luminance: 33305 cd/sqm



TEST NUMBER: P1428071

CATALOG NUMBER: SQ2W-PP3-K-075U-100D-L830-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	197.5	2.3
10°-20°	571.7	6.7
20°-30°	895.7	10.5
30°-40°	1104.9	13.0
40°-50°	1040.2	12.2
50°-60°	736.5	8.7
60°-70°	419.7	4.9
70°-80°	207.7	2.4
80°-90°	55.4	0.7
90°-100°	89.0	1.0
100°-110°	259.5	3.1
110°-120°	423.5	5.0
120°-130°	537.4	6.3
130°-140°	575.1	6.8
140°-150°	537.0	6.3
150°-160°	441.9	5.2
160°-170°	296.3	3.5
170°-180°	105.2	1.2
0°-30°	1664.9	19.6
0°-40°	2769.8	32.6
0°-60°	4546.5	53.5
0°-90°	5229.3	61.6
90°-120°	772.0	9.1
90°-150°	2421.5	28.5
90°-180°	3265.0	38.4
0°-180°	8494.2	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	2074	2074	2074	2074	2074	
5°	2050	2088	2050	2088	2050	195
15°	1993	2044	1993	2044	1993	562
25°	1846	2059	1846	2059	1846	850
35°	1636	1904	1636	1904	1636	1020
45°	1333	1156	1333	1156	1333	1026
55°	967	561	967	561	967	853
65°	518	292	518	292	518	520
75°	224	160	224	160	224	242
85°	50	26	50	26	50	59
90°	3	25	3	49	3	5
95°	35	26	35	152	35	42
105°	165	264	165	364	165	175
115°	316	438	316	540	316	312
125°	468	695	468	662	468	418
135°	636	909	636	733	636	491
145°	812	1048	812	749	812	508
155°	965	1138	965	777	965	443
165°	1066	1187	1066	894	1066	300
175°	1115	1162	1115	1049	1115	106
180°	1118	1118	1118	1118	1118	



TEST NUMBER: P1428071

CATALOG NUMBER: SQ2W-PP3-K-075U-100D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	2074.5	2074.5	2074.5	2074.5	2074.5	2074.5	2074.5	2074.5	2074.5	2074.5	2074.5
2.5°	2058.7	2072.0	2085.3	2082.1	2073.6	2070.1	2071.6	2073.2	2074.7	2076.3	2074.7
5°	2050.4	2067.0	2083.6	2081.1	2072.3	2068.9	2070.9	2074.0	2080.9	2087.7	2080.9
7.5°	2042.5	2059.5	2076.4	2074.2	2065.7	2063.0	2066.3	2070.9	2079.3	2087.7	2079.3
10°	2037.3	2051.9	2066.5	2064.3	2056.5	2055.0	2059.9	2065.3	2072.1	2078.9	2072.1
12.5°	2021.5	2035.3	2049.1	2047.3	2040.3	2040.0	2046.5	2052.8	2058.8	2064.9	2058.8
15°	1993.4	2006.1	2018.7	2019.0	2015.1	2017.5	2026.3	2034.1	2039.0	2043.8	2039.0
17.5°	1955.2	1970.6	1986.0	1989.6	1989.2	1995.2	2007.7	2018.3	2023.4	2028.5	2023.4
20°	1925.4	1943.9	1962.5	1968.5	1970.5	1979.3	1994.9	2009.0	2018.7	2028.5	2018.7
22.5°	1893.8	1915.5	1937.1	1945.2	1948.7	1962.1	1985.5	2007.2	2024.0	2040.8	2024.0
25°	1846.5	1867.9	1889.4	1904.9	1918.6	1942.5	1976.6	2008.5	2033.8	2059.2	2033.8
27.5°	1791.2	1812.5	1833.7	1860.5	1889.2	1922.7	1961.1	1994.9	2015.0	2035.1	2015.0
30°	1754.4	1774.8	1795.3	1826.0	1860.1	1897.1	1937.1	1971.7	1990.2	2008.7	1990.2
32.5°	1708.8	1730.0	1751.2	1783.9	1820.3	1860.1	1903.2	1939.7	1956.7	1973.7	1956.7
35°	1635.9	1656.4	1676.9	1714.9	1758.7	1803.1	1847.9	1884.0	1893.7	1903.5	1893.7
37.5°	1552.2	1575.4	1598.6	1641.2	1690.3	1727.5	1752.6	1771.6	1772.2	1772.8	1772.2
40°	1489.0	1519.2	1549.4	1592.1	1638.9	1664.7	1669.6	1670.1	1657.4	1644.7	1657.4
42.5°	1427.6	1466.4	1505.2	1539.5	1572.2	1578.9	1559.6	1531.1	1474.7	1418.4	1474.7
45°	1333.3	1379.1	1424.9	1445.9	1458.6	1415.7	1317.2	1233.7	1194.7	1155.7	1194.7
47.5°	1232.9	1278.1	1323.3	1317.5	1294.7	1229.8	1122.8	1035.8	1008.9	982.0	1008.9
50°	1164.5	1207.3	1250.2	1219.3	1163.7	1090.6	1000.0	925.7	900.3	875.0	900.3
52.5°	1087.3	1125.5	1163.7	1116.9	1041.9	964.9	886.0	817.1	778.5	739.9	778.5
55°	967.1	993.4	1019.7	968.6	891.6	806.8	714.2	635.5	598.4	561.4	598.4
57.5°	822.4	840.9	859.4	819.1	759.3	675.0	566.2	474.3	432.7	391.2	432.7
60°	725.9	740.5	755.1	718.6	665.0	584.5	477.3	391.8	371.3	350.9	371.3
62.5°	638.1	651.2	664.3	626.2	571.0	499.2	410.7	342.5	335.3	328.1	335.3
65°	517.5	530.2	542.9	502.9	445.4	389.4	334.8	293.6	292.6	291.7	292.6
67.5°	411.8	425.7	439.5	401.9	347.1	305.7	277.6	256.3	255.1	253.9	255.1
70°	348.7	363.3	377.9	342.8	291.2	257.6	242.0	229.8	227.8	225.9	227.8
72.5°	296.0	309.9	323.7	293.1	247.7	219.9	209.8	201.9	200.7	199.6	200.7
75°	223.7	234.4	245.1	223.0	189.8	170.8	165.9	162.0	161.1	160.1	161.1
77.5°	162.3	169.1	175.9	161.4	139.8	127.7	125.1	123.0	122.0	121.1	122.0
80°	127.2	130.1	133.0	122.8	108.2	100.4	99.4	98.4	97.5	96.5	97.5
82.5°	95.6	94.6	93.7	87.7	80.1	75.8	74.9	73.7	71.9	70.2	71.9
85°	50.4	48.5	46.5	44.6	42.6	39.7	35.8	32.2	29.2	26.3	29.2
87.5°	16.5	17.4	18.5	16.5	13.3	11.1	10.4	10.0	10.2	10.2	10.2
90°	3.4	7.9	13.6	18.1	21.5	22.6	22.6	23.7	24.8	24.8	24.8
92.5°	12.4	19.7	19.9	19.9	24.2	26.2	28.0	28.2	29.4	29.4	29.4
95°	35.0	38.4	57.6	56.5	38.4	30.5	26.0	26.0	26.0	26.0	26.0
97.5°	66.9	71.8	75.0	100.5	106.2	102.6	83.6	70.3	62.8	59.4	62.8
100°	94.9	97.1	103.9	105.0	133.3	160.4	146.8	129.9	124.2	120.9	124.2
102.5°	122.9	124.2	134.6	139.4	145.9	161.3	208.3	203.1	199.2	198.6	199.2
105°	164.9	166.0	185.2	194.3	198.8	198.8	197.7	220.2	256.4	264.3	256.4
107.5°	209.9	215.1	237.6	261.8	267.0	268.4	262.5	259.1	257.7	258.7	257.7
110°	240.6	248.5	275.6	306.1	314.0	316.3	314.0	310.6	308.3	308.3	308.3

TEST NUMBER: P1428071

CATALOG NUMBER: SQ2W-PP3-K-075U-100D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	270.4	281.9	312.6	347.7	361.0	367.8	362.8	360.3	358.0	359.9	358.0
115°	316.3	333.2	373.9	410.0	437.1	440.5	439.4	439.4	438.2	438.2	438.2
117.5°	358.7	385.8	431.5	473.5	504.9	513.9	518.4	517.1	515.7	518.0	515.7
120°	388.5	420.2	472.1	519.6	550.1	563.6	568.1	565.9	568.1	565.9	568.1
122.5°	420.2	459.0	510.1	559.3	595.2	610.6	616.0	616.5	616.9	615.6	616.9
125°	467.6	515.0	574.9	625.7	663.0	681.1	685.6	686.7	689.0	694.6	689.0
127.5°	515.5	569.3	635.0	684.0	722.2	744.1	751.1	753.6	758.3	760.8	758.3
130°	548.9	609.9	676.6	722.9	760.1	783.9	796.3	799.7	805.3	804.2	805.3
132.5°	584.2	647.9	715.4	763.5	798.1	823.6	834.2	843.9	846.0	847.6	846.0
135°	635.9	704.8	772.6	820.0	852.8	877.6	891.2	900.2	905.8	909.2	905.8
137.5°	690.3	763.1	828.1	870.4	903.4	924.8	940.2	949.7	955.5	958.2	955.5
140°	727.4	797.4	860.7	904.7	934.1	955.5	969.1	980.4	987.2	987.2	987.2
142.5°	762.6	831.7	893.2	937.2	963.0	982.6	997.1	1005.7	1013.4	1013.4	1013.4
145°	812.1	881.0	937.5	981.5	1003.0	1021.0	1036.9	1043.6	1048.2	1048.2	1048.2
147.5°	863.8	924.8	976.3	1018.6	1036.6	1057.9	1070.3	1075.7	1081.4	1078.9	1081.4
150°	894.5	951.0	1000.7	1040.2	1058.3	1078.7	1091.1	1095.6	1101.2	1097.9	1101.2
152.5°	924.4	978.1	1023.3	1060.1	1075.5	1095.8	1110.1	1114.6	1118.4	1115.9	1118.4
155°	964.6	1012.0	1053.8	1087.7	1101.2	1120.4	1134.0	1139.6	1144.2	1138.5	1144.2
157.5°	1000.5	1041.4	1077.7	1108.9	1123.4	1139.9	1152.5	1159.5	1164.0	1161.6	1164.0
160°	1022.2	1059.4	1092.2	1121.6	1135.1	1149.8	1163.4	1171.3	1175.8	1172.4	1175.8
162.5°	1040.2	1073.9	1104.9	1131.5	1143.3	1156.1	1172.4	1179.4	1183.9	1179.6	1183.9
165°	1066.2	1093.3	1120.4	1143.0	1153.2	1163.4	1180.3	1188.2	1191.6	1187.1	1191.6
167.5°	1085.9	1106.7	1128.6	1148.0	1155.5	1165.4	1182.3	1188.9	1193.2	1187.5	1193.2
170°	1096.7	1114.8	1134.0	1149.8	1155.5	1164.5	1181.4	1187.1	1190.5	1184.8	1190.5
172.5°	1105.8	1119.3	1134.9	1148.9	1151.8	1159.1	1175.1	1180.8	1183.2	1178.5	1183.2
175°	1114.8	1122.7	1134.0	1143.0	1141.9	1146.4	1160.0	1164.5	1169.0	1162.2	1169.0
177.5°	1119.1	1122.7	1126.3	1131.7	1128.1	1128.1	1138.1	1140.8	1141.7	1138.1	1141.7
180°	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2



TEST NUMBER: P1428071

CATALOG NUMBER: SQ2W-PP3-K-075U-100D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	2074.5	2074.5	2074.5	2074.5	2074.5	2074.5	2074.5	2074.5	2074.5	2074.5	2074.5
2.5°	2073.2	2071.6	2070.1	2073.6	2082.1	2085.3	2072.0	2058.7	2072.0	2085.3	2082.1
5°	2074.0	2070.9	2068.9	2072.3	2081.1	2083.6	2067.0	2050.4	2067.0	2083.6	2081.1
7.5°	2070.9	2066.3	2063.0	2065.7	2074.2	2076.4	2059.5	2042.5	2059.5	2076.4	2074.2
10°	2065.3	2059.9	2055.0	2056.5	2064.3	2066.5	2051.9	2037.3	2051.9	2066.5	2064.3
12.5°	2052.8	2046.5	2040.0	2040.3	2047.3	2049.1	2035.3	2021.5	2035.3	2049.1	2047.3
15°	2034.1	2026.3	2017.5	2015.1	2019.0	2018.7	2006.1	1993.4	2006.1	2018.7	2019.0
17.5°	2018.3	2007.7	1995.2	1989.2	1989.6	1986.0	1970.6	1955.2	1970.6	1986.0	1989.6
20°	2009.0	1994.9	1979.3	1970.5	1968.5	1962.5	1943.9	1925.4	1943.9	1962.5	1968.5
22.5°	2007.2	1985.5	1962.1	1948.7	1945.2	1937.1	1915.5	1893.8	1915.5	1937.1	1945.2
25°	2008.5	1976.6	1942.5	1918.6	1904.9	1889.4	1867.9	1846.5	1867.9	1889.4	1904.9
27.5°	1994.9	1961.1	1922.7	1889.2	1860.5	1833.7	1812.5	1791.2	1812.5	1833.7	1860.5
30°	1971.7	1937.1	1897.1	1860.1	1826.0	1795.3	1774.8	1754.4	1774.8	1795.3	1826.0
32.5°	1939.7	1903.2	1860.1	1820.3	1783.9	1751.2	1730.0	1708.8	1730.0	1751.2	1783.9
35°	1884.0	1847.9	1803.1	1758.7	1714.9	1676.9	1656.4	1635.9	1656.4	1676.9	1714.9
37.5°	1771.6	1752.6	1727.5	1690.3	1641.2	1598.6	1575.4	1552.2	1575.4	1598.6	1641.2
40°	1670.1	1669.6	1664.7	1638.9	1592.1	1549.4	1519.2	1489.0	1519.2	1549.4	1592.1
42.5°	1531.1	1559.6	1578.9	1572.2	1539.5	1505.2	1466.4	1427.6	1466.4	1505.2	1539.5
45°	1233.7	1317.2	1415.7	1458.6	1445.9	1424.9	1379.1	1333.3	1379.1	1424.9	1445.9
47.5°	1035.8	1122.8	1229.8	1294.7	1317.5	1323.3	1278.1	1232.9	1278.1	1323.3	1317.5
50°	925.7	1000.0	1090.6	1163.7	1219.3	1250.2	1207.3	1164.5	1207.3	1250.2	1219.3
52.5°	817.1	886.0	964.9	1041.9	1116.9	1163.7	1125.5	1087.3	1125.5	1163.7	1116.9
55°	635.5	714.2	806.8	891.6	968.6	1019.7	993.4	967.1	993.4	1019.7	968.6
57.5°	474.3	566.2	675.0	759.3	819.1	859.4	840.9	822.4	840.9	859.4	819.1
60°	391.8	477.3	584.5	665.0	718.6	755.1	740.5	725.9	740.5	755.1	718.6
62.5°	342.5	410.7	499.2	571.0	626.2	664.3	651.2	638.1	651.2	664.3	626.2
65°	293.6	334.8	389.4	445.4	502.9	542.9	530.2	517.5	530.2	542.9	502.9
67.5°	256.3	277.6	305.7	347.1	401.9	439.5	425.7	411.8	425.7	439.5	401.9
70°	229.8	242.0	257.6	291.2	342.8	377.9	363.3	348.7	363.3	377.9	342.8
72.5°	201.9	209.8	219.9	247.7	293.1	323.7	309.9	296.0	309.9	323.7	293.1
75°	162.0	165.9	170.8	189.8	223.0	245.1	234.4	223.7	234.4	245.1	223.0
77.5°	123.0	125.1	127.7	139.8	161.4	175.9	169.1	162.3	169.1	175.9	161.4
80°	98.4	99.4	100.4	108.2	122.8	133.0	130.1	127.2	130.1	133.0	122.8
82.5°	73.7	74.9	75.8	80.1	87.7	93.7	94.6	95.6	94.6	93.7	87.7
85°	32.2	35.8	39.7	42.6	44.6	46.5	48.5	50.4	48.5	46.5	44.6
87.5°	10.0	10.4	11.1	13.3	16.5	18.5	17.4	16.5	17.4	18.3	16.9
90°	23.7	22.6	22.6	21.5	18.1	13.6	7.9	3.4	7.9	12.4	20.3
92.5°	28.2	28.0	26.2	24.2	19.9	19.9	19.7	12.4	21.5	30.5	43.8
95°	26.0	26.0	30.5	38.4	56.5	57.6	38.4	35.0	49.7	70.0	88.1
97.5°	70.3	83.6	102.6	106.2	100.5	75.0	71.8	66.9	91.0	111.1	140.3
100°	129.9	146.8	160.4	133.3	105.0	103.9	97.1	94.9	120.9	140.1	168.3
102.5°	203.1	208.3	161.3	145.9	139.4	134.6	124.2	122.9	148.9	175.3	199.0
105°	220.2	197.7	198.8	198.8	194.3	185.2	166.0	164.9	194.3	224.8	254.1
107.5°	259.1	262.5	268.4	267.0	261.8	237.6	215.1	209.9	236.3	272.9	305.2
110°	310.6	314.0	316.3	314.0	306.1	275.6	248.5	240.6	264.3	302.7	337.7



TEST NUMBER: P1428071

CATALOG NUMBER: SQ2W-PP3-K-075U-100D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	360.3	362.8	367.8	361.0	347.7	312.6	281.9	270.4	294.1	333.4	369.3
115°	439.4	439.4	440.5	437.1	410.0	373.9	333.2	316.3	336.6	372.7	412.3
117.5°	517.1	518.4	513.9	504.9	473.5	431.5	385.8	358.7	374.8	412.9	453.6
120°	565.9	568.1	563.6	550.1	519.6	472.1	420.2	388.5	401.0	438.2	478.9
122.5°	616.5	616.0	610.6	595.2	559.3	510.1	459.0	420.2	425.4	459.9	499.7
125°	686.7	685.6	681.1	663.0	625.7	574.9	515.0	467.6	460.8	490.2	530.9
127.5°	753.6	751.1	744.1	722.2	684.0	635.0	569.3	515.5	500.4	518.9	556.2
130°	799.7	796.3	783.9	760.1	722.9	676.6	609.9	548.9	527.5	538.8	571.5
132.5°	843.9	834.2	823.6	798.1	763.5	715.4	647.9	584.2	554.6	559.5	585.1
135°	900.2	891.2	877.6	852.8	820.0	772.6	704.8	635.9	595.2	590.7	605.4
137.5°	949.7	940.2	924.8	903.4	870.4	828.1	763.1	690.3	639.1	623.9	629.6
140°	980.4	969.1	955.5	934.1	904.7	860.7	797.4	727.4	669.8	648.3	644.9
142.5°	1005.7	997.1	982.6	963.0	937.2	893.2	831.7	762.6	701.4	673.6	665.7
145°	1043.6	1036.9	1021.0	1003.0	981.5	937.5	881.0	812.1	751.1	715.0	698.0
147.5°	1075.7	1070.3	1057.9	1036.6	1018.6	976.3	924.8	863.8	801.3	756.5	734.6
150°	1095.6	1091.1	1078.7	1058.3	1040.2	1000.7	951.0	894.5	834.7	787.2	759.0
152.5°	1114.6	1110.1	1095.8	1075.5	1060.1	1023.3	978.1	924.4	863.6	816.2	787.0
155°	1139.6	1134.0	1120.4	1101.2	1087.7	1053.8	1012.0	964.6	912.6	862.9	830.2
157.5°	1159.5	1152.5	1139.9	1123.4	1108.9	1077.7	1041.4	1000.5	955.1	907.6	874.2
160°	1171.3	1163.4	1149.8	1135.1	1121.6	1092.2	1059.4	1022.2	980.4	937.5	901.3
162.5°	1179.4	1172.4	1156.1	1143.3	1131.5	1104.9	1073.9	1040.2	1003.0	965.5	932.0
165°	1188.2	1180.3	1163.4	1153.2	1143.0	1120.4	1093.3	1066.2	1034.6	1004.1	977.0
167.5°	1188.9	1182.3	1165.4	1155.5	1148.0	1128.6	1106.7	1085.9	1061.3	1037.3	1014.7
170°	1187.1	1181.4	1164.5	1155.5	1149.8	1134.0	1114.8	1096.7	1077.5	1057.2	1039.1
172.5°	1180.8	1175.1	1159.1	1151.8	1148.9	1134.9	1119.3	1105.8	1089.3	1074.4	1059.9
175°	1164.5	1160.0	1146.4	1141.9	1143.0	1134.0	1122.7	1114.8	1104.6	1095.6	1087.7
177.5°	1140.8	1138.1	1128.1	1128.1	1131.7	1126.3	1122.7	1119.1	1114.6	1111.9	1109.1
180°	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2



TEST NUMBER: P1428071

CATALOG NUMBER: SQ2W-PP3-K-075U-100D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	2074.5	2074.5	2074.5	2074.5	2074.5	2074.5	2074.5	2074.5	2074.5	2074.5	2074.5
2.5°	2073.6	2070.1	2071.6	2073.2	2074.7	2076.3	2074.7	2073.2	2071.6	2070.1	2073.6
5°	2072.3	2068.9	2070.9	2074.0	2080.9	2087.7	2080.9	2074.0	2070.9	2068.9	2072.3
7.5°	2065.7	2063.0	2066.3	2070.9	2079.3	2087.7	2079.3	2070.9	2066.3	2063.0	2065.7
10°	2056.5	2055.0	2059.9	2065.3	2072.1	2078.9	2072.1	2065.3	2059.9	2055.0	2056.5
12.5°	2040.3	2040.0	2046.5	2052.8	2058.8	2064.9	2058.8	2052.8	2046.5	2040.0	2040.3
15°	2015.1	2017.5	2026.3	2034.1	2039.0	2043.8	2039.0	2034.1	2026.3	2017.5	2015.1
17.5°	1989.2	1995.2	2007.7	2018.3	2023.4	2028.5	2023.4	2018.3	2007.7	1995.2	1989.2
20°	1970.5	1979.3	1994.9	2009.0	2018.7	2028.5	2018.7	2009.0	1994.9	1979.3	1970.5
22.5°	1948.7	1962.1	1985.5	2007.2	2024.0	2040.8	2024.0	2007.2	1985.5	1962.1	1948.7
25°	1918.6	1942.5	1976.6	2008.5	2033.8	2059.2	2033.8	2008.5	1976.6	1942.5	1918.6
27.5°	1889.2	1922.7	1961.1	1994.9	2015.0	2035.1	2015.0	1994.9	1961.1	1922.7	1889.2
30°	1860.1	1897.1	1937.1	1971.7	1990.2	2008.7	1990.2	1971.7	1937.1	1897.1	1860.1
32.5°	1820.3	1860.1	1903.2	1939.7	1956.7	1973.7	1956.7	1939.7	1903.2	1860.1	1820.3
35°	1758.7	1803.1	1847.9	1884.0	1893.7	1903.5	1893.7	1884.0	1847.9	1803.1	1758.7
37.5°	1690.3	1727.5	1752.6	1771.6	1772.2	1772.8	1772.2	1771.6	1752.6	1727.5	1690.3
40°	1638.9	1664.7	1669.6	1670.1	1657.4	1644.7	1657.4	1670.1	1669.6	1664.7	1638.9
42.5°	1572.2	1578.9	1559.6	1531.1	1474.7	1418.4	1474.7	1531.1	1559.6	1578.9	1572.2
45°	1458.6	1415.7	1317.2	1233.7	1194.7	1155.7	1194.7	1233.7	1317.2	1415.7	1458.6
47.5°	1294.7	1229.8	1122.8	1035.8	1008.9	982.0	1008.9	1035.8	1122.8	1229.8	1294.7
50°	1163.7	1090.6	1000.0	925.7	900.3	875.0	900.3	925.7	1000.0	1090.6	1163.7
52.5°	1041.9	964.9	886.0	817.1	778.5	739.9	778.5	817.1	886.0	964.9	1041.9
55°	891.6	806.8	714.2	635.5	598.4	561.4	598.4	635.5	714.2	806.8	891.6
57.5°	759.3	675.0	566.2	474.3	432.7	391.2	432.7	474.3	566.2	675.0	759.3
60°	665.0	584.5	477.3	391.8	371.3	350.9	371.3	391.8	477.3	584.5	665.0
62.5°	571.0	499.2	410.7	342.5	335.3	328.1	335.3	342.5	410.7	499.2	571.0
65°	445.4	389.4	334.8	293.6	292.6	291.7	292.6	293.6	334.8	389.4	445.4
67.5°	347.1	305.7	277.6	256.3	255.1	253.9	255.1	256.3	277.6	305.7	347.1
70°	291.2	257.6	242.0	229.8	227.8	225.9	227.8	229.8	242.0	257.6	291.2
72.5°	247.7	219.9	209.8	201.9	200.7	199.6	200.7	201.9	209.8	219.9	247.7
75°	189.8	170.8	165.9	162.0	161.1	160.1	161.1	162.0	165.9	170.8	189.8
77.5°	139.8	127.7	125.1	123.0	122.0	121.1	122.0	123.0	125.1	127.7	139.8
80°	108.2	100.4	99.4	98.4	97.5	96.5	97.5	98.4	99.4	100.4	108.2
82.5°	80.1	75.8	74.9	73.7	71.9	70.2	71.9	73.7	74.9	75.8	80.1
85°	42.6	39.7	35.8	32.2	29.2	26.3	29.2	32.2	35.8	39.7	42.6
87.5°	14.2	13.4	14.2	14.5	15.4	15.0	15.4	14.5	14.2	13.4	14.2
90°	26.0	33.9	41.8	46.3	50.8	48.6	50.8	46.3	41.8	33.9	26.0
92.5°	52.2	65.5	75.2	83.4	87.0	86.5	87.0	83.4	75.2	65.5	52.2
95°	105.0	120.9	136.7	148.0	154.7	152.5	154.7	148.0	136.7	120.9	105.0
97.5°	162.0	183.2	200.8	211.4	218.2	222.7	218.2	211.4	200.8	183.2	162.0
100°	199.9	220.2	240.6	253.0	264.3	268.8	264.3	253.0	240.6	220.2	199.9
102.5°	230.6	257.3	279.4	292.8	302.2	306.8	302.2	292.8	279.4	257.3	230.6
105°	281.2	309.5	333.2	350.1	360.3	363.7	360.3	350.1	333.2	309.5	281.2
107.5°	331.8	361.0	382.9	401.6	414.1	421.3	414.1	401.6	382.9	361.0	331.8
110°	371.6	395.3	419.0	436.0	448.4	452.9	448.4	436.0	419.0	395.3	371.6

TEST NUMBER: P1428071

CATALOG NUMBER: SQ2W-PP3-K-075U-100D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	405.0	431.5	455.2	472.1	486.4	492.7	486.4	472.1	455.2	431.5	405.0
115°	451.8	486.8	508.3	524.1	534.2	539.9	534.2	524.1	508.3	486.8	451.8
117.5°	490.6	527.2	550.7	562.9	567.7	571.7	567.7	562.9	550.7	527.2	490.6
120°	515.0	548.9	576.0	591.8	597.5	599.8	597.5	591.8	576.0	548.9	515.0
122.5°	537.6	569.7	595.9	615.3	624.6	626.9	624.6	615.3	595.9	569.7	537.6
125°	569.3	599.8	626.9	646.1	656.2	661.9	656.2	646.1	626.9	599.8	569.3
127.5°	596.8	629.8	654.6	672.0	682.0	686.5	682.0	672.0	654.6	629.8	596.8
130°	612.2	646.1	670.9	690.1	699.1	703.7	699.1	690.1	670.9	646.1	612.2
132.5°	623.9	659.6	685.4	702.8	712.7	717.2	712.7	702.8	685.4	659.6	623.9
135°	638.2	675.4	702.5	719.5	728.5	733.0	728.5	719.5	702.5	675.4	638.2
137.5°	650.6	684.5	712.7	730.5	738.7	741.6	738.7	730.5	712.7	684.5	650.6
140°	659.6	689.0	717.2	734.2	743.2	744.3	743.2	734.2	717.2	689.0	659.6
142.5°	671.4	694.4	719.0	736.0	745.0	747.0	745.0	736.0	719.0	694.4	671.4
145°	692.4	705.9	722.9	738.7	746.6	748.8	746.6	738.7	722.9	705.9	692.4
147.5°	718.8	723.1	731.9	742.3	750.0	751.6	750.0	742.3	731.9	723.1	718.8
150°	738.7	737.5	740.9	747.7	754.5	753.4	754.5	747.7	740.9	737.5	738.7
152.5°	761.3	754.7	754.5	757.7	760.8	760.6	760.8	757.7	754.5	754.7	761.3
155°	799.7	787.2	780.5	778.2	778.2	777.1	778.2	778.2	780.5	787.2	799.7
157.5°	841.9	824.5	814.4	808.9	807.4	804.9	807.4	808.9	814.4	824.5	841.9
160°	870.8	851.6	841.5	832.4	829.0	825.6	829.0	832.4	841.5	851.6	870.8
162.5°	897.9	879.6	868.6	860.4	857.0	851.9	857.0	860.4	868.6	879.6	897.9
165°	942.0	922.8	910.4	903.6	899.1	894.5	899.1	903.6	910.4	922.8	942.0
167.5°	986.0	965.0	956.9	949.2	944.9	936.8	944.9	949.2	956.9	965.0	986.0
170°	1013.1	993.9	989.4	982.6	974.7	965.7	974.7	982.6	989.4	993.9	1013.1
172.5°	1036.6	1023.8	1019.2	1012.5	1010.0	1002.7	1010.0	1012.5	1019.2	1023.8	1036.6
175°	1070.7	1060.6	1060.6	1059.4	1056.1	1049.3	1056.1	1059.4	1060.6	1060.6	1070.7
177.5°	1099.2	1093.8	1097.4	1097.4	1096.5	1090.2	1096.5	1097.4	1097.4	1093.8	1099.2
180°	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2



TEST NUMBER: P1428071

CATALOG NUMBER: SQ2W-PP3-K-075U-100D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	2074.5	2074.5	2074.5	2074.5
2.5°	2082.1	2085.3	2072.0	2058.7
5°	2081.1	2083.6	2067.0	2050.4
7.5°	2074.2	2076.4	2059.5	2042.5
10°	2064.3	2066.5	2051.9	2037.3
12.5°	2047.3	2049.1	2035.3	2021.5
15°	2019.0	2018.7	2006.1	1993.4
17.5°	1989.6	1986.0	1970.6	1955.2
20°	1968.5	1962.5	1943.9	1925.4
22.5°	1945.2	1937.1	1915.5	1893.8
25°	1904.9	1889.4	1867.9	1846.5
27.5°	1860.5	1833.7	1812.5	1791.2
30°	1826.0	1795.3	1774.8	1754.4
32.5°	1783.9	1751.2	1730.0	1708.8
35°	1714.9	1676.9	1656.4	1635.9
37.5°	1641.2	1598.6	1575.4	1552.2
40°	1592.1	1549.4	1519.2	1489.0
42.5°	1539.5	1505.2	1466.4	1427.6
45°	1445.9	1424.9	1379.1	1333.3
47.5°	1317.5	1323.3	1278.1	1232.9
50°	1219.3	1250.2	1207.3	1164.5
52.5°	1116.9	1163.7	1125.5	1087.3
55°	968.6	1019.7	993.4	967.1
57.5°	819.1	859.4	840.9	822.4
60°	718.6	755.1	740.5	725.9
62.5°	626.2	664.3	651.2	638.1
65°	502.9	542.9	530.2	517.5
67.5°	401.9	439.5	425.7	411.8
70°	342.8	377.9	363.3	348.7
72.5°	293.1	323.7	309.9	296.0
75°	223.0	245.1	234.4	223.7
77.5°	161.4	175.9	169.1	162.3
80°	122.8	133.0	130.1	127.2
82.5°	87.7	93.7	94.6	95.6
85°	44.6	46.5	48.5	50.4
87.5°	16.9	18.3	17.4	16.5
90°	20.3	12.4	7.9	3.4
92.5°	43.8	30.5	21.5	12.4
95°	88.1	70.0	49.7	35.0
97.5°	140.3	111.1	91.0	66.9
100°	168.3	140.1	120.9	94.9
102.5°	199.0	175.3	148.9	122.9
105°	254.1	224.8	194.3	164.9
107.5°	305.2	272.9	236.3	209.9
110°	337.7	302.7	264.3	240.6



TEST NUMBER: P1428071

CATALOG NUMBER: SQ2W-PP3-K-075U-100D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	369.3	333.4	294.1	270.4
115°	412.3	372.7	336.6	316.3
117.5°	453.6	412.9	374.8	358.7
120°	478.9	438.2	401.0	388.5
122.5°	499.7	459.9	425.4	420.2
125°	530.9	490.2	460.8	467.6
127.5°	556.2	518.9	500.4	515.5
130°	571.5	538.8	527.5	548.9
132.5°	585.1	559.5	554.6	584.2
135°	605.4	590.7	595.2	635.9
137.5°	629.6	623.9	639.1	690.3
140°	644.9	648.3	669.8	727.4
142.5°	665.7	673.6	701.4	762.6
145°	698.0	715.0	751.1	812.1
147.5°	734.6	756.5	801.3	863.8
150°	759.0	787.2	834.7	894.5
152.5°	787.0	816.2	863.6	924.4
155°	830.2	862.9	912.6	964.6
157.5°	874.2	907.6	955.1	1000.5
160°	901.3	937.5	980.4	1022.2
162.5°	932.0	965.5	1003.0	1040.2
165°	977.0	1004.1	1034.6	1066.2
167.5°	1014.7	1037.3	1061.3	1085.9
170°	1039.1	1057.2	1077.5	1096.7
172.5°	1059.9	1074.4	1089.3	1105.8
175°	1087.7	1095.6	1104.6	1114.8
177.5°	1109.1	1111.9	1114.6	1119.1
180°	1118.2	1118.2	1118.2	1118.2



TEST NUMBER: P1428071
 CATALOG NUMBER: SQ2W-PP3-K-075U-100D-L830-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	20.67	21.60	21.53	22.48	23.58	16.44	17.38	17.30	18.25	19.35
	3H	21.74	22.57	22.61	23.46	24.58	17.76	18.59	18.63	19.48	20.60
	4H	22.11	22.90	23.00	23.79	24.92	18.32	19.10	19.20	19.99	21.13
	6H	22.31	23.03	23.21	23.93	25.08	18.68	19.41	19.58	20.31	21.46
	8H	22.37	23.06	23.28	23.97	25.12	18.82	19.50	19.72	20.42	21.57
	12H	22.39	23.05	23.31	23.96	25.13	18.85	19.51	19.77	20.42	21.59
4H	2H	20.80	21.59	21.69	22.48	23.61	17.36	18.15	18.25	19.04	20.17
	3H	22.10	22.75	23.00	23.67	24.82	18.79	19.44	19.69	20.36	21.51
	4H	22.61	23.20	23.52	24.12	25.30	19.41	20.01	20.33	20.92	22.10
	6H	22.93	23.44	23.86	24.38	25.56	19.86	20.37	20.79	21.32	22.50
	8H	23.04	23.52	23.97	24.45	25.64	20.03	20.51	20.97	21.45	22.64
	12H	23.09	23.52	24.04	24.47	25.67	20.09	20.52	21.04	21.47	22.67
8H	4H	22.63	23.11	23.57	24.05	25.24	19.73	20.20	20.66	21.14	22.33
	6H	23.05	23.44	24.01	24.42	25.61	20.29	20.68	21.25	21.66	22.85
	8H	23.23	23.58	24.20	24.55	25.76	20.54	20.89	21.50	21.86	23.06
	12H	23.33	23.64	24.30	24.60	25.86	20.64	20.95	21.61	21.91	23.17
12H	4H	22.60	23.03	23.55	23.98	25.18	19.74	20.17	20.69	21.13	22.32
	6H	23.04	23.39	24.01	24.36	25.57	20.36	20.70	21.32	21.67	22.88
	8H	23.24	23.55	24.21	24.51	25.77	20.63	20.94	21.60	21.90	23.16