

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1428077

Luminaire Tested: SQ2W-PP3-K-075U-125D-L830-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1428077
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-7)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-PP3-K-075U-125D-L830-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - PERCEIVE PRISM LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 1250 LUMENS PER FOOT
UPLIGHT 750 LUMENS PER FOOT
Light Source: 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9775.0 lumens
Efficiency: N/A
Efficacy: 134.3 lumens/watt
Spacing Criteria (0/90/45): 1.26 / 1.41 / 1.4
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 72.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1428077

CATALOG NUMBER: SQ2W-PP3-K-075U-125D-L830-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

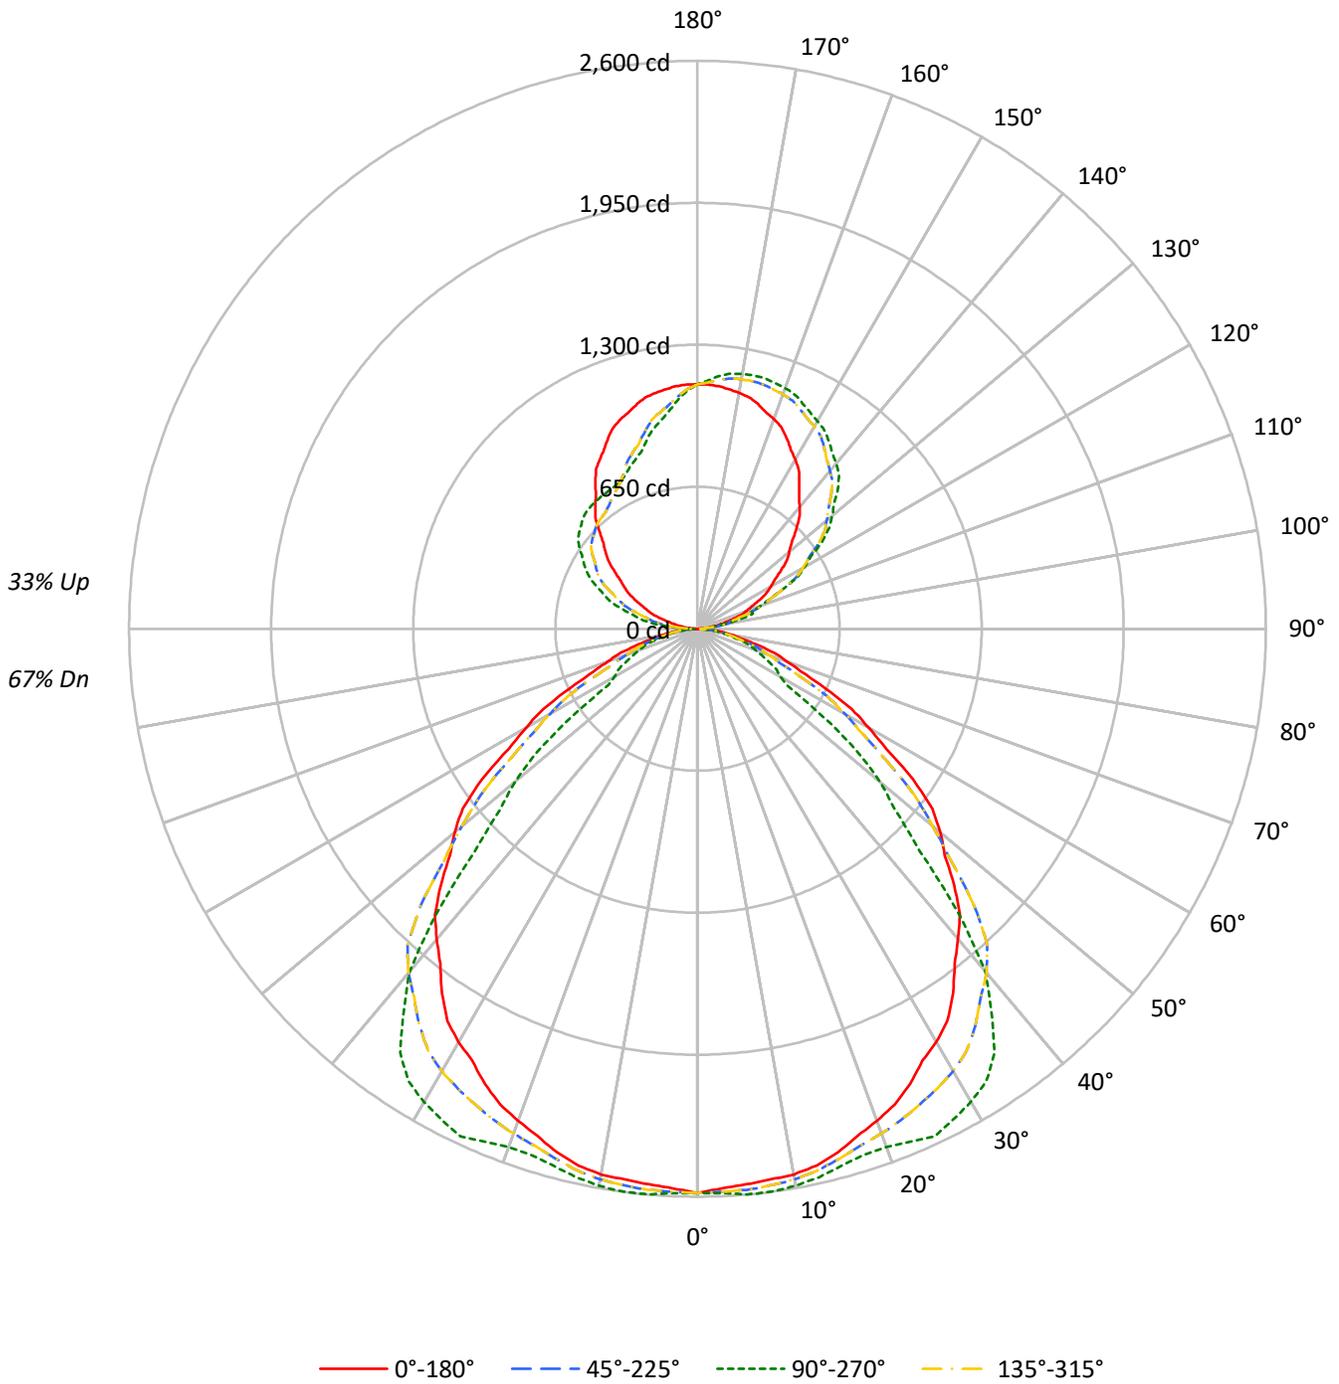



TEST NUMBER: P1428077

CATALOG NUMBER: SQ2W-PP3-K-075U-125D-L830-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	71	71	71	67				
1	102	98	94	91	96	93	89	86	82	80	78	73	71	69	64	63	62	58				
2	94	86	81	75	88	82	77	72	73	69	65	65	62	59	57	55	53	49				
3	86	77	69	64	81	73	66	61	65	60	56	58	54	51	51	48	46	42				
4	79	68	60	54	74	65	58	52	58	52	48	52	47	44	46	43	40	37				
5	73	61	53	47	68	58	51	45	52	46	42	47	42	38	42	38	35	32				
6	67	55	47	41	63	52	45	40	47	41	37	43	38	34	38	34	31	28				
7	62	50	42	36	58	47	40	35	43	37	33	39	34	30	35	31	28	25				
8	58	45	38	32	54	43	36	31	39	33	29	36	31	27	32	28	25	23				
9	54	42	34	29	51	40	33	28	36	30	26	33	28	24	30	25	23	20				
10	50	38	31	26	48	36	30	25	33	28	24	30	25	22	27	23	20	19				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	41706	41706	41706	41706
5°	41379	42131	41379	42131
10°	41588	42439	41588	42439
15°	41489	42538	41489	42538
20°	41191	43398	41191	43398
25°	40958	45677	40958	45677
30°	40726	46631	40726	46631
35°	40149	46715	40149	46715
40°	39078	43163	39078	43163
45°	37908	32857	37908	32857
50°	36419	27366	36419	27366
55°	33897	19676	33897	19676
60°	29185	14108	29185	14108
65°	24618	13876	24618	13876
70°	20497	13274	20497	13274
75°	17373	12433	17373	12433
80°	14728	11167	14728	11167
85°	11634	6076	11634	6076

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 40°
 Vertical Angle: 45°
 Luminance: 41467 cd/sqm



TEST NUMBER: P1428077

CATALOG NUMBER: SQ2W-PP3-K-075U-125D-L830-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	246.0	2.5
10°-20°	711.9	7.3
20°-30°	1115.2	11.4
30°-40°	1375.7	14.1
40°-50°	1295.2	13.2
50°-60°	917.1	9.4
60°-70°	522.6	5.3
70°-80°	258.7	2.6
80°-90°	67.8	0.7
90°-100°	89.0	0.9
100°-110°	259.5	2.7
110°-120°	423.5	4.3
120°-130°	537.4	5.5
130°-140°	575.1	5.9
140°-150°	537.0	5.5
150°-160°	441.9	4.5
160°-170°	296.3	3.0
170°-180°	105.2	1.1
0°-30°	2073.1	21.2
0°-40°	3448.8	35.3
0°-60°	5661.0	57.9
0°-90°	6510.1	66.6
90°-120°	772.0	7.9
90°-150°	2421.5	24.8
90°-180°	3265.0	33.4
0°-180°	9775.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	2583	2583	2583	2583	2583	
5°	2553	2600	2553	2600	2553	243
15°	2482	2545	2482	2545	2482	699
25°	2299	2564	2299	2564	2299	1059
35°	2037	2370	2037	2370	2037	1270
45°	1660	1439	1660	1439	1660	1278
55°	1204	699	1204	699	1204	1062
65°	644	363	644	363	644	647
75°	278	199	278	199	278	302
85°	63	33	63	33	63	74
90°	3	25	3	49	3	5
95°	35	26	35	152	35	42
105°	165	264	165	364	165	175
115°	316	438	316	540	316	312
125°	468	695	468	662	468	418
135°	636	909	636	733	636	491
145°	812	1048	812	749	812	508
155°	965	1138	965	777	965	443
165°	1066	1187	1066	894	1066	300
175°	1115	1162	1115	1049	1115	106
180°	1118	1118	1118	1118	1118	



TEST NUMBER: P1428077

CATALOG NUMBER: SQ2W-PP3-K-075U-125D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	2583.1	2583.1	2583.1	2583.1	2583.1	2583.1	2583.1	2583.1	2583.1	2583.1	2583.1
2.5°	2563.5	2580.0	2596.5	2592.6	2581.9	2577.5	2579.5	2581.4	2583.4	2585.3	2583.4
5°	2553.1	2573.7	2594.3	2591.3	2580.4	2576.1	2578.6	2582.5	2591.0	2599.5	2591.0
7.5°	2543.2	2564.4	2585.5	2582.8	2572.1	2568.8	2572.9	2578.6	2589.1	2599.5	2589.1
10°	2536.7	2554.9	2573.1	2570.4	2560.7	2558.8	2564.9	2571.6	2580.1	2588.6	2580.1
12.5°	2517.0	2534.3	2551.5	2549.3	2540.5	2540.2	2548.2	2556.1	2563.6	2571.1	2563.6
15°	2482.1	2497.9	2513.6	2513.9	2509.1	2512.1	2523.0	2532.8	2538.8	2544.9	2538.8
17.5°	2434.6	2453.7	2472.9	2477.4	2476.9	2484.4	2499.9	2513.2	2519.5	2525.8	2519.5
20°	2397.4	2420.5	2443.6	2451.1	2453.6	2464.5	2483.9	2501.5	2513.6	2525.8	2513.6
22.5°	2358.1	2385.1	2412.0	2422.0	2426.4	2443.1	2472.3	2499.3	2520.2	2541.1	2520.2
25°	2299.1	2325.8	2352.5	2372.0	2388.9	2418.7	2461.1	2500.9	2532.4	2564.0	2532.4
27.5°	2230.3	2256.8	2283.2	2316.6	2352.3	2394.0	2441.9	2484.0	2509.0	2534.0	2509.0
30°	2184.5	2209.9	2235.4	2273.7	2316.1	2362.2	2412.0	2455.1	2478.1	2501.2	2478.1
32.5°	2127.7	2154.1	2180.6	2221.2	2266.6	2316.1	2369.8	2415.3	2436.4	2457.5	2436.4
35°	2037.0	2062.5	2088.0	2135.3	2189.9	2245.1	2301.0	2345.9	2358.0	2370.1	2358.0
37.5°	1932.7	1961.6	1990.5	2043.6	2104.7	2151.0	2182.3	2205.9	2206.7	2207.4	2206.7
40°	1854.1	1891.7	1929.3	1982.4	2040.6	2072.8	2078.9	2079.5	2063.7	2047.9	2063.7
42.5°	1777.6	1825.9	1874.2	1916.9	1957.6	1966.0	1942.0	1906.4	1836.3	1766.1	1836.3
45°	1660.2	1717.2	1774.3	1800.4	1816.1	1762.7	1640.2	1536.1	1487.6	1439.0	1487.6
47.5°	1535.1	1591.4	1647.7	1640.5	1612.1	1531.3	1398.0	1289.7	1256.2	1222.7	1256.2
50°	1449.9	1503.3	1556.7	1518.2	1449.0	1358.0	1245.1	1152.6	1121.0	1089.5	1121.0
52.5°	1353.8	1401.4	1449.0	1390.8	1297.3	1201.4	1103.1	1017.4	969.4	921.3	969.4
55°	1204.2	1236.9	1269.7	1206.0	1110.1	1004.5	889.3	791.3	745.1	699.0	745.1
57.5°	1024.0	1047.0	1070.1	1020.0	945.4	840.5	705.0	590.5	538.8	487.1	538.8
60°	903.8	922.0	940.2	894.7	828.0	727.8	594.4	487.9	462.4	436.9	462.4
62.5°	794.6	810.9	827.1	779.7	711.0	621.5	511.3	426.5	417.5	408.5	417.5
65°	644.4	660.2	676.0	626.2	554.6	484.8	416.9	365.6	364.4	363.2	364.4
67.5°	512.8	530.0	547.3	500.4	432.2	380.6	345.7	319.1	317.7	316.2	317.7
70°	434.2	452.4	470.6	426.9	362.6	320.7	301.3	286.1	283.7	281.2	283.7
72.5°	368.6	385.9	403.1	365.0	308.4	273.8	261.2	251.4	249.9	248.5	249.9
75°	278.5	291.9	305.2	277.6	236.3	212.7	206.6	201.8	200.5	199.3	200.5
77.5°	202.1	210.6	219.1	201.0	174.0	159.0	155.8	153.2	151.9	150.7	151.9
80°	158.4	162.0	165.7	152.9	134.7	125.0	123.8	122.6	121.4	120.1	121.4
82.5°	119.1	117.8	116.6	109.2	99.8	94.4	93.2	91.7	89.6	87.4	89.6
85°	62.8	60.4	57.9	55.5	53.1	49.5	44.6	40.0	36.4	32.8	36.4
87.5°	20.3	21.2	22.4	19.6	15.5	12.8	11.8	11.3	11.5	11.5	11.5
90°	3.4	7.9	13.6	18.1	21.5	22.6	22.6	23.7	24.8	24.8	24.8
92.5°	12.4	19.7	19.9	19.9	24.2	26.2	28.0	28.2	29.4	29.4	29.4
95°	35.0	38.4	57.6	56.5	38.4	30.5	26.0	26.0	26.0	26.0	26.0
97.5°	66.9	71.8	75.0	100.5	106.2	102.6	83.6	70.3	62.8	59.4	62.8
100°	94.9	97.1	103.9	105.0	133.3	160.4	146.8	129.9	124.2	120.9	124.2
102.5°	122.9	124.2	134.6	139.4	145.9	161.3	208.3	203.1	199.2	198.6	199.2
105°	164.9	166.0	185.2	194.3	198.8	198.8	197.7	220.2	256.4	264.3	256.4
107.5°	209.9	215.1	237.6	261.8	267.0	268.4	262.5	259.1	257.7	258.7	257.7
110°	240.6	248.5	275.6	306.1	314.0	316.3	314.0	310.6	308.3	308.3	308.3



TEST NUMBER: P1428077

CATALOG NUMBER: SQ2W-PP3-K-075U-125D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	270.4	281.9	312.6	347.7	361.0	367.8	362.8	360.3	358.0	359.9	358.0
115°	316.3	333.2	373.9	410.0	437.1	440.5	439.4	439.4	438.2	438.2	438.2
117.5°	358.7	385.8	431.5	473.5	504.9	513.9	518.4	517.1	515.7	518.0	515.7
120°	388.5	420.2	472.1	519.6	550.1	563.6	568.1	565.9	568.1	565.9	568.1
122.5°	420.2	459.0	510.1	559.3	595.2	610.6	616.0	616.5	616.9	615.6	616.9
125°	467.6	515.0	574.9	625.7	663.0	681.1	685.6	686.7	689.0	694.6	689.0
127.5°	515.5	569.3	635.0	684.0	722.2	744.1	751.1	753.6	758.3	760.8	758.3
130°	548.9	609.9	676.6	722.9	760.1	783.9	796.3	799.7	805.3	804.2	805.3
132.5°	584.2	647.9	715.4	763.5	798.1	823.6	834.2	843.9	846.0	847.6	846.0
135°	635.9	704.8	772.6	820.0	852.8	877.6	891.2	900.2	905.8	909.2	905.8
137.5°	690.3	763.1	828.1	870.4	903.4	924.8	940.2	949.7	955.5	958.2	955.5
140°	727.4	797.4	860.7	904.7	934.1	955.5	969.1	980.4	987.2	987.2	987.2
142.5°	762.6	831.7	893.2	937.2	963.0	982.6	997.1	1005.7	1013.4	1013.4	1013.4
145°	812.1	881.0	937.5	981.5	1003.0	1021.0	1036.9	1043.6	1048.2	1048.2	1048.2
147.5°	863.8	924.8	976.3	1018.6	1036.6	1057.9	1070.3	1075.7	1081.4	1078.9	1081.4
150°	894.5	951.0	1000.7	1040.2	1058.3	1078.7	1091.1	1095.6	1101.2	1097.9	1101.2
152.5°	924.4	978.1	1023.3	1060.1	1075.5	1095.8	1110.1	1114.6	1118.4	1115.9	1118.4
155°	964.6	1012.0	1053.8	1087.7	1101.2	1120.4	1134.0	1139.6	1144.2	1138.5	1144.2
157.5°	1000.5	1041.4	1077.7	1108.9	1123.4	1139.9	1152.5	1159.5	1164.0	1161.6	1164.0
160°	1022.2	1059.4	1092.2	1121.6	1135.1	1149.8	1163.4	1171.3	1175.8	1172.4	1175.8
162.5°	1040.2	1073.9	1104.9	1131.5	1143.3	1156.1	1172.4	1179.4	1183.9	1179.6	1183.9
165°	1066.2	1093.3	1120.4	1143.0	1153.2	1163.4	1180.3	1188.2	1191.6	1187.1	1191.6
167.5°	1085.9	1106.7	1128.6	1148.0	1155.5	1165.4	1182.3	1188.9	1193.2	1187.5	1193.2
170°	1096.7	1114.8	1134.0	1149.8	1155.5	1164.5	1181.4	1187.1	1190.5	1184.8	1190.5
172.5°	1105.8	1119.3	1134.9	1148.9	1151.8	1159.1	1175.1	1180.8	1183.2	1178.5	1183.2
175°	1114.8	1122.7	1134.0	1143.0	1141.9	1146.4	1160.0	1164.5	1169.0	1162.2	1169.0
177.5°	1119.1	1122.7	1126.3	1131.7	1128.1	1128.1	1138.1	1140.8	1141.7	1138.1	1141.7
180°	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2



TEST NUMBER: P1428077

CATALOG NUMBER: SQ2W-PP3-K-075U-125D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	2583.1	2583.1	2583.1	2583.1	2583.1	2583.1	2583.1	2583.1	2583.1	2583.1	2583.1
2.5°	2581.4	2579.5	2577.5	2581.9	2592.6	2596.5	2580.0	2563.5	2580.0	2596.5	2592.6
5°	2582.5	2578.6	2576.1	2580.4	2591.3	2594.3	2573.7	2553.1	2573.7	2594.3	2591.3
7.5°	2578.6	2572.9	2568.8	2572.1	2582.8	2585.5	2564.4	2543.2	2564.4	2585.5	2582.8
10°	2571.6	2564.9	2558.8	2560.7	2570.4	2573.1	2554.9	2536.7	2554.9	2573.1	2570.4
12.5°	2556.1	2548.2	2540.2	2540.5	2549.3	2551.5	2534.3	2517.0	2534.3	2551.5	2549.3
15°	2532.8	2523.0	2512.1	2509.1	2513.9	2513.6	2497.9	2482.1	2497.9	2513.6	2513.9
17.5°	2513.2	2499.9	2484.4	2476.9	2477.4	2472.9	2453.7	2434.6	2453.7	2472.9	2477.4
20°	2501.5	2483.9	2464.5	2453.6	2451.1	2443.6	2420.5	2397.4	2420.5	2443.6	2451.1
22.5°	2499.3	2472.3	2443.1	2426.4	2422.0	2412.0	2385.1	2358.1	2385.1	2412.0	2422.0
25°	2500.9	2461.1	2418.7	2388.9	2372.0	2352.5	2325.8	2299.1	2325.8	2352.5	2372.0
27.5°	2484.0	2441.9	2394.0	2352.3	2316.6	2283.2	2256.8	2230.3	2256.8	2283.2	2316.6
30°	2455.1	2412.0	2362.2	2316.1	2273.7	2235.4	2209.9	2184.5	2209.9	2235.4	2273.7
32.5°	2415.3	2369.8	2316.1	2266.6	2221.2	2180.6	2154.1	2127.7	2154.1	2180.6	2221.2
35°	2345.9	2301.0	2245.1	2189.9	2135.3	2088.0	2062.5	2037.0	2062.5	2088.0	2135.3
37.5°	2205.9	2182.3	2151.0	2104.7	2043.6	1990.5	1961.6	1932.7	1961.6	1990.5	2043.6
40°	2079.5	2078.9	2072.8	2040.6	1982.4	1929.3	1891.7	1854.1	1891.7	1929.3	1982.4
42.5°	1906.4	1942.0	1966.0	1957.6	1916.9	1874.2	1825.9	1777.6	1825.9	1874.2	1916.9
45°	1536.1	1640.2	1762.7	1816.1	1800.4	1774.3	1717.2	1660.2	1717.2	1774.3	1800.4
47.5°	1289.7	1398.0	1531.3	1612.1	1640.5	1647.7	1591.4	1535.1	1591.4	1647.7	1640.5
50°	1152.6	1245.1	1358.0	1449.0	1518.2	1556.7	1503.3	1449.9	1503.3	1556.7	1518.2
52.5°	1017.4	1103.1	1201.4	1297.3	1390.8	1449.0	1401.4	1353.8	1401.4	1449.0	1390.8
55°	791.3	889.3	1004.5	1110.1	1206.0	1269.7	1236.9	1204.2	1236.9	1269.7	1206.0
57.5°	590.5	705.0	840.5	945.4	1020.0	1070.1	1047.0	1024.0	1047.0	1070.1	1020.0
60°	487.9	594.4	727.8	828.0	894.7	940.2	922.0	903.8	922.0	940.2	894.7
62.5°	426.5	511.3	621.5	711.0	779.7	827.1	810.9	794.6	810.9	827.1	779.7
65°	365.6	416.9	484.8	554.6	626.2	676.0	660.2	644.4	660.2	676.0	626.2
67.5°	319.1	345.7	380.6	432.2	500.4	547.3	530.0	512.8	530.0	547.3	500.4
70°	286.1	301.3	320.7	362.6	426.9	470.6	452.4	434.2	452.4	470.6	426.9
72.5°	251.4	261.2	273.8	308.4	365.0	403.1	385.9	368.6	385.9	403.1	365.0
75°	201.8	206.6	212.7	236.3	277.6	305.2	291.9	278.5	291.9	305.2	277.6
77.5°	153.2	155.8	159.0	174.0	201.0	219.1	210.6	202.1	210.6	219.1	201.0
80°	122.6	123.8	125.0	134.7	152.9	165.7	162.0	158.4	162.0	165.7	152.9
82.5°	91.7	93.2	94.4	99.8	109.2	116.6	117.8	119.1	117.8	116.6	109.2
85°	40.0	44.6	49.5	53.1	55.5	57.9	60.4	62.8	60.4	57.9	55.5
87.5°	11.3	11.8	12.8	15.5	19.6	22.4	21.2	20.3	21.2	22.1	20.1
90°	23.7	22.6	22.6	21.5	18.1	13.6	7.9	3.4	7.9	12.4	20.3
92.5°	28.2	28.0	26.2	24.2	19.9	19.9	19.7	12.4	21.5	30.5	43.8
95°	26.0	26.0	30.5	38.4	56.5	57.6	38.4	35.0	49.7	70.0	88.1
97.5°	70.3	83.6	102.6	106.2	100.5	75.0	71.8	66.9	91.0	111.1	140.3
100°	129.9	146.8	160.4	133.3	105.0	103.9	97.1	94.9	120.9	140.1	168.3
102.5°	203.1	208.3	161.3	145.9	139.4	134.6	124.2	122.9	148.9	175.3	199.0
105°	220.2	197.7	198.8	198.8	194.3	185.2	166.0	164.9	194.3	224.8	254.1
107.5°	259.1	262.5	268.4	267.0	261.8	237.6	215.1	209.9	236.3	272.9	305.2
110°	310.6	314.0	316.3	314.0	306.1	275.6	248.5	240.6	264.3	302.7	337.7



TEST NUMBER: P1428077

CATALOG NUMBER: SQ2W-PP3-K-075U-125D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	360.3	362.8	367.8	361.0	347.7	312.6	281.9	270.4	294.1	333.4	369.3
115°	439.4	439.4	440.5	437.1	410.0	373.9	333.2	316.3	336.6	372.7	412.3
117.5°	517.1	518.4	513.9	504.9	473.5	431.5	385.8	358.7	374.8	412.9	453.6
120°	565.9	568.1	563.6	550.1	519.6	472.1	420.2	388.5	401.0	438.2	478.9
122.5°	616.5	616.0	610.6	595.2	559.3	510.1	459.0	420.2	425.4	459.9	499.7
125°	686.7	685.6	681.1	663.0	625.7	574.9	515.0	467.6	460.8	490.2	530.9
127.5°	753.6	751.1	744.1	722.2	684.0	635.0	569.3	515.5	500.4	518.9	556.2
130°	799.7	796.3	783.9	760.1	722.9	676.6	609.9	548.9	527.5	538.8	571.5
132.5°	843.9	834.2	823.6	798.1	763.5	715.4	647.9	584.2	554.6	559.5	585.1
135°	900.2	891.2	877.6	852.8	820.0	772.6	704.8	635.9	595.2	590.7	605.4
137.5°	949.7	940.2	924.8	903.4	870.4	828.1	763.1	690.3	639.1	623.9	629.6
140°	980.4	969.1	955.5	934.1	904.7	860.7	797.4	727.4	669.8	648.3	644.9
142.5°	1005.7	997.1	982.6	963.0	937.2	893.2	831.7	762.6	701.4	673.6	665.7
145°	1043.6	1036.9	1021.0	1003.0	981.5	937.5	881.0	812.1	751.1	715.0	698.0
147.5°	1075.7	1070.3	1057.9	1036.6	1018.6	976.3	924.8	863.8	801.3	756.5	734.6
150°	1095.6	1091.1	1078.7	1058.3	1040.2	1000.7	951.0	894.5	834.7	787.2	759.0
152.5°	1114.6	1110.1	1095.8	1075.5	1060.1	1023.3	978.1	924.4	863.6	816.2	787.0
155°	1139.6	1134.0	1120.4	1101.2	1087.7	1053.8	1012.0	964.6	912.6	862.9	830.2
157.5°	1159.5	1152.5	1139.9	1123.4	1108.9	1077.7	1041.4	1000.5	955.1	907.6	874.2
160°	1171.3	1163.4	1149.8	1135.1	1121.6	1092.2	1059.4	1022.2	980.4	937.5	901.3
162.5°	1179.4	1172.4	1156.1	1143.3	1131.5	1104.9	1073.9	1040.2	1003.0	965.5	932.0
165°	1188.2	1180.3	1163.4	1153.2	1143.0	1120.4	1093.3	1066.2	1034.6	1004.1	977.0
167.5°	1188.9	1182.3	1165.4	1155.5	1148.0	1128.6	1106.7	1085.9	1061.3	1037.3	1014.7
170°	1187.1	1181.4	1164.5	1155.5	1149.8	1134.0	1114.8	1096.7	1077.5	1057.2	1039.1
172.5°	1180.8	1175.1	1159.1	1151.8	1148.9	1134.9	1119.3	1105.8	1089.3	1074.4	1059.9
175°	1164.5	1160.0	1146.4	1141.9	1143.0	1134.0	1122.7	1114.8	1104.6	1095.6	1087.7
177.5°	1140.8	1138.1	1128.1	1128.1	1131.7	1126.3	1122.7	1119.1	1114.6	1111.9	1109.1
180°	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2



TEST NUMBER: P1428077

CATALOG NUMBER: SQ2W-PP3-K-075U-125D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	2583.1	2583.1	2583.1	2583.1	2583.1	2583.1	2583.1	2583.1	2583.1	2583.1	2583.1
2.5°	2581.9	2577.5	2579.5	2581.4	2583.4	2585.3	2583.4	2581.4	2579.5	2577.5	2581.9
5°	2580.4	2576.1	2578.6	2582.5	2591.0	2599.5	2591.0	2582.5	2578.6	2576.1	2580.4
7.5°	2572.1	2568.8	2572.9	2578.6	2589.1	2599.5	2589.1	2578.6	2572.9	2568.8	2572.1
10°	2560.7	2558.8	2564.9	2571.6	2580.1	2588.6	2580.1	2571.6	2564.9	2558.8	2560.7
12.5°	2540.5	2540.2	2548.2	2556.1	2563.6	2571.1	2563.6	2556.1	2548.2	2540.2	2540.5
15°	2509.1	2512.1	2523.0	2532.8	2538.8	2544.9	2538.8	2532.8	2523.0	2512.1	2509.1
17.5°	2476.9	2484.4	2499.9	2513.2	2519.5	2525.8	2519.5	2513.2	2499.9	2484.4	2476.9
20°	2453.6	2464.5	2483.9	2501.5	2513.6	2525.8	2513.6	2501.5	2483.9	2464.5	2453.6
22.5°	2426.4	2443.1	2472.3	2499.3	2520.2	2541.1	2520.2	2499.3	2472.3	2443.1	2426.4
25°	2388.9	2418.7	2461.1	2500.9	2532.4	2564.0	2532.4	2500.9	2461.1	2418.7	2388.9
27.5°	2352.3	2394.0	2441.9	2484.0	2509.0	2534.0	2509.0	2484.0	2441.9	2394.0	2352.3
30°	2316.1	2362.2	2412.0	2455.1	2478.1	2501.2	2478.1	2455.1	2412.0	2362.2	2316.1
32.5°	2266.6	2316.1	2369.8	2415.3	2436.4	2457.5	2436.4	2415.3	2369.8	2316.1	2266.6
35°	2189.9	2245.1	2301.0	2345.9	2358.0	2370.1	2358.0	2345.9	2301.0	2245.1	2189.9
37.5°	2104.7	2151.0	2182.3	2205.9	2206.7	2207.4	2206.7	2205.9	2182.3	2151.0	2104.7
40°	2040.6	2072.8	2078.9	2079.5	2063.7	2047.9	2063.7	2079.5	2078.9	2072.8	2040.6
42.5°	1957.6	1966.0	1942.0	1906.4	1836.3	1766.1	1836.3	1906.4	1942.0	1966.0	1957.6
45°	1816.1	1762.7	1640.2	1536.1	1487.6	1439.0	1487.6	1536.1	1640.2	1762.7	1816.1
47.5°	1612.1	1531.3	1398.0	1289.7	1256.2	1222.7	1256.2	1289.7	1398.0	1531.3	1612.1
50°	1449.0	1358.0	1245.1	1152.6	1121.0	1089.5	1121.0	1152.6	1245.1	1358.0	1449.0
52.5°	1297.3	1201.4	1103.1	1017.4	969.4	921.3	969.4	1017.4	1103.1	1201.4	1297.3
55°	1110.1	1004.5	889.3	791.3	745.1	699.0	745.1	791.3	889.3	1004.5	1110.1
57.5°	945.4	840.5	705.0	590.5	538.8	487.1	538.8	590.5	705.0	840.5	945.4
60°	828.0	727.8	594.4	487.9	462.4	436.9	462.4	487.9	594.4	727.8	828.0
62.5°	711.0	621.5	511.3	426.5	417.5	408.5	417.5	426.5	511.3	621.5	711.0
65°	554.6	484.8	416.9	365.6	364.4	363.2	364.4	365.6	416.9	484.8	554.6
67.5°	432.2	380.6	345.7	319.1	317.7	316.2	317.7	319.1	345.7	380.6	432.2
70°	362.6	320.7	301.3	286.1	283.7	281.2	283.7	286.1	301.3	320.7	362.6
72.5°	308.4	273.8	261.2	251.4	249.9	248.5	249.9	251.4	261.2	273.8	308.4
75°	236.3	212.7	206.6	201.8	200.5	199.3	200.5	201.8	206.6	212.7	236.3
77.5°	174.0	159.0	155.8	153.2	151.9	150.7	151.9	153.2	155.8	159.0	174.0
80°	134.7	125.0	123.8	122.6	121.4	120.1	121.4	122.6	123.8	125.0	134.7
82.5°	99.8	94.4	93.2	91.7	89.6	87.4	89.6	91.7	93.2	94.4	99.8
85°	53.1	49.5	44.6	40.0	36.4	32.8	36.4	40.0	44.6	49.5	53.1
87.5°	16.4	15.0	15.6	15.8	16.7	16.3	16.7	15.8	15.6	15.0	16.4
90°	26.0	33.9	41.8	46.3	50.8	48.6	50.8	46.3	41.8	33.9	26.0
92.5°	52.2	65.5	75.2	83.4	87.0	86.5	87.0	83.4	75.2	65.5	52.2
95°	105.0	120.9	136.7	148.0	154.7	152.5	154.7	148.0	136.7	120.9	105.0
97.5°	162.0	183.2	200.8	211.4	218.2	222.7	218.2	211.4	200.8	183.2	162.0
100°	199.9	220.2	240.6	253.0	264.3	268.8	264.3	253.0	240.6	220.2	199.9
102.5°	230.6	257.3	279.4	292.8	302.2	306.8	302.2	292.8	279.4	257.3	230.6
105°	281.2	309.5	333.2	350.1	360.3	363.7	360.3	350.1	333.2	309.5	281.2
107.5°	331.8	361.0	382.9	401.6	414.1	421.3	414.1	401.6	382.9	361.0	331.8
110°	371.6	395.3	419.0	436.0	448.4	452.9	448.4	436.0	419.0	395.3	371.6



TEST NUMBER: P1428077

CATALOG NUMBER: SQ2W-PP3-K-075U-125D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	405.0	431.5	455.2	472.1	486.4	492.7	486.4	472.1	455.2	431.5	405.0
115°	451.8	486.8	508.3	524.1	534.2	539.9	534.2	524.1	508.3	486.8	451.8
117.5°	490.6	527.2	550.7	562.9	567.7	571.7	567.7	562.9	550.7	527.2	490.6
120°	515.0	548.9	576.0	591.8	597.5	599.8	597.5	591.8	576.0	548.9	515.0
122.5°	537.6	569.7	595.9	615.3	624.6	626.9	624.6	615.3	595.9	569.7	537.6
125°	569.3	599.8	626.9	646.1	656.2	661.9	656.2	646.1	626.9	599.8	569.3
127.5°	596.8	629.8	654.6	672.0	682.0	686.5	682.0	672.0	654.6	629.8	596.8
130°	612.2	646.1	670.9	690.1	699.1	703.7	699.1	690.1	670.9	646.1	612.2
132.5°	623.9	659.6	685.4	702.8	712.7	717.2	712.7	702.8	685.4	659.6	623.9
135°	638.2	675.4	702.5	719.5	728.5	733.0	728.5	719.5	702.5	675.4	638.2
137.5°	650.6	684.5	712.7	730.5	738.7	741.6	738.7	730.5	712.7	684.5	650.6
140°	659.6	689.0	717.2	734.2	743.2	744.3	743.2	734.2	717.2	689.0	659.6
142.5°	671.4	694.4	719.0	736.0	745.0	747.0	745.0	736.0	719.0	694.4	671.4
145°	692.4	705.9	722.9	738.7	746.6	748.8	746.6	738.7	722.9	705.9	692.4
147.5°	718.8	723.1	731.9	742.3	750.0	751.6	750.0	742.3	731.9	723.1	718.8
150°	738.7	737.5	740.9	747.7	754.5	753.4	754.5	747.7	740.9	737.5	738.7
152.5°	761.3	754.7	754.5	757.7	760.8	760.6	760.8	757.7	754.5	754.7	761.3
155°	799.7	787.2	780.5	778.2	778.2	777.1	778.2	778.2	780.5	787.2	799.7
157.5°	841.9	824.5	814.4	808.9	807.4	804.9	807.4	808.9	814.4	824.5	841.9
160°	870.8	851.6	841.5	832.4	829.0	825.6	829.0	832.4	841.5	851.6	870.8
162.5°	897.9	879.6	868.6	860.4	857.0	851.9	857.0	860.4	868.6	879.6	897.9
165°	942.0	922.8	910.4	903.6	899.1	894.5	899.1	903.6	910.4	922.8	942.0
167.5°	986.0	965.0	956.9	949.2	944.9	936.8	944.9	949.2	956.9	965.0	986.0
170°	1013.1	993.9	989.4	982.6	974.7	965.7	974.7	982.6	989.4	993.9	1013.1
172.5°	1036.6	1023.8	1019.2	1012.5	1010.0	1002.7	1010.0	1012.5	1019.2	1023.8	1036.6
175°	1070.7	1060.6	1060.6	1059.4	1056.1	1049.3	1056.1	1059.4	1060.6	1060.6	1070.7
177.5°	1099.2	1093.8	1097.4	1097.4	1096.5	1090.2	1096.5	1097.4	1097.4	1093.8	1099.2
180°	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2	1118.2



TEST NUMBER: P1428077

CATALOG NUMBER: SQ2W-PP3-K-075U-125D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	2583.1	2583.1	2583.1	2583.1
2.5°	2592.6	2596.5	2580.0	2563.5
5°	2591.3	2594.3	2573.7	2553.1
7.5°	2582.8	2585.5	2564.4	2543.2
10°	2570.4	2573.1	2554.9	2536.7
12.5°	2549.3	2551.5	2534.3	2517.0
15°	2513.9	2513.6	2497.9	2482.1
17.5°	2477.4	2472.9	2453.7	2434.6
20°	2451.1	2443.6	2420.5	2397.4
22.5°	2422.0	2412.0	2385.1	2358.1
25°	2372.0	2352.5	2325.8	2299.1
27.5°	2316.6	2283.2	2256.8	2230.3
30°	2273.7	2235.4	2209.9	2184.5
32.5°	2221.2	2180.6	2154.1	2127.7
35°	2135.3	2088.0	2062.5	2037.0
37.5°	2043.6	1990.5	1961.6	1932.7
40°	1982.4	1929.3	1891.7	1854.1
42.5°	1916.9	1874.2	1825.9	1777.6
45°	1800.4	1774.3	1717.2	1660.2
47.5°	1640.5	1647.7	1591.4	1535.1
50°	1518.2	1556.7	1503.3	1449.9
52.5°	1390.8	1449.0	1401.4	1353.8
55°	1206.0	1269.7	1236.9	1204.2
57.5°	1020.0	1070.1	1047.0	1024.0
60°	894.7	940.2	922.0	903.8
62.5°	779.7	827.1	810.9	794.6
65°	626.2	676.0	660.2	644.4
67.5°	500.4	547.3	530.0	512.8
70°	426.9	470.6	452.4	434.2
72.5°	365.0	403.1	385.9	368.6
75°	277.6	305.2	291.9	278.5
77.5°	201.0	219.1	210.6	202.1
80°	152.9	165.7	162.0	158.4
82.5°	109.2	116.6	117.8	119.1
85°	55.5	57.9	60.4	62.8
87.5°	20.1	22.1	21.2	20.3
90°	20.3	12.4	7.9	3.4
92.5°	43.8	30.5	21.5	12.4
95°	88.1	70.0	49.7	35.0
97.5°	140.3	111.1	91.0	66.9
100°	168.3	140.1	120.9	94.9
102.5°	199.0	175.3	148.9	122.9
105°	254.1	224.8	194.3	164.9
107.5°	305.2	272.9	236.3	209.9
110°	337.7	302.7	264.3	240.6



TEST NUMBER: P1428077

CATALOG NUMBER: SQ2W-PP3-K-075U-125D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	369.3	333.4	294.1	270.4
115°	412.3	372.7	336.6	316.3
117.5°	453.6	412.9	374.8	358.7
120°	478.9	438.2	401.0	388.5
122.5°	499.7	459.9	425.4	420.2
125°	530.9	490.2	460.8	467.6
127.5°	556.2	518.9	500.4	515.5
130°	571.5	538.8	527.5	548.9
132.5°	585.1	559.5	554.6	584.2
135°	605.4	590.7	595.2	635.9
137.5°	629.6	623.9	639.1	690.3
140°	644.9	648.3	669.8	727.4
142.5°	665.7	673.6	701.4	762.6
145°	698.0	715.0	751.1	812.1
147.5°	734.6	756.5	801.3	863.8
150°	759.0	787.2	834.7	894.5
152.5°	787.0	816.2	863.6	924.4
155°	830.2	862.9	912.6	964.6
157.5°	874.2	907.6	955.1	1000.5
160°	901.3	937.5	980.4	1022.2
162.5°	932.0	965.5	1003.0	1040.2
165°	977.0	1004.1	1034.6	1066.2
167.5°	1014.7	1037.3	1061.3	1085.9
170°	1039.1	1057.2	1077.5	1096.7
172.5°	1059.9	1074.4	1089.3	1105.8
175°	1087.7	1095.6	1104.6	1114.8
177.5°	1109.1	1111.9	1114.6	1119.1
180°	1118.2	1118.2	1118.2	1118.2



TEST NUMBER: P1428077
 CATALOG NUMBER: SQ2W-PP3-K-075U-125D-L830-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	21.84	22.83	22.65	23.65	24.67	17.61	18.60	18.42	19.42	20.44
	3H	22.91	23.79	23.73	24.63	25.67	18.93	19.81	19.75	20.65	21.69
	4H	23.29	24.12	24.12	24.96	26.01	19.49	20.32	20.33	21.17	22.22
	6H	23.49	24.25	24.34	25.10	26.17	19.86	20.63	20.72	21.48	22.55
	8H	23.55	24.28	24.41	25.15	26.22	20.00	20.72	20.86	21.59	22.66
	12H	23.58	24.27	24.44	25.13	26.23	20.04	20.73	20.90	21.59	22.68
4H	2H	21.98	22.81	22.82	23.65	24.70	18.54	19.37	19.38	20.21	21.27
	3H	23.28	23.97	24.14	24.84	25.92	19.97	20.66	20.83	21.54	22.61
	4H	23.80	24.42	24.66	25.29	26.39	20.60	21.22	21.47	22.10	23.19
	6H	24.12	24.65	25.00	25.55	26.65	21.05	21.59	21.93	22.49	23.59
	8H	24.23	24.73	25.11	25.62	26.74	21.22	21.73	22.11	22.62	23.73
	12H	24.28	24.73	25.18	25.64	26.76	21.28	21.73	22.18	22.64	23.76
8H	4H	23.82	24.33	24.71	25.22	26.33	20.92	21.42	21.80	22.31	23.42
	6H	24.24	24.66	25.15	25.59	26.70	21.48	21.90	22.39	22.83	23.94
	8H	24.42	24.79	25.34	25.72	26.85	21.73	22.10	22.65	23.02	24.16
	12H	24.52	24.85	25.45	25.77	26.95	21.83	22.16	22.76	23.08	24.26
12H	4H	23.79	24.24	24.69	25.15	26.27	20.93	21.39	21.84	22.30	23.42
	6H	24.23	24.60	25.15	25.53	26.66	21.55	21.91	22.47	22.84	23.97
	8H	24.43	24.76	25.36	25.68	26.86	21.83	22.15	22.75	23.07	24.25