

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1428479

Luminaire Tested: SQ2W-PW1-K-150U-100D-L830-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1428479
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-8)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-PW1-K-150U-100D-L830-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - PERCEIVE WAVES LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 1000 LUMENS PER FOOT
UPLIGHT 1500 LUMENS PER FOOT
Light Source: 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11692.7 lumens
Efficiency: N/A
Efficacy: 126.1 lumens/watt
Spacing Criteria (0/90/45): 1.27 / 1.11 / 1.23
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 92.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1428479

CATALOG NUMBER: SQ2W-PW1-K-150U-100D-L830-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

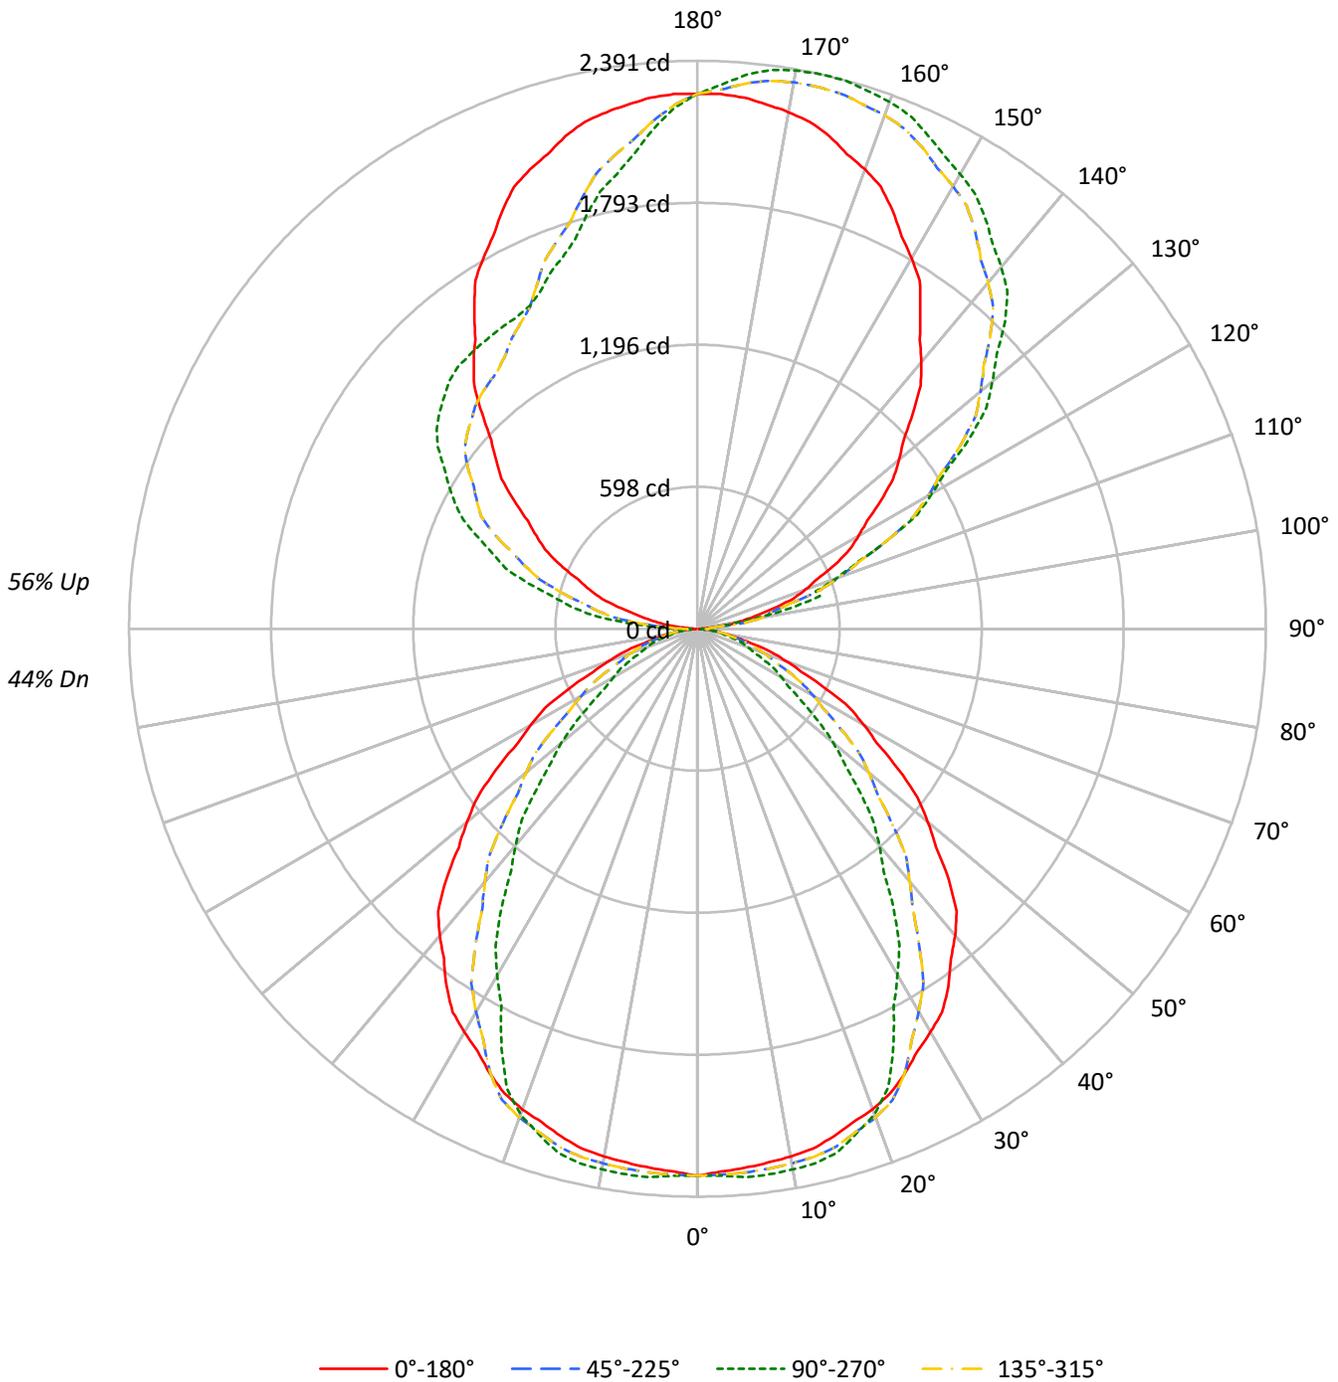



TEST NUMBER: P1428479

CATALOG NUMBER: SQ2W-PW1-K-150U-100D-L830-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	50	50	50	44				
1	97	93	89	86	89	85	82	79	71	69	67	57	56	55	45	44	44	38				
2	89	82	76	71	81	75	70	66	63	59	56	51	49	46	40	39	37	33				
3	81	72	65	60	74	66	60	55	56	51	48	46	42	40	36	34	32	28				
4	74	64	57	51	68	59	53	47	50	45	41	41	37	34	33	30	28	25				
5	68	57	50	44	63	53	46	41	45	39	36	37	33	30	30	27	25	22				
6	63	52	44	38	58	48	41	36	40	35	31	33	30	27	27	24	22	19				
7	58	47	39	34	53	43	36	32	37	31	28	31	27	24	25	22	20	17				
8	54	42	35	30	50	39	33	28	33	28	25	28	24	21	23	20	18	15				
9	51	39	31	27	46	36	29	25	31	26	22	26	22	19	21	18	16	14				
10	47	36	29	24	43	33	27	23	28	23	20	24	20	17	20	17	15	13				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	37177	37177	37177	37177
5°	36928	37568	36928	37568
10°	36996	37895	36996	37895
15°	36986	38122	36986	38122
20°	37001	37377	37001	37377
25°	36801	34730	36801	34730
30°	36550	31399	36550	31399
35°	36265	28355	36265	28355
40°	35543	25052	35543	25052
45°	34149	21881	34149	21881
50°	31782	18728	31782	18728
55°	29075	15186	29075	15186
60°	26059	13100	26059	13100
65°	22788	11644	22788	11644
70°	18632	10560	18632	10560
75°	14504	9713	14504	9713
80°	10804	8563	10804	8563
85°	7317	4872	7317	4872

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 34149 cd/sqm



TEST NUMBER: P1428479

CATALOG NUMBER: SQ2W-PW1-K-150U-100D-L830-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	219.3	1.9
10°-20°	635.3	5.4
20°-30°	934.9	8.0
30°-40°	1022.2	8.7
40°-50°	917.0	7.8
50°-60°	684.0	5.9
60°-70°	432.3	3.7
70°-80°	214.2	1.8
80°-90°	59.4	0.5
90°-100°	179.2	1.5
100°-110°	522.6	4.5
110°-120°	852.8	7.3
120°-130°	1082.1	9.3
130°-140°	1157.9	9.9
140°-150°	1081.2	9.2
150°-160°	889.7	7.6
160°-170°	596.7	5.1
170°-180°	211.9	1.8
0°-30°	1789.5	15.3
0°-40°	2811.7	24.0
0°-60°	4412.7	37.7
0°-90°	5118.7	43.8
90°-120°	1554.5	13.3
90°-150°	4875.8	41.7
90°-180°	6574.0	56.2
0°-180°	11692.7	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	2303	2303	2303	2303	2303	
5°	2278	2318	2278	2318	2278	217
15°	2213	2281	2213	2281	2213	625
25°	2066	1950	2066	1950	2066	951
35°	1840	1439	1840	1439	1840	1147
45°	1496	958	1496	958	1496	1147
55°	1033	540	1033	540	1033	922
65°	596	305	596	305	596	591
75°	232	156	232	156	232	256
85°	40	26	40	26	40	50
90°	7	50	7	98	7	7
95°	70	52	70	307	70	85
105°	332	532	332	732	332	353
115°	637	882	637	1087	637	628
125°	942	1399	942	1333	942	842
135°	1280	1831	1280	1476	1280	989
145°	1635	2110	1635	1508	1635	1023
155°	1942	2292	1942	1565	1942	893
165°	2147	2390	2147	1801	2147	604
175°	2245	2340	2245	2113	2245	213
180°	2252	2252	2252	2252	2252	



TEST NUMBER: P1428479

CATALOG NUMBER: SQ2W-PW1-K-150U-100D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	2302.6	2302.6	2302.6	2302.6	2302.6	2302.6	2302.6	2302.6	2302.6	2302.6	2302.6
2.5°	2286.8	2300.1	2313.3	2310.2	2301.6	2297.7	2298.5	2299.7	2302.0	2304.4	2302.0
5°	2278.5	2295.1	2311.6	2309.2	2300.4	2296.5	2297.5	2300.4	2309.2	2318.0	2309.2
7.5°	2267.1	2283.8	2300.6	2299.8	2293.2	2291.5	2294.9	2299.5	2308.1	2316.6	2308.1
10°	2256.6	2274.1	2291.6	2291.6	2285.8	2285.3	2290.2	2295.8	2303.6	2311.4	2303.6
12.5°	2242.5	2260.8	2279.2	2280.5	2276.2	2276.9	2282.6	2288.8	2296.6	2304.4	2296.6
15°	2212.7	2232.2	2251.7	2255.8	2254.9	2257.8	2264.6	2270.9	2275.8	2280.7	2275.8
17.5°	2178.1	2197.5	2217.0	2220.9	2219.5	2219.7	2221.5	2223.4	2225.7	2228.1	2225.7
20°	2153.5	2173.0	2192.5	2195.2	2192.2	2187.4	2180.5	2175.4	2175.4	2175.4	2175.4
22.5°	2118.4	2139.5	2160.5	2160.7	2153.8	2141.2	2122.6	2107.2	2101.0	2094.7	2101.0
25°	2065.8	2086.2	2106.7	2097.2	2077.7	2049.0	2010.9	1978.8	1964.2	1949.5	1964.2
27.5°	2004.4	2020.9	2037.5	2012.7	1974.1	1927.8	1873.8	1828.2	1808.0	1787.7	1808.0
30°	1960.5	1973.2	1985.8	1946.6	1890.1	1832.1	1772.6	1723.2	1703.7	1684.2	1703.7
32.5°	1914.9	1919.8	1924.6	1872.9	1802.4	1736.2	1674.4	1622.8	1601.7	1580.7	1601.7
35°	1839.9	1831.1	1822.4	1753.6	1664.9	1589.4	1527.0	1475.6	1457.1	1438.6	1457.1
37.5°	1751.3	1725.2	1699.1	1621.6	1527.1	1447.2	1381.9	1327.8	1307.3	1286.8	1307.3
40°	1686.4	1649.4	1612.3	1529.2	1430.8	1348.9	1283.6	1229.5	1209.1	1188.6	1209.1
42.5°	1614.5	1568.1	1521.7	1436.2	1337.8	1255.9	1190.6	1136.3	1115.1	1093.8	1115.1
45°	1495.6	1441.0	1386.4	1297.5	1197.1	1115.2	1051.9	999.3	978.8	958.3	978.8
47.5°	1361.8	1307.6	1253.4	1164.8	1064.6	983.8	922.4	871.9	854.4	836.8	854.4
50°	1265.3	1212.7	1160.1	1075.3	979.8	901.3	839.9	788.5	767.0	745.6	767.0
52.5°	1167.1	1119.9	1072.7	991.1	897.9	819.8	756.9	702.3	673.1	643.9	673.1
55°	1032.9	988.1	943.2	866.2	778.5	699.6	629.4	572.6	556.0	539.5	556.0
57.5°	894.7	855.9	817.1	747.9	668.6	597.1	533.3	482.1	468.5	454.8	468.5
60°	807.0	772.9	738.8	672.5	595.5	530.2	476.6	433.0	419.3	405.7	419.3
62.5°	722.8	692.6	662.4	598.8	524.2	465.5	422.8	388.0	376.7	365.3	376.7
65°	596.5	574.1	551.7	499.3	436.9	388.2	353.1	324.3	314.6	304.8	314.6
67.5°	473.7	461.2	448.7	409.5	361.4	321.9	291.1	266.4	259.9	253.5	259.9
70°	394.7	390.8	386.9	354.5	312.6	279.0	253.7	233.4	228.6	223.7	228.6
72.5°	326.3	327.9	329.4	302.5	266.0	237.9	218.0	202.2	198.9	195.6	198.9
75°	232.5	240.3	248.0	230.3	203.9	184.0	170.3	159.6	157.6	155.7	157.6
77.5°	158.3	170.0	181.7	170.2	150.9	136.2	126.0	118.0	116.5	114.9	116.5
80°	116.2	127.9	139.6	131.6	117.0	105.7	98.0	92.1	92.1	92.1	92.1
82.5°	81.1	90.5	99.9	94.2	83.4	76.1	72.2	69.3	69.3	69.3	69.3
85°	39.5	44.3	49.2	47.5	43.6	38.7	32.9	28.3	27.3	26.3	27.3
87.5°	11.9	16.0	20.7	20.1	17.6	15.7	14.9	14.8	15.3	15.3	15.3
90°	6.8	15.9	27.3	36.4	43.2	45.5	45.5	47.8	50.0	50.0	50.0
92.5°	25.0	39.6	40.0	40.0	48.7	52.8	56.4	56.9	59.1	59.1	59.1
95°	70.5	77.3	116.0	113.7	77.3	61.4	52.3	52.3	52.3	52.3	52.3
97.5°	134.6	144.6	151.0	202.4	213.8	206.5	168.3	141.5	126.4	119.6	126.4
100°	191.0	195.6	209.2	211.5	268.4	322.9	295.7	261.5	250.2	243.3	250.2
102.5°	247.4	250.2	271.1	280.6	293.8	324.8	419.4	408.9	401.2	399.8	401.2
105°	332.0	334.3	373.0	391.2	400.3	400.3	398.0	443.5	516.3	532.2	516.3
107.5°	422.6	433.0	478.5	527.2	537.6	540.4	528.5	521.7	519.0	520.8	519.0
110°	484.4	500.3	554.9	616.3	632.2	636.8	632.2	625.4	620.9	620.9	620.9

TEST NUMBER: P1428479

CATALOG NUMBER: SQ2W-PW1-K-150U-100D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	544.5	567.7	629.5	700.0	726.9	740.5	730.5	725.5	720.9	724.6	720.9
115°	636.8	670.9	752.8	825.6	880.1	887.0	884.7	884.7	882.4	882.4	882.4
117.5°	722.3	776.9	868.8	953.4	1016.6	1034.8	1043.9	1041.2	1038.4	1043.0	1038.4
120°	782.3	846.0	950.6	1046.2	1107.6	1134.9	1144.0	1139.4	1144.0	1139.4	1144.0
122.5°	846.0	924.3	1027.1	1126.2	1198.5	1229.5	1240.4	1241.3	1242.2	1239.5	1242.2
125°	941.5	1037.1	1157.6	1259.9	1335.0	1371.4	1380.5	1382.8	1387.3	1398.7	1387.3
127.5°	1038.0	1146.2	1278.6	1377.3	1454.2	1498.3	1512.4	1517.4	1526.9	1531.9	1526.9
130°	1105.3	1228.1	1362.3	1455.5	1530.6	1578.3	1603.4	1610.2	1621.6	1619.3	1621.6
132.5°	1176.3	1304.5	1440.5	1537.4	1607.0	1658.4	1679.8	1699.3	1703.4	1706.6	1703.4
135°	1280.4	1419.1	1555.6	1651.1	1717.1	1767.1	1794.4	1812.6	1824.0	1830.8	1824.0
137.5°	1390.0	1536.5	1667.5	1752.6	1819.0	1862.2	1893.1	1912.2	1924.0	1929.5	1924.0
140°	1464.6	1605.6	1733.0	1821.7	1880.8	1924.0	1951.3	1974.1	1987.7	1987.7	1987.7
142.5°	1535.6	1674.8	1798.5	1887.2	1939.0	1978.6	2007.7	2025.0	2040.5	2040.5	2040.5
145°	1635.2	1773.9	1887.6	1976.3	2019.6	2055.9	2087.8	2101.4	2110.5	2110.5	2110.5
147.5°	1739.4	1862.2	1965.9	2050.9	2087.3	2130.1	2155.1	2166.0	2177.4	2172.4	2177.4
150°	1801.2	1914.9	2015.0	2094.6	2131.0	2171.9	2196.9	2206.0	2217.4	2210.6	2217.4
152.5°	1861.3	1969.5	2060.5	2134.6	2165.6	2206.5	2235.2	2244.2	2252.0	2247.0	2252.0
155°	1942.2	2037.7	2121.9	2190.1	2217.4	2256.1	2283.4	2294.7	2303.8	2292.5	2303.8
157.5°	2014.5	2096.9	2170.1	2232.9	2262.0	2295.2	2320.7	2334.8	2343.9	2338.9	2343.9
160°	2058.2	2133.3	2199.2	2258.3	2285.6	2315.2	2342.5	2358.4	2367.5	2360.7	2367.5
162.5°	2094.6	2162.4	2224.7	2278.4	2302.0	2327.9	2360.7	2374.8	2383.9	2375.2	2383.9
165°	2146.9	2201.5	2256.1	2301.6	2322.0	2342.5	2376.6	2392.5	2399.4	2390.3	2399.4
167.5°	2186.5	2228.3	2272.5	2311.6	2326.6	2346.6	2380.7	2393.9	2402.5	2391.2	2402.5
170°	2208.3	2244.7	2283.4	2315.2	2326.6	2344.8	2378.9	2390.3	2397.1	2385.7	2397.1
172.5°	2226.5	2253.8	2285.2	2313.4	2319.3	2333.9	2366.2	2377.5	2382.5	2373.0	2382.5
175°	2244.7	2260.6	2283.4	2301.6	2299.3	2308.4	2335.7	2344.8	2353.9	2340.2	2353.9
177.5°	2253.3	2260.6	2267.9	2278.8	2271.5	2271.5	2291.6	2297.0	2298.8	2291.6	2298.8
180°	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5



TEST NUMBER: P1428479

CATALOG NUMBER: SQ2W-PW1-K-150U-100D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	2302.6	2302.6	2302.6	2302.6	2302.6	2302.6	2302.6	2302.6	2302.6	2302.6	2302.6
2.5°	2299.7	2298.5	2297.7	2301.6	2310.2	2313.3	2300.1	2286.8	2300.1	2313.3	2310.2
5°	2300.4	2297.5	2296.5	2300.4	2309.2	2311.6	2295.1	2278.5	2295.1	2311.6	2309.2
7.5°	2299.5	2294.9	2291.5	2293.2	2299.8	2300.6	2283.8	2267.1	2283.8	2300.6	2299.8
10°	2295.8	2290.2	2285.3	2285.8	2291.6	2291.6	2274.1	2256.6	2274.1	2291.6	2291.6
12.5°	2288.8	2282.6	2276.9	2276.2	2280.5	2279.2	2260.8	2242.5	2260.8	2279.2	2280.5
15°	2270.9	2264.6	2257.8	2254.9	2255.8	2251.7	2232.2	2212.7	2232.2	2251.7	2255.8
17.5°	2223.4	2221.5	2219.7	2219.5	2220.9	2217.0	2197.5	2178.1	2197.5	2217.0	2220.9
20°	2175.4	2180.5	2187.4	2192.2	2195.2	2192.5	2173.0	2153.5	2173.0	2192.5	2195.2
22.5°	2107.2	2122.6	2141.2	2153.8	2160.7	2160.5	2139.5	2118.4	2139.5	2160.5	2160.7
25°	1978.8	2010.9	2049.0	2077.7	2097.2	2106.7	2086.2	2065.8	2086.2	2106.7	2097.2
27.5°	1828.2	1873.8	1927.8	1974.1	2012.7	2037.5	2020.9	2004.4	2020.9	2037.5	2012.7
30°	1723.2	1772.6	1832.1	1890.1	1946.6	1985.8	1973.2	1960.5	1973.2	1985.8	1946.6
32.5°	1622.8	1674.4	1736.2	1802.4	1872.9	1924.6	1919.8	1914.9	1919.8	1924.6	1872.9
35°	1475.6	1527.0	1589.4	1664.9	1753.6	1822.4	1831.1	1839.9	1831.1	1822.4	1753.6
37.5°	1327.8	1381.9	1447.2	1527.1	1621.6	1699.1	1725.2	1751.3	1725.2	1699.1	1621.6
40°	1229.5	1283.6	1348.9	1430.8	1529.2	1612.3	1649.4	1686.4	1649.4	1612.3	1529.2
42.5°	1136.3	1190.6	1255.9	1337.8	1436.2	1521.7	1568.1	1614.5	1568.1	1521.7	1436.2
45°	999.3	1051.9	1115.2	1197.1	1297.5	1386.4	1441.0	1495.6	1441.0	1386.4	1297.5
47.5°	871.9	922.4	983.8	1064.6	1164.8	1253.4	1307.6	1361.8	1307.6	1253.4	1164.8
50°	788.5	839.9	901.3	979.8	1075.3	1160.1	1212.7	1265.3	1212.7	1160.1	1075.3
52.5°	702.3	756.9	819.8	897.9	991.1	1072.7	1119.9	1167.1	1119.9	1072.7	991.1
55°	572.6	629.4	699.6	778.5	866.2	943.2	988.1	1032.9	988.1	943.2	866.2
57.5°	482.1	533.3	597.1	668.6	747.9	817.1	855.9	894.7	855.9	817.1	747.9
60°	433.0	476.6	530.2	595.5	672.5	738.8	772.9	807.0	772.9	738.8	672.5
62.5°	388.0	422.8	465.5	524.2	598.8	662.4	692.6	722.8	692.6	662.4	598.8
65°	324.3	353.1	388.2	436.9	499.3	551.7	574.1	596.5	574.1	551.7	499.3
67.5°	266.4	291.1	321.9	361.4	409.5	448.7	461.2	473.7	461.2	448.7	409.5
70°	233.4	253.7	279.0	312.6	354.5	386.9	390.8	394.7	390.8	386.9	354.5
72.5°	202.2	218.0	237.9	266.0	302.5	329.4	327.9	326.3	327.9	329.4	302.5
75°	159.6	170.3	184.0	203.9	230.3	248.0	240.3	232.5	240.3	248.0	230.3
77.5°	118.0	126.0	136.2	150.9	170.2	181.7	170.0	158.3	170.0	181.7	170.2
80°	92.1	98.0	105.7	117.0	131.6	139.6	127.9	116.2	127.9	139.6	131.6
82.5°	69.3	72.2	76.1	83.4	94.2	99.9	90.5	81.1	90.5	99.9	94.2
85°	28.3	32.9	38.7	43.6	47.5	49.2	44.3	39.5	44.3	49.2	47.5
87.5°	14.8	14.9	15.7	17.6	20.1	20.7	16.0	11.9	16.0	20.2	21.1
90°	47.8	45.5	45.5	43.2	36.4	27.3	15.9	6.8	15.9	25.0	40.9
92.5°	56.9	56.4	52.8	48.7	40.0	40.0	39.6	25.0	43.2	61.4	88.2
95°	52.3	52.3	61.4	77.3	113.7	116.0	77.3	70.5	100.1	141.0	177.4
97.5°	141.5	168.3	206.5	213.8	202.4	151.0	144.6	134.6	183.3	223.8	282.5
100°	261.5	295.7	322.9	268.4	211.5	209.2	195.6	191.0	243.3	282.0	338.9
102.5°	408.9	419.4	324.8	293.8	280.6	271.1	250.2	247.4	299.7	353.0	400.7
105°	443.5	398.0	400.3	400.3	391.2	373.0	334.3	332.0	391.2	452.6	511.7
107.5°	521.7	528.5	540.4	537.6	527.2	478.5	433.0	422.6	475.8	549.5	614.5
110°	625.4	632.2	636.8	632.2	616.3	554.9	500.3	484.4	532.2	609.5	680.0



TEST NUMBER: P1428479

CATALOG NUMBER: SQ2W-PW1-K-150U-100D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	725.5	730.5	740.5	726.9	700.0	629.5	567.7	544.5	592.2	671.4	743.7
115°	884.7	884.7	887.0	880.1	825.6	752.8	670.9	636.8	677.7	750.5	830.1
117.5°	1041.2	1043.9	1034.8	1016.6	953.4	868.8	776.9	722.3	754.6	831.5	913.3
120°	1139.4	1144.0	1134.9	1107.6	1046.2	950.6	846.0	782.3	807.4	882.4	964.3
122.5°	1241.3	1240.4	1229.5	1198.5	1126.2	1027.1	924.3	846.0	856.5	926.1	1006.1
125°	1382.8	1380.5	1371.4	1335.0	1259.9	1157.6	1037.1	941.5	927.9	987.0	1068.9
127.5°	1517.4	1512.4	1498.3	1454.2	1377.3	1278.6	1146.2	1038.0	1007.5	1044.8	1119.9
130°	1610.2	1603.4	1578.3	1530.6	1455.5	1362.3	1228.1	1105.3	1062.1	1084.8	1150.8
132.5°	1699.3	1679.8	1658.4	1607.0	1537.4	1440.5	1304.5	1176.3	1116.7	1126.7	1178.1
135°	1812.6	1794.4	1767.1	1717.1	1651.1	1555.6	1419.1	1280.4	1198.5	1189.4	1219.0
137.5°	1912.2	1893.1	1862.2	1819.0	1752.6	1667.5	1536.5	1390.0	1286.8	1256.3	1267.7
140°	1974.1	1951.3	1924.0	1880.8	1821.7	1733.0	1605.6	1464.6	1348.6	1305.4	1298.6
142.5°	2025.0	2007.7	1978.6	1939.0	1887.2	1798.5	1674.8	1535.6	1412.3	1356.4	1340.5
145°	2101.4	2087.8	2055.9	2019.6	1976.3	1887.6	1773.9	1635.2	1512.4	1439.6	1405.5
147.5°	2166.0	2155.1	2130.1	2087.3	2050.9	1965.9	1862.2	1739.4	1613.4	1523.3	1479.2
150°	2206.0	2196.9	2171.9	2131.0	2094.6	2015.0	1914.9	1801.2	1680.7	1585.2	1528.3
152.5°	2244.2	2235.2	2206.5	2165.6	2134.6	2060.5	1969.5	1861.3	1738.9	1643.4	1584.7
155°	2294.7	2283.4	2256.1	2217.4	2190.1	2121.9	2037.7	1942.2	1837.6	1737.5	1671.6
157.5°	2334.8	2320.7	2295.2	2262.0	2232.9	2170.1	2096.9	2014.5	1923.1	1827.6	1760.3
160°	2358.4	2342.5	2315.2	2285.6	2258.3	2199.2	2133.3	2058.2	1974.1	1887.6	1814.9
162.5°	2374.8	2360.7	2327.9	2302.0	2278.4	2224.7	2162.4	2094.6	2019.6	1944.0	1876.7
165°	2392.5	2376.6	2342.5	2322.0	2301.6	2256.1	2201.5	2146.9	2083.2	2021.8	1967.2
167.5°	2393.9	2380.7	2346.6	2326.6	2311.6	2272.5	2228.3	2186.5	2136.9	2088.7	2043.2
170°	2390.3	2378.9	2344.8	2326.6	2315.2	2283.4	2244.7	2208.3	2169.7	2128.7	2092.3
172.5°	2377.5	2366.2	2333.9	2319.3	2313.4	2285.2	2253.8	2226.5	2193.3	2163.3	2134.2
175°	2344.8	2335.7	2308.4	2299.3	2301.6	2283.4	2260.6	2244.7	2224.2	2206.0	2190.1
177.5°	2297.0	2291.6	2271.5	2271.5	2278.8	2267.9	2260.6	2253.3	2244.2	2238.8	2233.3
180°	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5



TEST NUMBER: P1428479

CATALOG NUMBER: SQ2W-PW1-K-150U-100D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	2302.6	2302.6	2302.6	2302.6	2302.6	2302.6	2302.6	2302.6	2302.6	2302.6	2302.6
2.5°	2301.6	2297.7	2298.5	2299.7	2302.0	2304.4	2302.0	2299.7	2298.5	2297.7	2301.6
5°	2300.4	2296.5	2297.5	2300.4	2309.2	2318.0	2309.2	2300.4	2297.5	2296.5	2300.4
7.5°	2293.2	2291.5	2294.9	2299.5	2308.1	2316.6	2308.1	2299.5	2294.9	2291.5	2293.2
10°	2285.8	2285.3	2290.2	2295.8	2303.6	2311.4	2303.6	2295.8	2290.2	2285.3	2285.8
12.5°	2276.2	2276.9	2282.6	2288.8	2296.6	2304.4	2296.6	2288.8	2282.6	2276.9	2276.2
15°	2254.9	2257.8	2264.6	2270.9	2275.8	2280.7	2275.8	2270.9	2264.6	2257.8	2254.9
17.5°	2219.5	2219.7	2221.5	2223.4	2225.7	2228.1	2225.7	2223.4	2221.5	2219.7	2219.5
20°	2192.2	2187.4	2180.5	2175.4	2175.4	2175.4	2175.4	2175.4	2180.5	2187.4	2192.2
22.5°	2153.8	2141.2	2122.6	2107.2	2101.0	2094.7	2101.0	2107.2	2122.6	2141.2	2153.8
25°	2077.7	2049.0	2010.9	1978.8	1964.2	1949.5	1964.2	1978.8	2010.9	2049.0	2077.7
27.5°	1974.1	1927.8	1873.8	1828.2	1808.0	1787.7	1808.0	1828.2	1873.8	1927.8	1974.1
30°	1890.1	1832.1	1772.6	1723.2	1703.7	1684.2	1703.7	1723.2	1772.6	1832.1	1890.1
32.5°	1802.4	1736.2	1674.4	1622.8	1601.7	1580.7	1601.7	1622.8	1674.4	1736.2	1802.4
35°	1664.9	1589.4	1527.0	1475.6	1457.1	1438.6	1457.1	1475.6	1527.0	1589.4	1664.9
37.5°	1527.1	1447.2	1381.9	1327.8	1307.3	1286.8	1307.3	1327.8	1381.9	1447.2	1527.1
40°	1430.8	1348.9	1283.6	1229.5	1209.1	1188.6	1209.1	1229.5	1283.6	1348.9	1430.8
42.5°	1337.8	1255.9	1190.6	1136.3	1115.1	1093.8	1115.1	1136.3	1190.6	1255.9	1337.8
45°	1197.1	1115.2	1051.9	999.3	978.8	958.3	978.8	999.3	1051.9	1115.2	1197.1
47.5°	1064.6	983.8	922.4	871.9	854.4	836.8	854.4	871.9	922.4	983.8	1064.6
50°	979.8	901.3	839.9	788.5	767.0	745.6	767.0	788.5	839.9	901.3	979.8
52.5°	897.9	819.8	756.9	702.3	673.1	643.9	673.1	702.3	756.9	819.8	897.9
55°	778.5	699.6	629.4	572.6	556.0	539.5	556.0	572.6	629.4	699.6	778.5
57.5°	668.6	597.1	533.3	482.1	468.5	454.8	468.5	482.1	533.3	597.1	668.6
60°	595.5	530.2	476.6	433.0	419.3	405.7	419.3	433.0	476.6	530.2	595.5
62.5°	524.2	465.5	422.8	388.0	376.7	365.3	376.7	388.0	422.8	465.5	524.2
65°	436.9	388.2	353.1	324.3	314.6	304.8	314.6	324.3	353.1	388.2	436.9
67.5°	361.4	321.9	291.1	266.4	259.9	253.5	259.9	266.4	291.1	321.9	361.4
70°	312.6	279.0	253.7	233.4	228.6	223.7	228.6	233.4	253.7	279.0	312.6
72.5°	266.0	237.9	218.0	202.2	198.9	195.6	198.9	202.2	218.0	237.9	266.0
75°	203.9	184.0	170.3	159.6	157.6	155.7	157.6	159.6	170.3	184.0	203.9
77.5°	150.9	136.2	126.0	118.0	116.5	114.9	116.5	118.0	126.0	136.2	150.9
80°	117.0	105.7	98.0	92.1	92.1	92.1	92.1	92.1	98.0	105.7	117.0
82.5°	83.4	76.1	72.2	69.3	69.3	69.3	69.3	69.3	72.2	76.1	83.4
85°	43.6	38.7	32.9	28.3	27.3	26.3	27.3	28.3	32.9	38.7	43.6
87.5°	19.4	20.3	22.7	23.9	25.7	24.8	25.7	23.9	22.7	20.3	19.4
90°	52.3	68.2	84.1	93.2	102.3	97.8	102.3	93.2	84.1	68.2	52.3
92.5°	105.1	131.9	151.5	167.8	175.1	174.2	175.1	167.8	151.5	131.9	105.1
95°	211.5	243.3	275.2	297.9	311.6	307.0	311.6	297.9	275.2	243.3	211.5
97.5°	326.1	368.9	404.4	425.7	439.4	448.5	439.4	425.7	404.4	368.9	326.1
100°	402.5	443.5	484.4	509.4	532.2	541.3	532.2	509.4	484.4	443.5	402.5
102.5°	464.4	518.1	562.7	589.5	608.6	617.7	608.6	589.5	562.7	518.1	464.4
105°	566.3	623.1	670.9	705.0	725.5	732.3	725.5	705.0	670.9	623.1	566.3
107.5°	668.2	726.9	771.0	808.7	833.7	848.3	833.7	808.7	771.0	726.9	668.2
110°	748.2	796.0	843.8	877.9	902.9	912.0	902.9	877.9	843.8	796.0	748.2



TEST NUMBER: P1428479

CATALOG NUMBER: SQ2W-PW1-K-150U-100D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	815.6	868.8	916.5	950.6	979.3	992.0	979.3	950.6	916.5	868.8	815.6
115°	909.7	980.2	1023.4	1055.3	1075.7	1087.1	1075.7	1055.3	1023.4	980.2	909.7
117.5°	987.9	1061.6	1108.9	1133.5	1143.0	1151.2	1143.0	1133.5	1108.9	1061.6	987.9
120°	1037.1	1105.3	1159.9	1191.7	1203.1	1207.6	1203.1	1191.7	1159.9	1105.3	1037.1
122.5°	1082.6	1147.1	1199.9	1239.0	1257.7	1262.2	1257.7	1239.0	1199.9	1147.1	1082.6
125°	1146.2	1207.6	1262.2	1300.9	1321.4	1332.7	1321.4	1300.9	1262.2	1207.6	1146.2
127.5°	1201.7	1268.1	1318.2	1353.2	1373.2	1382.3	1373.2	1353.2	1318.2	1268.1	1201.7
130°	1232.7	1300.9	1350.9	1389.6	1407.8	1416.9	1407.8	1389.6	1350.9	1300.9	1232.7
132.5°	1256.3	1328.2	1380.0	1415.1	1435.1	1444.2	1435.1	1415.1	1380.0	1328.2	1256.3
135°	1285.0	1360.0	1414.6	1448.7	1466.9	1476.0	1466.9	1448.7	1414.6	1360.0	1285.0
137.5°	1310.0	1378.2	1435.1	1471.0	1487.4	1493.3	1487.4	1471.0	1435.1	1378.2	1310.0
140°	1328.2	1387.3	1444.2	1478.3	1496.5	1498.7	1496.5	1478.3	1444.2	1387.3	1328.2
142.5°	1351.8	1398.2	1447.8	1481.9	1500.1	1504.2	1500.1	1481.9	1447.8	1398.2	1351.8
145°	1394.1	1421.4	1455.5	1487.4	1503.3	1507.8	1503.3	1487.4	1455.5	1421.4	1394.1
147.5°	1447.3	1456.0	1473.7	1494.6	1510.1	1513.3	1510.1	1494.6	1473.7	1456.0	1447.3
150°	1487.4	1485.1	1491.9	1505.6	1519.2	1516.9	1519.2	1505.6	1491.9	1485.1	1487.4
152.5°	1532.9	1519.7	1519.2	1525.6	1531.9	1531.5	1531.9	1525.6	1519.2	1519.7	1532.9
155°	1610.2	1585.2	1571.5	1567.0	1567.0	1564.7	1567.0	1567.0	1571.5	1585.2	1610.2
157.5°	1695.2	1660.2	1639.7	1628.8	1625.6	1620.6	1625.6	1628.8	1639.7	1660.2	1695.2
160°	1753.5	1714.8	1694.3	1676.1	1669.3	1662.5	1669.3	1676.1	1694.3	1714.8	1753.5
162.5°	1808.0	1771.2	1748.9	1732.5	1725.7	1715.3	1725.7	1732.5	1748.9	1771.2	1808.0
165°	1896.7	1858.1	1833.1	1819.4	1810.3	1801.2	1810.3	1819.4	1833.1	1858.1	1896.7
167.5°	1985.4	1943.1	1926.8	1911.3	1902.7	1886.3	1902.7	1911.3	1926.8	1943.1	1985.4
170°	2040.0	2001.4	1992.3	1978.6	1962.7	1944.5	1962.7	1978.6	1992.3	2001.4	2040.0
172.5°	2087.3	2061.4	2052.3	2038.7	2033.7	2019.1	2033.7	2038.7	2052.3	2061.4	2087.3
175°	2156.0	2135.5	2135.5	2133.3	2126.4	2112.8	2126.4	2133.3	2135.5	2135.5	2156.0
177.5°	2213.3	2202.4	2209.7	2209.7	2207.9	2195.1	2207.9	2209.7	2209.7	2202.4	2213.3
180°	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5	2251.5



TEST NUMBER: P1428479

CATALOG NUMBER: SQ2W-PW1-K-150U-100D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	2302.6	2302.6	2302.6	2302.6
2.5°	2310.2	2313.3	2300.1	2286.8
5°	2309.2	2311.6	2295.1	2278.5
7.5°	2299.8	2300.6	2283.8	2267.1
10°	2291.6	2291.6	2274.1	2256.6
12.5°	2280.5	2279.2	2260.8	2242.5
15°	2255.8	2251.7	2232.2	2212.7
17.5°	2220.9	2217.0	2197.5	2178.1
20°	2195.2	2192.5	2173.0	2153.5
22.5°	2160.7	2160.5	2139.5	2118.4
25°	2097.2	2106.7	2086.2	2065.8
27.5°	2012.7	2037.5	2020.9	2004.4
30°	1946.6	1985.8	1973.2	1960.5
32.5°	1872.9	1924.6	1919.8	1914.9
35°	1753.6	1822.4	1831.1	1839.9
37.5°	1621.6	1699.1	1725.2	1751.3
40°	1529.2	1612.3	1649.4	1686.4
42.5°	1436.2	1521.7	1568.1	1614.5
45°	1297.5	1386.4	1441.0	1495.6
47.5°	1164.8	1253.4	1307.6	1361.8
50°	1075.3	1160.1	1212.7	1265.3
52.5°	991.1	1072.7	1119.9	1167.1
55°	866.2	943.2	988.1	1032.9
57.5°	747.9	817.1	855.9	894.7
60°	672.5	738.8	772.9	807.0
62.5°	598.8	662.4	692.6	722.8
65°	499.3	551.7	574.1	596.5
67.5°	409.5	448.7	461.2	473.7
70°	354.5	386.9	390.8	394.7
72.5°	302.5	329.4	327.9	326.3
75°	230.3	248.0	240.3	232.5
77.5°	170.2	181.7	170.0	158.3
80°	131.6	139.6	127.9	116.2
82.5°	94.2	99.9	90.5	81.1
85°	47.5	49.2	44.3	39.5
87.5°	21.1	20.2	16.0	11.9
90°	40.9	25.0	15.9	6.8
92.5°	88.2	61.4	43.2	25.0
95°	177.4	141.0	100.1	70.5
97.5°	282.5	223.8	183.3	134.6
100°	338.9	282.0	243.3	191.0
102.5°	400.7	353.0	299.7	247.4
105°	511.7	452.6	391.2	332.0
107.5°	614.5	549.5	475.8	422.6
110°	680.0	609.5	532.2	484.4



TEST NUMBER: P1428479

CATALOG NUMBER: SQ2W-PW1-K-150U-100D-L830-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	743.7	671.4	592.2	544.5
115°	830.1	750.5	677.7	636.8
117.5°	913.3	831.5	754.6	722.3
120°	964.3	882.4	807.4	782.3
122.5°	1006.1	926.1	856.5	846.0
125°	1068.9	987.0	927.9	941.5
127.5°	1119.9	1044.8	1007.5	1038.0
130°	1150.8	1084.8	1062.1	1105.3
132.5°	1178.1	1126.7	1116.7	1176.3
135°	1219.0	1189.4	1198.5	1280.4
137.5°	1267.7	1256.3	1286.8	1390.0
140°	1298.6	1305.4	1348.6	1464.6
142.5°	1340.5	1356.4	1412.3	1535.6
145°	1405.5	1439.6	1512.4	1635.2
147.5°	1479.2	1523.3	1613.4	1739.4
150°	1528.3	1585.2	1680.7	1801.2
152.5°	1584.7	1643.4	1738.9	1861.3
155°	1671.6	1737.5	1837.6	1942.2
157.5°	1760.3	1827.6	1923.1	2014.5
160°	1814.9	1887.6	1974.1	2058.2
162.5°	1876.7	1944.0	2019.6	2094.6
165°	1967.2	2021.8	2083.2	2146.9
167.5°	2043.2	2088.7	2136.9	2186.5
170°	2092.3	2128.7	2169.7	2208.3
172.5°	2134.2	2163.3	2193.3	2226.5
175°	2190.1	2206.0	2224.2	2244.7
177.5°	2233.3	2238.8	2244.2	2253.3
180°	2251.5	2251.5	2251.5	2251.5



TEST NUMBER: P1428479

CATALOG NUMBER: SQ2W-PW1-K-150U-100D-L830-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.86	19.64	19.88	20.66	22.02	15.11	15.89	16.13	16.91	18.27
	3H	20.16	20.85	21.19	21.88	23.26	16.38	17.07	17.40	18.10	19.48
	4H	20.56	21.22	21.60	22.25	23.64	16.88	17.53	17.92	18.57	19.95
	6H	20.74	21.34	21.79	22.38	23.78	17.18	17.78	18.23	18.82	20.22
	8H	20.78	21.35	21.83	22.41	23.80	17.29	17.87	18.35	18.92	20.31
	12H	20.78	21.32	21.84	22.37	23.79	17.32	17.87	18.38	18.91	20.33
4H	2H	18.98	19.64	20.03	20.67	22.06	15.91	16.57	16.96	17.60	18.99
	3H	20.52	21.06	21.57	22.12	23.52	17.35	17.90	18.40	18.96	20.36
	4H	21.06	21.56	22.12	22.61	24.03	17.93	18.42	18.98	19.48	20.90
	6H	21.37	21.79	22.43	22.87	24.29	18.30	18.73	19.37	19.81	21.23
	8H	21.46	21.85	22.52	22.92	24.36	18.45	18.85	19.52	19.92	21.35
	12H	21.47	21.83	22.56	22.91	24.35	18.49	18.85	19.58	19.93	21.37
8H	4H	21.09	21.49	22.16	22.56	23.99	18.26	18.66	19.33	19.73	21.16
	6H	21.51	21.84	22.60	22.95	24.38	18.75	19.08	19.84	20.19	21.62
	8H	21.68	21.97	22.78	23.06	24.51	18.97	19.26	20.07	20.35	21.80
	12H	21.76	22.01	22.86	23.10	24.59	19.05	19.31	20.15	20.39	21.88
12H	4H	21.05	21.41	22.13	22.49	23.93	18.28	18.64	19.36	19.72	21.16
	6H	21.50	21.79	22.60	22.89	24.34	18.83	19.12	19.93	20.21	21.66
	8H	21.69	21.94	22.79	23.03	24.52	19.07	19.32	20.17	20.41	21.90