

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1427543

Luminaire Tested: SQ2W-BBM-K-125U-050D-L930-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2024
Report Number: P1427543
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G3-2104-222-2)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-BBM-K-125U-050D-L930-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - BLACK DISCREET BAFFLE, MEDIUM 80-DEGREE OPTIC
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6652.2 lumens
Efficiency: N/A
Efficacy: 107.1 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.17 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 62.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1427543

CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L930-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

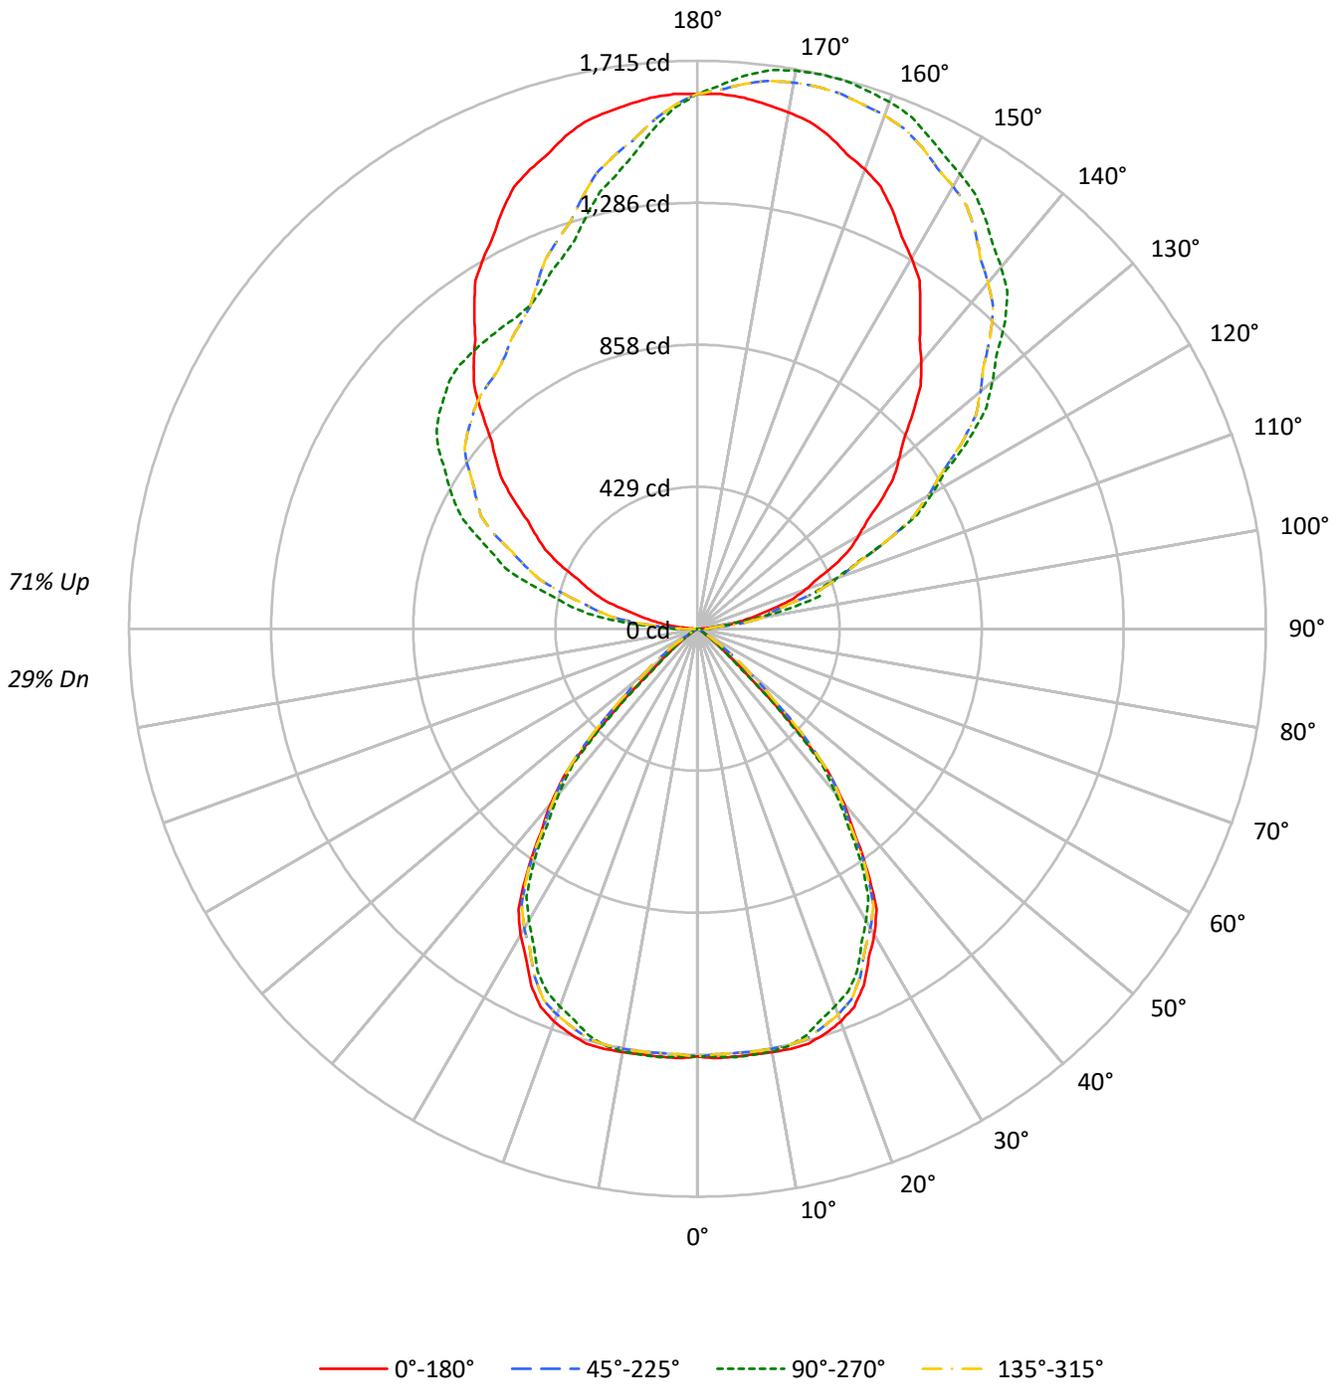



TEST NUMBER: P1427543

CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L930-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	37	37	37	29
1	94	90	87	84	84	81	79	76	64	63	61	49	48	47	34	34	33	27
2	87	80	75	71	78	73	68	64	58	55	52	44	42	41	32	31	30	24
3	80	72	65	60	72	65	60	55	52	48	45	40	38	36	29	28	27	22
4	74	64	57	52	66	58	52	48	47	43	40	37	34	32	27	26	24	20
5	68	58	51	45	61	53	46	42	43	38	35	33	31	28	25	23	22	18
6	63	52	45	40	57	48	41	37	39	34	31	31	28	25	23	21	20	17
7	58	47	40	35	53	43	37	33	36	31	28	28	25	23	21	20	18	15
8	54	43	36	31	49	40	33	29	33	28	25	26	23	21	20	18	17	14
9	51	40	33	28	46	36	30	26	30	26	23	24	21	19	18	17	15	13
10	47	36	30	25	43	33	28	24	28	23	20	22	19	17	17	15	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	20855	20855	20855	20855
5°	21019	21052	21019	21052
10°	21283	21252	21283	21252
15°	21668	21235	21668	21235
20°	21695	20852	21695	20852
25°	21158	20330	21158	20330
30°	19891	18962	19891	18962
35°	17652	16990	17652	16990
40°	14477	13702	14477	13702
45°	8631	8101	8631	8101
50°	2695	2549	2695	2549
55°	1019	1019	1019	1019
60°	61	19	61	19
65°	0	0	0	0
70°	0	0	0	0
75°	0	0	0	0
80°	0	0	0	0
85°	0	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 40°
 Vertical Angle: 45°
 Luminance: 10106 cd/sqm



TEST NUMBER: P1427543

CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L930-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	123.5	1.9
10°-20°	361.8	5.4
20°-30°	532.3	8.0
30°-40°	544.0	8.2
40°-50°	313.4	4.7
50°-60°	53.9	0.8
60°-70°	1.9	0.0
70°-80°	0.0	0.0
80°-90°	8.6	0.1
90°-100°	128.5	1.9
100°-110°	374.8	5.6
110°-120°	611.6	9.2
120°-130°	776.1	11.7
130°-140°	830.4	12.5
140°-150°	775.4	11.7
150°-160°	638.1	9.6
160°-170°	427.9	6.4
170°-180°	151.9	2.3
0°-30°	1017.6	15.3
0°-40°	1561.6	23.5
0°-60°	1928.9	29.0
0°-90°	1939.4	29.2
90°-120°	1114.9	16.8
90°-150°	3496.8	52.6
90°-180°	4715.0	70.9
0°-180°	6652.2	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1292	1292	1292	1292	1292	
5°	1297	1299	1297	1299	1297	124
15°	1296	1270	1296	1270	1296	365
25°	1188	1141	1188	1141	1188	542
35°	896	862	896	862	896	553
45°	378	355	378	355	378	293
55°	36	36	36	36	36	38
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	5	36	5	70	5	4
95°	51	38	51	220	51	61
105°	238	382	238	525	238	253
115°	457	633	457	780	457	450
125°	675	1003	675	956	675	604
135°	918	1313	918	1058	918	710
145°	1173	1514	1173	1081	1173	734
155°	1393	1644	1393	1122	1393	640
165°	1540	1714	1540	1292	1540	433
175°	1610	1678	1610	1515	1610	153
180°	1615	1615	1615	1615	1615	



TEST NUMBER: P1427543

CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	1291.7	1291.7	1291.7	1291.7	1291.7	1291.7	1291.7	1291.7	1291.7	1291.7	1291.7
2.5°	1297.4	1295.8	1294.2	1290.4	1285.8	1286.1	1291.4	1295.1	1293.9	1292.8	1293.9
5°	1296.9	1295.5	1294.0	1290.0	1285.1	1286.6	1294.3	1300.0	1299.4	1298.9	1299.4
7.5°	1296.1	1295.2	1294.2	1291.4	1287.9	1289.4	1295.7	1300.2	1298.7	1297.3	1298.7
10°	1298.2	1297.9	1297.6	1293.3	1287.5	1287.9	1294.5	1299.1	1297.7	1296.3	1297.7
12.5°	1299.2	1301.0	1302.8	1296.5	1287.6	1285.7	1290.9	1294.2	1291.6	1289.0	1291.6
15°	1296.3	1301.1	1306.0	1297.1	1283.6	1277.3	1278.2	1277.9	1274.2	1270.4	1274.2
17.5°	1281.8	1288.7	1295.6	1283.8	1265.8	1255.3	1252.1	1248.4	1243.1	1237.9	1243.1
20°	1262.7	1270.7	1278.7	1265.9	1246.1	1233.4	1228.0	1222.7	1218.1	1213.6	1218.1
22.5°	1235.8	1243.1	1250.5	1238.2	1219.3	1206.4	1199.6	1193.5	1189.8	1186.2	1189.8
25°	1187.7	1192.6	1197.5	1184.9	1166.5	1154.8	1149.6	1145.2	1143.2	1141.2	1143.2
27.5°	1119.6	1121.0	1122.4	1112.4	1098.6	1088.5	1082.0	1076.6	1074.0	1071.4	1074.0
30°	1066.9	1066.9	1066.9	1059.1	1048.8	1040.2	1033.3	1026.9	1022.0	1017.1	1022.0
32.5°	1005.3	1004.7	1004.0	998.3	990.9	983.5	975.9	969.0	964.1	959.2	964.1
35°	895.6	898.8	901.9	898.0	891.7	884.8	877.3	870.6	866.3	862.0	866.3
37.5°	776.9	778.1	779.3	776.0	771.2	764.8	756.8	749.8	746.2	742.6	746.2
40°	686.9	687.2	687.5	683.5	678.0	672.4	666.7	661.0	655.5	650.1	655.5
42.5°	582.0	587.8	593.6	591.1	585.9	578.7	569.5	562.0	559.8	557.5	559.8
45°	378.0	403.6	429.1	438.6	442.6	439.4	429.1	413.9	384.3	354.8	384.3
47.5°	190.0	221.8	253.6	275.7	294.4	289.1	259.6	229.7	198.4	167.1	198.4
50°	107.3	126.2	145.2	174.7	207.7	202.3	158.3	122.7	112.1	101.5	112.1
52.5°	71.6	80.0	88.4	112.1	141.0	139.1	106.4	80.4	74.4	68.4	74.4
55°	36.2	38.5	40.8	51.3	64.5	64.2	50.4	39.6	37.9	36.2	37.9
57.5°	12.3	15.4	18.5	23.1	28.3	28.4	23.6	19.2	16.4	13.6	16.4
60°	1.9	4.8	7.7	11.4	15.4	15.0	10.1	5.8	3.2	0.6	3.2
62.5°	0.4	1.2	2.0	5.0	8.8	8.7	4.8	1.6	0.9	0.1	0.9
65°	0.0	0.0	0.0	0.2	0.5	0.5	0.2	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	1.0	2.3	3.9	5.2	6.2	6.5	6.5	6.9	7.2	7.2	7.2
90°	4.9	11.4	19.6	26.1	31.0	32.6	32.6	34.3	35.9	35.9	35.9
92.5°	17.9	28.4	28.7	28.7	34.9	37.8	40.4	40.8	42.4	42.4	42.4
95°	50.6	55.5	83.2	81.6	55.5	44.0	37.5	37.5	37.5	37.5	37.5
97.5°	96.6	103.7	108.3	145.2	153.3	148.1	120.7	101.5	90.7	85.8	90.7
100°	137.0	140.3	150.1	151.7	192.5	231.6	212.0	187.6	179.4	174.5	179.4
102.5°	177.5	179.4	194.4	201.3	210.7	232.9	300.8	293.3	287.7	286.7	287.7
105°	238.1	239.8	267.5	280.5	287.1	287.1	285.4	318.1	370.2	381.7	370.2
107.5°	303.0	310.5	343.2	378.1	385.6	387.5	379.1	374.2	372.2	373.5	372.2
110°	347.4	358.8	398.0	442.0	453.4	456.7	453.4	448.5	445.3	445.3	445.3



TEST NUMBER: P1427543

CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	390.5	407.1	451.5	502.0	521.3	531.1	523.9	520.3	517.0	519.6	517.0
115°	456.7	481.2	539.9	592.1	631.2	636.1	634.5	634.5	632.8	632.8	632.8
117.5°	518.0	557.2	623.1	683.7	729.1	742.1	748.6	746.7	744.7	748.0	744.7
120°	561.1	606.7	681.8	750.3	794.3	813.9	820.4	817.1	820.4	817.1	820.4
122.5°	606.7	662.9	736.6	807.7	859.6	881.7	889.6	890.2	890.9	888.9	890.9
125°	675.2	743.8	830.2	903.6	957.4	983.5	990.0	991.7	994.9	1003.1	994.9
127.5°	744.4	822.0	917.0	987.8	1042.9	1074.5	1084.6	1088.2	1095.1	1098.7	1095.1
130°	792.7	880.8	977.0	1043.9	1097.7	1131.9	1149.9	1154.8	1162.9	1161.3	1162.9
132.5°	843.6	935.6	1033.1	1102.6	1152.5	1189.3	1204.7	1218.7	1221.6	1223.9	1221.6
135°	918.3	1017.8	1115.6	1184.1	1231.4	1267.3	1286.9	1299.9	1308.1	1313.0	1308.1
137.5°	996.9	1101.9	1195.9	1256.9	1304.5	1335.5	1357.7	1371.4	1379.9	1383.8	1379.9
140°	1050.4	1151.5	1242.8	1306.5	1348.9	1379.9	1399.4	1415.7	1425.5	1425.5	1425.5
142.5°	1101.3	1201.1	1289.8	1353.4	1390.6	1419.0	1439.9	1452.3	1463.4	1463.4	1463.4
145°	1172.7	1272.2	1353.8	1417.4	1448.4	1474.5	1497.3	1507.1	1513.6	1513.6	1513.6
147.5°	1247.4	1335.5	1409.9	1470.9	1497.0	1527.6	1545.6	1553.4	1561.6	1558.0	1561.6
150°	1291.8	1373.3	1445.1	1502.2	1528.3	1557.6	1575.6	1582.1	1590.3	1585.4	1590.3
152.5°	1334.8	1412.5	1477.7	1530.9	1553.1	1582.4	1603.0	1609.5	1615.0	1611.5	1615.0
155°	1392.9	1461.4	1521.8	1570.7	1590.3	1618.0	1637.6	1645.7	1652.2	1644.1	1652.2
157.5°	1444.8	1503.8	1556.3	1601.3	1622.2	1646.0	1664.3	1674.4	1680.9	1677.4	1680.9
160°	1476.1	1529.9	1577.2	1619.6	1639.2	1660.4	1680.0	1691.4	1697.9	1693.0	1697.9
162.5°	1502.2	1550.8	1595.5	1634.0	1650.9	1669.5	1693.0	1703.1	1709.6	1703.5	1709.6
165°	1539.7	1578.8	1618.0	1650.6	1665.3	1680.0	1704.4	1715.8	1720.7	1714.2	1720.7
167.5°	1568.1	1598.1	1629.7	1657.8	1668.5	1682.9	1707.4	1716.8	1723.0	1714.9	1723.0
170°	1583.7	1609.8	1637.6	1660.4	1668.5	1681.6	1706.1	1714.2	1719.1	1711.0	1719.1
172.5°	1596.8	1616.4	1638.9	1659.1	1663.3	1673.8	1696.9	1705.1	1708.7	1701.8	1708.7
175°	1609.8	1621.2	1637.6	1650.6	1649.0	1655.5	1675.1	1681.6	1688.1	1678.3	1688.1
177.5°	1616.0	1621.2	1626.5	1634.3	1629.1	1629.1	1643.4	1647.3	1648.6	1643.4	1648.6
180°	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7



TEST NUMBER: P1427543

CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	1291.7	1291.7	1291.7	1291.7	1291.7	1291.7	1291.7	1291.7	1291.7	1291.7	1291.7
2.5°	1295.1	1291.4	1286.1	1285.8	1290.4	1294.2	1295.8	1297.4	1295.8	1294.2	1290.4
5°	1300.0	1294.3	1286.6	1285.1	1290.0	1294.0	1295.5	1296.9	1295.5	1294.0	1290.0
7.5°	1300.2	1295.7	1289.4	1287.9	1291.4	1294.2	1295.2	1296.1	1295.2	1294.2	1291.4
10°	1299.1	1294.5	1287.9	1287.5	1293.3	1297.6	1297.9	1298.2	1297.9	1297.6	1293.3
12.5°	1294.2	1290.9	1285.7	1287.6	1296.5	1302.8	1301.0	1299.2	1301.0	1302.8	1296.5
15°	1277.9	1278.2	1277.3	1283.6	1297.1	1306.0	1301.1	1296.3	1301.1	1306.0	1297.1
17.5°	1248.4	1252.1	1255.3	1265.8	1283.8	1295.6	1288.7	1281.8	1288.7	1295.6	1283.8
20°	1222.7	1228.0	1233.4	1246.1	1265.9	1278.7	1270.7	1262.7	1270.7	1278.7	1265.9
22.5°	1193.5	1199.6	1206.4	1219.3	1238.2	1250.5	1243.1	1235.8	1243.1	1250.5	1238.2
25°	1145.2	1149.6	1154.8	1166.5	1184.9	1197.5	1192.6	1187.7	1192.6	1197.5	1184.9
27.5°	1076.6	1082.0	1088.5	1098.6	1112.4	1122.4	1121.0	1119.6	1121.0	1122.4	1112.4
30°	1026.9	1033.3	1040.2	1048.8	1059.1	1066.9	1066.9	1066.9	1066.9	1066.9	1059.1
32.5°	969.0	975.9	983.5	990.9	998.3	1004.0	1004.7	1005.3	1004.7	1004.0	998.3
35°	870.6	877.3	884.8	891.7	898.0	901.9	898.8	895.6	898.8	901.9	898.0
37.5°	749.8	756.8	764.8	771.2	776.0	779.3	778.1	776.9	778.1	779.3	776.0
40°	661.0	666.7	672.4	678.0	683.5	687.5	687.2	686.9	687.2	687.5	683.5
42.5°	562.0	569.5	578.7	585.9	591.1	593.6	587.8	582.0	587.8	593.6	591.1
45°	413.9	429.1	439.4	442.6	438.6	429.1	403.6	378.0	403.6	429.1	438.6
47.5°	229.7	259.6	289.1	294.4	275.7	253.6	221.8	190.0	221.8	253.6	275.7
50°	122.7	158.3	202.3	207.7	174.7	145.2	126.2	107.3	126.2	145.2	174.7
52.5°	80.4	106.4	139.1	141.0	112.1	88.4	80.0	71.6	80.0	88.4	112.1
55°	39.6	50.4	64.2	64.5	51.3	40.8	38.5	36.2	38.5	40.8	51.3
57.5°	19.2	23.6	28.4	28.3	23.1	18.5	15.4	12.3	15.4	18.5	23.1
60°	5.8	10.1	15.0	15.4	11.4	7.7	4.8	1.9	4.8	7.7	11.4
62.5°	1.6	4.8	8.7	8.8	5.0	2.0	1.2	0.4	1.2	2.0	5.0
65°	0.0	0.2	0.5	0.5	0.2	0.0	0.0	0.0	0.0	0.0	0.2
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	6.9	6.5	6.5	6.2	5.2	3.9	2.3	1.0	2.3	3.6	5.9
90°	34.3	32.6	32.6	31.0	26.1	19.6	11.4	4.9	11.4	17.9	29.4
92.5°	40.8	40.4	37.8	34.9	28.7	28.7	28.4	17.9	31.0	44.0	63.3
95°	37.5	37.5	44.0	55.5	81.6	83.2	55.5	50.6	71.8	101.1	127.2
97.5°	101.5	120.7	148.1	153.3	145.2	108.3	103.7	96.6	131.5	160.5	202.6
100°	187.6	212.0	231.6	192.5	151.7	150.1	140.3	137.0	174.5	202.2	243.0
102.5°	293.3	300.8	232.9	210.7	201.3	194.4	179.4	177.5	215.0	253.1	287.4
105°	318.1	285.4	287.1	287.1	280.5	267.5	239.8	238.1	280.5	324.6	367.0
107.5°	374.2	379.1	387.5	385.6	378.1	343.2	310.5	303.0	341.2	394.1	440.7
110°	448.5	453.4	456.7	453.4	442.0	398.0	358.8	347.4	381.7	437.1	487.7



TEST NUMBER: P1427543

CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	520.3	523.9	531.1	521.3	502.0	451.5	407.1	390.5	424.7	481.5	533.3
115°	634.5	634.5	636.1	631.2	592.1	539.9	481.2	456.7	486.0	538.2	595.3
117.5°	746.7	748.6	742.1	729.1	683.7	623.1	557.2	518.0	541.2	596.3	655.0
120°	817.1	820.4	813.9	794.3	750.3	681.8	606.7	561.1	579.0	632.8	691.6
122.5°	890.2	889.6	881.7	859.6	807.7	736.6	662.9	606.7	614.2	664.2	721.6
125°	991.7	990.0	983.5	957.4	903.6	830.2	743.8	675.2	665.5	707.9	766.6
127.5°	1088.2	1084.6	1074.5	1042.9	987.8	917.0	822.0	744.4	722.5	749.3	803.1
130°	1154.8	1149.9	1131.9	1097.7	1043.9	977.0	880.8	792.7	761.7	778.0	825.3
132.5°	1218.7	1204.7	1189.3	1152.5	1102.6	1033.1	935.6	843.6	800.8	808.0	844.9
135°	1299.9	1286.9	1267.3	1231.4	1184.1	1115.6	1017.8	918.3	859.6	853.0	874.2
137.5°	1371.4	1357.7	1335.5	1304.5	1256.9	1195.9	1101.9	996.9	922.8	901.0	909.1
140°	1415.7	1399.4	1379.9	1348.9	1306.5	1242.8	1151.5	1050.4	967.2	936.2	931.3
142.5°	1452.3	1439.9	1419.0	1390.6	1353.4	1289.8	1201.1	1101.3	1012.9	972.7	961.3
145°	1507.1	1497.3	1474.5	1448.4	1417.4	1353.8	1272.2	1172.7	1084.6	1032.4	1008.0
147.5°	1553.4	1545.6	1527.6	1497.0	1470.9	1409.9	1335.5	1247.4	1157.1	1092.5	1060.8
150°	1582.1	1575.6	1557.6	1528.3	1502.2	1445.1	1373.3	1291.8	1205.3	1136.8	1096.1
152.5°	1609.5	1603.0	1582.4	1553.1	1530.9	1477.7	1412.5	1334.8	1247.1	1178.6	1136.5
155°	1645.7	1637.6	1618.0	1590.3	1570.7	1521.8	1461.4	1392.9	1317.9	1246.1	1198.8
157.5°	1674.4	1664.3	1646.0	1622.2	1601.3	1556.3	1503.8	1444.8	1379.2	1310.7	1262.4
160°	1691.4	1680.0	1660.4	1639.2	1619.6	1577.2	1529.9	1476.1	1415.7	1353.8	1301.6
162.5°	1703.1	1693.0	1669.5	1650.9	1634.0	1595.5	1550.8	1502.2	1448.4	1394.2	1345.9
165°	1715.8	1704.4	1680.0	1665.3	1650.6	1618.0	1578.8	1539.7	1494.0	1450.0	1410.8
167.5°	1716.8	1707.4	1682.9	1668.5	1657.8	1629.7	1598.1	1568.1	1532.5	1497.9	1465.3
170°	1714.2	1706.1	1681.6	1668.5	1660.4	1637.6	1609.8	1583.7	1556.0	1526.6	1500.6
172.5°	1705.1	1696.9	1673.8	1663.3	1659.1	1638.9	1616.4	1596.8	1573.0	1551.4	1530.6
175°	1681.6	1675.1	1655.5	1649.0	1650.6	1637.6	1621.2	1609.8	1595.2	1582.1	1570.7
177.5°	1647.3	1643.4	1629.1	1629.1	1634.3	1626.5	1621.2	1616.0	1609.5	1605.6	1601.7
180°	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7



TEST NUMBER: P1427543

CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	1291.7	1291.7	1291.7	1291.7	1291.7	1291.7	1291.7	1291.7	1291.7	1291.7	1291.7
2.5°	1285.8	1286.1	1291.4	1295.1	1293.9	1292.8	1293.9	1295.1	1291.4	1286.1	1285.8
5°	1285.1	1286.6	1294.3	1300.0	1299.4	1298.9	1299.4	1300.0	1294.3	1286.6	1285.1
7.5°	1287.9	1289.4	1295.7	1300.2	1298.7	1297.3	1298.7	1300.2	1295.7	1289.4	1287.9
10°	1287.5	1287.9	1294.5	1299.1	1297.7	1296.3	1297.7	1299.1	1294.5	1287.9	1287.5
12.5°	1287.6	1285.7	1290.9	1294.2	1291.6	1289.0	1291.6	1294.2	1290.9	1285.7	1287.6
15°	1283.6	1277.3	1278.2	1277.9	1274.2	1270.4	1274.2	1277.9	1278.2	1277.3	1283.6
17.5°	1265.8	1255.3	1252.1	1248.4	1243.1	1237.9	1243.1	1248.4	1252.1	1255.3	1265.8
20°	1246.1	1233.4	1228.0	1222.7	1218.1	1213.6	1218.1	1222.7	1228.0	1233.4	1246.1
22.5°	1219.3	1206.4	1199.6	1193.5	1189.8	1186.2	1189.8	1193.5	1199.6	1206.4	1219.3
25°	1166.5	1154.8	1149.6	1145.2	1143.2	1141.2	1143.2	1145.2	1149.6	1154.8	1166.5
27.5°	1098.6	1088.5	1082.0	1076.6	1074.0	1071.4	1074.0	1076.6	1082.0	1088.5	1098.6
30°	1048.8	1040.2	1033.3	1026.9	1022.0	1017.1	1022.0	1026.9	1033.3	1040.2	1048.8
32.5°	990.9	983.5	975.9	969.0	964.1	959.2	964.1	969.0	975.9	983.5	990.9
35°	891.7	884.8	877.3	870.6	866.3	862.0	866.3	870.6	877.3	884.8	891.7
37.5°	771.2	764.8	756.8	749.8	746.2	742.6	746.2	749.8	756.8	764.8	771.2
40°	678.0	672.4	666.7	661.0	655.5	650.1	655.5	661.0	666.7	672.4	678.0
42.5°	585.9	578.7	569.5	562.0	559.8	557.5	559.8	562.0	569.5	578.7	585.9
45°	442.6	439.4	429.1	413.9	384.3	354.8	384.3	413.9	429.1	439.4	442.6
47.5°	294.4	289.1	259.6	229.7	198.4	167.1	198.4	229.7	259.6	289.1	294.4
50°	207.7	202.3	158.3	122.7	112.1	101.5	112.1	122.7	158.3	202.3	207.7
52.5°	141.0	139.1	106.4	80.4	74.4	68.4	74.4	80.4	106.4	139.1	141.0
55°	64.5	64.2	50.4	39.6	37.9	36.2	37.9	39.6	50.4	64.2	64.5
57.5°	28.3	28.4	23.6	19.2	16.4	13.6	16.4	19.2	23.6	28.4	28.3
60°	15.4	15.0	10.1	5.8	3.2	0.6	3.2	5.8	10.1	15.0	15.4
62.5°	8.8	8.7	4.8	1.6	0.9	0.1	0.9	1.6	4.8	8.7	8.8
65°	0.5	0.5	0.2	0.0	0.0	0.0	0.0	0.0	0.2	0.5	0.5
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	7.5	9.8	12.1	13.4	14.7	14.0	14.7	13.4	12.1	9.8	7.5
90°	37.5	48.9	60.3	66.9	73.4	70.1	73.4	66.9	60.3	48.9	37.5
92.5°	75.4	94.6	108.6	120.4	125.6	124.9	125.6	120.4	108.6	94.6	75.4
95°	151.7	174.5	197.4	213.7	223.5	220.2	223.5	213.7	197.4	174.5	151.7
97.5°	233.9	264.6	290.0	305.3	315.1	321.6	315.1	305.3	290.0	264.6	233.9
100°	288.7	318.1	347.4	365.4	381.7	388.2	381.7	365.4	347.4	318.1	288.7
102.5°	333.1	371.5	403.5	422.8	436.5	443.0	436.5	422.8	403.5	371.5	333.1
105°	406.1	446.9	481.2	505.6	520.3	525.2	520.3	505.6	481.2	446.9	406.1
107.5°	479.2	521.3	552.9	580.0	597.9	608.4	597.9	580.0	552.9	521.3	479.2
110°	536.6	570.9	605.1	629.6	647.5	654.0	647.5	629.6	605.1	570.9	536.6



TEST NUMBER: P1427543

CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	584.9	623.1	657.3	681.8	702.3	711.5	702.3	681.8	657.3	623.1	584.9
115°	652.4	703.0	734.0	756.8	771.5	779.6	771.5	756.8	734.0	703.0	652.4
117.5°	708.5	761.4	795.3	812.9	819.8	825.6	819.8	812.9	795.3	761.4	708.5
120°	743.8	792.7	831.8	854.7	862.8	866.1	862.8	854.7	831.8	792.7	743.8
122.5°	776.4	822.7	860.5	888.6	902.0	905.2	902.0	888.6	860.5	822.7	776.4
125°	822.0	866.1	905.2	933.0	947.6	955.8	947.6	933.0	905.2	866.1	822.0
127.5°	861.8	909.5	945.3	970.5	984.8	991.3	984.8	970.5	945.3	909.5	861.8
130°	884.0	933.0	968.8	996.6	1009.6	1016.1	1009.6	996.6	968.8	933.0	884.0
132.5°	901.0	952.5	989.7	1014.8	1029.2	1035.7	1029.2	1014.8	989.7	952.5	901.0
135°	921.5	975.4	1014.5	1039.0	1052.0	1058.5	1052.0	1039.0	1014.5	975.4	921.5
137.5°	939.5	988.4	1029.2	1055.0	1066.7	1070.9	1066.7	1055.0	1029.2	988.4	939.5
140°	952.5	994.9	1035.7	1060.2	1073.2	1074.9	1073.2	1060.2	1035.7	994.9	952.5
142.5°	969.5	1002.8	1038.3	1062.8	1075.8	1078.8	1075.8	1062.8	1038.3	1002.8	969.5
145°	999.8	1019.4	1043.9	1066.7	1078.1	1081.4	1078.1	1066.7	1043.9	1019.4	999.8
147.5°	1038.0	1044.2	1056.9	1071.9	1083.0	1085.3	1083.0	1071.9	1056.9	1044.2	1038.0
150°	1066.7	1065.1	1070.0	1079.7	1089.5	1087.9	1089.5	1079.7	1070.0	1065.1	1066.7
152.5°	1099.3	1089.9	1089.5	1094.1	1098.7	1098.3	1098.7	1094.1	1089.5	1089.9	1099.3
155°	1154.8	1136.8	1127.0	1123.8	1123.8	1122.2	1123.8	1123.8	1127.0	1136.8	1154.8
157.5°	1215.8	1190.7	1176.0	1168.1	1165.9	1162.3	1165.9	1168.1	1176.0	1190.7	1215.8
160°	1257.5	1229.8	1215.1	1202.1	1197.2	1192.3	1197.2	1202.1	1215.1	1229.8	1257.5
162.5°	1296.7	1270.2	1254.3	1242.5	1237.6	1230.1	1237.6	1242.5	1254.3	1270.2	1296.7
165°	1360.3	1332.6	1314.6	1304.8	1298.3	1291.8	1298.3	1304.8	1314.6	1332.6	1360.3
167.5°	1423.9	1393.6	1381.8	1370.7	1364.5	1352.8	1364.5	1370.7	1381.8	1393.6	1423.9
170°	1463.0	1435.3	1428.8	1419.0	1407.6	1394.5	1407.6	1419.0	1428.8	1435.3	1463.0
172.5°	1497.0	1478.4	1471.8	1462.1	1458.5	1448.0	1458.5	1462.1	1471.8	1478.4	1497.0
175°	1546.2	1531.5	1531.5	1529.9	1525.0	1515.2	1525.0	1529.9	1531.5	1531.5	1546.2
177.5°	1587.3	1579.5	1584.7	1584.7	1583.4	1574.3	1583.4	1584.7	1584.7	1579.5	1587.3
180°	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7



TEST NUMBER: P1427543

CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	1291.7	1291.7	1291.7	1291.7
2.5°	1290.4	1294.2	1295.8	1297.4
5°	1290.0	1294.0	1295.5	1296.9
7.5°	1291.4	1294.2	1295.2	1296.1
10°	1293.3	1297.6	1297.9	1298.2
12.5°	1296.5	1302.8	1301.0	1299.2
15°	1297.1	1306.0	1301.1	1296.3
17.5°	1283.8	1295.6	1288.7	1281.8
20°	1265.9	1278.7	1270.7	1262.7
22.5°	1238.2	1250.5	1243.1	1235.8
25°	1184.9	1197.5	1192.6	1187.7
27.5°	1112.4	1122.4	1121.0	1119.6
30°	1059.1	1066.9	1066.9	1066.9
32.5°	998.3	1004.0	1004.7	1005.3
35°	898.0	901.9	898.8	895.6
37.5°	776.0	779.3	778.1	776.9
40°	683.5	687.5	687.2	686.9
42.5°	591.1	593.6	587.8	582.0
45°	438.6	429.1	403.6	378.0
47.5°	275.7	253.6	221.8	190.0
50°	174.7	145.2	126.2	107.3
52.5°	112.1	88.4	80.0	71.6
55°	51.3	40.8	38.5	36.2
57.5°	23.1	18.5	15.4	12.3
60°	11.4	7.7	4.8	1.9
62.5°	5.0	2.0	1.2	0.4
65°	0.2	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0
87.5°	5.9	3.6	2.3	1.0
90°	29.4	17.9	11.4	4.9
92.5°	63.3	44.0	31.0	17.9
95°	127.2	101.1	71.8	50.6
97.5°	202.6	160.5	131.5	96.6
100°	243.0	202.2	174.5	137.0
102.5°	287.4	253.1	215.0	177.5
105°	367.0	324.6	280.5	238.1
107.5°	440.7	394.1	341.2	303.0
110°	487.7	437.1	381.7	347.4



TEST NUMBER: P1427543

CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	533.3	481.5	424.7	390.5
115°	595.3	538.2	486.0	456.7
117.5°	655.0	596.3	541.2	518.0
120°	691.6	632.8	579.0	561.1
122.5°	721.6	664.2	614.2	606.7
125°	766.6	707.9	665.5	675.2
127.5°	803.1	749.3	722.5	744.4
130°	825.3	778.0	761.7	792.7
132.5°	844.9	808.0	800.8	843.6
135°	874.2	853.0	859.6	918.3
137.5°	909.1	901.0	922.8	996.9
140°	931.3	936.2	967.2	1050.4
142.5°	961.3	972.7	1012.9	1101.3
145°	1008.0	1032.4	1084.6	1172.7
147.5°	1060.8	1092.5	1157.1	1247.4
150°	1096.1	1136.8	1205.3	1291.8
152.5°	1136.5	1178.6	1247.1	1334.8
155°	1198.8	1246.1	1317.9	1392.9
157.5°	1262.4	1310.7	1379.2	1444.8
160°	1301.6	1353.8	1415.7	1476.1
162.5°	1345.9	1394.2	1448.4	1502.2
165°	1410.8	1450.0	1494.0	1539.7
167.5°	1465.3	1497.9	1532.5	1568.1
170°	1500.6	1526.6	1556.0	1583.7
172.5°	1530.6	1551.4	1573.0	1596.8
175°	1570.7	1582.1	1595.2	1609.8
177.5°	1601.7	1605.6	1609.5	1616.0
180°	1614.7	1614.7	1614.7	1614.7



TEST NUMBER: P1427543

CATALOG NUMBER: SQ2W-BBM-K-125U-050D-L930-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4H	2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00