

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1435820

Luminaire Tested: SQ2W-FA-K-100U-075D-L930-UNV-STD-W-WM-4

Issue Date: 3/24/2026

Test Information

Test Method: LM-79-2019
Report Number: P1435820
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2502-345-2)
Test Lab: INNOVATION CENTER
Issue Date: 3/24/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-FA-K-100U-075D-L930-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - FROSTED CONTINUOUS ASYMMETRIC ROLL LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 750 LUMENS PER FOOT
UPLIGHT 1000 LUMENS PER FOOT
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6406.0 lumens
Efficiency: N/A
Efficacy: 107.1 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.23 / 1.34
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 59.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1435820
CATALOG NUMBER: SQ2W-FA-K-100U-075D-L930-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

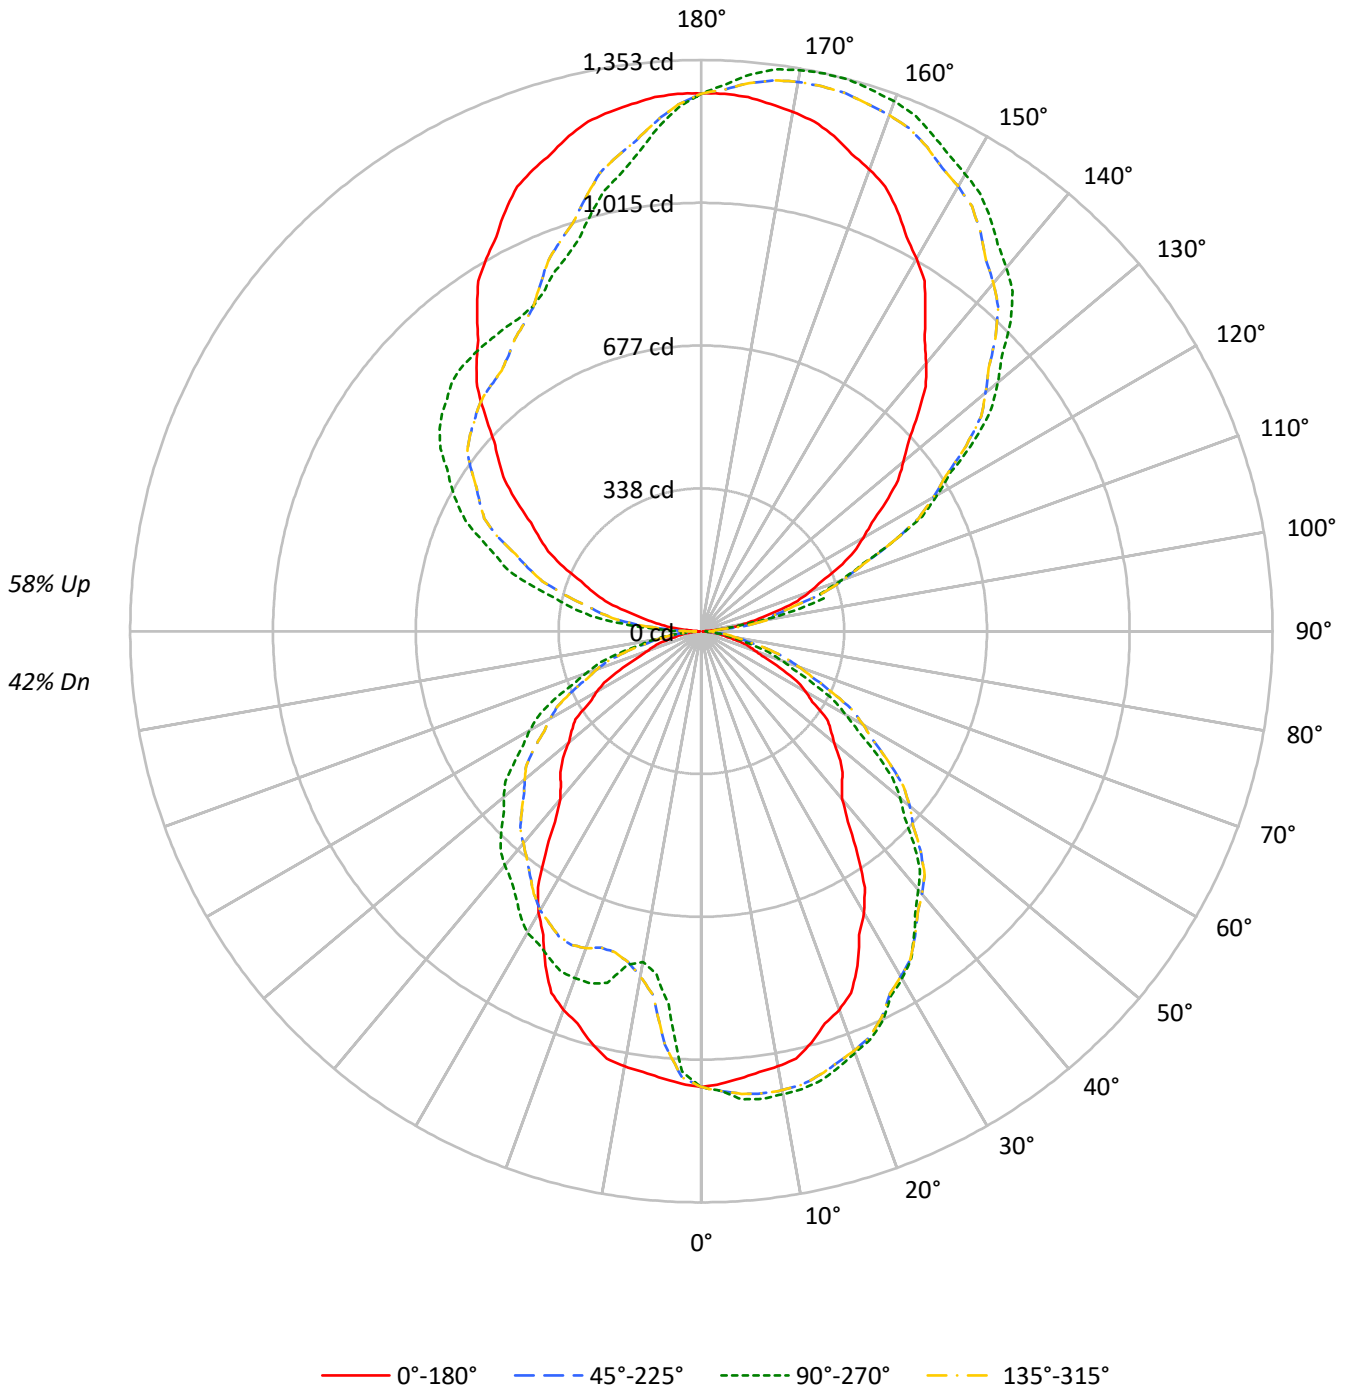



TEST NUMBER: P1435820

CATALOG NUMBER: SQ2W-FA-K-100U-075D-L930-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	49	49	49	42				
1	96	92	88	85	88	84	81	78	69	67	65	56	54	53	43	42	41	36				
2	87	80	74	69	80	73	68	64	61	57	54	49	46	44	38	36	35	30				
3	80	70	63	58	73	65	58	53	54	49	45	43	40	37	34	32	30	25				
4	73	62	55	49	66	57	50	45	47	42	38	38	35	32	30	28	26	22				
5	67	55	47	42	61	51	44	39	42	37	33	35	31	28	27	24	22	19				
6	62	50	42	36	56	46	39	34	38	33	29	31	27	24	25	22	20	16				
7	57	45	37	31	52	41	34	29	35	29	25	28	24	21	22	20	17	15				
8	53	41	33	28	48	37	31	26	31	26	22	26	22	19	21	18	15	13				
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14	12				
10	46	34	27	22	42	31	25	21	26	21	18	22	18	15	18	15	13	11				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	17437	17437	17437	17437
5°	17233	18047	17233	14384
10°	17157	18255	17157	13040
15°	16864	18403	16864	14413
20°	16398	18269	16398	15032
25°	15586	18121	15586	15214
30°	14359	17717	14359	15375
35°	12707	17327	12707	15100
40°	10941	16853	10941	15264
45°	10800	16248	10800	15294
50°	10303	15458	10303	15352
55°	10252	14257	10252	15200
60°	9193	12707	9193	15138
65°	7836	11194	7836	14712
70°	6326	9484	6326	13633
75°	5483	7835	5483	12532
80°	4668	5839	4668	10116
85°	3094	3094	3094	6206

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 40°
 Vertical Angle: 45°
 Luminance: 16760 cd/sqm



TEST NUMBER: P1435820

CATALOG NUMBER: SQ2W-FA-K-100U-075D-L930-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	97.2	1.5
10°-20°	271.5	4.2
20°-30°	412.4	6.4
30°-40°	484.1	7.6
40°-50°	491.3	7.7
50°-60°	430.3	6.7
60°-70°	305.2	4.8
70°-80°	157.2	2.5
80°-90°	38.2	0.6
90°-100°	101.4	1.6
100°-110°	295.6	4.6
110°-120°	482.4	7.5
120°-130°	612.1	9.6
130°-140°	655.0	10.2
140°-150°	611.6	9.5
150°-160°	503.3	7.9
160°-170°	337.5	5.3
170°-180°	119.8	1.9
0°-30°	781.1	12.2
0°-40°	1265.2	19.8
0°-60°	2186.8	34.1
0°-90°	2687.4	42.0
90°-120°	879.3	13.7
90°-150°	2758.0	43.1
90°-180°	3719.0	58.1
0°-180°	6406.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1080	1080	1080	1080	1080	
5°	1063	1114	1063	888	1063	101
15°	1009	1101	1009	862	1009	283
25°	875	1017	875	854	875	399
35°	645	879	645	766	645	402
45°	473	712	473	670	473	362
55°	364	506	364	540	364	315
65°	205	293	205	385	205	205
75°	88	126	88	201	88	95
85°	17	17	17	34	17	21
90°	4	28	4	55	4	4
95°	40	30	40	174	40	48
105°	188	301	188	414	188	200
115°	360	499	360	615	360	355
125°	533	791	533	754	533	477
135°	724	1036	724	835	724	560
145°	925	1194	925	853	925	579
155°	1099	1297	1099	885	1099	505
165°	1214	1352	1214	1019	1214	342
175°	1270	1324	1270	1195	1270	120
180°	1274	1274	1274	1274	1274	



TEST NUMBER: P1435820

CATALOG NUMBER: SQ2W-FA-K-100U-075D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0
2.5°	1073.3	1080.8	1088.2	1090.1	1090.1	1090.1	1090.1	1090.1	1090.1	1090.1	1090.1
5°	1063.3	1076.3	1089.3	1095.4	1099.1	1101.9	1103.7	1106.1	1109.8	1113.5	1109.8
7.5°	1053.2	1070.7	1088.2	1096.8	1102.3	1106.8	1110.2	1113.1	1115.0	1116.9	1115.0
10°	1046.5	1067.0	1087.5	1096.8	1102.3	1106.1	1107.9	1109.8	1111.7	1113.5	1111.7
12.5°	1036.5	1058.4	1080.4	1091.2	1098.3	1102.7	1104.6	1106.4	1108.3	1110.2	1108.3
15°	1008.9	1038.6	1068.4	1080.0	1085.6	1090.3	1094.0	1097.2	1099.1	1101.0	1099.1
17.5°	974.5	1010.6	1046.7	1061.3	1068.8	1074.2	1077.5	1080.4	1081.9	1083.4	1081.9
20°	954.4	993.5	1032.6	1047.9	1055.4	1060.0	1061.9	1063.3	1063.3	1063.3	1063.3
22.5°	927.6	971.2	1014.7	1031.2	1038.6	1042.5	1042.9	1043.6	1045.0	1046.5	1045.0
25°	874.9	925.1	975.4	996.3	1007.5	1012.1	1010.3	1009.8	1013.5	1017.2	1013.5
27.5°	810.4	873.7	936.9	958.3	965.8	970.4	972.3	973.7	973.7	973.7	973.7
30°	770.2	840.9	911.6	934.9	942.3	947.0	948.9	950.3	950.3	950.3	950.3
32.5°	720.0	804.1	888.2	913.7	919.6	922.8	923.2	923.5	923.5	923.5	923.5
35°	644.7	747.0	849.3	877.7	881.4	883.3	883.3	882.8	880.9	879.1	880.9
37.5°	569.3	685.4	801.5	834.7	840.3	841.8	839.2	836.8	834.9	833.0	834.9
40°	519.1	645.6	772.1	807.9	813.5	813.5	807.9	803.3	801.4	799.6	801.4
42.5°	492.3	617.3	742.3	777.8	783.4	782.6	775.6	769.8	767.9	766.1	767.9
45°	473.0	584.7	696.3	728.4	734.0	733.0	725.6	719.1	715.4	711.6	715.4
47.5°	443.7	542.0	640.2	671.7	681.0	680.1	668.9	659.6	655.9	652.2	655.9
50°	410.2	507.0	603.7	634.9	644.2	643.3	632.1	622.8	619.1	615.4	619.1
52.5°	386.8	477.6	568.4	596.9	604.8	602.3	589.7	579.3	575.5	571.8	575.5
55°	364.2	440.5	516.8	540.0	545.6	541.9	528.8	517.7	512.1	506.5	512.1
57.5°	311.4	384.0	456.6	479.2	485.1	480.7	465.8	453.0	446.7	440.4	446.7
60°	284.7	349.8	414.9	436.8	444.2	440.5	425.6	412.1	402.8	393.5	402.8
62.5°	254.5	312.2	369.9	392.1	402.5	400.3	385.4	371.9	362.6	353.3	362.6
65°	205.1	255.4	305.6	327.9	340.9	340.0	325.1	311.6	302.3	293.0	302.3
67.5°	160.7	203.9	247.1	269.0	283.9	283.2	266.8	252.7	245.2	237.8	245.2
70°	134.0	171.2	208.4	228.8	243.7	243.7	228.8	215.8	208.4	200.9	208.4
72.5°	117.2	145.5	173.8	193.1	209.5	209.5	193.1	179.4	173.4	167.4	173.4
75°	87.9	104.7	121.4	139.5	158.1	160.0	145.1	133.0	129.3	125.6	129.3
77.5°	63.6	71.4	79.3	93.5	109.9	111.7	99.1	89.2	87.7	86.2	87.7
80°	50.2	52.1	54.0	65.6	80.5	82.3	71.2	62.8	62.8	62.8	62.8
82.5°	33.5	35.3	37.2	45.5	55.9	57.0	48.8	42.3	40.8	39.3	40.8
85°	16.7	16.7	16.7	19.5	23.3	23.3	19.5	16.7	16.7	16.7	16.7
87.5°	4.1	5.1	6.4	8.6	10.8	11.1	9.6	8.8	9.0	9.0	9.0
90°	3.9	9.0	15.4	20.6	24.4	25.7	25.7	27.0	28.3	28.3	28.3
92.5°	14.2	22.4	22.6	22.6	27.5	29.8	31.9	32.2	33.4	33.4	33.4
95°	39.9	43.7	65.6	64.3	43.7	34.7	29.6	29.6	29.6	29.6	29.6
97.5°	76.2	81.8	85.4	114.5	120.9	116.8	95.2	80.0	71.5	67.7	71.5
100°	108.1	110.6	118.4	119.6	151.8	182.7	167.2	147.9	141.5	137.6	141.5
102.5°	140.0	141.5	153.3	158.7	166.2	183.7	237.2	231.3	226.9	226.2	226.9
105°	187.8	189.1	211.0	221.3	226.4	226.4	225.1	250.9	292.0	301.0	292.0
107.5°	239.0	244.9	270.7	298.2	304.1	305.7	299.0	295.1	293.6	294.6	293.6
110°	274.0	283.0	313.9	348.6	357.6	360.2	357.6	353.8	351.2	351.2	351.2



TEST NUMBER: P1435820

CATALOG NUMBER: SQ2W-FA-K-100U-075D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	308.0	321.1	356.1	396.0	411.1	418.9	413.2	410.4	407.8	409.9	407.8
115°	360.2	379.5	425.8	467.0	497.9	501.7	500.4	500.4	499.1	499.1	499.1
117.5°	408.6	439.5	491.4	539.3	575.0	585.3	590.5	588.9	587.4	590.0	587.4
120°	442.5	478.6	537.7	591.8	626.5	641.9	647.1	644.5	647.1	644.5	647.1
122.5°	478.6	522.8	581.0	637.0	678.0	695.5	701.6	702.1	702.7	701.1	702.7
125°	532.6	586.6	654.8	712.7	755.1	775.7	780.9	782.2	784.7	791.2	784.7
127.5°	587.1	648.4	723.2	779.1	822.6	847.5	855.5	858.3	863.7	866.6	863.7
130°	625.2	694.7	770.6	823.3	865.8	892.8	906.9	910.8	917.2	916.0	917.2
132.5°	665.4	737.9	814.8	869.6	909.0	938.1	950.2	961.2	963.5	965.4	963.5
135°	724.3	802.7	879.9	934.0	971.3	999.6	1015.0	1025.3	1031.7	1035.6	1031.7
137.5°	786.3	869.1	943.2	991.3	1028.9	1053.3	1070.8	1081.6	1088.3	1091.4	1088.3
140°	828.5	908.2	980.3	1030.4	1063.9	1088.3	1103.8	1116.6	1124.4	1124.4	1124.4
142.5°	868.6	947.3	1017.3	1067.5	1096.8	1119.2	1135.7	1145.5	1154.2	1154.2	1154.2
145°	925.0	1003.4	1067.8	1117.9	1142.4	1162.9	1181.0	1188.7	1193.8	1193.8	1193.8
147.5°	983.9	1053.3	1112.0	1160.1	1180.7	1204.9	1219.0	1225.2	1231.6	1228.8	1231.6
150°	1018.9	1083.2	1139.8	1184.8	1205.4	1228.6	1242.7	1247.9	1254.3	1250.4	1254.3
152.5°	1052.8	1114.1	1165.5	1207.5	1225.0	1248.1	1264.3	1269.5	1273.8	1271.0	1273.8
155°	1098.6	1152.7	1200.3	1238.8	1254.3	1276.2	1291.6	1298.0	1303.2	1296.7	1303.2
157.5°	1139.5	1186.1	1227.5	1263.0	1279.5	1298.3	1312.7	1320.7	1325.8	1323.0	1325.8
160°	1164.2	1206.7	1244.0	1277.4	1292.9	1309.6	1325.0	1334.0	1339.2	1335.3	1339.2
162.5°	1184.8	1223.2	1258.4	1288.8	1302.1	1316.8	1335.3	1343.3	1348.5	1343.6	1348.5
165°	1214.4	1245.3	1276.2	1301.9	1313.5	1325.0	1344.3	1353.3	1357.2	1352.1	1357.2
167.5°	1236.8	1260.5	1285.4	1307.5	1316.0	1327.4	1346.7	1354.1	1359.0	1352.6	1359.0
170°	1249.1	1269.7	1291.6	1309.6	1316.0	1326.3	1345.6	1352.1	1355.9	1349.5	1355.9
172.5°	1259.4	1274.9	1292.6	1308.6	1311.9	1320.2	1338.4	1344.9	1347.7	1342.3	1347.7
175°	1269.7	1278.7	1291.6	1301.9	1300.6	1305.7	1321.2	1326.3	1331.5	1323.8	1331.5
177.5°	1274.6	1278.7	1282.8	1289.0	1284.9	1284.9	1296.2	1299.3	1300.3	1296.2	1300.3
180°	1273.6	1273.6	1273.6	1273.6	1273.6	1273.6	1273.6	1273.6	1273.6	1273.6	1273.6



TEST NUMBER: P1435820

CATALOG NUMBER: SQ2W-FA-K-100U-075D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0
2.5°	1090.1	1090.1	1090.1	1090.1	1090.1	1088.2	1080.8	1073.3	1073.3	1073.3	1067.7
5°	1106.1	1103.7	1101.9	1099.1	1095.4	1089.3	1076.3	1063.3	1057.7	1052.1	1028.4
7.5°	1113.1	1110.2	1106.8	1102.3	1096.8	1088.2	1070.7	1053.2	1028.3	1003.4	950.5
10°	1109.8	1107.9	1106.1	1102.3	1096.8	1087.5	1067.0	1046.5	996.3	946.1	895.8
12.5°	1106.4	1104.6	1102.7	1098.3	1091.2	1080.4	1058.4	1036.5	965.4	894.3	848.9
15°	1097.2	1094.0	1090.3	1085.6	1080.0	1068.4	1038.6	1008.9	928.9	848.9	810.7
17.5°	1080.4	1077.5	1074.2	1068.8	1061.3	1046.7	1010.6	974.5	890.8	807.1	782.5
20°	1063.3	1061.9	1060.0	1055.4	1047.9	1032.6	993.5	954.4	870.7	787.0	775.8
22.5°	1043.6	1042.9	1042.5	1038.6	1031.2	1014.7	971.2	927.6	845.4	763.2	763.6
25°	1009.8	1010.3	1012.1	1007.5	996.3	975.4	925.1	874.9	802.3	729.8	742.3
27.5°	973.7	972.3	970.4	965.8	958.3	936.9	873.7	810.4	753.1	695.8	716.7
30°	950.3	948.9	947.0	942.3	934.9	911.6	840.9	770.2	721.9	673.5	697.7
32.5°	923.5	923.2	922.8	919.6	913.7	888.2	804.1	720.0	685.0	650.1	675.4
35°	882.8	883.3	883.3	881.4	877.7	849.3	747.0	644.7	629.8	614.9	644.7
37.5°	836.8	839.2	841.8	840.3	834.7	801.5	685.4	569.3	574.2	579.0	615.1
40°	803.3	807.9	813.5	813.5	807.9	772.1	645.6	519.1	535.8	552.6	591.6
42.5°	769.8	775.6	782.6	783.4	777.8	742.3	617.3	492.3	510.5	528.8	569.3
45°	719.1	725.6	733.0	734.0	728.4	696.3	584.7	473.0	484.2	495.4	534.4
47.5°	659.6	668.9	680.1	681.0	671.7	640.2	542.0	443.7	451.9	460.1	500.1
50°	622.8	632.1	643.3	644.2	634.9	603.7	507.0	410.2	421.4	432.6	474.4
52.5°	579.3	589.7	602.3	604.8	596.9	568.4	477.6	386.8	393.5	400.2	445.4
55°	517.7	528.8	541.9	545.6	540.0	516.8	440.5	364.2	358.6	353.0	399.1
57.5°	453.0	465.8	480.7	485.1	479.2	456.6	384.0	311.4	306.6	301.8	351.6
60°	412.1	425.6	440.5	444.2	436.8	414.9	349.8	284.7	275.4	266.1	318.1
62.5°	371.9	385.4	400.3	402.5	392.1	369.9	312.2	254.5	248.2	241.9	292.5
65°	311.6	325.1	340.0	340.9	327.9	305.6	255.4	205.1	208.8	212.6	258.1
67.5°	252.7	266.8	283.2	283.9	269.0	247.1	203.9	160.7	173.0	185.3	226.3
70°	215.8	228.8	243.7	243.7	228.8	208.4	171.2	134.0	150.7	167.4	205.1
72.5°	179.4	193.1	209.5	209.5	193.1	173.8	145.5	117.2	134.0	150.7	181.7
75°	133.0	145.1	160.0	158.1	139.5	121.4	104.7	87.9	104.7	121.4	145.1
77.5°	89.2	99.1	111.7	109.9	93.5	79.3	71.4	63.6	77.4	91.2	107.7
80°	62.8	71.2	82.3	80.5	65.6	54.0	52.1	50.2	59.5	68.8	80.9
82.5°	42.3	48.8	57.0	55.9	45.5	37.2	35.3	33.5	41.3	49.1	57.5
85°	16.7	19.5	23.3	23.3	19.5	16.7	16.7	16.7	20.5	24.2	27.9
87.5°	8.8	9.6	11.1	10.8	8.6	6.4	5.1	4.1	6.6	9.2	11.3
90°	27.0	25.7	25.7	24.4	20.6	15.4	9.0	3.9	9.0	14.2	23.2
92.5°	32.2	31.9	29.8	27.5	22.6	22.6	22.4	14.2	24.4	34.7	49.9
95°	29.6	29.6	34.7	43.7	64.3	65.6	43.7	39.9	56.6	79.8	100.3
97.5°	80.0	95.2	116.8	120.9	114.5	85.4	81.8	76.2	103.7	126.6	159.8
100°	147.9	167.2	182.7	151.8	119.6	118.4	110.6	108.1	137.6	159.5	191.7
102.5°	231.3	237.2	183.7	166.2	158.7	153.3	141.5	140.0	169.6	199.7	226.7
105°	250.9	225.1	226.4	226.4	221.3	211.0	189.1	187.8	221.3	256.0	289.5
107.5°	295.1	299.0	305.7	304.1	298.2	270.7	244.9	239.0	269.1	310.8	347.6
110°	353.8	357.6	360.2	357.6	348.6	313.9	283.0	274.0	301.0	344.8	384.6



TEST NUMBER: P1435820

CATALOG NUMBER: SQ2W-FA-K-100U-075D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	410.4	413.2	418.9	411.1	396.0	356.1	321.1	308.0	335.0	379.8	420.7
115°	500.4	500.4	501.7	497.9	467.0	425.8	379.5	360.2	383.4	424.5	469.6
117.5°	588.9	590.5	585.3	575.0	539.3	491.4	439.5	408.6	426.8	470.3	516.6
120°	644.5	647.1	641.9	626.5	591.8	537.7	478.6	442.5	456.7	499.1	545.5
122.5°	702.1	701.6	695.5	678.0	637.0	581.0	522.8	478.6	484.5	523.8	569.1
125°	782.2	780.9	775.7	755.1	712.7	654.8	586.6	532.6	524.9	558.3	604.6
127.5°	858.3	855.5	847.5	822.6	779.1	723.2	648.4	587.1	569.9	591.0	633.4
130°	910.8	906.9	892.8	865.8	823.3	770.6	694.7	625.2	600.8	613.6	650.9
132.5°	961.2	950.2	938.1	909.0	869.6	814.8	737.9	665.4	631.6	637.3	666.4
135°	1025.3	1015.0	999.6	971.3	934.0	879.9	802.7	724.3	678.0	672.8	689.5
137.5°	1081.6	1070.8	1053.3	1028.9	991.3	943.2	869.1	786.3	727.9	710.6	717.1
140°	1116.6	1103.8	1088.3	1063.9	1030.4	980.3	908.2	828.5	762.9	738.4	734.6
142.5°	1145.5	1135.7	1119.2	1096.8	1067.5	1017.3	947.3	868.6	798.9	767.2	758.2
145°	1188.7	1181.0	1162.9	1142.4	1117.9	1067.8	1003.4	925.0	855.5	814.3	795.0
147.5°	1225.2	1219.0	1204.9	1180.7	1160.1	1112.0	1053.3	983.9	912.6	861.7	836.7
150°	1247.9	1242.7	1228.6	1205.4	1184.8	1139.8	1083.2	1018.9	950.7	896.7	864.5
152.5°	1269.5	1264.3	1248.1	1225.0	1207.5	1165.5	1114.1	1052.8	983.6	929.6	896.4
155°	1298.0	1291.6	1276.2	1254.3	1238.8	1200.3	1152.7	1098.6	1039.4	982.8	945.5
157.5°	1320.7	1312.7	1298.3	1279.5	1263.0	1227.5	1186.1	1139.5	1087.8	1033.8	995.7
160°	1334.0	1325.0	1309.6	1292.9	1277.4	1244.0	1206.7	1164.2	1116.6	1067.8	1026.6
162.5°	1343.3	1335.3	1316.8	1302.1	1288.8	1258.4	1223.2	1184.8	1142.4	1099.7	1061.6
165°	1353.3	1344.3	1325.0	1313.5	1301.9	1276.2	1245.3	1214.4	1178.4	1143.7	1112.8
167.5°	1354.1	1346.7	1327.4	1316.0	1307.5	1285.4	1260.5	1236.8	1208.7	1181.5	1155.7
170°	1352.1	1345.6	1326.3	1316.0	1309.6	1291.6	1269.7	1249.1	1227.3	1204.1	1183.5
172.5°	1344.9	1338.4	1320.2	1311.9	1308.6	1292.6	1274.9	1259.4	1240.7	1223.7	1207.2
175°	1326.3	1321.2	1305.7	1300.6	1301.9	1291.6	1278.7	1269.7	1258.1	1247.9	1238.8
177.5°	1299.3	1296.2	1284.9	1284.9	1289.0	1282.8	1278.7	1274.6	1269.5	1266.4	1263.3
180°	1273.6	1273.6	1273.6	1273.6	1273.6	1273.6	1273.6	1273.6	1273.6	1273.6	1273.6



TEST NUMBER: P1435820

CATALOG NUMBER: SQ2W-FA-K-100U-075D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0
2.5°	1060.3	1054.3	1049.9	1046.2	1044.7	1043.2	1044.7	1046.2	1049.9	1054.3	1060.3
5°	998.6	967.0	933.5	906.1	896.8	887.5	896.8	906.1	933.5	967.0	998.6
7.5°	888.4	850.3	836.1	824.8	821.8	818.8	821.8	824.8	836.1	850.3	888.4
10°	845.6	814.9	803.7	795.4	795.4	795.4	795.4	795.4	803.7	814.9	845.6
12.5°	812.1	793.3	792.6	793.9	801.3	808.8	801.3	793.9	792.6	793.3	812.1
15°	786.5	789.3	819.1	843.7	853.0	862.3	853.0	843.7	819.1	789.3	786.5
17.5°	777.7	793.7	830.5	860.0	867.5	874.9	867.5	860.0	830.5	793.7	777.7
20°	788.9	809.3	837.2	860.0	867.5	874.9	867.5	860.0	837.2	809.3	788.9
22.5°	791.5	816.4	838.3	856.7	864.1	871.6	864.1	856.7	838.3	816.4	791.5
25°	783.3	813.0	831.6	846.5	850.3	854.0	850.3	846.5	831.6	813.0	783.3
27.5°	763.6	796.3	814.9	829.5	832.1	834.7	832.1	829.5	814.9	796.3	763.6
30°	746.1	779.6	798.2	813.5	819.1	824.7	819.1	813.5	798.2	779.6	746.1
32.5°	720.8	755.0	778.1	795.6	796.8	797.9	796.8	795.6	778.1	755.0	720.8
35°	689.3	724.7	750.7	769.8	767.9	766.1	767.9	769.8	750.7	724.7	689.3
37.5°	661.6	696.2	718.9	736.5	738.7	740.9	738.7	736.5	718.9	696.2	661.6
40°	638.2	673.5	697.7	716.8	720.5	724.2	720.5	716.8	697.7	673.5	638.2
42.5°	617.3	653.4	677.6	696.7	700.4	704.1	700.4	696.7	677.6	653.4	617.3
45°	582.8	620.0	646.1	666.1	667.9	669.8	667.9	666.1	646.1	620.0	582.8
47.5°	550.7	588.1	612.3	630.9	632.8	634.6	632.8	630.9	612.3	588.1	550.7
50°	526.5	564.7	588.8	607.5	609.3	611.2	609.3	607.5	588.8	564.7	526.5
52.5°	503.5	543.1	564.3	580.7	582.5	584.4	582.5	580.7	564.3	543.1	503.5
55°	462.3	504.2	524.7	540.0	540.0	540.0	540.0	540.0	524.7	504.2	462.3
57.5°	419.7	462.7	480.6	494.5	496.8	499.0	496.8	494.5	480.6	462.7	419.7
60°	390.7	434.4	449.3	461.4	465.1	468.8	465.1	461.4	449.3	434.4	390.7
62.5°	362.1	404.3	419.2	430.9	433.1	435.4	433.1	430.9	419.2	404.3	362.1
65°	317.7	354.9	369.8	381.4	383.3	385.1	383.3	381.4	369.8	354.9	317.7
67.5°	276.9	307.4	317.9	326.1	327.5	329.0	327.5	326.1	317.9	307.4	276.9
70°	249.8	275.8	283.3	288.8	288.8	288.8	288.8	288.8	283.3	275.8	249.8
72.5°	217.4	239.0	246.4	252.4	253.9	255.4	253.9	252.4	246.4	239.0	217.4
75°	171.2	187.0	192.6	197.2	199.1	200.9	199.1	197.2	192.6	187.0	171.2
77.5°	125.2	135.6	139.0	142.0	143.8	145.7	143.8	142.0	139.0	135.6	125.2
80°	94.0	101.4	103.3	105.1	107.0	108.8	107.0	105.1	103.3	101.4	94.0
82.5°	66.0	71.3	73.1	74.6	75.0	75.4	75.0	74.6	73.1	71.3	66.0
85°	31.6	33.5	33.5	33.5	33.5	33.5	33.5	33.5	33.5	33.5	31.6
87.5°	12.6	14.4	16.2	17.2	18.3	17.8	18.3	17.2	16.2	14.4	12.6
90°	29.6	38.6	47.6	52.7	57.9	55.3	57.9	52.7	47.6	38.6	29.6
92.5°	59.4	74.6	85.7	94.9	99.1	98.5	99.1	94.9	85.7	74.6	59.4
95°	119.6	137.6	155.7	168.5	176.2	173.7	176.2	168.5	155.7	137.6	119.6
97.5°	184.5	208.7	228.7	240.8	248.5	253.7	248.5	240.8	228.7	208.7	184.5
100°	227.7	250.9	274.0	288.2	301.0	306.2	301.0	288.2	274.0	250.9	227.7
102.5°	262.7	293.1	318.3	333.4	344.3	349.4	344.3	318.3	293.1	262.7	
105°	320.3	352.5	379.5	398.8	410.4	414.2	410.4	398.8	379.5	352.5	320.3
107.5°	378.0	411.1	436.1	457.5	471.6	479.8	471.6	457.5	436.1	411.1	378.0
110°	423.2	450.3	477.3	496.6	510.7	515.9	510.7	496.6	477.3	450.3	423.2



TEST NUMBER: P1435820

CATALOG NUMBER: SQ2W-FA-K-100U-075D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	461.3	491.4	518.4	537.7	553.9	561.1	553.9	537.7	518.4	491.4	461.3
115°	514.6	554.5	578.9	596.9	608.5	614.9	608.5	596.9	578.9	554.5	514.6
117.5°	558.8	600.5	627.3	641.2	646.6	651.2	646.6	641.2	627.3	600.5	558.8
120°	586.6	625.2	656.1	674.1	680.5	683.1	680.5	674.1	656.1	625.2	586.6
122.5°	612.3	648.9	678.7	700.9	711.4	714.0	711.4	700.9	678.7	648.9	612.3
125°	648.4	683.1	714.0	735.8	747.4	753.9	747.4	735.8	714.0	683.1	648.4
127.5°	679.8	717.3	745.6	765.4	776.8	781.9	776.8	765.4	745.6	717.3	679.8
130°	697.3	735.8	764.1	786.0	796.3	801.5	796.3	786.0	764.1	735.8	697.3
132.5°	710.6	751.3	780.6	800.4	811.7	816.9	811.7	800.4	780.6	751.3	710.6
135°	726.8	769.3	800.2	819.5	829.8	834.9	829.8	819.5	800.2	769.3	726.8
137.5°	741.0	779.6	811.7	832.1	841.3	844.7	841.3	832.1	811.7	779.6	741.0
140°	751.3	784.7	816.9	836.2	846.5	847.8	846.5	836.2	816.9	784.7	751.3
142.5°	764.7	790.9	819.0	838.2	848.5	850.9	848.5	838.2	819.0	790.9	764.7
145°	788.6	804.0	823.3	841.3	850.3	852.9	850.3	841.3	823.3	804.0	788.6
147.5°	818.7	823.6	833.6	845.5	854.2	856.0	854.2	845.5	833.6	823.6	818.7
150°	841.3	840.1	843.9	851.6	859.3	858.1	859.3	851.6	843.9	840.1	841.3
152.5°	867.1	859.6	859.3	862.9	866.6	866.3	866.6	862.9	859.3	859.6	867.1
155°	910.8	896.7	888.9	886.4	886.4	885.1	886.4	886.4	888.9	896.7	910.8
157.5°	958.9	939.1	927.5	921.4	919.6	916.7	919.6	921.4	927.5	939.1	958.9
160°	991.9	970.0	958.4	948.1	944.3	940.4	944.3	948.1	958.4	970.0	991.9
162.5°	1022.7	1001.9	989.3	980.0	976.2	970.2	976.2	980.0	989.3	1001.9	1022.7
165°	1072.9	1051.0	1036.9	1029.2	1024.0	1018.9	1024.0	1029.2	1036.9	1051.0	1072.9
167.5°	1123.1	1099.1	1089.9	1081.1	1076.2	1067.0	1076.2	1081.1	1089.9	1099.1	1123.1
170°	1153.9	1132.1	1126.9	1119.2	1110.2	1099.9	1110.2	1119.2	1126.9	1132.1	1153.9
172.5°	1180.7	1166.0	1160.9	1153.2	1150.3	1142.1	1150.3	1153.2	1160.9	1166.0	1180.7
175°	1219.6	1208.0	1208.0	1206.7	1202.8	1195.1	1202.8	1206.7	1208.0	1208.0	1219.6
177.5°	1252.0	1245.8	1249.9	1249.9	1248.9	1241.7	1248.9	1249.9	1249.9	1245.8	1252.0
180°	1273.6	1273.6	1273.6	1273.6	1273.6	1273.6	1273.6	1273.6	1273.6	1273.6	1273.6



TEST NUMBER: P1435820

CATALOG NUMBER: SQ2W-FA-K-100U-075D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	1080.0	1080.0	1080.0	1080.0
2.5°	1067.7	1073.3	1073.3	1073.3
5°	1028.4	1052.1	1057.7	1063.3
7.5°	950.5	1003.4	1028.3	1053.2
10°	895.8	946.1	996.3	1046.5
12.5°	848.9	894.3	965.4	1036.5
15°	810.7	848.9	928.9	1008.9
17.5°	782.5	807.1	890.8	974.5
20°	775.8	787.0	870.7	954.4
22.5°	763.6	763.2	845.4	927.6
25°	742.3	729.8	802.3	874.9
27.5°	716.7	695.8	753.1	810.4
30°	697.7	673.5	721.9	770.2
32.5°	675.4	650.1	685.0	720.0
35°	644.7	614.9	629.8	644.7
37.5°	615.1	579.0	574.2	569.3
40°	591.6	552.6	535.8	519.1
42.5°	569.3	528.8	510.5	492.3
45°	534.4	495.4	484.2	473.0
47.5°	500.1	460.1	451.9	443.7
50°	474.4	432.6	421.4	410.2
52.5°	445.4	400.2	393.5	386.8
55°	399.1	353.0	358.6	364.2
57.5°	351.6	301.8	306.6	311.4
60°	318.1	266.1	275.4	284.7
62.5°	292.5	241.9	248.2	254.5
65°	258.1	212.6	208.8	205.1
67.5°	226.3	185.3	173.0	160.7
70°	205.1	167.4	150.7	134.0
72.5°	181.7	150.7	134.0	117.2
75°	145.1	121.4	104.7	87.9
77.5°	107.7	91.2	77.4	63.6
80°	80.9	68.8	59.5	50.2
82.5°	57.5	49.1	41.3	33.5
85°	27.9	24.2	20.5	16.7
87.5°	11.3	9.2	6.6	4.1
90°	23.2	14.2	9.0	3.9
92.5°	49.9	34.7	24.4	14.2
95°	100.3	79.8	56.6	39.9
97.5°	159.8	126.6	103.7	76.2
100°	191.7	159.5	137.6	108.1
102.5°	226.7	199.7	169.6	140.0
105°	289.5	256.0	221.3	187.8
107.5°	347.6	310.8	269.1	239.0
110°	384.6	344.8	301.0	274.0



TEST NUMBER: P1435820

CATALOG NUMBER: SQ2W-FA-K-100U-075D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	420.7	379.8	335.0	308.0
115°	469.6	424.5	383.4	360.2
117.5°	516.6	470.3	426.8	408.6
120°	545.5	499.1	456.7	442.5
122.5°	569.1	523.8	484.5	478.6
125°	604.6	558.3	524.9	532.6
127.5°	633.4	591.0	569.9	587.1
130°	650.9	613.6	600.8	625.2
132.5°	666.4	637.3	631.6	665.4
135°	689.5	672.8	678.0	724.3
137.5°	717.1	710.6	727.9	786.3
140°	734.6	738.4	762.9	828.5
142.5°	758.2	767.2	798.9	868.6
145°	795.0	814.3	855.5	925.0
147.5°	836.7	861.7	912.6	983.9
150°	864.5	896.7	950.7	1018.9
152.5°	896.4	929.6	983.6	1052.8
155°	945.5	982.8	1039.4	1098.6
157.5°	995.7	1033.8	1087.8	1139.5
160°	1026.6	1067.8	1116.6	1164.2
162.5°	1061.6	1099.7	1142.4	1184.8
165°	1112.8	1143.7	1178.4	1214.4
167.5°	1155.7	1181.5	1208.7	1236.8
170°	1183.5	1204.1	1227.3	1249.1
172.5°	1207.2	1223.7	1240.7	1259.4
175°	1238.8	1247.9	1258.1	1269.7
177.5°	1263.3	1266.4	1269.5	1274.6
180°	1273.6	1273.6	1273.6	1273.6



TEST NUMBER: P1435820
 CATALOG NUMBER: SQ2W-FA-K-100U-075D-L930-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.51	16.31	16.54	17.34	18.72	16.71	17.51	17.74	18.54	19.92
	3H	16.60	17.31	17.63	18.35	19.75	17.95	18.66	18.99	19.70	21.10
	4H	16.95	17.62	17.99	18.66	20.07	18.34	19.01	19.38	20.05	21.46
	6H	17.10	17.72	18.16	18.77	20.19	18.49	19.11	19.55	20.16	21.58
	8H	17.14	17.73	18.20	18.79	20.21	18.52	19.11	19.58	20.17	21.59
	12H	17.13	17.69	18.20	18.75	20.19	18.50	19.06	19.57	20.12	21.56
4H	2H	16.37	17.05	17.43	18.09	19.50	17.29	17.96	18.34	19.00	20.41
	3H	17.76	18.32	18.82	19.39	20.81	18.75	19.31	19.81	20.38	21.80
	4H	18.21	18.72	19.27	19.78	21.23	19.22	19.73	20.28	20.79	22.24
	6H	18.43	18.87	19.51	19.96	21.40	19.44	19.88	20.51	20.96	22.40
	8H	18.49	18.90	19.57	19.98	21.43	19.48	19.89	20.56	20.97	22.43
	12H	18.49	18.86	19.58	19.95	21.41	19.47	19.84	20.56	20.93	22.39
8H	4H	18.59	19.00	19.66	20.07	21.53	19.41	19.82	20.48	20.90	22.35
	6H	18.93	19.27	20.03	20.39	21.84	19.72	20.06	20.82	21.18	22.63
	8H	19.05	19.35	20.16	20.45	21.92	19.81	20.11	20.92	21.21	22.68
	12H	19.08	19.35	20.19	20.44	21.95	19.83	20.09	20.94	21.18	22.69
12H	4H	18.59	18.96	19.68	20.05	21.51	19.37	19.75	20.47	20.84	22.30
	6H	19.00	19.30	20.11	20.40	21.87	19.74	20.03	20.84	21.14	22.61
	8H	19.15	19.41	20.26	20.50	22.01	19.85	20.11	20.96	21.21	22.72