

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1435868

Luminaire Tested: SQ2W-FA-K-150U-075D-L930-UNV-STD-W-WM-4

Issue Date: 3/24/2026

Test Information

Test Method: LM-79-2019
Report Number: P1435868
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2502-345-2)
Test Lab: INNOVATION CENTER
Issue Date: 3/24/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-FA-K-150U-075D-L930-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - FROSTED CONTINUOUS ASYMMETRIC ROLL LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 750 LUMENS PER FOOT
UPLIGHT 1500 LUMENS PER FOOT
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8282.4 lumens
Efficiency: N/A
Efficacy: 101.3 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.23 / 1.34
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 81.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1435868

CATALOG NUMBER: SQ2W-FA-K-150U-075D-L930-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

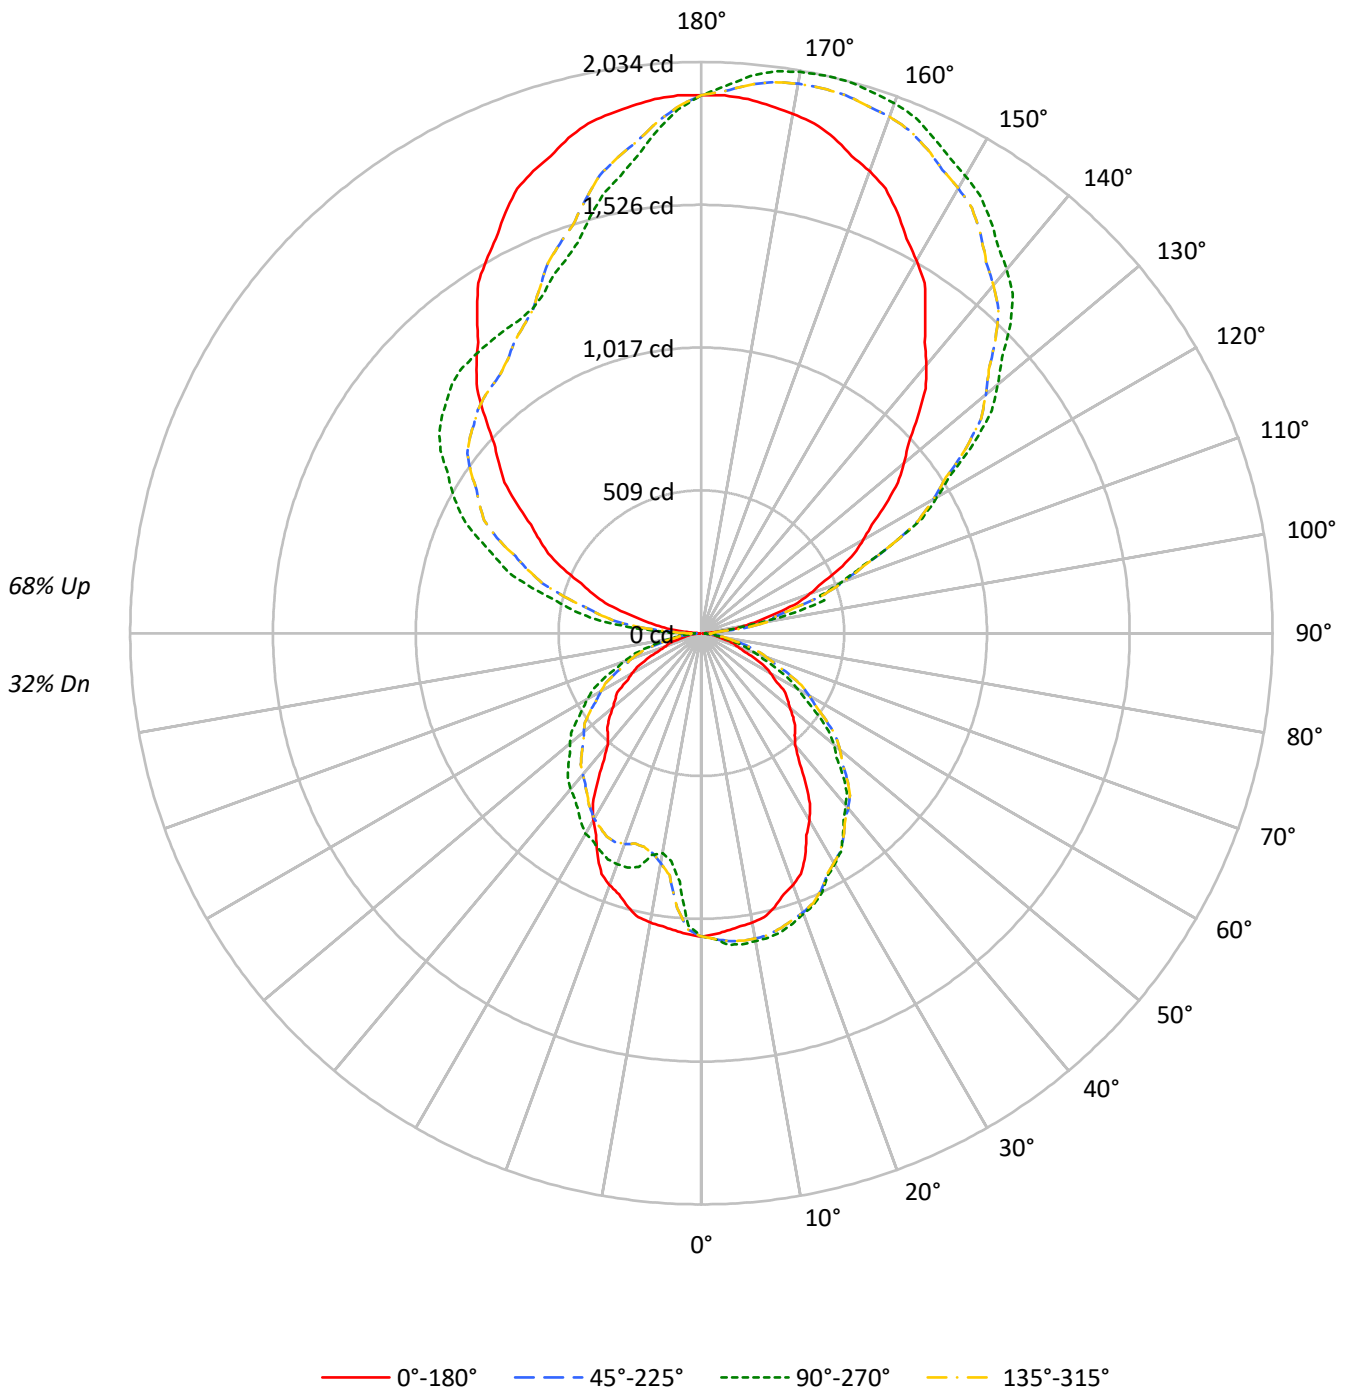



TEST NUMBER: P1435868

CATALOG NUMBER: SQ2W-FA-K-150U-075D-L930-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40	32
1	94	90	86	83	84	81	78	75	64	62	60	49	48	47	35	35	34	27
2	86	78	72	67	77	71	66	61	57	53	50	43	41	39	31	30	29	23
3	78	69	62	56	70	62	56	51	50	46	42	38	35	33	28	26	24	20
4	71	61	53	47	64	55	48	43	44	39	36	34	31	28	25	23	21	17
5	65	54	46	40	59	49	42	37	39	34	31	31	27	24	22	20	18	15
6	60	48	40	35	54	44	37	32	35	30	27	28	24	21	20	18	16	13
7	55	44	36	30	50	40	33	28	32	27	23	25	21	19	18	16	14	11
8	51	39	32	27	46	36	29	25	29	24	21	23	19	17	17	14	13	10
9	48	36	29	24	43	33	26	22	27	22	18	21	17	15	15	13	11	9
10	44	33	26	21	40	30	24	20	24	20	16	19	16	13	14	12	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	17437	17437	17437	17437
5°	17233	18047	17233	14384
10°	17157	18255	17157	13040
15°	16864	18403	16864	14413
20°	16398	18269	16398	15032
25°	15586	18121	15586	15214
30°	14359	17717	14359	15375
35°	12707	17327	12707	15100
40°	10941	16853	10941	15264
45°	10800	16248	10800	15294
50°	10303	15458	10303	15352
55°	10252	14257	10252	15200
60°	9193	12707	9193	15138
65°	7836	11194	7836	14712
70°	6326	9484	6326	13633
75°	5483	7835	5483	12532
80°	4668	5839	4668	10116
85°	3094	3094	3094	6206

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 40°
 Vertical Angle: 45°
 Luminance: 16760 cd/sqm



TEST NUMBER: P1435868

CATALOG NUMBER: SQ2W-FA-K-150U-075D-L930-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	97.2	1.2
10°-20°	271.5	3.3
20°-30°	412.4	5.0
30°-40°	484.1	5.8
40°-50°	491.3	5.9
50°-60°	430.3	5.2
60°-70°	305.2	3.7
70°-80°	157.2	1.9
80°-90°	40.9	0.5
90°-100°	152.4	1.8
100°-110°	444.5	5.4
110°-120°	725.4	8.8
120°-130°	920.5	11.1
130°-140°	985.0	11.9
140°-150°	919.8	11.1
150°-160°	756.8	9.1
160°-170°	507.6	6.1
170°-180°	180.2	2.2
0°-30°	781.1	9.4
0°-40°	1265.2	15.3
0°-60°	2186.8	26.4
0°-90°	2690.1	32.5
90°-120°	1322.4	16.0
90°-150°	4147.7	50.1
90°-180°	5592.0	67.5
0°-180°	8282.4	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1080	1080	1080	1080	1080	
5°	1063	1114	1063	888	1063	101
15°	1009	1101	1009	862	1009	283
25°	875	1017	875	854	875	399
35°	645	879	645	766	645	402
45°	473	712	473	670	473	362
55°	364	506	364	540	364	315
65°	205	293	205	385	205	205
75°	88	126	88	201	88	95
85°	17	17	17	34	17	21
90°	6	43	6	83	6	5
95°	60	44	60	261	60	72
105°	282	453	282	623	282	300
115°	542	751	542	925	542	534
125°	801	1190	801	1134	801	717
135°	1089	1557	1089	1256	1089	842
145°	1391	1795	1391	1283	1391	870
155°	1652	1950	1652	1331	1652	759
165°	1826	2033	1826	1532	1826	514
175°	1910	1991	1910	1797	1910	181
180°	1915	1915	1915	1915	1915	



TEST NUMBER: P1435868

CATALOG NUMBER: SQ2W-FA-K-150U-075D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0
2.5°	1073.3	1080.8	1088.2	1090.1	1090.1	1090.1	1090.1	1090.1	1090.1	1090.1	1090.1
5°	1063.3	1076.3	1089.3	1095.4	1099.1	1101.9	1103.7	1106.1	1109.8	1113.5	1109.8
7.5°	1053.2	1070.7	1088.2	1096.8	1102.3	1106.8	1110.2	1113.1	1115.0	1116.9	1115.0
10°	1046.5	1067.0	1087.5	1096.8	1102.3	1106.1	1107.9	1109.8	1111.7	1113.5	1111.7
12.5°	1036.5	1058.4	1080.4	1091.2	1098.3	1102.7	1104.6	1106.4	1108.3	1110.2	1108.3
15°	1008.9	1038.6	1068.4	1080.0	1085.6	1090.3	1094.0	1097.2	1099.1	1101.0	1099.1
17.5°	974.5	1010.6	1046.7	1061.3	1068.8	1074.2	1077.5	1080.4	1081.9	1083.4	1081.9
20°	954.4	993.5	1032.6	1047.9	1055.4	1060.0	1061.9	1063.3	1063.3	1063.3	1063.3
22.5°	927.6	971.2	1014.7	1031.2	1038.6	1042.5	1042.9	1043.6	1045.0	1046.5	1045.0
25°	874.9	925.1	975.4	996.3	1007.5	1012.1	1010.3	1009.8	1013.5	1017.2	1013.5
27.5°	810.4	873.7	936.9	958.3	965.8	970.4	972.3	973.7	973.7	973.7	973.7
30°	770.2	840.9	911.6	934.9	942.3	947.0	948.9	950.3	950.3	950.3	950.3
32.5°	720.0	804.1	888.2	913.7	919.6	922.8	923.2	923.5	923.5	923.5	923.5
35°	644.7	747.0	849.3	877.7	881.4	883.3	883.3	882.8	880.9	879.1	880.9
37.5°	569.3	685.4	801.5	834.7	840.3	841.8	839.2	836.8	834.9	833.0	834.9
40°	519.1	645.6	772.1	807.9	813.5	813.5	807.9	803.3	801.4	799.6	801.4
42.5°	492.3	617.3	742.3	777.8	783.4	782.6	775.6	769.8	767.9	766.1	767.9
45°	473.0	584.7	696.3	728.4	734.0	733.0	725.6	719.1	715.4	711.6	715.4
47.5°	443.7	542.0	640.2	671.7	681.0	680.1	668.9	659.6	655.9	652.2	655.9
50°	410.2	507.0	603.7	634.9	644.2	643.3	632.1	622.8	619.1	615.4	619.1
52.5°	386.8	477.6	568.4	596.9	604.8	602.3	589.7	579.3	575.5	571.8	575.5
55°	364.2	440.5	516.8	540.0	545.6	541.9	528.8	517.7	512.1	506.5	512.1
57.5°	311.4	384.0	456.6	479.2	485.1	480.7	465.8	453.0	446.7	440.4	446.7
60°	284.7	349.8	414.9	436.8	444.2	440.5	425.6	412.1	402.8	393.5	402.8
62.5°	254.5	312.2	369.9	392.1	402.5	400.3	385.4	371.9	362.6	353.3	362.6
65°	205.1	255.4	305.6	327.9	340.9	340.0	325.1	311.6	302.3	293.0	302.3
67.5°	160.7	203.9	247.1	269.0	283.9	283.2	266.8	252.7	245.2	237.8	245.2
70°	134.0	171.2	208.4	228.8	243.7	243.7	228.8	215.8	208.4	200.9	208.4
72.5°	117.2	145.5	173.8	193.1	209.5	209.5	193.1	179.4	173.4	167.4	173.4
75°	87.9	104.7	121.4	139.5	158.1	160.0	145.1	133.0	129.3	125.6	129.3
77.5°	63.6	71.4	79.3	93.5	109.9	111.7	99.1	89.2	87.7	86.2	87.7
80°	50.2	52.1	54.0	65.6	80.5	82.3	71.2	62.8	62.8	62.8	62.8
82.5°	33.5	35.3	37.2	45.5	55.9	57.0	48.8	42.3	40.8	39.3	40.8
85°	16.7	16.7	16.7	19.5	23.3	23.3	19.5	16.7	16.7	16.7	16.7
87.5°	4.5	6.1	8.0	10.7	13.3	13.7	12.2	11.5	11.9	11.9	11.9
90°	5.8	13.5	23.2	31.0	36.8	38.7	38.7	40.6	42.6	42.6	42.6
92.5°	21.3	33.7	34.0	34.0	41.4	44.9	48.0	48.4	50.3	50.3	50.3
95°	60.0	65.8	98.7	96.7	65.8	52.2	44.5	44.5	44.5	44.5	44.5
97.5°	114.5	123.0	128.5	172.2	181.9	175.7	143.2	120.3	107.6	101.8	107.6
100°	162.5	166.4	178.0	179.9	228.3	274.7	251.5	222.5	212.8	207.0	212.8
102.5°	210.5	212.8	230.6	238.7	250.0	276.3	356.7	347.8	341.3	340.1	341.3
105°	282.5	284.4	317.3	332.8	340.5	340.5	338.6	377.3	439.2	452.7	439.2
107.5°	359.5	368.4	407.0	448.4	457.3	459.7	449.6	443.8	441.5	443.0	441.5
110°	412.1	425.6	472.1	524.3	537.8	541.7	537.8	532.0	528.2	528.2	528.2



TEST NUMBER: P1435868

CATALOG NUMBER: SQ2W-FA-K-150U-075D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	463.2	482.9	535.5	595.5	618.3	629.9	621.4	617.2	613.3	616.4	613.3
115°	541.7	570.7	640.4	702.3	748.7	754.5	752.6	752.6	750.6	750.6	750.6
117.5°	614.4	660.9	739.0	811.0	864.8	880.3	888.0	885.7	883.4	887.2	883.4
120°	665.5	719.7	808.7	889.9	942.2	965.4	973.1	969.3	973.1	969.3	973.1
122.5°	719.7	786.2	873.7	958.0	1019.6	1045.9	1055.2	1055.9	1056.7	1054.4	1056.7
125°	800.9	882.2	984.7	1071.8	1135.6	1166.6	1174.3	1176.3	1180.1	1189.8	1180.1
127.5°	883.0	975.1	1087.7	1171.6	1237.0	1274.5	1286.5	1290.8	1298.9	1303.2	1298.9
130°	940.2	1044.7	1158.8	1238.2	1302.0	1342.6	1363.9	1369.7	1379.4	1377.5	1379.4
132.5°	1000.6	1109.7	1225.4	1307.8	1367.0	1410.7	1428.9	1445.6	1449.0	1451.8	1449.0
135°	1089.2	1207.2	1323.3	1404.5	1460.7	1503.2	1526.4	1541.9	1551.6	1557.4	1551.6
137.5°	1182.5	1307.0	1418.5	1490.8	1547.3	1584.1	1610.4	1626.6	1636.7	1641.3	1636.7
140°	1245.9	1365.9	1474.2	1549.6	1599.9	1636.7	1659.9	1679.3	1690.9	1690.9	1690.9
142.5°	1306.3	1424.7	1529.9	1605.4	1649.5	1683.1	1707.9	1722.6	1735.8	1735.8	1735.8
145°	1391.0	1509.0	1605.8	1681.2	1718.0	1748.9	1776.0	1787.6	1795.3	1795.3	1795.3
147.5°	1479.6	1584.1	1672.3	1744.7	1775.6	1812.0	1833.3	1842.6	1852.2	1848.0	1852.2
150°	1532.2	1629.0	1714.1	1781.8	1812.8	1847.6	1868.9	1876.6	1886.3	1880.5	1886.3
152.5°	1583.3	1675.4	1752.8	1815.9	1842.2	1877.0	1901.4	1909.1	1915.7	1911.4	1915.7
155°	1652.2	1733.4	1805.0	1863.1	1886.3	1919.2	1942.4	1952.1	1959.8	1950.1	1959.8
157.5°	1713.7	1783.7	1846.0	1899.4	1924.2	1952.4	1974.1	1986.1	1993.8	1989.6	1993.8
160°	1750.8	1814.7	1870.8	1921.1	1944.3	1969.5	1992.7	2006.2	2014.0	2008.2	2014.0
162.5°	1781.8	1839.5	1892.5	1938.1	1958.2	1980.3	2008.2	2020.2	2027.9	2020.5	2027.9
165°	1826.3	1872.7	1919.2	1957.9	1975.3	1992.7	2021.7	2035.2	2041.0	2033.3	2041.0
167.5°	1860.0	1895.6	1933.1	1966.4	1979.1	1996.2	2025.2	2036.4	2043.8	2034.1	2043.8
170°	1878.5	1909.5	1942.4	1969.5	1979.1	1994.6	2023.6	2033.3	2039.1	2029.4	2039.1
172.5°	1894.0	1917.2	1943.9	1967.9	1972.9	1985.3	2012.8	2022.5	2026.7	2018.6	2026.7
175°	1909.5	1923.0	1942.4	1957.9	1955.9	1963.7	1986.9	1994.6	2002.4	1990.7	2002.4
177.5°	1916.8	1923.0	1929.2	1938.5	1932.3	1932.3	1949.3	1954.0	1955.5	1949.3	1955.5
180°	1915.3	1915.3	1915.3	1915.3	1915.3	1915.3	1915.3	1915.3	1915.3	1915.3	1915.3



TEST NUMBER: P1435868

CATALOG NUMBER: SQ2W-FA-K-150U-075D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0
2.5°	1090.1	1090.1	1090.1	1090.1	1090.1	1088.2	1080.8	1073.3	1073.3	1073.3	1067.7
5°	1106.1	1103.7	1101.9	1099.1	1095.4	1089.3	1076.3	1063.3	1057.7	1052.1	1028.4
7.5°	1113.1	1110.2	1106.8	1102.3	1096.8	1088.2	1070.7	1053.2	1028.3	1003.4	950.5
10°	1109.8	1107.9	1106.1	1102.3	1096.8	1087.5	1067.0	1046.5	996.3	946.1	895.8
12.5°	1106.4	1104.6	1102.7	1098.3	1091.2	1080.4	1058.4	1036.5	965.4	894.3	848.9
15°	1097.2	1094.0	1090.3	1085.6	1080.0	1068.4	1038.6	1008.9	928.9	848.9	810.7
17.5°	1080.4	1077.5	1074.2	1068.8	1061.3	1046.7	1010.6	974.5	890.8	807.1	782.5
20°	1063.3	1061.9	1060.0	1055.4	1047.9	1032.6	993.5	954.4	870.7	787.0	775.8
22.5°	1043.6	1042.9	1042.5	1038.6	1031.2	1014.7	971.2	927.6	845.4	763.2	763.6
25°	1009.8	1010.3	1012.1	1007.5	996.3	975.4	925.1	874.9	802.3	729.8	742.3
27.5°	973.7	972.3	970.4	965.8	958.3	936.9	873.7	810.4	753.1	695.8	716.7
30°	950.3	948.9	947.0	942.3	934.9	911.6	840.9	770.2	721.9	673.5	697.7
32.5°	923.5	923.2	922.8	919.6	913.7	888.2	804.1	720.0	685.0	650.1	675.4
35°	882.8	883.3	883.3	881.4	877.7	849.3	747.0	644.7	629.8	614.9	644.7
37.5°	836.8	839.2	841.8	840.3	834.7	801.5	685.4	569.3	574.2	579.0	615.1
40°	803.3	807.9	813.5	813.5	807.9	772.1	645.6	519.1	535.8	552.6	591.6
42.5°	769.8	775.6	782.6	783.4	777.8	742.3	617.3	492.3	510.5	528.8	569.3
45°	719.1	725.6	733.0	734.0	728.4	696.3	584.7	473.0	484.2	495.4	534.4
47.5°	659.6	668.9	680.1	681.0	671.7	640.2	542.0	443.7	451.9	460.1	500.1
50°	622.8	632.1	643.3	644.2	634.9	603.7	507.0	410.2	421.4	432.6	474.4
52.5°	579.3	589.7	602.3	604.8	596.9	568.4	477.6	386.8	393.5	400.2	445.4
55°	517.7	528.8	541.9	545.6	540.0	516.8	440.5	364.2	358.6	353.0	399.1
57.5°	453.0	465.8	480.7	485.1	479.2	456.6	384.0	311.4	306.6	301.8	351.6
60°	412.1	425.6	440.5	444.2	436.8	414.9	349.8	284.7	275.4	266.1	318.1
62.5°	371.9	385.4	400.3	402.5	392.1	369.9	312.2	254.5	248.2	241.9	292.5
65°	311.6	325.1	340.0	340.9	327.9	305.6	255.4	205.1	208.8	212.6	258.1
67.5°	252.7	266.8	283.2	283.9	269.0	247.1	203.9	160.7	173.0	185.3	226.3
70°	215.8	228.8	243.7	243.7	228.8	208.4	171.2	134.0	150.7	167.4	205.1
72.5°	179.4	193.1	209.5	209.5	193.1	173.8	145.5	117.2	134.0	150.7	181.7
75°	133.0	145.1	160.0	158.1	139.5	121.4	104.7	87.9	104.7	121.4	145.1
77.5°	89.2	99.1	111.7	109.9	93.5	79.3	71.4	63.6	77.4	91.2	107.7
80°	62.8	71.2	82.3	80.5	65.6	54.0	52.1	50.2	59.5	68.8	80.9
82.5°	42.3	48.8	57.0	55.9	45.5	37.2	35.3	33.5	41.3	49.1	57.5
85°	16.7	19.5	23.3	23.3	19.5	16.7	16.7	16.7	20.5	24.2	27.9
87.5°	11.5	12.2	13.7	13.3	10.7	8.0	6.1	4.5	7.5	10.6	13.7
90°	40.6	38.7	38.7	36.8	31.0	23.2	13.5	5.8	13.5	21.3	34.8
92.5°	48.4	48.0	44.9	41.4	34.0	34.0	33.7	21.3	36.8	52.2	75.1
95°	44.5	44.5	52.2	65.8	96.7	98.7	65.8	60.0	85.1	119.9	150.9
97.5°	120.3	143.2	175.7	181.9	172.2	128.5	123.0	114.5	155.9	190.4	240.3
100°	222.5	251.5	274.7	228.3	179.9	178.0	166.4	162.5	207.0	239.9	288.3
102.5°	347.8	356.7	276.3	250.0	238.7	230.6	212.8	210.5	255.0	300.3	340.9
105°	377.3	338.6	340.5	340.5	332.8	317.3	284.4	282.5	332.8	385.0	435.3
107.5°	443.8	449.6	459.7	457.3	448.4	407.0	368.4	359.5	404.7	467.4	522.7
110°	532.0	537.8	541.7	537.8	524.3	472.1	425.6	412.1	452.7	518.5	578.5



TEST NUMBER: P1435868

CATALOG NUMBER: SQ2W-FA-K-150U-075D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	617.2	621.4	629.9	618.3	595.5	535.5	482.9	463.2	503.8	571.1	632.6
115°	752.6	752.6	754.5	748.7	702.3	640.4	570.7	541.7	576.5	638.4	706.1
117.5°	885.7	888.0	880.3	864.8	811.0	739.0	660.9	614.4	641.9	707.3	777.0
120°	969.3	973.1	965.4	942.2	889.9	808.7	719.7	665.5	686.8	750.6	820.3
122.5°	1055.9	1055.2	1045.9	1019.6	958.0	873.7	786.2	719.7	728.6	787.8	855.9
125°	1176.3	1174.3	1166.6	1135.6	1071.8	984.7	882.2	800.9	789.3	839.6	909.3
127.5°	1290.8	1286.5	1274.5	1237.0	1171.6	1087.7	975.1	883.0	857.0	888.8	952.6
130°	1369.7	1363.9	1342.6	1302.0	1238.2	1158.8	1044.7	940.2	903.5	922.8	978.9
132.5°	1445.6	1428.9	1410.7	1367.0	1307.8	1225.4	1109.7	1000.6	949.9	958.4	1002.1
135°	1541.9	1526.4	1503.2	1460.7	1404.5	1323.3	1207.2	1089.2	1019.6	1011.8	1037.0
137.5°	1626.6	1610.4	1584.1	1547.3	1490.8	1418.5	1307.0	1182.5	1094.6	1068.7	1078.4
140°	1679.3	1659.9	1636.7	1599.9	1549.6	1474.2	1365.9	1245.9	1147.2	1110.5	1104.7
142.5°	1722.6	1707.9	1683.1	1649.5	1605.4	1529.9	1424.7	1306.3	1201.4	1153.8	1140.3
145°	1787.6	1776.0	1748.9	1718.0	1681.2	1605.8	1509.0	1391.0	1286.5	1224.6	1195.6
147.5°	1842.6	1833.3	1812.0	1775.6	1744.7	1672.3	1584.1	1479.6	1372.4	1295.8	1258.3
150°	1876.6	1868.9	1847.6	1812.8	1781.8	1714.1	1629.0	1532.2	1429.7	1348.4	1300.1
152.5°	1909.1	1901.4	1877.0	1842.2	1815.9	1752.8	1675.4	1583.3	1479.2	1398.0	1348.1
155°	1952.1	1942.4	1919.2	1886.3	1863.1	1805.0	1733.4	1652.2	1563.2	1478.1	1422.0
157.5°	1986.1	1974.1	1952.4	1924.2	1899.4	1846.0	1783.7	1713.7	1635.9	1554.7	1497.4
160°	2006.2	1992.7	1969.5	1944.3	1921.1	1870.8	1814.7	1750.8	1679.3	1605.8	1543.8
162.5°	2020.2	2008.2	1980.3	1958.2	1938.1	1892.5	1839.5	1781.8	1718.0	1653.7	1596.5
165°	2035.2	2021.7	1992.7	1975.3	1957.9	1919.2	1872.7	1826.3	1772.1	1719.9	1673.5
167.5°	2036.4	2025.2	1996.2	1979.1	1966.4	1933.1	1895.6	1860.0	1817.8	1776.8	1738.1
170°	2033.3	2023.6	1994.6	1979.1	1969.5	1942.4	1909.5	1878.5	1845.6	1810.8	1779.9
172.5°	2022.5	2012.8	1985.3	1972.9	1967.9	1943.9	1917.2	1894.0	1865.8	1840.2	1815.5
175°	1994.6	1986.9	1963.7	1955.9	1957.9	1942.4	1923.0	1909.5	1892.1	1876.6	1863.1
177.5°	1954.0	1949.3	1932.3	1932.3	1938.5	1929.2	1923.0	1916.8	1909.1	1904.5	1899.8
180°	1915.3	1915.3	1915.3	1915.3	1915.3	1915.3	1915.3	1915.3	1915.3	1915.3	1915.3



TEST NUMBER: P1435868

CATALOG NUMBER: SQ2W-FA-K-150U-075D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0	1080.0
2.5°	1060.3	1054.3	1049.9	1046.2	1044.7	1043.2	1044.7	1046.2	1049.9	1054.3	1060.3
5°	998.6	967.0	933.5	906.1	896.8	887.5	896.8	906.1	933.5	967.0	998.6
7.5°	888.4	850.3	836.1	824.8	821.8	818.8	821.8	824.8	836.1	850.3	888.4
10°	845.6	814.9	803.7	795.4	795.4	795.4	795.4	795.4	803.7	814.9	845.6
12.5°	812.1	793.3	792.6	793.9	801.3	808.8	801.3	793.9	792.6	793.3	812.1
15°	786.5	789.3	819.1	843.7	853.0	862.3	853.0	843.7	819.1	789.3	786.5
17.5°	777.7	793.7	830.5	860.0	867.5	874.9	867.5	860.0	830.5	793.7	777.7
20°	788.9	809.3	837.2	860.0	867.5	874.9	867.5	860.0	837.2	809.3	788.9
22.5°	791.5	816.4	838.3	856.7	864.1	871.6	864.1	856.7	838.3	816.4	791.5
25°	783.3	813.0	831.6	846.5	850.3	854.0	850.3	846.5	831.6	813.0	783.3
27.5°	763.6	796.3	814.9	829.5	832.1	834.7	832.1	829.5	814.9	796.3	763.6
30°	746.1	779.6	798.2	813.5	819.1	824.7	819.1	813.5	798.2	779.6	746.1
32.5°	720.8	755.0	778.1	795.6	796.8	797.9	796.8	795.6	778.1	755.0	720.8
35°	689.3	724.7	750.7	769.8	767.9	766.1	767.9	769.8	750.7	724.7	689.3
37.5°	661.6	696.2	718.9	736.5	738.7	740.9	738.7	736.5	718.9	696.2	661.6
40°	638.2	673.5	697.7	716.8	720.5	724.2	720.5	716.8	697.7	673.5	638.2
42.5°	617.3	653.4	677.6	696.7	700.4	704.1	700.4	696.7	677.6	653.4	617.3
45°	582.8	620.0	646.1	666.1	667.9	669.8	667.9	666.1	646.1	620.0	582.8
47.5°	550.7	588.1	612.3	630.9	632.8	634.6	632.8	630.9	612.3	588.1	550.7
50°	526.5	564.7	588.8	607.5	609.3	611.2	609.3	607.5	588.8	564.7	526.5
52.5°	503.5	543.1	564.3	580.7	582.5	584.4	582.5	580.7	564.3	543.1	503.5
55°	462.3	504.2	524.7	540.0	540.0	540.0	540.0	540.0	524.7	504.2	462.3
57.5°	419.7	462.7	480.6	494.5	496.8	499.0	496.8	494.5	480.6	462.7	419.7
60°	390.7	434.4	449.3	461.4	465.1	468.8	465.1	461.4	449.3	434.4	390.7
62.5°	362.1	404.3	419.2	430.9	433.1	435.4	433.1	430.9	419.2	404.3	362.1
65°	317.7	354.9	369.8	381.4	383.3	385.1	383.3	381.4	369.8	354.9	317.7
67.5°	276.9	307.4	317.9	326.1	327.5	329.0	327.5	326.1	317.9	307.4	276.9
70°	249.8	275.8	283.3	288.8	288.8	288.8	288.8	288.8	283.3	275.8	249.8
72.5°	217.4	239.0	246.4	252.4	253.9	255.4	253.9	252.4	246.4	239.0	217.4
75°	171.2	187.0	192.6	197.2	199.1	200.9	199.1	197.2	192.6	187.0	171.2
77.5°	125.2	135.6	139.0	142.0	143.8	145.7	143.8	142.0	139.0	135.6	125.2
80°	94.0	101.4	103.3	105.1	107.0	108.8	107.0	105.1	103.3	101.4	94.0
82.5°	66.0	71.3	73.1	74.6	75.0	75.4	75.0	74.6	73.1	71.3	66.0
85°	31.6	33.5	33.5	33.5	33.5	33.5	33.5	33.5	33.5	33.5	31.6
87.5°	15.6	18.3	21.0	22.6	24.1	23.3	24.1	22.6	21.0	18.3	15.6
90°	44.5	58.0	71.6	79.3	87.1	83.2	87.1	79.3	71.6	58.0	44.5
92.5°	89.4	112.2	128.8	142.8	149.0	148.2	149.0	142.8	128.8	112.2	89.4
95°	179.9	207.0	234.1	253.4	265.0	261.2	265.0	253.4	234.1	207.0	179.9
97.5°	277.4	313.8	344.0	362.2	373.8	381.5	373.8	362.2	344.0	313.8	277.4
100°	342.4	377.3	412.1	433.4	452.7	460.4	452.7	433.4	412.1	377.3	342.4
102.5°	395.1	440.7	478.6	501.5	517.7	525.4	517.7	501.5	478.6	440.7	395.1
105°	481.7	530.1	570.7	599.7	617.2	623.0	617.2	599.7	570.7	530.1	481.7
107.5°	568.4	618.3	655.8	688.0	709.2	721.6	709.2	688.0	655.8	618.3	568.4
110°	636.5	677.1	717.8	746.8	768.1	775.8	768.1	746.8	717.8	677.1	636.5



TEST NUMBER: P1435868

CATALOG NUMBER: SQ2W-FA-K-150U-075D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	693.8	739.0	779.7	808.7	833.1	843.9	833.1	808.7	779.7	739.0	693.8
115°	773.9	833.8	870.6	897.7	915.1	924.8	915.1	897.7	870.6	833.8	773.9
117.5°	840.4	903.1	943.3	964.2	972.4	979.3	972.4	964.2	943.3	903.1	840.4
120°	882.2	940.2	986.7	1013.8	1023.4	1027.3	1023.4	1013.8	986.7	940.2	882.2
122.5°	920.9	975.8	1020.7	1054.0	1069.9	1073.7	1069.9	1054.0	1020.7	975.8	920.9
125°	975.1	1027.3	1073.7	1106.6	1124.0	1133.7	1124.0	1106.6	1073.7	1027.3	975.1
127.5°	1022.3	1078.8	1121.3	1151.1	1168.1	1175.9	1168.1	1151.1	1121.3	1078.8	1022.3
130°	1048.6	1106.6	1149.2	1182.1	1197.5	1205.3	1197.5	1182.1	1149.2	1106.6	1048.6
132.5°	1068.7	1129.8	1173.9	1203.7	1220.8	1228.5	1220.8	1203.7	1173.9	1129.8	1068.7
135°	1093.1	1156.9	1203.3	1232.4	1247.8	1255.6	1247.8	1232.4	1203.3	1156.9	1093.1
137.5°	1114.4	1172.4	1220.8	1251.3	1265.3	1270.3	1265.3	1251.3	1220.8	1172.4	1114.4
140°	1129.8	1180.1	1228.5	1257.5	1273.0	1274.9	1273.0	1257.5	1228.5	1180.1	1129.8
142.5°	1150.0	1189.4	1231.6	1260.6	1276.1	1279.6	1276.1	1260.6	1231.6	1189.4	1150.0
145°	1185.9	1209.2	1238.2	1265.3	1278.8	1282.7	1278.8	1265.3	1238.2	1209.2	1185.9
147.5°	1231.2	1238.6	1253.6	1271.4	1284.6	1287.3	1284.6	1271.4	1253.6	1238.6	1231.2
150°	1265.3	1263.3	1269.1	1280.7	1292.3	1290.4	1292.3	1280.7	1269.1	1263.3	1265.3
152.5°	1303.9	1292.7	1292.3	1297.8	1303.2	1302.8	1303.2	1297.8	1292.3	1292.7	1303.9
155°	1369.7	1348.4	1336.8	1333.0	1333.0	1331.0	1333.0	1333.0	1336.8	1348.4	1369.7
157.5°	1442.1	1412.3	1394.9	1385.6	1382.9	1378.6	1382.9	1385.6	1394.9	1412.3	1442.1
160°	1491.6	1458.7	1441.3	1425.8	1420.0	1414.2	1420.0	1425.8	1441.3	1458.7	1491.6
162.5°	1538.0	1506.7	1487.7	1473.8	1468.0	1459.1	1468.0	1473.8	1487.7	1506.7	1538.0
165°	1613.5	1580.6	1559.3	1547.7	1540.0	1532.2	1540.0	1547.7	1559.3	1580.6	1613.5
167.5°	1688.9	1653.0	1639.0	1625.9	1618.5	1604.6	1618.5	1625.9	1639.0	1653.0	1688.9
170°	1735.4	1702.5	1694.7	1683.1	1669.6	1654.1	1669.6	1683.1	1694.7	1702.5	1735.4
172.5°	1775.6	1753.6	1745.8	1734.2	1730.0	1717.6	1730.0	1734.2	1745.8	1753.6	1775.6
175°	1834.0	1816.6	1816.6	1814.7	1808.9	1797.3	1808.9	1814.7	1816.6	1816.6	1834.0
177.5°	1882.8	1873.5	1879.7	1879.7	1878.1	1867.3	1878.1	1879.7	1879.7	1873.5	1882.8
180°	1915.3	1915.3	1915.3	1915.3	1915.3	1915.3	1915.3	1915.3	1915.3	1915.3	1915.3



TEST NUMBER: P1435868

CATALOG NUMBER: SQ2W-FA-K-150U-075D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	1080.0	1080.0	1080.0	1080.0
2.5°	1067.7	1073.3	1073.3	1073.3
5°	1028.4	1052.1	1057.7	1063.3
7.5°	950.5	1003.4	1028.3	1053.2
10°	895.8	946.1	996.3	1046.5
12.5°	848.9	894.3	965.4	1036.5
15°	810.7	848.9	928.9	1008.9
17.5°	782.5	807.1	890.8	974.5
20°	775.8	787.0	870.7	954.4
22.5°	763.6	763.2	845.4	927.6
25°	742.3	729.8	802.3	874.9
27.5°	716.7	695.8	753.1	810.4
30°	697.7	673.5	721.9	770.2
32.5°	675.4	650.1	685.0	720.0
35°	644.7	614.9	629.8	644.7
37.5°	615.1	579.0	574.2	569.3
40°	591.6	552.6	535.8	519.1
42.5°	569.3	528.8	510.5	492.3
45°	534.4	495.4	484.2	473.0
47.5°	500.1	460.1	451.9	443.7
50°	474.4	432.6	421.4	410.2
52.5°	445.4	400.2	393.5	386.8
55°	399.1	353.0	358.6	364.2
57.5°	351.6	301.8	306.6	311.4
60°	318.1	266.1	275.4	284.7
62.5°	292.5	241.9	248.2	254.5
65°	258.1	212.6	208.8	205.1
67.5°	226.3	185.3	173.0	160.7
70°	205.1	167.4	150.7	134.0
72.5°	181.7	150.7	134.0	117.2
75°	145.1	121.4	104.7	87.9
77.5°	107.7	91.2	77.4	63.6
80°	80.9	68.8	59.5	50.2
82.5°	57.5	49.1	41.3	33.5
85°	27.9	24.2	20.5	16.7
87.5°	13.7	10.6	7.5	4.5
90°	34.8	21.3	13.5	5.8
92.5°	75.1	52.2	36.8	21.3
95°	150.9	119.9	85.1	60.0
97.5°	240.3	190.4	155.9	114.5
100°	288.3	239.9	207.0	162.5
102.5°	340.9	300.3	255.0	210.5
105°	435.3	385.0	332.8	282.5
107.5°	522.7	467.4	404.7	359.5
110°	578.5	518.5	452.7	412.1



TEST NUMBER: P1435868

CATALOG NUMBER: SQ2W-FA-K-150U-075D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	632.6	571.1	503.8	463.2
115°	706.1	638.4	576.5	541.7
117.5°	777.0	707.3	641.9	614.4
120°	820.3	750.6	686.8	665.5
122.5°	855.9	787.8	728.6	719.7
125°	909.3	839.6	789.3	800.9
127.5°	952.6	888.8	857.0	883.0
130°	978.9	922.8	903.5	940.2
132.5°	1002.1	958.4	949.9	1000.6
135°	1037.0	1011.8	1019.6	1089.2
137.5°	1078.4	1068.7	1094.6	1182.5
140°	1104.7	1110.5	1147.2	1245.9
142.5°	1140.3	1153.8	1201.4	1306.3
145°	1195.6	1224.6	1286.5	1391.0
147.5°	1258.3	1295.8	1372.4	1479.6
150°	1300.1	1348.4	1429.7	1532.2
152.5°	1348.1	1398.0	1479.2	1583.3
155°	1422.0	1478.1	1563.2	1652.2
157.5°	1497.4	1554.7	1635.9	1713.7
160°	1543.8	1605.8	1679.3	1750.8
162.5°	1596.5	1653.7	1718.0	1781.8
165°	1673.5	1719.9	1772.1	1826.3
167.5°	1738.1	1776.8	1817.8	1860.0
170°	1779.9	1810.8	1845.6	1878.5
172.5°	1815.5	1840.2	1865.8	1894.0
175°	1863.1	1876.6	1892.1	1909.5
177.5°	1899.8	1904.5	1909.1	1916.8
180°	1915.3	1915.3	1915.3	1915.3



TEST NUMBER: P1435868
 CATALOG NUMBER: SQ2W-FA-K-150U-075D-L930-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.42	15.14	15.51	16.23	17.74	15.62	16.34	16.71	17.43	18.93
	3H	15.50	16.14	16.60	17.24	18.76	16.85	17.50	17.95	18.60	20.12
	4H	15.84	16.46	16.96	17.56	19.08	17.23	17.85	18.35	18.95	20.47
	6H	16.00	16.56	17.12	17.67	19.20	17.39	17.95	18.51	19.06	20.59
	8H	16.03	16.56	17.15	17.68	19.21	17.41	17.94	18.53	19.06	20.59
	12H	16.02	16.53	17.15	17.64	19.19	17.39	17.90	18.52	19.01	20.56
4H	2H	15.27	15.88	16.39	16.98	18.51	16.18	16.80	17.30	17.90	19.42
	3H	16.64	17.16	17.77	18.28	19.82	17.63	18.15	18.76	19.27	20.81
	4H	17.09	17.56	18.22	18.68	20.24	18.10	18.57	19.23	19.69	21.25
	6H	17.31	17.72	18.45	18.86	20.41	18.32	18.72	19.46	19.86	21.41
	8H	17.37	17.74	18.51	18.88	20.44	18.36	18.74	19.50	19.87	21.44
	12H	17.36	17.70	18.52	18.85	20.42	18.34	18.68	19.50	19.83	21.40
8H	4H	17.47	17.84	18.60	18.97	20.54	18.29	18.66	19.42	19.80	21.36
	6H	17.81	18.12	18.97	19.29	20.86	18.60	18.91	19.75	20.08	21.64
	8H	17.93	18.20	19.09	19.35	20.93	18.69	18.96	19.85	20.11	21.70
	12H	17.96	18.20	19.13	19.35	20.96	18.70	18.94	19.87	20.09	21.70
12H	4H	17.46	17.80	18.62	18.95	20.52	18.25	18.59	19.40	19.73	21.30
	6H	17.88	18.15	19.04	19.30	20.89	18.61	18.88	19.78	20.04	21.62
	8H	18.02	18.26	19.19	19.41	21.02	18.72	18.96	19.89	20.11	21.73