

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1427894

Luminaire Tested: SQ2W-PH1-K-075U-050D-L930-UNV-STD-W-WM-4

Issue Date: 3/10/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1427894  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-10)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/10/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ2W-PH1-K-075U-050D-L930-UNV-STD-W-WM-4  
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE  
DOWNLIGHT - PERCEIVE HEX LENS  
UPLIGHT - ASYMMETRIC ROLL LENS  
DOWNLIGHT 500 LUMENS PER FOOT  
UPLIGHT 750 LUMENS PER FOOT  
Light Source: 3000K CCT, 90 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5016.3 lumens  
Efficiency: N/A  
Efficacy: 121.2 lumens/watt  
Spacing Criteria (0/90/45): 1.19 / 1.02 / 1.23  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse

Input Watts (W): 41.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1427894

CATALOG NUMBER: SQ2W-PH1-K-075U-050D-L930-UNV-STD-W-WM-4

### Luminous Intensity Polar Plot

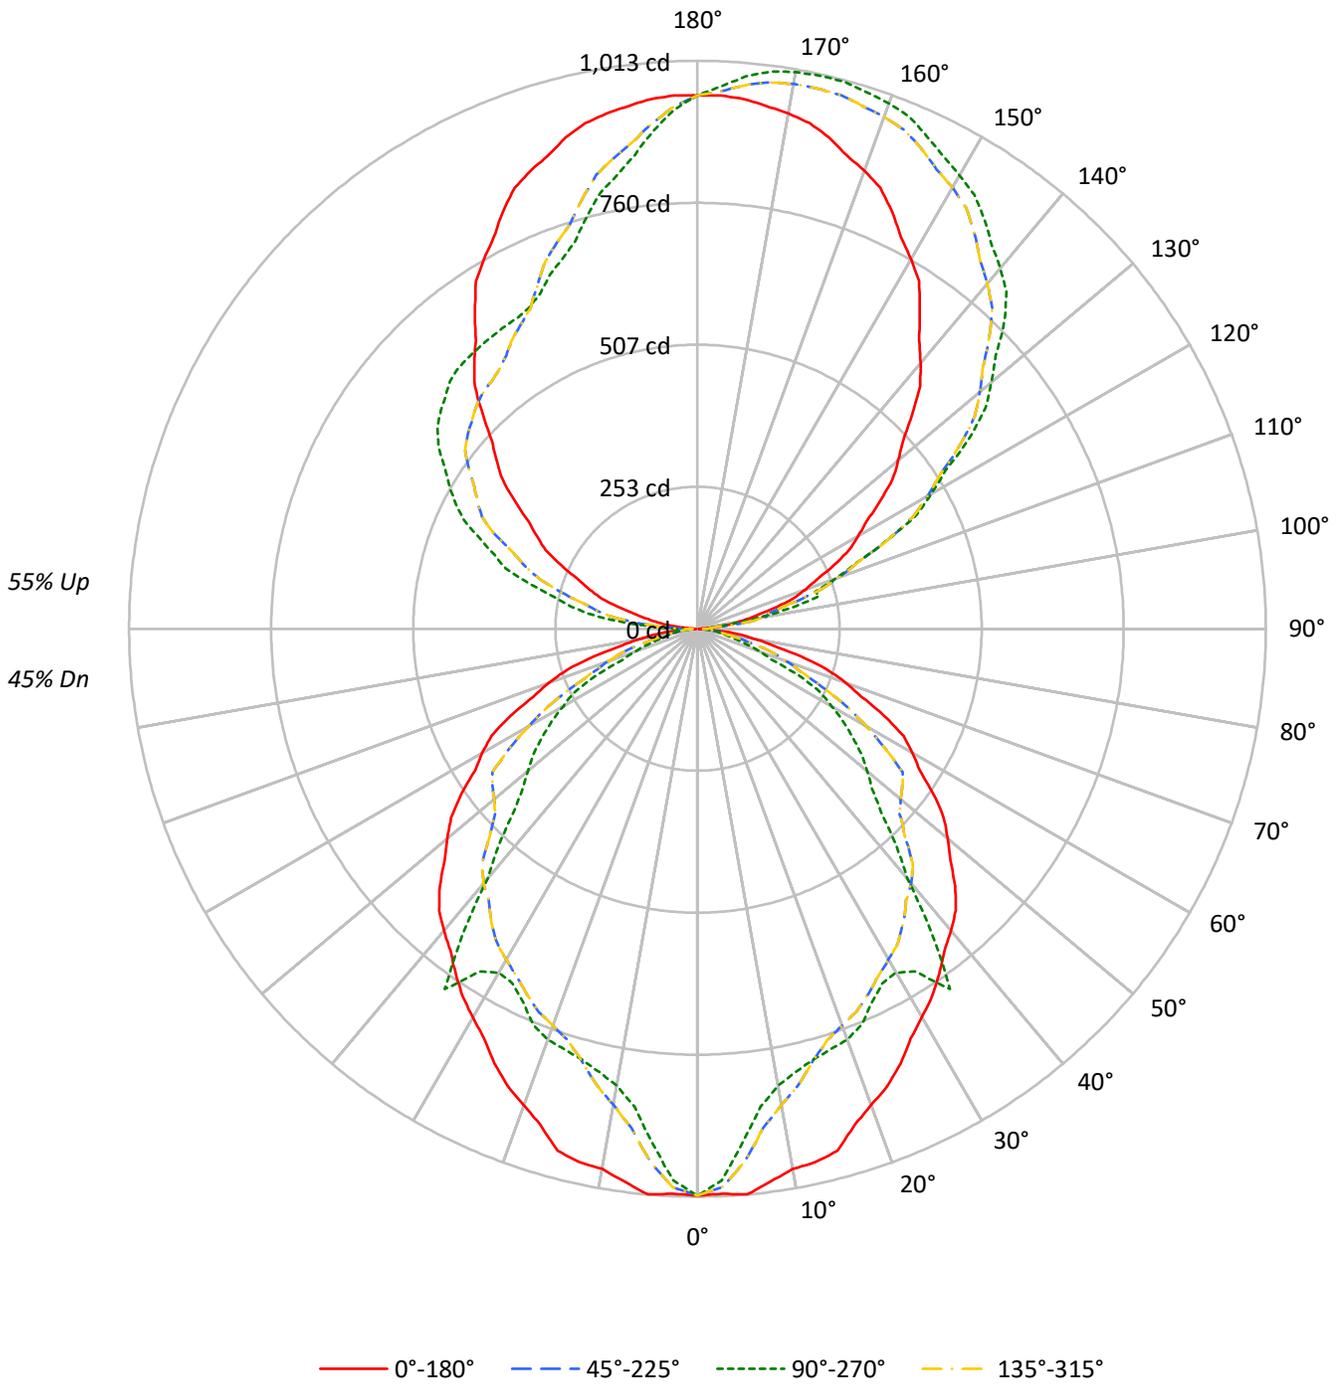



TEST NUMBER: P1427894

CATALOG NUMBER: SQ2W-PH1-K-075U-050D-L930-UNV-STD-W-WM-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	45
1	97	93	89	85	89	85	82	79	71	68	66	58	56	55	46	45	44	38
2	88	81	75	70	81	74	69	65	62	58	55	51	48	46	40	38	37	32
3	81	71	64	58	73	66	59	54	55	50	46	45	42	39	36	33	32	27
4	74	63	55	49	67	58	51	46	49	44	40	40	36	33	32	29	27	23
5	68	56	48	42	62	52	45	40	44	38	34	36	32	29	29	26	24	20
6	62	50	42	37	57	47	39	34	39	34	30	32	28	25	26	23	21	18
7	58	45	38	32	53	42	35	30	36	30	26	30	25	22	24	21	19	16
8	53	41	34	28	49	38	31	27	32	27	23	27	23	20	22	19	17	14
9	50	38	30	25	45	35	28	24	30	24	21	25	21	18	20	17	15	13
10	46	34	27	23	43	32	26	21	27	22	19	23	19	16	19	16	14	12

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	16322	16322	16322	16322
5°	16415	14917	16415	14917
10°	16037	13562	16037	13562
15°	16108	13295	16108	13295
20°	15534	13402	15534	13402
25°	15249	13090	15249	13090
30°	14918	13198	14918	13198
35°	14806	15468	14806	15468
40°	14819	12264	14819	12264
45°	14823	10563	14823	10563
50°	14616	9904	14616	9904
55°	14429	9503	14429	9503
60°	14286	8912	14286	8912
65°	14036	7752	14036	7752
70°	13256	5537	13256	5537
75°	11821	4198	11821	4198
80°	9660	3933	9660	3933
85°	6058	2668	6058	2668

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 14823 cd/sqm



TEST NUMBER: P1427894

CATALOG NUMBER: SQ2W-PH1-K-075U-050D-L930-UNV-STD-W-WM-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	89.0	1.8
10°-20°	234.0	4.7
20°-30°	343.0	6.8
30°-40°	415.3	8.3
40°-50°	408.4	8.1
50°-60°	355.3	7.1
60°-70°	247.1	4.9
70°-80°	117.2	2.3
80°-90°	29.8	0.6
90°-100°	75.7	1.5
100°-110°	220.8	4.4
110°-120°	360.3	7.2
120°-130°	457.2	9.1
130°-140°	489.2	9.8
140°-150°	456.8	9.1
150°-160°	375.9	7.5
160°-170°	252.1	5.0
170°-180°	89.5	1.8
0°-30°	665.9	13.3
0°-40°	1081.3	21.6
0°-60°	1845.0	36.8
0°-90°	2239.0	44.6
90°-120°	656.7	13.1
90°-150°	2059.9	41.1
90°-180°	2777.0	55.4
0°-180°	5016.3	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1011	1011	1011	1011	1011	
5°	1013	920	1013	920	1013	95
15°	964	795	964	795	964	269
25°	856	735	856	735	856	394
35°	751	785	751	785	751	471
45°	649	463	649	463	649	499
55°	513	338	513	338	513	458
65°	367	203	367	203	367	361
75°	190	67	190	67	190	201
85°	33	14	33	14	33	44
90°	3	21	3	41	3	3
95°	30	22	30	130	30	36
105°	140	225	140	309	140	149
115°	269	373	269	459	269	265
125°	398	591	398	563	398	356
135°	541	773	541	624	541	418
145°	691	892	691	637	691	432
155°	820	968	820	661	820	377
165°	907	1010	907	761	907	255
175°	948	989	948	893	948	90
180°	951	951	951	951	951	



TEST NUMBER: P1427894

CATALOG NUMBER: SQ2W-PH1-K-075U-050D-L930-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	1010.9	1010.9	1010.9	1010.9	1010.9	1010.9	1010.9	1010.9	1010.9	1010.9	1010.9
2.5°	1008.5	1013.3	1018.1	1011.4	1000.8	993.4	989.3	986.1	985.4	984.7	985.4
5°	1012.8	1012.4	1011.9	991.9	965.4	945.6	932.3	922.2	921.3	920.4	921.3
7.5°	994.3	981.1	967.8	941.0	909.6	886.6	872.0	860.8	860.2	859.5	860.2
10°	978.2	958.1	938.0	907.6	873.9	850.3	837.1	827.2	827.2	827.2	827.2
12.5°	974.3	942.6	910.9	877.6	843.8	822.0	812.2	805.4	807.4	809.5	807.4
15°	963.7	915.9	868.0	834.2	805.1	789.3	786.8	786.0	790.7	795.4	790.7
17.5°	928.7	877.2	825.6	795.9	773.5	765.1	770.5	776.0	781.5	786.9	781.5
20°	904.1	853.2	802.4	774.9	755.2	750.5	760.8	769.8	774.9	780.0	774.9
22.5°	883.3	831.8	780.2	755.9	740.7	738.7	750.0	759.2	761.9	764.6	761.9
25°	856.0	797.9	739.7	722.0	717.7	720.5	730.3	737.4	736.1	734.8	736.1
27.5°	823.3	762.6	701.9	690.5	695.6	701.1	707.1	711.7	712.5	713.3	712.5
30°	800.2	739.5	678.8	669.7	677.9	684.9	690.9	696.8	702.3	707.9	702.3
32.5°	777.9	715.2	652.4	645.9	658.1	671.3	685.5	699.3	712.1	724.8	712.1
35°	751.2	685.8	620.4	615.2	630.2	649.4	672.9	701.0	742.9	784.8	742.9
37.5°	723.1	653.0	582.9	580.5	600.8	621.1	641.3	659.9	673.2	686.5	673.2
40°	703.1	629.6	556.0	555.9	580.3	605.5	631.6	643.4	612.7	581.9	612.7
42.5°	681.5	608.0	534.5	532.3	554.0	581.7	615.7	628.1	576.2	524.2	576.2
45°	649.2	572.7	496.2	493.4	515.2	530.6	539.6	537.0	499.8	462.6	499.8
47.5°	611.1	538.2	465.3	464.7	488.2	489.9	469.8	451.1	436.6	422.0	436.6
50°	581.9	513.1	444.2	447.2	474.2	471.6	439.5	413.1	403.7	394.3	403.7
52.5°	553.4	488.0	422.6	430.6	463.0	457.8	415.2	381.6	375.3	368.9	375.3
55°	512.6	449.8	387.0	404.9	449.8	443.0	384.4	340.2	338.9	337.6	338.9
57.5°	469.4	409.9	350.5	363.0	399.4	392.2	341.4	303.9	306.1	308.4	306.1
60°	442.4	384.7	327.0	328.6	350.0	343.2	308.1	281.2	278.6	276.0	278.6
62.5°	414.0	359.0	304.0	296.0	303.7	295.7	271.9	253.5	250.9	248.3	250.9
65°	367.4	317.4	267.4	252.3	248.9	237.4	217.7	202.9	202.9	202.9	202.9
67.5°	316.2	272.6	229.0	212.2	204.2	192.8	177.8	164.0	153.8	143.5	153.8
70°	280.8	242.4	203.9	186.3	175.6	161.9	145.2	131.0	124.2	117.3	124.2
72.5°	243.1	210.1	177.1	159.1	146.0	132.7	119.1	106.9	99.0	91.2	99.0
75°	189.5	163.0	136.5	118.9	104.4	90.9	78.5	69.0	68.2	67.3	68.2
77.5°	137.0	117.6	98.3	84.1	71.6	62.3	56.0	51.4	51.5	51.6	51.5
80°	103.9	89.3	74.8	61.6	48.7	42.1	41.7	41.5	41.9	42.3	41.9
82.5°	73.1	62.3	51.6	43.1	35.4	31.8	32.4	32.9	33.0	33.1	33.0
85°	32.7	27.6	22.4	20.5	19.7	18.4	16.7	15.3	14.9	14.4	14.9
87.5°	7.5	7.9	8.5	8.5	8.0	7.7	7.7	7.9	8.1	8.1	8.1
90°	2.9	6.7	11.5	15.4	18.3	19.2	19.2	20.2	21.1	21.1	21.1
92.5°	10.6	16.7	16.9	16.9	20.6	22.3	23.8	24.0	25.0	25.0	25.0
95°	29.8	32.7	49.0	48.0	32.7	25.9	22.1	22.1	22.1	22.1	22.1
97.5°	56.9	61.1	63.8	85.5	90.3	87.2	71.1	59.8	53.4	50.5	53.4
100°	80.7	82.6	88.4	89.4	113.4	136.4	124.9	110.5	105.7	102.8	105.7
102.5°	104.5	105.7	114.5	118.6	124.1	137.2	177.2	172.8	169.5	168.9	169.5
105°	140.3	141.2	157.6	165.3	169.1	169.1	168.1	187.4	218.1	224.8	218.1
107.5°	178.5	182.9	202.2	222.7	227.1	228.3	223.3	220.4	219.3	220.0	219.3
110°	204.7	211.4	234.4	260.4	267.1	269.0	267.1	264.2	262.3	262.3	262.3



TEST NUMBER: P1427894

CATALOG NUMBER: SQ2W-PH1-K-075U-050D-L930-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	230.0	239.8	266.0	295.7	307.1	312.8	308.6	306.5	304.6	306.1	304.6
115°	269.0	283.4	318.0	348.8	371.8	374.7	373.8	373.8	372.8	372.8	372.8
117.5°	305.2	328.2	367.0	402.8	429.5	437.2	441.0	439.9	438.7	440.6	438.7
120°	330.5	357.4	401.6	442.0	467.9	479.4	483.3	481.4	483.3	481.4	483.3
122.5°	357.4	390.5	433.9	475.8	506.3	519.4	524.0	524.4	524.8	523.6	524.8
125°	397.8	438.1	489.1	532.3	564.0	579.4	583.2	584.2	586.1	590.9	586.1
127.5°	438.5	484.2	540.2	581.9	614.3	633.0	638.9	641.0	645.1	647.2	645.1
130°	467.0	518.8	575.5	614.9	646.6	666.8	677.4	680.3	685.1	684.1	685.1
132.5°	496.9	551.1	608.6	649.5	678.9	700.6	709.7	717.9	719.6	721.0	719.6
135°	540.9	599.5	657.2	697.5	725.4	746.5	758.1	765.8	770.6	773.4	770.6
137.5°	587.2	649.1	704.5	740.4	768.5	786.7	799.8	807.8	812.8	815.1	812.8
140°	618.8	678.3	732.1	769.6	794.6	812.8	824.4	834.0	839.7	839.7	839.7
142.5°	648.7	707.5	759.8	797.3	819.2	835.9	848.2	855.5	862.0	862.0	862.0
145°	690.8	749.4	797.5	834.9	853.2	868.6	882.0	887.8	891.6	891.6	891.6
147.5°	734.8	786.7	830.5	866.5	881.8	899.9	910.5	915.1	919.9	917.8	919.9
150°	761.0	809.0	851.3	884.9	900.3	917.6	928.1	932.0	936.8	933.9	936.8
152.5°	786.3	832.1	870.5	901.8	914.9	932.2	944.3	948.1	951.4	949.3	951.4
155°	820.5	860.9	896.4	925.3	936.8	953.1	964.6	969.5	973.3	968.5	973.3
157.5°	851.1	885.9	916.8	943.3	955.6	969.6	980.4	986.4	990.2	988.1	990.2
160°	869.5	901.2	929.1	954.1	965.6	978.1	989.6	996.4	1000.2	997.3	1000.2
162.5°	884.9	913.5	939.9	962.5	972.5	983.5	997.3	1003.3	1007.1	1003.5	1007.1
165°	907.0	930.1	953.1	972.3	981.0	989.6	1004.0	1010.8	1013.7	1009.8	1013.7
167.5°	923.7	941.4	960.0	976.6	982.9	991.4	1005.8	1011.3	1015.0	1010.2	1015.0
170°	932.9	948.3	964.6	978.1	982.9	990.6	1005.0	1009.8	1012.7	1007.9	1012.7
172.5°	940.6	952.2	965.4	977.3	979.8	986.0	999.6	1004.4	1006.5	1002.5	1006.5
175°	948.3	955.0	964.6	972.3	971.4	975.2	986.7	990.6	994.4	988.7	994.4
177.5°	952.0	955.0	958.1	962.7	959.7	959.7	968.1	970.4	971.2	968.1	971.2
180°	951.2	951.2	951.2	951.2	951.2	951.2	951.2	951.2	951.2	951.2	951.2



TEST NUMBER: P1427894

CATALOG NUMBER: SQ2W-PH1-K-075U-050D-L930-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	1010.9	1010.9	1010.9	1010.9	1010.9	1010.9	1010.9	1010.9	1010.9	1010.9	1010.9
2.5°	986.1	989.3	993.4	1000.8	1011.4	1018.1	1013.3	1008.5	1013.3	1018.1	1011.4
5°	922.2	932.3	945.6	965.4	991.9	1011.9	1012.4	1012.8	1012.4	1011.9	991.9
7.5°	860.8	872.0	886.6	909.6	941.0	967.8	981.1	994.3	981.1	967.8	941.0
10°	827.2	837.1	850.3	873.9	907.6	938.0	958.1	978.2	958.1	938.0	907.6
12.5°	805.4	812.2	822.0	843.8	877.6	910.9	942.6	974.3	942.6	910.9	877.6
15°	786.0	786.8	789.3	805.1	834.2	868.0	915.9	963.7	915.9	868.0	834.2
17.5°	776.0	770.5	765.1	773.5	795.9	825.6	877.2	928.7	877.2	825.6	795.9
20°	769.8	760.8	750.5	755.2	774.9	802.4	853.2	904.1	853.2	802.4	774.9
22.5°	759.2	750.0	738.7	740.7	755.9	780.2	831.8	883.3	831.8	780.2	755.9
25°	737.4	730.3	720.5	717.7	722.0	739.7	797.9	856.0	797.9	739.7	722.0
27.5°	711.7	707.1	701.1	695.6	690.5	701.9	762.6	823.3	762.6	701.9	690.5
30°	696.8	690.9	684.9	677.9	669.7	678.8	739.5	800.2	739.5	678.8	669.7
32.5°	699.3	685.5	671.3	658.1	645.9	652.4	715.2	777.9	715.2	652.4	645.9
35°	701.0	672.9	649.4	630.2	615.2	620.4	685.8	751.2	685.8	620.4	615.2
37.5°	659.9	641.3	621.1	600.8	580.5	582.9	653.0	723.1	653.0	582.9	580.5
40°	643.4	631.6	605.5	580.3	555.9	556.0	629.6	703.1	629.6	556.0	555.9
42.5°	628.1	615.7	581.7	554.0	532.3	534.5	608.0	681.5	608.0	534.5	532.3
45°	537.0	539.6	530.6	515.2	493.4	496.2	572.7	649.2	572.7	496.2	493.4
47.5°	451.1	469.8	489.9	488.2	464.7	465.3	538.2	611.1	538.2	465.3	464.7
50°	413.1	439.5	471.6	474.2	447.2	444.2	513.1	581.9	513.1	444.2	447.2
52.5°	381.6	415.2	457.8	463.0	430.6	422.6	488.0	553.4	488.0	422.6	430.6
55°	340.2	384.4	443.0	449.8	404.9	387.0	449.8	512.6	449.8	387.0	404.9
57.5°	303.9	341.4	392.2	399.4	363.0	350.5	409.9	469.4	409.9	350.5	363.0
60°	281.2	308.1	343.2	350.0	328.6	327.0	384.7	442.4	384.7	327.0	328.6
62.5°	253.5	271.9	295.7	303.7	296.0	304.0	359.0	414.0	359.0	304.0	296.0
65°	202.9	217.7	237.4	248.9	252.3	267.4	317.4	367.4	317.4	267.4	252.3
67.5°	164.0	177.8	192.8	204.2	212.2	229.0	272.6	316.2	272.6	229.0	212.2
70°	131.0	145.2	161.9	175.6	186.3	203.9	242.4	280.8	242.4	203.9	186.3
72.5°	106.9	119.1	132.7	146.0	159.1	177.1	210.1	243.1	210.1	177.1	159.1
75°	69.0	78.5	90.9	104.4	118.9	136.5	163.0	189.5	163.0	136.5	118.9
77.5°	51.4	56.0	62.3	71.6	84.1	98.3	117.6	137.0	117.6	98.3	84.1
80°	41.5	41.7	42.1	48.7	61.6	74.8	89.3	103.9	89.3	74.8	61.6
82.5°	32.9	32.4	31.8	35.4	43.1	51.6	62.3	73.1	62.3	51.6	43.1
85°	15.3	16.7	18.4	19.7	20.5	22.4	27.6	32.7	27.6	22.4	20.5
87.5°	7.9	7.7	7.7	8.0	8.5	8.5	7.9	7.5	7.9	8.4	8.8
90°	20.2	19.2	19.2	18.3	15.4	11.5	6.7	2.9	6.7	10.6	17.3
92.5°	24.0	23.8	22.3	20.6	16.9	16.9	16.7	10.6	18.3	25.9	37.3
95°	22.1	22.1	25.9	32.7	48.0	49.0	32.7	29.8	42.3	59.6	74.9
97.5°	59.8	71.1	87.2	90.3	85.5	63.8	61.1	56.9	77.4	94.5	119.3
100°	110.5	124.9	136.4	113.4	89.4	88.4	82.6	80.7	102.8	119.1	143.2
102.5°	172.8	177.2	137.2	124.1	118.6	114.5	105.7	104.5	126.6	149.1	169.3
105°	187.4	168.1	169.1	169.1	165.3	157.6	141.2	140.3	165.3	191.2	216.2
107.5°	220.4	223.3	228.3	227.1	222.7	202.2	182.9	178.5	201.0	232.1	259.6
110°	264.2	267.1	269.0	267.1	260.4	234.4	211.4	204.7	224.8	257.5	287.3



TEST NUMBER: P1427894

CATALOG NUMBER: SQ2W-PH1-K-075U-050D-L930-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	306.5	308.6	312.8	307.1	295.7	266.0	239.8	230.0	250.2	283.6	314.2
115°	373.8	373.8	374.7	371.8	348.8	318.0	283.4	269.0	286.3	317.1	350.7
117.5°	439.9	441.0	437.2	429.5	402.8	367.0	328.2	305.2	318.8	351.3	385.9
120°	481.4	483.3	479.4	467.9	442.0	401.6	357.4	330.5	341.1	372.8	407.4
122.5°	524.4	524.0	519.4	506.3	475.8	433.9	390.5	357.4	361.8	391.2	425.1
125°	584.2	583.2	579.4	564.0	532.3	489.1	438.1	397.8	392.0	417.0	451.6
127.5°	641.0	638.9	633.0	614.3	581.9	540.2	484.2	438.5	425.6	441.4	473.1
130°	680.3	677.4	666.8	646.6	614.9	575.5	518.8	467.0	448.7	458.3	486.2
132.5°	717.9	709.7	700.6	678.9	649.5	608.6	551.1	496.9	471.8	476.0	497.7
135°	765.8	758.1	746.5	725.4	697.5	657.2	599.5	540.9	506.3	502.5	515.0
137.5°	807.8	799.8	786.7	768.5	740.4	704.5	649.1	587.2	543.6	530.7	535.6
140°	834.0	824.4	812.8	794.6	769.6	732.1	678.3	618.8	569.8	551.5	548.6
142.5°	855.5	848.2	835.9	819.2	797.3	759.8	707.5	648.7	596.7	573.0	566.3
145°	887.8	882.0	868.6	853.2	834.9	797.5	749.4	690.8	638.9	608.2	593.8
147.5°	915.1	910.5	899.9	881.8	866.5	830.5	786.7	734.8	681.6	643.5	624.9
150°	932.0	928.1	917.6	900.3	884.9	851.3	809.0	761.0	710.0	669.7	645.7
152.5°	948.1	944.3	932.2	914.9	901.8	870.5	832.1	786.3	734.6	694.3	669.5
155°	969.5	964.6	953.1	936.8	925.3	896.4	860.9	820.5	776.3	734.1	706.2
157.5°	986.4	980.4	969.6	955.6	943.3	916.8	885.9	851.1	812.5	772.1	743.7
160°	996.4	989.6	978.1	965.6	954.1	929.1	901.2	869.5	834.0	797.5	766.7
162.5°	1003.3	997.3	983.5	972.5	962.5	939.9	913.5	884.9	853.2	821.3	792.9
165°	1010.8	1004.0	989.6	981.0	972.3	953.1	930.1	907.0	880.1	854.2	831.1
167.5°	1011.3	1005.8	991.4	982.9	976.6	960.0	941.4	923.7	902.8	882.4	863.2
170°	1009.8	1005.0	990.6	982.9	978.1	964.6	948.3	932.9	916.6	899.3	883.9
172.5°	1004.4	999.6	986.0	979.8	977.3	965.4	952.2	940.6	926.6	913.9	901.6
175°	990.6	986.7	975.2	971.4	972.3	964.6	955.0	948.3	939.7	932.0	925.3
177.5°	970.4	968.1	959.7	959.7	962.7	958.1	955.0	952.0	948.1	945.8	943.5
180°	951.2	951.2	951.2	951.2	951.2	951.2	951.2	951.2	951.2	951.2	951.2



TEST NUMBER: P1427894

CATALOG NUMBER: SQ2W-PH1-K-075U-050D-L930-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	1010.9	1010.9	1010.9	1010.9	1010.9	1010.9	1010.9	1010.9	1010.9	1010.9	1010.9
2.5°	1000.8	993.4	989.3	986.1	985.4	984.7	985.4	986.1	989.3	993.4	1000.8
5°	965.4	945.6	932.3	922.2	921.3	920.4	921.3	922.2	932.3	945.6	965.4
7.5°	909.6	886.6	872.0	860.8	860.2	859.5	860.2	860.8	872.0	886.6	909.6
10°	873.9	850.3	837.1	827.2	827.2	827.2	827.2	827.2	837.1	850.3	873.9
12.5°	843.8	822.0	812.2	805.4	807.4	809.5	807.4	805.4	812.2	822.0	843.8
15°	805.1	789.3	786.8	786.0	790.7	795.4	790.7	786.0	786.8	789.3	805.1
17.5°	773.5	765.1	770.5	776.0	781.5	786.9	781.5	776.0	770.5	765.1	773.5
20°	755.2	750.5	760.8	769.8	774.9	780.0	774.9	769.8	760.8	750.5	755.2
22.5°	740.7	738.7	750.0	759.2	761.9	764.6	761.9	759.2	750.0	738.7	740.7
25°	717.7	720.5	730.3	737.4	736.1	734.8	736.1	737.4	730.3	720.5	717.7
27.5°	695.6	701.1	707.1	711.7	712.5	713.3	712.5	711.7	707.1	701.1	695.6
30°	677.9	684.9	690.9	696.8	702.3	707.9	702.3	696.8	690.9	684.9	677.9
32.5°	658.1	671.3	685.5	699.3	712.1	724.8	712.1	699.3	685.5	671.3	658.1
35°	630.2	649.4	672.9	701.0	742.9	784.8	742.9	701.0	672.9	649.4	630.2
37.5°	600.8	621.1	641.3	659.9	673.2	686.5	673.2	659.9	641.3	621.1	600.8
40°	580.3	605.5	631.6	643.4	612.7	581.9	612.7	643.4	631.6	605.5	580.3
42.5°	554.0	581.7	615.7	628.1	576.2	524.2	576.2	628.1	615.7	581.7	554.0
45°	515.2	530.6	539.6	537.0	499.8	462.6	499.8	537.0	539.6	530.6	515.2
47.5°	488.2	489.9	469.8	451.1	436.6	422.0	436.6	451.1	469.8	489.9	488.2
50°	474.2	471.6	439.5	413.1	403.7	394.3	403.7	413.1	439.5	471.6	474.2
52.5°	463.0	457.8	415.2	381.6	375.3	368.9	375.3	381.6	415.2	457.8	463.0
55°	449.8	443.0	384.4	340.2	338.9	337.6	338.9	340.2	384.4	443.0	449.8
57.5°	399.4	392.2	341.4	303.9	306.1	308.4	306.1	303.9	341.4	392.2	399.4
60°	350.0	343.2	308.1	281.2	278.6	276.0	278.6	281.2	308.1	343.2	350.0
62.5°	303.7	295.7	271.9	253.5	250.9	248.3	250.9	253.5	271.9	295.7	303.7
65°	248.9	237.4	217.7	202.9	202.9	202.9	202.9	202.9	217.7	237.4	248.9
67.5°	204.2	192.8	177.8	164.0	153.8	143.5	153.8	164.0	177.8	192.8	204.2
70°	175.6	161.9	145.2	131.0	124.2	117.3	124.2	131.0	145.2	161.9	175.6
72.5°	146.0	132.7	119.1	106.9	99.0	91.2	99.0	106.9	119.1	132.7	146.0
75°	104.4	90.9	78.5	69.0	68.2	67.3	68.2	69.0	78.5	90.9	104.4
77.5°	71.6	62.3	56.0	51.4	51.5	51.6	51.5	51.4	56.0	62.3	71.6
80°	48.7	42.1	41.7	41.5	41.9	42.3	41.9	41.5	41.7	42.1	48.7
82.5°	35.4	31.8	32.4	32.9	33.0	33.1	33.0	32.9	32.4	31.8	35.4
85°	19.7	18.4	16.7	15.3	14.9	14.4	14.9	15.3	16.7	18.4	19.7
87.5°	8.8	9.6	11.0	11.7	12.5	12.1	12.5	11.7	11.0	9.6	8.8
90°	22.1	28.8	35.5	39.4	43.2	41.3	43.2	39.4	35.5	28.8	22.1
92.5°	44.4	55.7	64.0	70.9	74.0	73.6	74.0	70.9	64.0	55.7	44.4
95°	89.4	102.8	116.3	125.9	131.6	129.7	131.6	125.9	116.3	102.8	89.4
97.5°	137.8	155.8	170.8	179.9	185.6	189.5	185.6	179.9	170.8	155.8	137.8
100°	170.1	187.4	204.7	215.2	224.8	228.7	224.8	215.2	204.7	187.4	170.1
102.5°	196.2	218.9	237.7	249.0	257.1	261.0	257.1	249.0	237.7	218.9	196.2
105°	239.2	263.3	283.4	297.8	306.5	309.4	306.5	297.8	283.4	263.3	239.2
107.5°	282.3	307.1	325.7	341.7	352.2	358.4	352.2	341.7	325.7	307.1	282.3
110°	316.1	336.3	356.5	370.9	381.4	385.3	381.4	370.9	356.5	336.3	316.1



TEST NUMBER: P1427894

CATALOG NUMBER: SQ2W-PH1-K-075U-050D-L930-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	344.5	367.0	387.2	401.6	413.7	419.1	413.7	401.6	387.2	367.0	344.5
115°	384.3	414.1	432.4	445.8	454.5	459.3	454.5	445.8	432.4	414.1	384.3
117.5°	417.4	448.5	468.5	478.9	482.9	486.4	482.9	478.9	468.5	448.5	417.4
120°	438.1	467.0	490.0	503.5	508.3	510.2	508.3	503.5	490.0	467.0	438.1
122.5°	457.3	484.6	506.9	523.4	531.3	533.2	531.3	523.4	506.9	484.6	457.3
125°	484.2	510.2	533.2	549.6	558.2	563.0	558.2	549.6	533.2	510.2	484.2
127.5°	507.7	535.7	556.9	571.7	580.1	584.0	580.1	571.7	556.9	535.7	507.7
130°	520.8	549.6	570.7	587.1	594.7	598.6	594.7	587.1	570.7	549.6	520.8
132.5°	530.7	561.1	583.0	597.8	606.3	610.1	606.3	597.8	583.0	561.1	530.7
135°	542.9	574.6	597.6	612.0	619.7	623.6	619.7	612.0	597.6	574.6	542.9
137.5°	553.4	582.2	606.3	621.4	628.4	630.9	628.4	621.4	606.3	582.2	553.4
140°	561.1	586.1	610.1	624.5	632.2	633.2	632.2	624.5	610.1	586.1	561.1
142.5°	571.1	590.7	611.6	626.1	633.7	635.5	633.7	626.1	611.6	590.7	571.1
145°	589.0	600.5	614.9	628.4	635.1	637.0	635.1	628.4	614.9	600.5	589.0
147.5°	611.5	615.1	622.6	631.4	638.0	639.3	638.0	631.4	622.6	615.1	611.5
150°	628.4	627.4	630.3	636.1	641.8	640.9	641.8	636.1	630.3	627.4	628.4
152.5°	647.6	642.0	641.8	644.5	647.2	647.0	647.2	644.5	641.8	642.0	647.6
155°	680.3	669.7	663.9	662.0	662.0	661.0	662.0	662.0	663.9	669.7	680.3
157.5°	716.2	701.4	692.7	688.1	686.8	684.7	686.8	688.1	692.7	701.4	716.2
160°	740.8	724.4	715.8	708.1	705.2	702.3	705.2	708.1	715.8	724.4	740.8
162.5°	763.8	748.3	738.9	731.9	729.1	724.6	729.1	731.9	738.9	748.3	763.8
165°	801.3	785.0	774.4	768.6	764.8	761.0	764.8	768.6	774.4	785.0	801.3
167.5°	838.8	820.9	814.0	807.5	803.8	796.9	803.8	807.5	814.0	820.9	838.8
170°	861.8	845.5	841.7	835.9	829.2	821.5	829.2	835.9	841.7	845.5	861.8
172.5°	881.8	870.9	867.0	861.3	859.2	853.0	859.2	861.3	867.0	870.9	881.8
175°	910.8	902.2	902.2	901.2	898.4	892.6	898.4	901.2	902.2	902.2	910.8
177.5°	935.1	930.4	933.5	933.5	932.8	927.4	932.8	933.5	933.5	930.4	935.1
180°	951.2	951.2	951.2	951.2	951.2	951.2	951.2	951.2	951.2	951.2	951.2



TEST NUMBER: P1427894

CATALOG NUMBER: SQ2W-PH1-K-075U-050D-L930-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	330°	340°	350°	360°
0°	1010.9	1010.9	1010.9	1010.9
2.5°	1011.4	1018.1	1013.3	1008.5
5°	991.9	1011.9	1012.4	1012.8
7.5°	941.0	967.8	981.1	994.3
10°	907.6	938.0	958.1	978.2
12.5°	877.6	910.9	942.6	974.3
15°	834.2	868.0	915.9	963.7
17.5°	795.9	825.6	877.2	928.7
20°	774.9	802.4	853.2	904.1
22.5°	755.9	780.2	831.8	883.3
25°	722.0	739.7	797.9	856.0
27.5°	690.5	701.9	762.6	823.3
30°	669.7	678.8	739.5	800.2
32.5°	645.9	652.4	715.2	777.9
35°	615.2	620.4	685.8	751.2
37.5°	580.5	582.9	653.0	723.1
40°	555.9	556.0	629.6	703.1
42.5°	532.3	534.5	608.0	681.5
45°	493.4	496.2	572.7	649.2
47.5°	464.7	465.3	538.2	611.1
50°	447.2	444.2	513.1	581.9
52.5°	430.6	422.6	488.0	553.4
55°	404.9	387.0	449.8	512.6
57.5°	363.0	350.5	409.9	469.4
60°	328.6	327.0	384.7	442.4
62.5°	296.0	304.0	359.0	414.0
65°	252.3	267.4	317.4	367.4
67.5°	212.2	229.0	272.6	316.2
70°	186.3	203.9	242.4	280.8
72.5°	159.1	177.1	210.1	243.1
75°	118.9	136.5	163.0	189.5
77.5°	84.1	98.3	117.6	137.0
80°	61.6	74.8	89.3	103.9
82.5°	43.1	51.6	62.3	73.1
85°	20.5	22.4	27.6	32.7
87.5°	8.8	8.4	7.9	7.5
90°	17.3	10.6	6.7	2.9
92.5°	37.3	25.9	18.3	10.6
95°	74.9	59.6	42.3	29.8
97.5°	119.3	94.5	77.4	56.9
100°	143.2	119.1	102.8	80.7
102.5°	169.3	149.1	126.6	104.5
105°	216.2	191.2	165.3	140.3
107.5°	259.6	232.1	201.0	178.5
110°	287.3	257.5	224.8	204.7

TEST NUMBER: P1427894

CATALOG NUMBER: SQ2W-PH1-K-075U-050D-L930-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	330°	340°	350°	360°
112.5°	314.2	283.6	250.2	230.0
115°	350.7	317.1	286.3	269.0
117.5°	385.9	351.3	318.8	305.2
120°	407.4	372.8	341.1	330.5
122.5°	425.1	391.2	361.8	357.4
125°	451.6	417.0	392.0	397.8
127.5°	473.1	441.4	425.6	438.5
130°	486.2	458.3	448.7	467.0
132.5°	497.7	476.0	471.8	496.9
135°	515.0	502.5	506.3	540.9
137.5°	535.6	530.7	543.6	587.2
140°	548.6	551.5	569.8	618.8
142.5°	566.3	573.0	596.7	648.7
145°	593.8	608.2	638.9	690.8
147.5°	624.9	643.5	681.6	734.8
150°	645.7	669.7	710.0	761.0
152.5°	669.5	694.3	734.6	786.3
155°	706.2	734.1	776.3	820.5
157.5°	743.7	772.1	812.5	851.1
160°	766.7	797.5	834.0	869.5
162.5°	792.9	821.3	853.2	884.9
165°	831.1	854.2	880.1	907.0
167.5°	863.2	882.4	902.8	923.7
170°	883.9	899.3	916.6	932.9
172.5°	901.6	913.9	926.6	940.6
175°	925.3	932.0	939.7	948.3
177.5°	943.5	945.8	948.1	952.0
180°	951.2	951.2	951.2	951.2

TEST NUMBER: P1427894

CATALOG NUMBER: SQ2W-PH1-K-075U-050D-L930-UNV-STD-W-WM-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	16.06	16.87	17.06	17.88	19.23	14.89	15.69	15.89	16.71	18.05
	3H	18.23	18.95	19.24	19.97	21.34	15.93	16.66	16.95	17.68	19.05
	4H	19.04	19.72	20.07	20.75	22.12	16.17	16.86	17.20	17.88	19.26
	6H	19.50	20.13	20.54	21.16	22.55	16.31	16.94	17.35	17.97	19.36
	8H	19.65	20.25	20.70	21.30	22.68	16.37	16.97	17.41	18.02	19.40
	12H	19.71	20.28	20.76	21.32	22.73	16.38	16.95	17.43	17.99	19.40
4H	2H	16.49	17.17	17.52	18.20	19.57	15.56	16.25	16.60	17.27	18.65
	3H	18.73	19.30	19.77	20.36	21.74	16.79	17.36	17.83	18.41	19.80
	4H	19.60	20.13	20.65	21.17	22.58	17.08	17.60	18.13	18.64	20.06
	6H	20.16	20.61	21.22	21.68	23.08	17.27	17.72	18.33	18.79	20.20
	8H	20.36	20.78	21.42	21.84	23.26	17.36	17.78	18.42	18.84	20.26
	12H	20.44	20.82	21.52	21.90	23.32	17.38	17.76	18.46	18.84	20.26
8H	4H	19.62	20.04	20.68	21.10	22.52	17.30	17.72	18.36	18.78	20.20
	6H	20.25	20.59	21.33	21.70	23.12	17.57	17.91	18.65	19.02	20.43
	8H	20.51	20.81	21.60	21.90	23.34	17.71	18.02	18.80	19.10	20.54
	12H	20.64	20.91	21.73	21.99	23.47	17.78	18.04	18.87	19.12	20.60
12H	4H	19.57	19.95	20.65	21.02	22.45	17.30	17.67	18.37	18.75	20.18
	6H	20.23	20.53	21.31	21.61	23.05	17.60	17.91	18.69	18.99	20.43
	8H	20.49	20.76	21.59	21.84	23.32	17.76	18.03	18.86	19.11	20.59