

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1427960

Luminaire Tested: SQ2W-PH1-K-125U-125D-L930-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1427960
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-10)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-PH1-K-125U-125D-L930-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - PERCEIVE HEX LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 1250 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10119.2 lumens
Efficiency: N/A
Efficacy: 108.6 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.02 / 1.23
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 93.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1427960

CATALOG NUMBER: SQ2W-PH1-K-125U-125D-L930-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

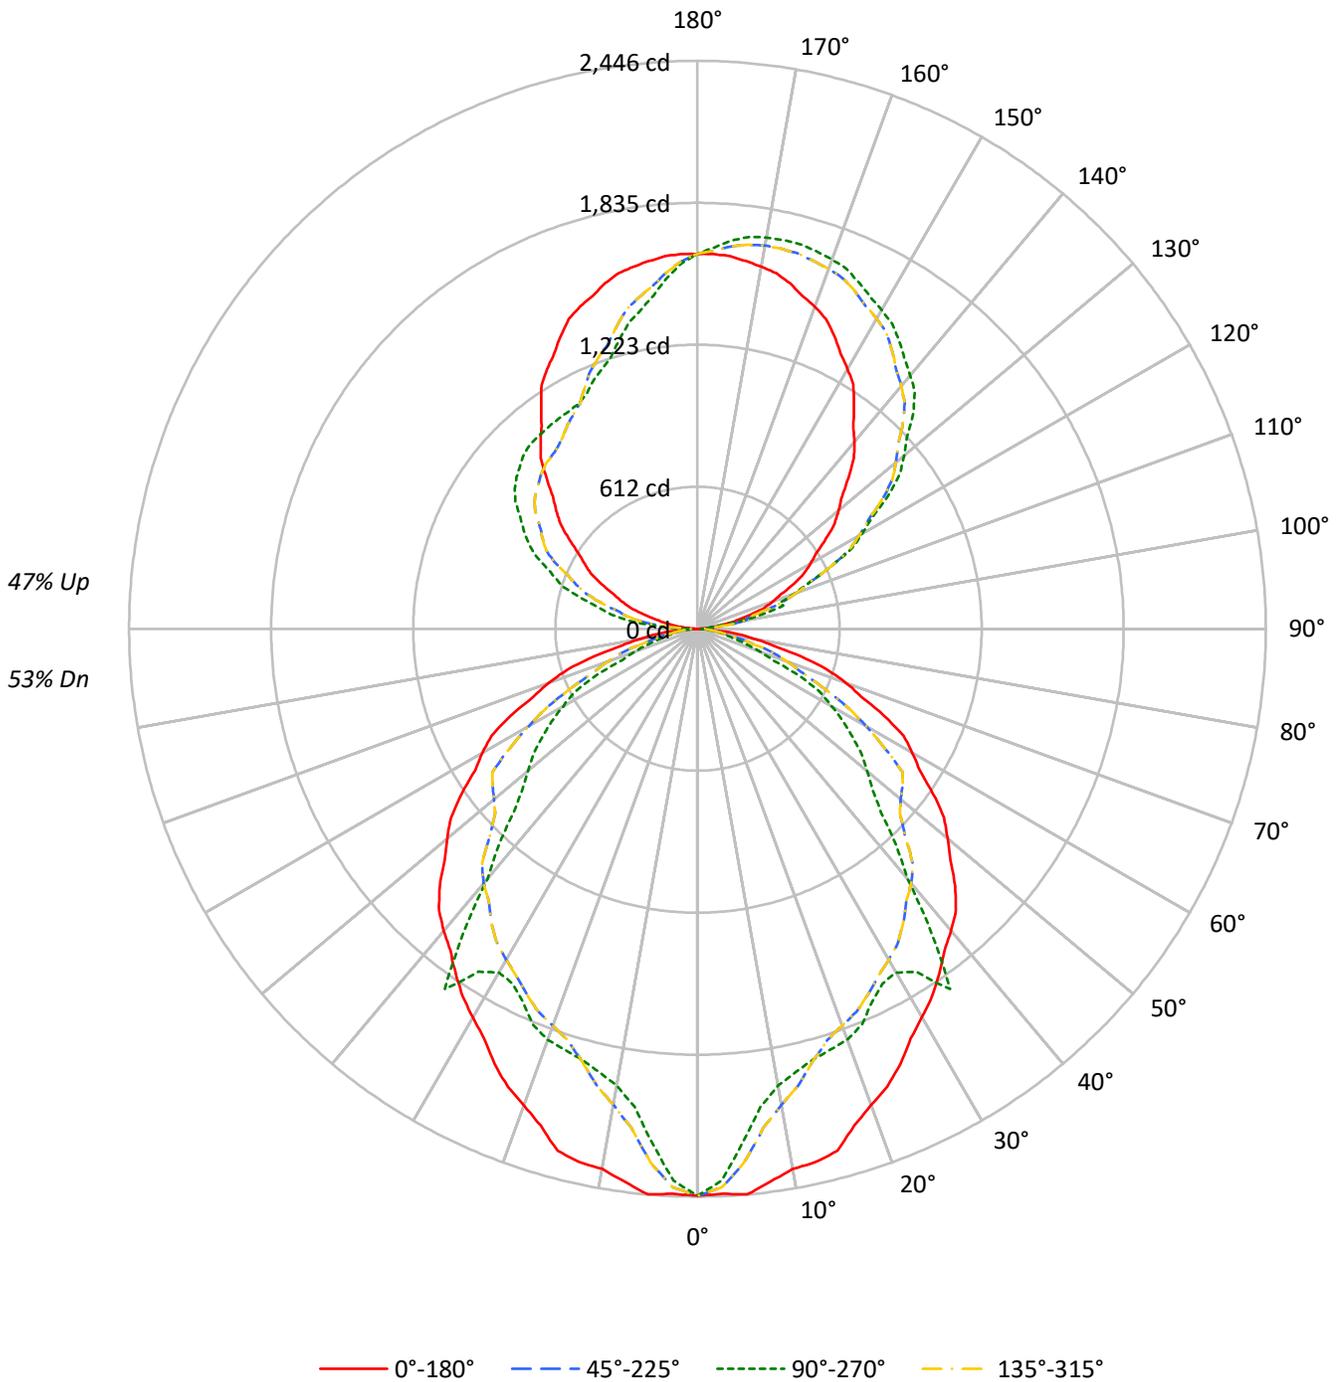



TEST NUMBER: P1427960

CATALOG NUMBER: SQ2W-PH1-K-125U-125D-L930-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	59	59	59	53				53
1	99	95	91	87	91	88	84	81	75	73	71	63	62	60	53	52	51				45	
2	90	83	77	72	83	77	72	67	66	62	59	56	53	51	47	45	43				38	
3	82	73	66	60	76	68	61	56	58	53	49	50	46	43	41	39	37				33	
4	75	65	57	51	70	60	53	48	52	46	42	44	40	37	37	34	32				28	
5	69	58	49	43	64	54	46	41	46	41	36	40	35	32	33	30	28				24	
6	64	52	44	38	59	48	41	36	42	36	32	36	31	28	30	27	24				21	
7	59	47	39	33	55	44	36	31	38	32	28	33	28	25	28	24	22				19	
8	55	42	35	29	51	40	33	28	35	29	25	30	25	22	25	22	19				17	
9	51	39	31	26	47	36	30	25	32	26	22	28	23	20	23	20	17				15	
10	48	36	28	23	44	33	27	22	29	24	20	25	21	18	22	18	16				14	

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	39416	39416	39416	39416
5°	39641	36027	39641	36027
10°	38729	32750	38729	32750
15°	38903	32110	38903	32110
20°	37515	32367	37515	32367
25°	36828	31614	36828	31614
30°	36030	31873	36030	31873
35°	35756	37358	35756	37358
40°	35788	29619	35788	29619
45°	35800	25512	35800	25512
50°	35298	23920	35298	23920
55°	34848	22950	34848	22950
60°	34503	21525	34503	21525
65°	33898	18724	33898	18724
70°	32020	13378	32020	13378
75°	28546	10143	28546	10143
80°	23328	9502	23328	9502
85°	14635	6447	14635	6447

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 35800 cd/sqm



TEST NUMBER: P1427960

CATALOG NUMBER: SQ2W-PH1-K-125U-125D-L930-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	214.8	2.1
10°-20°	565.0	5.6
20°-30°	828.4	8.2
30°-40°	1003.1	9.9
40°-50°	986.4	9.7
50°-60°	858.0	8.5
60°-70°	596.7	5.9
70°-80°	283.0	2.8
80°-90°	69.1	0.7
90°-100°	128.5	1.3
100°-110°	374.8	3.7
110°-120°	611.6	6.0
120°-130°	776.1	7.7
130°-140°	830.4	8.2
140°-150°	775.4	7.7
150°-160°	638.1	6.3
160°-170°	427.9	4.2
170°-180°	151.9	1.5
0°-30°	1608.2	15.9
0°-40°	2611.3	25.8
0°-60°	4455.7	44.0
0°-90°	5404.5	53.4
90°-120°	1114.9	11.0
90°-150°	3496.8	34.6
90°-180°	4715.0	46.6
0°-180°	10119.2	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	2441	2441	2441	2441	2441	
5°	2446	2223	2446	2223	2446	230
15°	2327	1921	2327	1921	2327	649
25°	2067	1775	2067	1775	2067	951
35°	1814	1895	1814	1895	1814	1136
45°	1568	1117	1568	1117	1568	1205
55°	1238	815	1238	815	1238	1106
65°	887	490	887	490	887	872
75°	458	163	458	163	458	485
85°	79	35	79	35	79	106
90°	5	36	5	70	5	6
95°	51	38	51	220	51	61
105°	238	382	238	525	238	253
115°	457	633	457	780	457	450
125°	675	1003	675	956	675	604
135°	918	1313	918	1058	918	710
145°	1173	1514	1173	1081	1173	734
155°	1393	1644	1393	1122	1393	640
165°	1540	1714	1540	1292	1540	433
175°	1610	1678	1610	1515	1610	153
180°	1615	1615	1615	1615	1615	



TEST NUMBER: P1427960

CATALOG NUMBER: SQ2W-PH1-K-125U-125D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	2441.3	2441.3	2441.3	2441.3	2441.3	2441.3	2441.3	2441.3	2441.3	2441.3	2441.3
2.5°	2435.7	2447.2	2458.8	2442.5	2416.9	2399.1	2389.2	2381.4	2379.7	2378.1	2379.7
5°	2445.9	2444.9	2443.8	2395.6	2331.6	2283.6	2251.6	2227.0	2225.0	2222.9	2225.0
7.5°	2401.3	2369.3	2337.3	2272.5	2196.7	2141.2	2105.8	2079.0	2077.3	2075.6	2077.3
10°	2362.3	2313.8	2265.2	2191.9	2110.4	2053.6	2021.6	1997.6	1997.6	1997.6	1997.6
12.5°	2353.0	2276.4	2199.8	2119.5	2037.9	1985.3	1961.5	1945.0	1949.9	1954.9	1949.9
15°	2327.4	2211.8	2096.2	2014.6	1944.4	1906.2	1900.0	1898.2	1909.6	1921.0	1909.6
17.5°	2242.9	2118.4	1993.9	1922.2	1868.1	1847.7	1860.9	1874.1	1887.3	1900.5	1887.3
20°	2183.4	2060.6	1937.7	1871.4	1823.9	1812.6	1837.3	1859.0	1871.4	1883.8	1871.4
22.5°	2133.3	2008.8	1884.3	1825.6	1788.8	1784.1	1811.3	1833.4	1840.0	1846.6	1840.0
25°	2067.3	1926.9	1786.5	1743.6	1733.3	1740.0	1763.8	1780.8	1777.7	1774.6	1777.7
27.5°	1988.3	1841.7	1695.1	1667.6	1679.8	1693.1	1707.6	1718.9	1720.7	1722.6	1720.7
30°	1932.6	1786.0	1639.4	1617.4	1637.1	1654.1	1668.5	1682.7	1696.2	1709.6	1696.2
32.5°	1878.7	1727.1	1575.6	1559.8	1589.4	1621.3	1655.5	1688.9	1719.7	1750.5	1719.7
35°	1814.1	1656.2	1498.2	1485.8	1521.9	1568.4	1625.2	1693.1	1794.2	1895.4	1794.2
37.5°	1746.3	1577.0	1407.7	1402.0	1451.0	1499.9	1548.8	1593.6	1625.8	1658.0	1625.8
40°	1698.0	1520.4	1342.8	1342.6	1401.4	1462.3	1525.3	1553.9	1479.6	1405.3	1479.6
42.5°	1645.9	1468.4	1290.8	1285.6	1337.8	1404.9	1486.9	1517.0	1391.5	1265.9	1391.5
45°	1567.9	1383.1	1198.3	1191.6	1244.2	1281.4	1303.1	1296.9	1207.1	1117.3	1207.1
47.5°	1475.9	1299.8	1123.7	1122.2	1179.0	1183.1	1134.6	1089.4	1054.3	1019.2	1054.3
50°	1405.3	1239.1	1072.9	1080.1	1145.1	1138.9	1061.5	997.8	975.1	952.3	975.1
52.5°	1336.5	1178.6	1020.6	1039.8	1118.1	1105.7	1002.7	921.6	906.3	891.0	906.3
55°	1238.0	1086.3	934.5	977.9	1086.3	1069.8	928.3	821.5	818.4	815.3	818.4
57.5°	1133.5	990.0	846.5	876.6	964.6	947.2	824.6	734.0	739.3	744.7	739.3
60°	1068.5	929.1	789.8	793.6	845.2	828.7	744.1	679.0	672.8	666.6	672.8
62.5°	999.7	867.0	734.2	715.0	733.5	714.1	656.7	612.1	605.9	599.7	605.9
65°	887.3	766.5	645.7	609.3	601.1	573.2	525.7	490.1	490.1	490.1	490.1
67.5°	763.7	658.4	553.1	512.4	493.2	465.5	429.4	396.1	371.3	346.6	371.3
70°	678.3	585.3	492.4	449.8	424.0	391.0	350.7	316.4	299.9	283.4	299.9
72.5°	587.2	507.5	427.8	384.2	352.6	320.4	287.6	258.2	239.2	220.2	239.2
75°	457.6	393.6	329.6	287.3	252.2	219.6	189.7	166.7	164.7	162.6	164.7
77.5°	330.8	284.1	237.4	203.2	173.0	150.4	135.3	124.1	124.3	124.5	124.3
80°	250.9	215.8	180.7	148.7	117.7	101.7	100.7	100.1	101.2	102.2	101.2
82.5°	176.5	150.5	124.5	104.1	85.5	76.9	78.4	79.5	79.7	79.9	79.7
85°	79.0	66.6	54.2	49.6	47.5	44.4	40.3	36.9	35.9	34.8	35.9
87.5°	17.7	18.2	19.0	18.2	16.7	15.8	15.8	16.1	16.5	16.5	16.5
90°	4.9	11.4	19.6	26.1	31.0	32.6	32.6	34.3	35.9	35.9	35.9
92.5°	17.9	28.4	28.7	28.7	34.9	37.8	40.4	40.8	42.4	42.4	42.4
95°	50.6	55.5	83.2	81.6	55.5	44.0	37.5	37.5	37.5	37.5	37.5
97.5°	96.6	103.7	108.3	145.2	153.3	148.1	120.7	101.5	90.7	85.8	90.7
100°	137.0	140.3	150.1	151.7	192.5	231.6	212.0	187.6	179.4	174.5	179.4
102.5°	177.5	179.4	194.4	201.3	210.7	232.9	300.8	293.3	287.7	286.7	287.7
105°	238.1	239.8	267.5	280.5	287.1	287.1	285.4	318.1	370.2	381.7	370.2
107.5°	303.0	310.5	343.2	378.1	385.6	387.5	379.1	374.2	372.2	373.5	372.2
110°	347.4	358.8	398.0	442.0	453.4	456.7	453.4	448.5	445.3	445.3	445.3



TEST NUMBER: P1427960

CATALOG NUMBER: SQ2W-PH1-K-125U-125D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	390.5	407.1	451.5	502.0	521.3	531.1	523.9	520.3	517.0	519.6	517.0
115°	456.7	481.2	539.9	592.1	631.2	636.1	634.5	634.5	632.8	632.8	632.8
117.5°	518.0	557.2	623.1	683.7	729.1	742.1	748.6	746.7	744.7	748.0	744.7
120°	561.1	606.7	681.8	750.3	794.3	813.9	820.4	817.1	820.4	817.1	820.4
122.5°	606.7	662.9	736.6	807.7	859.6	881.7	889.6	890.2	890.9	888.9	890.9
125°	675.2	743.8	830.2	903.6	957.4	983.5	990.0	991.7	994.9	1003.1	994.9
127.5°	744.4	822.0	917.0	987.8	1042.9	1074.5	1084.6	1088.2	1095.1	1098.7	1095.1
130°	792.7	880.8	977.0	1043.9	1097.7	1131.9	1149.9	1154.8	1162.9	1161.3	1162.9
132.5°	843.6	935.6	1033.1	1102.6	1152.5	1189.3	1204.7	1218.7	1221.6	1223.9	1221.6
135°	918.3	1017.8	1115.6	1184.1	1231.4	1267.3	1286.9	1299.9	1308.1	1313.0	1308.1
137.5°	996.9	1101.9	1195.9	1256.9	1304.5	1335.5	1357.7	1371.4	1379.9	1383.8	1379.9
140°	1050.4	1151.5	1242.8	1306.5	1348.9	1379.9	1399.4	1415.7	1425.5	1425.5	1425.5
142.5°	1101.3	1201.1	1289.8	1353.4	1390.6	1419.0	1439.9	1452.3	1463.4	1463.4	1463.4
145°	1172.7	1272.2	1353.8	1417.4	1448.4	1474.5	1497.3	1507.1	1513.6	1513.6	1513.6
147.5°	1247.4	1335.5	1409.9	1470.9	1497.0	1527.6	1545.6	1553.4	1561.6	1558.0	1561.6
150°	1291.8	1373.3	1445.1	1502.2	1528.3	1557.6	1575.6	1582.1	1590.3	1585.4	1590.3
152.5°	1334.8	1412.5	1477.7	1530.9	1553.1	1582.4	1603.0	1609.5	1615.0	1611.5	1615.0
155°	1392.9	1461.4	1521.8	1570.7	1590.3	1618.0	1637.6	1645.7	1652.2	1644.1	1652.2
157.5°	1444.8	1503.8	1556.3	1601.3	1622.2	1646.0	1664.3	1674.4	1680.9	1677.4	1680.9
160°	1476.1	1529.9	1577.2	1619.6	1639.2	1660.4	1680.0	1691.4	1697.9	1693.0	1697.9
162.5°	1502.2	1550.8	1595.5	1634.0	1650.9	1669.5	1693.0	1703.1	1709.6	1703.5	1709.6
165°	1539.7	1578.8	1618.0	1650.6	1665.3	1680.0	1704.4	1715.8	1720.7	1714.2	1720.7
167.5°	1568.1	1598.1	1629.7	1657.8	1668.5	1682.9	1707.4	1716.8	1723.0	1714.9	1723.0
170°	1583.7	1609.8	1637.6	1660.4	1668.5	1681.6	1706.1	1714.2	1719.1	1711.0	1719.1
172.5°	1596.8	1616.4	1638.9	1659.1	1663.3	1673.8	1696.9	1705.1	1708.7	1701.8	1708.7
175°	1609.8	1621.2	1637.6	1650.6	1649.0	1655.5	1675.1	1681.6	1688.1	1678.3	1688.1
177.5°	1616.0	1621.2	1626.5	1634.3	1629.1	1629.1	1643.4	1647.3	1648.6	1643.4	1648.6
180°	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7



TEST NUMBER: P1427960

CATALOG NUMBER: SQ2W-PH1-K-125U-125D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	2441.3	2441.3	2441.3	2441.3	2441.3	2441.3	2441.3	2441.3	2441.3	2441.3	2441.3
2.5°	2381.4	2389.2	2399.1	2416.9	2442.5	2458.8	2447.2	2435.7	2447.2	2458.8	2442.5
5°	2227.0	2251.6	2283.6	2331.6	2395.6	2443.8	2444.9	2445.9	2444.9	2443.8	2395.6
7.5°	2079.0	2105.8	2141.2	2196.7	2272.5	2337.3	2369.3	2401.3	2369.3	2337.3	2272.5
10°	1997.6	2021.6	2053.6	2110.4	2191.9	2265.2	2313.8	2362.3	2313.8	2265.2	2191.9
12.5°	1945.0	1961.5	1985.3	2037.9	2119.5	2199.8	2276.4	2353.0	2276.4	2199.8	2119.5
15°	1898.2	1900.0	1906.2	1944.4	2014.6	2096.2	2211.8	2327.4	2211.8	2096.2	2014.6
17.5°	1874.1	1860.9	1847.7	1868.1	1922.2	1993.9	2118.4	2242.9	2118.4	1993.9	1922.2
20°	1859.0	1837.3	1812.6	1823.9	1871.4	1937.7	2060.6	2183.4	2060.6	1937.7	1871.4
22.5°	1833.4	1811.3	1784.1	1788.8	1825.6	1884.3	2008.8	2133.3	2008.8	1884.3	1825.6
25°	1780.8	1763.8	1740.0	1733.3	1743.6	1786.5	1926.9	2067.3	1926.9	1786.5	1743.6
27.5°	1718.9	1707.6	1693.1	1679.8	1667.6	1695.1	1841.7	1988.3	1841.7	1695.1	1667.6
30°	1682.7	1668.5	1654.1	1637.1	1617.4	1639.4	1786.0	1932.6	1786.0	1639.4	1617.4
32.5°	1688.9	1655.5	1621.3	1589.4	1559.8	1575.6	1727.1	1878.7	1727.1	1575.6	1559.8
35°	1693.1	1625.2	1568.4	1521.9	1485.8	1498.2	1656.2	1814.1	1656.2	1498.2	1485.8
37.5°	1593.6	1548.8	1499.9	1451.0	1402.0	1407.7	1577.0	1746.3	1577.0	1407.7	1402.0
40°	1553.9	1525.3	1462.3	1401.4	1342.6	1342.8	1520.4	1698.0	1520.4	1342.8	1342.6
42.5°	1517.0	1486.9	1404.9	1337.8	1285.6	1290.8	1468.4	1645.9	1468.4	1290.8	1285.6
45°	1296.9	1303.1	1281.4	1244.2	1191.6	1198.3	1383.1	1567.9	1383.1	1198.3	1191.6
47.5°	1089.4	1134.6	1183.1	1179.0	1122.2	1123.7	1299.8	1475.9	1299.8	1123.7	1122.2
50°	997.8	1061.5	1138.9	1145.1	1080.1	1072.9	1239.1	1405.3	1239.1	1072.9	1080.1
52.5°	921.6	1002.7	1105.7	1118.1	1039.8	1020.6	1178.6	1336.5	1178.6	1020.6	1039.8
55°	821.5	928.3	1069.8	1086.3	977.9	934.5	1086.3	1238.0	1086.3	934.5	977.9
57.5°	734.0	824.6	947.2	964.6	876.6	846.5	990.0	1133.5	990.0	846.5	876.6
60°	679.0	744.1	828.7	845.2	793.6	789.8	929.1	1068.5	929.1	789.8	793.6
62.5°	612.1	656.7	714.1	733.5	715.0	734.2	867.0	999.7	867.0	734.2	715.0
65°	490.1	525.7	573.2	601.1	609.3	645.7	766.5	887.3	766.5	645.7	609.3
67.5°	396.1	429.4	465.5	493.2	512.4	553.1	658.4	763.7	658.4	553.1	512.4
70°	316.4	350.7	391.0	424.0	449.8	492.4	585.3	678.3	585.3	492.4	449.8
72.5°	258.2	287.6	320.4	352.6	384.2	427.8	507.5	587.2	507.5	427.8	384.2
75°	166.7	189.7	219.6	252.2	287.3	329.6	393.6	457.6	393.6	329.6	287.3
77.5°	124.1	135.3	150.4	173.0	203.2	237.4	284.1	330.8	284.1	237.4	203.2
80°	100.1	100.7	101.7	117.7	148.7	180.7	215.8	250.9	215.8	180.7	148.7
82.5°	79.5	78.4	76.9	85.5	104.1	124.5	150.5	176.5	150.5	124.5	104.1
85°	36.9	40.3	44.4	47.5	49.6	54.2	66.6	79.0	66.6	54.2	49.6
87.5°	16.1	15.8	15.8	16.7	18.2	19.0	18.2	17.7	18.2	18.7	18.9
90°	34.3	32.6	32.6	31.0	26.1	19.6	11.4	4.9	11.4	17.9	29.4
92.5°	40.8	40.4	37.8	34.9	28.7	28.7	28.4	17.9	31.0	44.0	63.3
95°	37.5	37.5	44.0	55.5	81.6	83.2	55.5	50.6	71.8	101.1	127.2
97.5°	101.5	120.7	148.1	153.3	145.2	108.3	103.7	96.6	131.5	160.5	202.6
100°	187.6	212.0	231.6	192.5	151.7	150.1	140.3	137.0	174.5	202.2	243.0
102.5°	293.3	300.8	232.9	210.7	201.3	194.4	179.4	177.5	215.0	253.1	287.4
105°	318.1	285.4	287.1	287.1	280.5	267.5	239.8	238.1	280.5	324.6	367.0
107.5°	374.2	379.1	387.5	385.6	378.1	343.2	310.5	303.0	341.2	394.1	440.7
110°	448.5	453.4	456.7	453.4	442.0	398.0	358.8	347.4	381.7	437.1	487.7



TEST NUMBER: P1427960

CATALOG NUMBER: SQ2W-PH1-K-125U-125D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	520.3	523.9	531.1	521.3	502.0	451.5	407.1	390.5	424.7	481.5	533.3
115°	634.5	634.5	636.1	631.2	592.1	539.9	481.2	456.7	486.0	538.2	595.3
117.5°	746.7	748.6	742.1	729.1	683.7	623.1	557.2	518.0	541.2	596.3	655.0
120°	817.1	820.4	813.9	794.3	750.3	681.8	606.7	561.1	579.0	632.8	691.6
122.5°	890.2	889.6	881.7	859.6	807.7	736.6	662.9	606.7	614.2	664.2	721.6
125°	991.7	990.0	983.5	957.4	903.6	830.2	743.8	675.2	665.5	707.9	766.6
127.5°	1088.2	1084.6	1074.5	1042.9	987.8	917.0	822.0	744.4	722.5	749.3	803.1
130°	1154.8	1149.9	1131.9	1097.7	1043.9	977.0	880.8	792.7	761.7	778.0	825.3
132.5°	1218.7	1204.7	1189.3	1152.5	1102.6	1033.1	935.6	843.6	800.8	808.0	844.9
135°	1299.9	1286.9	1267.3	1231.4	1184.1	1115.6	1017.8	918.3	859.6	853.0	874.2
137.5°	1371.4	1357.7	1335.5	1304.5	1256.9	1195.9	1101.9	996.9	922.8	901.0	909.1
140°	1415.7	1399.4	1379.9	1348.9	1306.5	1242.8	1151.5	1050.4	967.2	936.2	931.3
142.5°	1452.3	1439.9	1419.0	1390.6	1353.4	1289.8	1201.1	1101.3	1012.9	972.7	961.3
145°	1507.1	1497.3	1474.5	1448.4	1417.4	1353.8	1272.2	1172.7	1084.6	1032.4	1008.0
147.5°	1553.4	1545.6	1527.6	1497.0	1470.9	1409.9	1335.5	1247.4	1157.1	1092.5	1060.8
150°	1582.1	1575.6	1557.6	1528.3	1502.2	1445.1	1373.3	1291.8	1205.3	1136.8	1096.1
152.5°	1609.5	1603.0	1582.4	1553.1	1530.9	1477.7	1412.5	1334.8	1247.1	1178.6	1136.5
155°	1645.7	1637.6	1618.0	1590.3	1570.7	1521.8	1461.4	1392.9	1317.9	1246.1	1198.8
157.5°	1674.4	1664.3	1646.0	1622.2	1601.3	1556.3	1503.8	1444.8	1379.2	1310.7	1262.4
160°	1691.4	1680.0	1660.4	1639.2	1619.6	1577.2	1529.9	1476.1	1415.7	1353.8	1301.6
162.5°	1703.1	1693.0	1669.5	1650.9	1634.0	1595.5	1550.8	1502.2	1448.4	1394.2	1345.9
165°	1715.8	1704.4	1680.0	1665.3	1650.6	1618.0	1578.8	1539.7	1494.0	1450.0	1410.8
167.5°	1716.8	1707.4	1682.9	1668.5	1657.8	1629.7	1598.1	1568.1	1532.5	1497.9	1465.3
170°	1714.2	1706.1	1681.6	1668.5	1660.4	1637.6	1609.8	1583.7	1556.0	1526.6	1500.6
172.5°	1705.1	1696.9	1673.8	1663.3	1659.1	1638.9	1616.4	1596.8	1573.0	1551.4	1530.6
175°	1681.6	1675.1	1655.5	1649.0	1650.6	1637.6	1621.2	1609.8	1595.2	1582.1	1570.7
177.5°	1647.3	1643.4	1629.1	1629.1	1634.3	1626.5	1621.2	1616.0	1609.5	1605.6	1601.7
180°	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7



TEST NUMBER: P1427960

CATALOG NUMBER: SQ2W-PH1-K-125U-125D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	2441.3	2441.3	2441.3	2441.3	2441.3	2441.3	2441.3	2441.3	2441.3	2441.3	2441.3
2.5°	2416.9	2399.1	2389.2	2381.4	2379.7	2378.1	2379.7	2381.4	2389.2	2399.1	2416.9
5°	2331.6	2283.6	2251.6	2227.0	2225.0	2222.9	2225.0	2227.0	2251.6	2283.6	2331.6
7.5°	2196.7	2141.2	2105.8	2079.0	2077.3	2075.6	2077.3	2079.0	2105.8	2141.2	2196.7
10°	2110.4	2053.6	2021.6	1997.6	1997.6	1997.6	1997.6	1997.6	2021.6	2053.6	2110.4
12.5°	2037.9	1985.3	1961.5	1945.0	1949.9	1954.9	1949.9	1945.0	1961.5	1985.3	2037.9
15°	1944.4	1906.2	1900.0	1898.2	1909.6	1921.0	1909.6	1898.2	1900.0	1906.2	1944.4
17.5°	1868.1	1847.7	1860.9	1874.1	1887.3	1900.5	1887.3	1874.1	1860.9	1847.7	1868.1
20°	1823.9	1812.6	1837.3	1859.0	1871.4	1883.8	1871.4	1859.0	1837.3	1812.6	1823.9
22.5°	1788.8	1784.1	1811.3	1833.4	1840.0	1846.6	1840.0	1833.4	1811.3	1784.1	1788.8
25°	1733.3	1740.0	1763.8	1780.8	1777.7	1774.6	1777.7	1780.8	1763.8	1740.0	1733.3
27.5°	1679.8	1693.1	1707.6	1718.9	1720.7	1722.6	1720.7	1718.9	1707.6	1693.1	1679.8
30°	1637.1	1654.1	1668.5	1682.7	1696.2	1709.6	1696.2	1682.7	1668.5	1654.1	1637.1
32.5°	1589.4	1621.3	1655.5	1688.9	1719.7	1750.5	1719.7	1688.9	1655.5	1621.3	1589.4
35°	1521.9	1568.4	1625.2	1693.1	1794.2	1895.4	1794.2	1693.1	1625.2	1568.4	1521.9
37.5°	1451.0	1499.9	1548.8	1593.6	1625.8	1658.0	1625.8	1593.6	1548.8	1499.9	1451.0
40°	1401.4	1462.3	1525.3	1553.9	1479.6	1405.3	1479.6	1553.9	1525.3	1462.3	1401.4
42.5°	1337.8	1404.9	1486.9	1517.0	1391.5	1265.9	1391.5	1517.0	1486.9	1404.9	1337.8
45°	1244.2	1281.4	1303.1	1296.9	1207.1	1117.3	1207.1	1296.9	1303.1	1281.4	1244.2
47.5°	1179.0	1183.1	1134.6	1089.4	1054.3	1019.2	1054.3	1089.4	1134.6	1183.1	1179.0
50°	1145.1	1138.9	1061.5	997.8	975.1	952.3	975.1	997.8	1061.5	1138.9	1145.1
52.5°	1118.1	1105.7	1002.7	921.6	906.3	891.0	906.3	921.6	1002.7	1105.7	1118.1
55°	1086.3	1069.8	928.3	821.5	818.4	815.3	818.4	821.5	928.3	1069.8	1086.3
57.5°	964.6	947.2	824.6	734.0	739.3	744.7	739.3	734.0	824.6	947.2	964.6
60°	845.2	828.7	744.1	679.0	672.8	666.6	672.8	679.0	744.1	828.7	845.2
62.5°	733.5	714.1	656.7	612.1	605.9	599.7	605.9	612.1	656.7	714.1	733.5
65°	601.1	573.2	525.7	490.1	490.1	490.1	490.1	490.1	525.7	573.2	601.1
67.5°	493.2	465.5	429.4	396.1	371.3	346.6	371.3	396.1	429.4	465.5	493.2
70°	424.0	391.0	350.7	316.4	299.9	283.4	299.9	316.4	350.7	391.0	424.0
72.5°	352.6	320.4	287.6	258.2	239.2	220.2	239.2	258.2	287.6	320.4	352.6
75°	252.2	219.6	189.7	166.7	164.7	162.6	164.7	166.7	189.7	219.6	252.2
77.5°	173.0	150.4	135.3	124.1	124.3	124.5	124.3	124.1	135.3	150.4	173.0
80°	117.7	101.7	100.7	100.1	101.2	102.2	101.2	100.1	100.7	101.7	117.7
82.5°	85.5	76.9	78.4	79.5	79.7	79.9	79.7	79.5	78.4	76.9	85.5
85°	47.5	44.4	40.3	36.9	35.9	34.8	35.9	36.9	40.3	44.4	47.5
87.5°	18.0	19.1	21.4	22.7	24.0	23.3	24.0	22.7	21.4	19.1	18.0
90°	37.5	48.9	60.3	66.9	73.4	70.1	73.4	66.9	60.3	48.9	37.5
92.5°	75.4	94.6	108.6	120.4	125.6	124.9	125.6	120.4	108.6	94.6	75.4
95°	151.7	174.5	197.4	213.7	223.5	220.2	223.5	213.7	197.4	174.5	151.7
97.5°	233.9	264.6	290.0	305.3	315.1	321.6	315.1	305.3	290.0	264.6	233.9
100°	288.7	318.1	347.4	365.4	381.7	388.2	381.7	365.4	347.4	318.1	288.7
102.5°	333.1	371.5	403.5	422.8	436.5	443.0	436.5	422.8	403.5	371.5	333.1
105°	406.1	446.9	481.2	505.6	520.3	525.2	520.3	505.6	481.2	446.9	406.1
107.5°	479.2	521.3	552.9	580.0	597.9	608.4	597.9	580.0	552.9	521.3	479.2
110°	536.6	570.9	605.1	629.6	647.5	654.0	647.5	629.6	605.1	570.9	536.6



TEST NUMBER: P1427960

CATALOG NUMBER: SQ2W-PH1-K-125U-125D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	584.9	623.1	657.3	681.8	702.3	711.5	702.3	681.8	657.3	623.1	584.9
115°	652.4	703.0	734.0	756.8	771.5	779.6	771.5	756.8	734.0	703.0	652.4
117.5°	708.5	761.4	795.3	812.9	819.8	825.6	819.8	812.9	795.3	761.4	708.5
120°	743.8	792.7	831.8	854.7	862.8	866.1	862.8	854.7	831.8	792.7	743.8
122.5°	776.4	822.7	860.5	888.6	902.0	905.2	902.0	888.6	860.5	822.7	776.4
125°	822.0	866.1	905.2	933.0	947.6	955.8	947.6	933.0	905.2	866.1	822.0
127.5°	861.8	909.5	945.3	970.5	984.8	991.3	984.8	970.5	945.3	909.5	861.8
130°	884.0	933.0	968.8	996.6	1009.6	1016.1	1009.6	996.6	968.8	933.0	884.0
132.5°	901.0	952.5	989.7	1014.8	1029.2	1035.7	1029.2	1014.8	989.7	952.5	901.0
135°	921.5	975.4	1014.5	1039.0	1052.0	1058.5	1052.0	1039.0	1014.5	975.4	921.5
137.5°	939.5	988.4	1029.2	1055.0	1066.7	1070.9	1066.7	1055.0	1029.2	988.4	939.5
140°	952.5	994.9	1035.7	1060.2	1073.2	1074.9	1073.2	1060.2	1035.7	994.9	952.5
142.5°	969.5	1002.8	1038.3	1062.8	1075.8	1078.8	1075.8	1062.8	1038.3	1002.8	969.5
145°	999.8	1019.4	1043.9	1066.7	1078.1	1081.4	1078.1	1066.7	1043.9	1019.4	999.8
147.5°	1038.0	1044.2	1056.9	1071.9	1083.0	1085.3	1083.0	1071.9	1056.9	1044.2	1038.0
150°	1066.7	1065.1	1070.0	1079.7	1089.5	1087.9	1089.5	1079.7	1070.0	1065.1	1066.7
152.5°	1099.3	1089.9	1089.5	1094.1	1098.7	1098.3	1098.7	1094.1	1089.5	1089.9	1099.3
155°	1154.8	1136.8	1127.0	1123.8	1123.8	1122.2	1123.8	1123.8	1127.0	1136.8	1154.8
157.5°	1215.8	1190.7	1176.0	1168.1	1165.9	1162.3	1165.9	1168.1	1176.0	1190.7	1215.8
160°	1257.5	1229.8	1215.1	1202.1	1197.2	1192.3	1197.2	1202.1	1215.1	1229.8	1257.5
162.5°	1296.7	1270.2	1254.3	1242.5	1237.6	1230.1	1237.6	1242.5	1254.3	1270.2	1296.7
165°	1360.3	1332.6	1314.6	1304.8	1298.3	1291.8	1298.3	1304.8	1314.6	1332.6	1360.3
167.5°	1423.9	1393.6	1381.8	1370.7	1364.5	1352.8	1364.5	1370.7	1381.8	1393.6	1423.9
170°	1463.0	1435.3	1428.8	1419.0	1407.6	1394.5	1407.6	1419.0	1428.8	1435.3	1463.0
172.5°	1497.0	1478.4	1471.8	1462.1	1458.5	1448.0	1458.5	1462.1	1471.8	1478.4	1497.0
175°	1546.2	1531.5	1531.5	1529.9	1525.0	1515.2	1525.0	1529.9	1531.5	1531.5	1546.2
177.5°	1587.3	1579.5	1584.7	1584.7	1583.4	1574.3	1583.4	1584.7	1584.7	1579.5	1587.3
180°	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7	1614.7



TEST NUMBER: P1427960

CATALOG NUMBER: SQ2W-PH1-K-125U-125D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	2441.3	2441.3	2441.3	2441.3
2.5°	2442.5	2458.8	2447.2	2435.7
5°	2395.6	2443.8	2444.9	2445.9
7.5°	2272.5	2337.3	2369.3	2401.3
10°	2191.9	2265.2	2313.8	2362.3
12.5°	2119.5	2199.8	2276.4	2353.0
15°	2014.6	2096.2	2211.8	2327.4
17.5°	1922.2	1993.9	2118.4	2242.9
20°	1871.4	1937.7	2060.6	2183.4
22.5°	1825.6	1884.3	2008.8	2133.3
25°	1743.6	1786.5	1926.9	2067.3
27.5°	1667.6	1695.1	1841.7	1988.3
30°	1617.4	1639.4	1786.0	1932.6
32.5°	1559.8	1575.6	1727.1	1878.7
35°	1485.8	1498.2	1656.2	1814.1
37.5°	1402.0	1407.7	1577.0	1746.3
40°	1342.6	1342.8	1520.4	1698.0
42.5°	1285.6	1290.8	1468.4	1645.9
45°	1191.6	1198.3	1383.1	1567.9
47.5°	1122.2	1123.7	1299.8	1475.9
50°	1080.1	1072.9	1239.1	1405.3
52.5°	1039.8	1020.6	1178.6	1336.5
55°	977.9	934.5	1086.3	1238.0
57.5°	876.6	846.5	990.0	1133.5
60°	793.6	789.8	929.1	1068.5
62.5°	715.0	734.2	867.0	999.7
65°	609.3	645.7	766.5	887.3
67.5°	512.4	553.1	658.4	763.7
70°	449.8	492.4	585.3	678.3
72.5°	384.2	427.8	507.5	587.2
75°	287.3	329.6	393.6	457.6
77.5°	203.2	237.4	284.1	330.8
80°	148.7	180.7	215.8	250.9
82.5°	104.1	124.5	150.5	176.5
85°	49.6	54.2	66.6	79.0
87.5°	18.9	18.7	18.2	17.7
90°	29.4	17.9	11.4	4.9
92.5°	63.3	44.0	31.0	17.9
95°	127.2	101.1	71.8	50.6
97.5°	202.6	160.5	131.5	96.6
100°	243.0	202.2	174.5	137.0
102.5°	287.4	253.1	215.0	177.5
105°	367.0	324.6	280.5	238.1
107.5°	440.7	394.1	341.2	303.0
110°	487.7	437.1	381.7	347.4



TEST NUMBER: P1427960

CATALOG NUMBER: SQ2W-PH1-K-125U-125D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	533.3	481.5	424.7	390.5
115°	595.3	538.2	486.0	456.7
117.5°	655.0	596.3	541.2	518.0
120°	691.6	632.8	579.0	561.1
122.5°	721.6	664.2	614.2	606.7
125°	766.6	707.9	665.5	675.2
127.5°	803.1	749.3	722.5	744.4
130°	825.3	778.0	761.7	792.7
132.5°	844.9	808.0	800.8	843.6
135°	874.2	853.0	859.6	918.3
137.5°	909.1	901.0	922.8	996.9
140°	931.3	936.2	967.2	1050.4
142.5°	961.3	972.7	1012.9	1101.3
145°	1008.0	1032.4	1084.6	1172.7
147.5°	1060.8	1092.5	1157.1	1247.4
150°	1096.1	1136.8	1205.3	1291.8
152.5°	1136.5	1178.6	1247.1	1334.8
155°	1198.8	1246.1	1317.9	1392.9
157.5°	1262.4	1310.7	1379.2	1444.8
160°	1301.6	1353.8	1415.7	1476.1
162.5°	1345.9	1394.2	1448.4	1502.2
165°	1410.8	1450.0	1494.0	1539.7
167.5°	1465.3	1497.9	1532.5	1568.1
170°	1500.6	1526.6	1556.0	1583.7
172.5°	1530.6	1551.4	1573.0	1596.8
175°	1570.7	1582.1	1595.2	1609.8
177.5°	1601.7	1605.6	1609.5	1616.0
180°	1614.7	1614.7	1614.7	1614.7



TEST NUMBER: P1427960
 CATALOG NUMBER: SQ2W-PH1-K-125U-125D-L930-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	19.95	20.84	20.88	21.78	23.00	18.78	19.66	19.71	20.61	21.83
	3H	22.13	22.92	23.07	23.87	25.12	19.83	20.62	20.77	21.58	22.83
	4H	22.94	23.69	23.90	24.65	25.91	20.08	20.83	21.03	21.79	23.04
	6H	23.41	24.10	24.38	25.07	26.33	20.22	20.91	21.19	21.87	23.14
	8H	23.56	24.22	24.54	25.20	26.47	20.28	20.94	21.25	21.92	23.18
	12H	23.62	24.25	24.60	25.22	26.51	20.29	20.92	21.27	21.89	23.18
4H	2H	20.39	21.14	21.35	22.10	23.35	19.47	20.22	20.43	21.18	22.43
	3H	22.64	23.27	23.61	24.26	25.53	20.70	21.32	21.67	22.31	23.58
	4H	23.52	24.09	24.50	25.07	26.36	20.99	21.56	21.97	22.54	23.84
	6H	24.08	24.57	25.07	25.57	26.87	21.19	21.68	22.18	22.69	23.98
	8H	24.28	24.74	25.28	25.74	27.04	21.28	21.74	22.28	22.74	24.04
	12H	24.37	24.78	25.38	25.79	27.11	21.31	21.72	22.32	22.73	24.05
8H	4H	23.54	24.00	24.54	25.00	26.30	21.22	21.68	22.22	22.68	23.98
	6H	24.17	24.55	25.19	25.59	26.90	21.49	21.87	22.51	22.91	24.21
	8H	24.44	24.77	25.46	25.80	27.12	21.64	21.97	22.67	23.00	24.32
	12H	24.57	24.86	25.60	25.88	27.25	21.70	22.00	22.73	23.02	24.39
12H	4H	23.50	23.91	24.51	24.92	26.23	21.22	21.63	22.23	22.65	23.96
	6H	24.15	24.48	25.18	25.51	26.83	21.53	21.86	22.55	22.89	24.21
	8H	24.42	24.71	25.45	25.74	27.10	21.69	21.98	22.72	23.00	24.37