

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1428206

Luminaire Tested: SQ2W-PR1-K-050U-050D-L930-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1428206
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-9)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-PR1-K-050U-050D-L930-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - PERCEIVE RIPPLE LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 500 LUMENS PER FOOT
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4100.6 lumens
Efficiency: N/A
Efficacy: 125.4 lumens/watt
Spacing Criteria (0/90/45): 1.28 / 1.34 / 1.36
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 32.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1428206

CATALOG NUMBER: SQ2W-PR1-K-050U-050D-L930-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

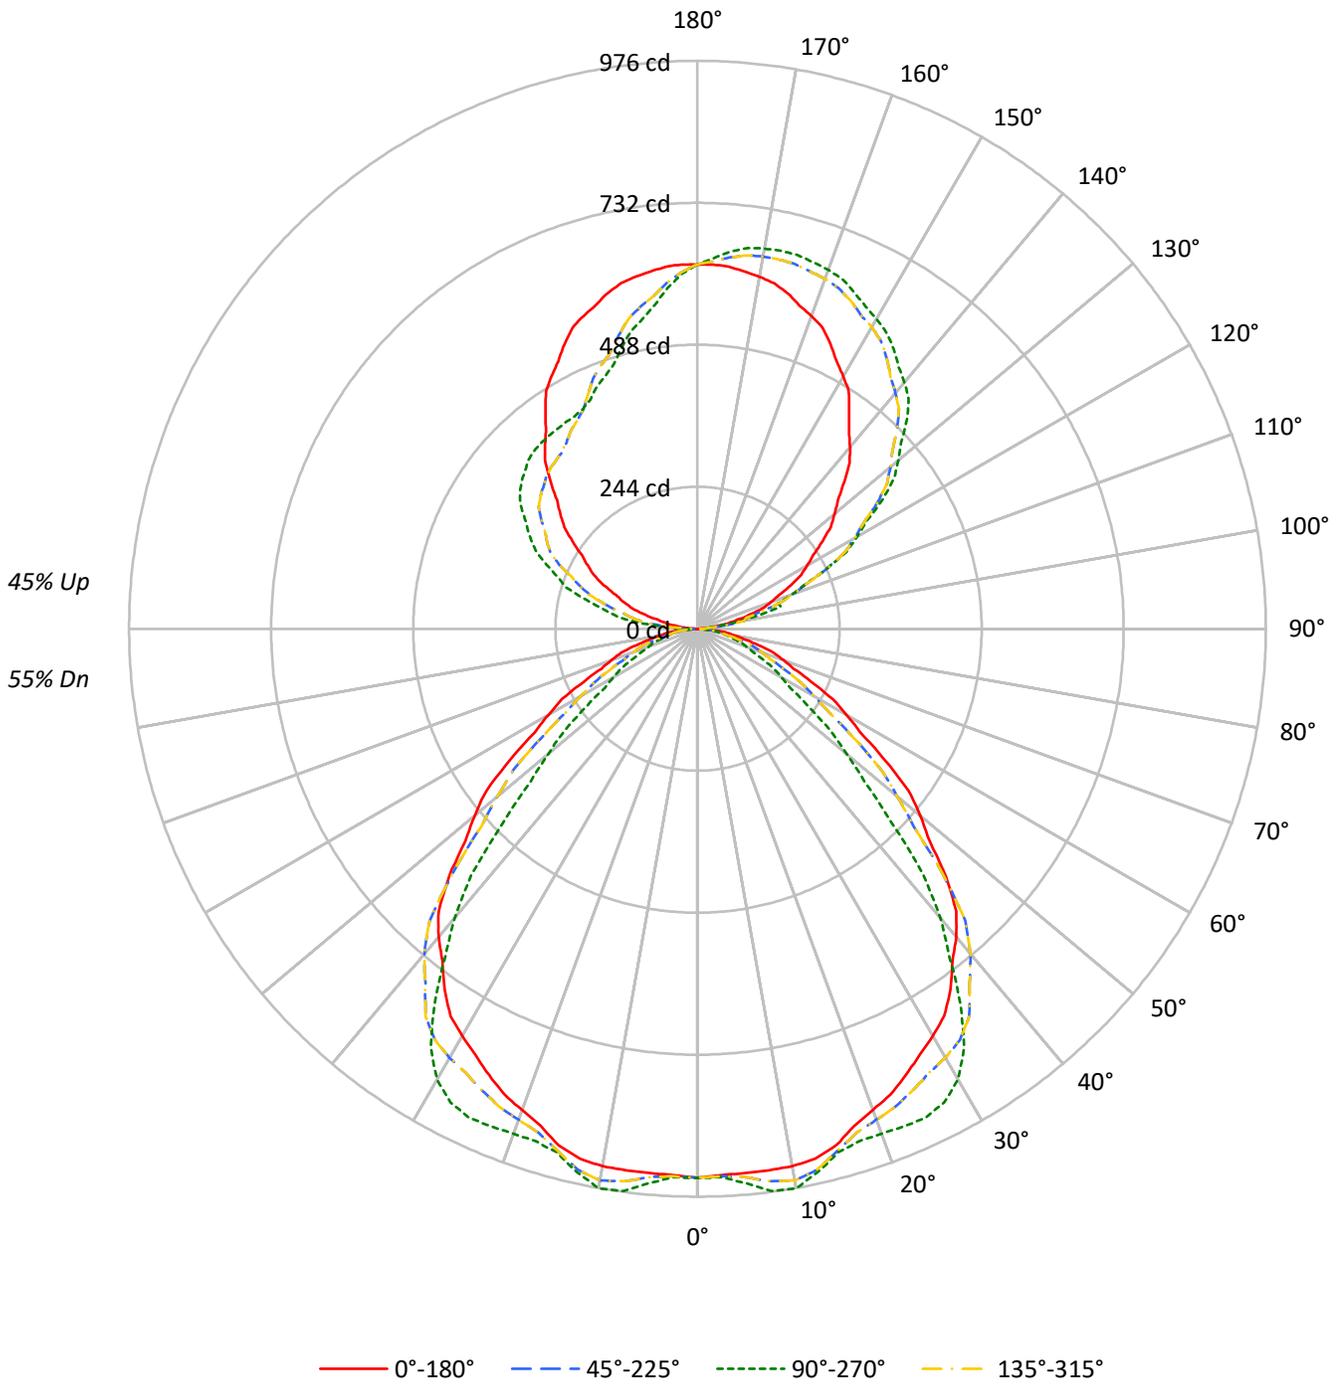



TEST NUMBER: P1428206

CATALOG NUMBER: SQ2W-PR1-K-050U-050D-L930-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55				55
1	100	96	92	89	93	89	86	83	77	74	72	65	64	62	55	54	53	48				48
2	91	84	78	74	85	79	74	69	68	64	61	58	56	53	49	47	46	41				41
3	84	75	68	62	78	70	64	59	61	56	52	52	49	46	44	42	40	36				36
4	77	66	59	53	71	62	55	50	54	49	45	47	43	40	40	37	35	31				31
5	71	60	52	46	66	56	49	44	49	43	39	42	38	35	36	33	30	27				27
6	65	54	46	40	61	50	43	38	44	39	34	38	34	31	33	30	27	24				24
7	61	49	41	35	56	46	39	34	40	35	30	35	31	27	30	27	24	22				22
8	56	44	37	31	52	42	35	30	37	31	27	32	28	24	28	24	22	20				20
9	52	40	33	28	49	38	31	27	34	28	24	30	25	22	26	22	20	18				18
10	49	37	30	25	46	35	29	24	31	26	22	27	23	20	24	20	18	16				16

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	15233	15233	15233	15233
5°	15214	15494	15214	15494
10°	15375	16004	15375	16004
15°	15370	15578	15370	15578
20°	15122	15864	15122	15864
25°	15078	16518	15078	16518
30°	15062	16676	15062	16676
35°	14919	15526	14919	15526
40°	14574	13664	14574	13664
45°	13791	10805	13791	10805
50°	12539	8382	12539	8382
55°	11020	6525	11020	6525
60°	9536	5373	9536	5373
65°	8229	4703	8229	4703
70°	7402	4178	7402	4178
75°	6781	3843	6781	3843
80°	5904	3756	5904	3756
85°	4279	1778	4279	1778

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 20°
 Vertical Angle: 45°
 Luminance: 14807 cd/sqm



TEST NUMBER: P1428206

CATALOG NUMBER: SQ2W-PR1-K-050U-050D-L930-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	91.1	2.2
10°-20°	263.8	6.4
20°-30°	407.8	9.9
30°-40°	490.4	12.0
40°-50°	440.3	10.7
50°-60°	295.1	7.2
60°-70°	171.6	4.2
70°-80°	88.2	2.1
80°-90°	24.3	0.6
90°-100°	49.8	1.2
100°-110°	145.3	3.5
110°-120°	237.1	5.8
120°-130°	300.9	7.3
130°-140°	322.0	7.9
140°-150°	300.7	7.3
150°-160°	247.4	6.0
160°-170°	165.9	4.0
170°-180°	58.9	1.4
0°-30°	762.7	18.6
0°-40°	1253.0	30.6
0°-60°	1988.4	48.5
0°-90°	2272.5	55.4
90°-120°	432.3	10.5
90°-150°	1355.8	33.1
90°-180°	1828.0	44.6
0°-180°	4100.6	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	944	944	944	944	944	
5°	939	956	939	956	939	90
15°	920	932	920	932	920	258
25°	846	927	846	927	846	390
35°	757	788	757	788	757	472
45°	604	473	604	473	604	462
55°	392	232	392	232	392	352
65°	215	123	215	123	215	218
75°	109	62	109	62	109	115
85°	23	10	23	10	23	29
90°	2	14	2	27	2	2
95°	20	14	20	85	20	24
105°	92	148	92	204	92	98
115°	177	245	177	302	177	175
125°	262	389	262	371	262	234
135°	356	509	356	410	356	275
145°	455	587	455	419	455	285
155°	540	638	540	435	540	248
165°	597	665	597	501	597	168
175°	624	651	624	588	624	59
180°	626	626	626	626	626	



TEST NUMBER: P1428206

CATALOG NUMBER: SQ2W-PR1-K-050U-050D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	943.5	943.5	943.5	943.5	943.5	943.5	943.5	943.5	943.5	943.5	943.5
2.5°	939.7	944.8	949.9	947.6	942.8	940.6	941.0	941.5	942.5	943.5	942.5
5°	938.7	946.0	953.3	951.5	946.8	944.9	945.8	947.5	951.8	956.0	951.8
7.5°	938.5	948.9	959.2	960.0	957.6	957.7	960.1	963.4	969.1	974.7	969.1
10°	937.8	950.2	962.6	964.4	962.7	962.0	962.4	964.3	970.2	976.2	970.2
12.5°	933.1	947.6	962.0	960.5	953.7	950.0	949.4	949.7	953.0	956.2	953.0
15°	919.5	936.6	953.7	946.7	931.8	924.9	926.2	927.7	929.9	932.0	929.9
17.5°	895.4	913.3	931.2	924.9	910.7	905.8	910.4	915.0	919.1	923.3	919.1
20°	880.1	897.6	915.1	910.8	899.3	896.5	902.5	908.8	916.1	923.3	916.1
22.5°	866.2	883.7	901.3	898.5	889.0	888.5	896.9	905.6	915.6	925.6	915.6
25°	846.4	861.8	877.2	877.5	872.8	877.5	891.6	905.0	916.1	927.2	916.1
27.5°	825.6	834.7	843.7	849.7	854.7	866.7	885.8	902.0	909.8	917.6	909.8
30°	807.9	813.9	819.9	831.0	843.8	858.6	875.2	888.5	891.5	894.5	891.5
32.5°	788.7	792.3	795.9	811.5	831.2	845.4	854.2	859.9	856.0	852.2	856.0
35°	756.9	759.9	762.9	782.9	808.6	818.0	811.1	804.0	795.8	787.7	795.8
37.5°	719.2	725.4	731.5	747.8	767.5	767.3	747.3	730.0	720.7	711.4	720.7
40°	691.5	701.8	712.1	723.0	734.1	724.7	694.7	669.6	658.9	648.3	658.9
42.5°	657.7	674.1	690.5	692.9	690.7	670.5	632.4	600.6	587.5	574.4	587.5
45°	604.0	626.2	648.5	635.8	611.4	578.5	537.0	502.3	487.7	473.2	487.7
47.5°	540.7	563.6	586.4	562.4	522.8	484.5	447.5	416.3	402.7	389.1	402.7
50°	499.2	517.6	535.9	508.8	466.5	428.0	393.4	363.7	348.7	333.7	348.7
52.5°	456.9	470.1	483.4	456.5	416.2	378.8	344.1	314.8	301.2	287.6	301.2
55°	391.5	398.3	405.1	380.2	344.8	310.6	277.6	250.6	241.2	231.8	241.2
57.5°	331.4	335.8	340.2	316.6	283.6	253.2	225.3	202.6	195.6	188.7	195.6
60°	295.3	298.3	301.3	277.3	244.4	217.0	195.2	177.5	171.9	166.4	171.9
62.5°	262.2	264.5	266.8	243.7	212.2	187.7	170.4	156.3	152.1	147.9	152.1
65°	215.4	217.6	219.7	200.1	173.1	153.0	139.8	129.1	126.1	123.1	126.1
67.5°	178.3	179.4	180.5	164.3	142.4	126.2	115.7	107.2	104.4	101.6	104.4
70°	156.8	157.2	157.6	143.3	124.1	109.8	100.3	92.8	90.6	88.5	90.6
72.5°	137.5	136.9	136.3	123.6	106.7	94.4	86.8	80.6	79.2	77.7	79.2
75°	108.7	107.4	106.1	95.5	81.9	72.5	67.3	63.3	62.4	61.6	62.4
77.5°	81.2	79.8	78.4	69.6	58.3	51.9	50.1	48.9	48.9	48.9	48.9
80°	63.5	61.8	60.1	53.2	44.7	40.4	40.4	40.4	40.4	40.4	40.4
82.5°	47.3	44.9	42.5	38.3	33.6	31.2	31.2	31.1	30.7	30.4	30.7
85°	23.1	20.9	18.8	18.3	18.3	17.0	14.4	12.2	10.9	9.6	10.9
87.5°	6.5	7.0	7.7	6.9	5.6	4.8	4.8	5.0	5.1	5.1	5.1
90°	1.9	4.4	7.6	10.1	12.0	12.6	12.6	13.3	13.9	13.9	13.9
92.5°	7.0	11.0	11.1	11.1	13.5	14.7	15.7	15.8	16.4	16.4	16.4
95°	19.6	21.5	32.3	31.6	21.5	17.1	14.5	14.5	14.5	14.5	14.5
97.5°	37.4	40.2	42.0	56.3	59.4	57.4	46.8	39.3	35.2	33.3	35.2
100°	53.1	54.4	58.2	58.8	74.6	89.8	82.2	72.7	69.6	67.7	69.6
102.5°	68.8	69.6	75.4	78.0	81.7	90.3	116.6	113.7	111.6	111.2	111.6
105°	92.3	93.0	103.7	108.8	111.3	111.3	110.7	123.3	143.6	148.0	143.6
107.5°	117.5	120.4	133.1	146.6	149.5	150.3	147.0	145.1	144.3	144.8	144.3
110°	134.7	139.1	154.3	171.4	175.8	177.1	175.8	173.9	172.6	172.6	172.6



TEST NUMBER: P1428206

CATALOG NUMBER: SQ2W-PR1-K-050U-050D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	151.4	157.8	175.0	194.7	202.1	205.9	203.1	201.7	200.5	201.5	200.5
115°	177.1	186.6	209.3	229.6	244.7	246.6	246.0	246.0	245.4	245.4	245.4
117.5°	200.9	216.0	241.6	265.1	282.7	287.7	290.3	289.5	288.8	290.0	288.8
120°	217.5	235.3	264.3	290.9	308.0	315.6	318.1	316.8	318.1	316.8	318.1
122.5°	235.3	257.0	285.6	313.2	333.3	341.9	344.9	345.2	345.4	344.7	345.4
125°	261.8	288.4	321.9	350.4	371.2	381.3	383.9	384.5	385.8	388.9	385.8
127.5°	288.6	318.7	355.5	383.0	404.4	416.6	420.5	421.9	424.6	426.0	424.6
130°	307.3	341.5	378.8	404.7	425.6	438.9	445.8	447.7	450.9	450.3	450.9
132.5°	327.1	362.7	400.6	427.5	446.9	461.2	467.1	472.5	473.7	474.6	473.7
135°	356.0	394.6	432.6	459.1	477.5	491.4	499.0	504.0	507.2	509.1	507.2
137.5°	386.5	427.3	463.7	487.3	505.8	517.8	526.4	531.7	535.0	536.5	535.0
140°	407.3	446.5	481.9	506.6	523.0	535.0	542.6	548.9	552.7	552.7	552.7
142.5°	427.0	465.7	500.1	524.8	539.2	550.2	558.3	563.1	567.4	567.4	567.4
145°	454.7	493.3	524.9	549.6	561.6	571.7	580.5	584.3	586.9	586.9	586.9
147.5°	483.7	517.8	546.7	570.3	580.4	592.3	599.3	602.3	605.5	604.1	605.5
150°	500.9	532.5	560.3	582.4	592.6	603.9	610.9	613.4	616.6	614.7	616.6
152.5°	517.6	547.7	573.0	593.6	602.2	613.6	621.5	624.1	626.2	624.8	626.2
155°	540.1	566.6	590.0	609.0	616.6	627.3	634.9	638.1	640.6	637.5	640.6
157.5°	560.2	583.1	603.4	620.9	629.0	638.2	645.3	649.2	651.8	650.4	651.8
160°	572.3	593.2	611.5	628.0	635.6	643.8	651.4	655.8	658.3	656.4	658.3
162.5°	582.4	601.3	618.6	633.5	640.1	647.3	656.4	660.4	662.9	660.5	662.9
165°	597.0	612.2	627.3	640.0	645.7	651.4	660.9	665.3	667.2	664.7	667.2
167.5°	608.0	619.6	631.9	642.8	647.0	652.5	662.0	665.7	668.1	664.9	668.1
170°	614.1	624.2	634.9	643.8	647.0	652.0	661.5	664.7	666.6	663.4	666.6
172.5°	619.1	626.7	635.4	643.3	644.9	649.0	658.0	661.1	662.5	659.9	662.5
175°	624.2	628.6	634.9	640.0	639.4	641.9	649.5	652.0	654.5	650.7	654.5
177.5°	626.6	628.6	630.6	633.7	631.6	631.6	637.2	638.7	639.2	637.2	639.2
180°	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1



TEST NUMBER: P1428206

CATALOG NUMBER: SQ2W-PR1-K-050U-050D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	943.5	943.5	943.5	943.5	943.5	943.5	943.5	943.5	943.5	943.5	943.5
2.5°	941.5	941.0	940.6	942.8	947.6	949.9	944.8	939.7	944.8	949.9	947.6
5°	947.5	945.8	944.9	946.8	951.5	953.3	946.0	938.7	946.0	953.3	951.5
7.5°	963.4	960.1	957.7	957.6	960.0	959.2	948.9	938.5	948.9	959.2	960.0
10°	964.3	962.4	962.0	962.7	964.4	962.6	950.2	937.8	950.2	962.6	964.4
12.5°	949.7	949.4	950.0	953.7	960.5	962.0	947.6	933.1	947.6	962.0	960.5
15°	927.7	926.2	924.9	931.8	946.7	953.7	936.6	919.5	936.6	953.7	946.7
17.5°	915.0	910.4	905.8	910.7	924.9	931.2	913.3	895.4	913.3	931.2	924.9
20°	908.8	902.5	896.5	899.3	910.8	915.1	897.6	880.1	897.6	915.1	910.8
22.5°	905.6	896.9	888.5	889.0	898.5	901.3	883.7	866.2	883.7	901.3	898.5
25°	905.0	891.6	877.5	872.8	877.5	877.2	861.8	846.4	861.8	877.2	877.5
27.5°	902.0	885.8	866.7	854.7	849.7	843.7	834.7	825.6	834.7	843.7	849.7
30°	888.5	875.2	858.6	843.8	831.0	819.9	813.9	807.9	813.9	819.9	831.0
32.5°	859.9	854.2	845.4	831.2	811.5	795.9	792.3	788.7	792.3	795.9	811.5
35°	804.0	811.1	818.0	808.6	782.9	762.9	759.9	756.9	759.9	762.9	782.9
37.5°	730.0	747.3	767.3	767.5	747.8	731.5	725.4	719.2	725.4	731.5	747.8
40°	669.6	694.7	724.7	734.1	723.0	712.1	701.8	691.5	701.8	712.1	723.0
42.5°	600.6	632.4	670.5	690.7	692.9	690.5	674.1	657.7	674.1	690.5	692.9
45°	502.3	537.0	578.5	611.4	635.8	648.5	626.2	604.0	626.2	648.5	635.8
47.5°	416.3	447.5	484.5	522.8	562.4	586.4	563.6	540.7	563.6	586.4	562.4
50°	363.7	393.4	428.0	466.5	508.8	535.9	517.6	499.2	517.6	535.9	508.8
52.5°	314.8	344.1	378.8	416.2	456.5	483.4	470.1	456.9	470.1	483.4	456.5
55°	250.6	277.6	310.6	344.8	380.2	405.1	398.3	391.5	398.3	405.1	380.2
57.5°	202.6	225.3	253.2	283.6	316.6	340.2	335.8	331.4	335.8	340.2	316.6
60°	177.5	195.2	217.0	244.4	277.3	301.3	298.3	295.3	298.3	301.3	277.3
62.5°	156.3	170.4	187.7	212.2	243.7	266.8	264.5	262.2	264.5	266.8	243.7
65°	129.1	139.8	153.0	173.1	200.1	219.7	217.6	215.4	217.6	219.7	200.1
67.5°	107.2	115.7	126.2	142.4	164.3	180.5	179.4	178.3	179.4	180.5	164.3
70°	92.8	100.3	109.8	124.1	143.3	157.6	157.2	156.8	157.2	157.6	143.3
72.5°	80.6	86.8	94.4	106.7	123.6	136.3	136.9	137.5	136.9	136.3	123.6
75°	63.3	67.3	72.5	81.9	95.5	106.1	107.4	108.7	107.4	106.1	95.5
77.5°	48.9	50.1	51.9	58.3	69.6	78.4	79.8	81.2	79.8	78.4	69.6
80°	40.4	40.4	40.4	44.7	53.2	60.1	61.8	63.5	61.8	60.1	53.2
82.5°	31.1	31.2	31.2	33.6	38.3	42.5	44.9	47.3	44.9	42.5	38.3
85°	12.2	14.4	17.0	18.3	18.3	18.8	20.9	23.1	20.9	18.8	18.3
87.5°	5.0	4.8	4.8	5.6	6.9	7.7	7.0	6.5	7.0	7.5	7.1
90°	13.3	12.6	12.6	12.0	10.1	7.6	4.4	1.9	4.4	7.0	11.4
92.5°	15.8	15.7	14.7	13.5	11.1	11.1	11.0	7.0	12.0	17.1	24.5
95°	14.5	14.5	17.1	21.5	31.6	32.3	21.5	19.6	27.8	39.2	49.3
97.5°	39.3	46.8	57.4	59.4	56.3	42.0	40.2	37.4	51.0	62.2	78.5
100°	72.7	82.2	89.8	74.6	58.8	58.2	54.4	53.1	67.7	78.4	94.2
102.5°	113.7	116.6	90.3	81.7	78.0	75.4	69.6	68.8	83.4	98.1	111.4
105°	123.3	110.7	111.3	111.3	108.8	103.7	93.0	92.3	108.8	125.8	142.3
107.5°	145.1	147.0	150.3	149.5	146.6	133.1	120.4	117.5	132.3	152.8	170.9
110°	173.9	175.8	177.1	175.8	171.4	154.3	139.1	134.7	148.0	169.5	189.1



TEST NUMBER: P1428206

CATALOG NUMBER: SQ2W-PR1-K-050U-050D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	201.7	203.1	205.9	202.1	194.7	175.0	157.8	151.4	164.7	186.7	206.8
115°	246.0	246.0	246.6	244.7	229.6	209.3	186.6	177.1	188.5	208.7	230.8
117.5°	289.5	290.3	287.7	282.7	265.1	241.6	216.0	200.9	209.8	231.2	254.0
120°	316.8	318.1	315.6	308.0	290.9	264.3	235.3	217.5	224.5	245.4	268.1
122.5°	345.2	344.9	341.9	333.3	313.2	285.6	257.0	235.3	238.2	257.5	279.8
125°	384.5	383.9	381.3	371.2	350.4	321.9	288.4	261.8	258.0	274.5	297.2
127.5°	421.9	420.5	416.6	404.4	383.0	355.5	318.7	288.6	280.2	290.5	311.4
130°	447.7	445.8	438.9	425.6	404.7	378.8	341.5	307.3	295.3	301.7	320.0
132.5°	472.5	467.1	461.2	446.9	427.5	400.6	362.7	327.1	310.5	313.3	327.6
135°	504.0	499.0	491.4	477.5	459.1	432.6	394.6	356.0	333.3	330.7	339.0
137.5°	531.7	526.4	517.8	505.8	487.3	463.7	427.3	386.5	357.8	349.3	352.5
140°	548.9	542.6	535.0	523.0	506.6	481.9	446.5	407.3	375.0	363.0	361.1
142.5°	563.1	558.3	550.2	539.2	524.8	500.1	465.7	427.0	392.7	377.2	372.7
145°	584.3	580.5	571.7	561.6	549.6	524.9	493.3	454.7	420.5	400.3	390.8
147.5°	602.3	599.3	592.3	580.4	570.3	546.7	517.8	483.7	448.6	423.6	411.3
150°	613.4	610.9	603.9	592.6	582.4	560.3	532.5	500.9	467.3	440.8	425.0
152.5°	624.1	621.5	613.6	602.2	593.6	573.0	547.7	517.6	483.5	457.0	440.7
155°	638.1	634.9	627.3	616.6	609.0	590.0	566.6	540.1	511.0	483.2	464.8
157.5°	649.2	645.3	638.2	629.0	620.9	603.4	583.1	560.2	534.8	508.2	489.5
160°	655.8	651.4	643.8	635.6	628.0	611.5	593.2	572.3	548.9	524.9	504.7
162.5°	660.4	656.4	647.3	640.1	633.5	618.6	601.3	582.4	561.6	540.6	521.9
165°	665.3	660.9	651.4	645.7	640.0	627.3	612.2	597.0	579.3	562.2	547.0
167.5°	665.7	662.0	652.5	647.0	642.8	631.9	619.6	608.0	594.2	580.8	568.2
170°	664.7	661.5	652.0	647.0	643.8	634.9	624.2	614.1	603.3	591.9	581.8
172.5°	661.1	658.0	649.0	644.9	643.3	635.4	626.7	619.1	609.9	601.5	593.4
175°	652.0	649.5	641.9	639.4	640.0	634.9	628.6	624.2	618.5	613.4	609.0
177.5°	638.7	637.2	631.6	631.6	633.7	630.6	628.6	626.6	624.1	622.5	621.0
180°	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1



TEST NUMBER: P1428206

CATALOG NUMBER: SQ2W-PR1-K-050U-050D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	943.5	943.5	943.5	943.5	943.5	943.5	943.5	943.5	943.5	943.5	943.5
2.5°	942.8	940.6	941.0	941.5	942.5	943.5	942.5	941.5	941.0	940.6	942.8
5°	946.8	944.9	945.8	947.5	951.8	956.0	951.8	947.5	945.8	944.9	946.8
7.5°	957.6	957.7	960.1	963.4	969.1	974.7	969.1	963.4	960.1	957.7	957.6
10°	962.7	962.0	962.4	964.3	970.2	976.2	970.2	964.3	962.4	962.0	962.7
12.5°	953.7	950.0	949.4	949.7	953.0	956.2	953.0	949.7	949.4	950.0	953.7
15°	931.8	924.9	926.2	927.7	929.9	932.0	929.9	927.7	926.2	924.9	931.8
17.5°	910.7	905.8	910.4	915.0	919.1	923.3	919.1	915.0	910.4	905.8	910.7
20°	899.3	896.5	902.5	908.8	916.1	923.3	916.1	908.8	902.5	896.5	899.3
22.5°	889.0	888.5	896.9	905.6	915.6	925.6	915.6	905.6	896.9	888.5	889.0
25°	872.8	877.5	891.6	905.0	916.1	927.2	916.1	905.0	891.6	877.5	872.8
27.5°	854.7	866.7	885.8	902.0	909.8	917.6	909.8	902.0	885.8	866.7	854.7
30°	843.8	858.6	875.2	888.5	891.5	894.5	891.5	888.5	875.2	858.6	843.8
32.5°	831.2	845.4	854.2	859.9	856.0	852.2	856.0	859.9	854.2	845.4	831.2
35°	808.6	818.0	811.1	804.0	795.8	787.7	795.8	804.0	811.1	818.0	808.6
37.5°	767.5	767.3	747.3	730.0	720.7	711.4	720.7	730.0	747.3	767.3	767.5
40°	734.1	724.7	694.7	669.6	658.9	648.3	658.9	669.6	694.7	724.7	734.1
42.5°	690.7	670.5	632.4	600.6	587.5	574.4	587.5	600.6	632.4	670.5	690.7
45°	611.4	578.5	537.0	502.3	487.7	473.2	487.7	502.3	537.0	578.5	611.4
47.5°	522.8	484.5	447.5	416.3	402.7	389.1	402.7	416.3	447.5	484.5	522.8
50°	466.5	428.0	393.4	363.7	348.7	333.7	348.7	363.7	393.4	428.0	466.5
52.5°	416.2	378.8	344.1	314.8	301.2	287.6	301.2	314.8	344.1	378.8	416.2
55°	344.8	310.6	277.6	250.6	241.2	231.8	241.2	250.6	277.6	310.6	344.8
57.5°	283.6	253.2	225.3	202.6	195.6	188.7	195.6	202.6	225.3	253.2	283.6
60°	244.4	217.0	195.2	177.5	171.9	166.4	171.9	177.5	195.2	217.0	244.4
62.5°	212.2	187.7	170.4	156.3	152.1	147.9	152.1	156.3	170.4	187.7	212.2
65°	173.1	153.0	139.8	129.1	126.1	123.1	126.1	129.1	139.8	153.0	173.1
67.5°	142.4	126.2	115.7	107.2	104.4	101.6	104.4	107.2	115.7	126.2	142.4
70°	124.1	109.8	100.3	92.8	90.6	88.5	90.6	92.8	100.3	109.8	124.1
72.5°	106.7	94.4	86.8	80.6	79.2	77.7	79.2	80.6	86.8	94.4	106.7
75°	81.9	72.5	67.3	63.3	62.4	61.6	62.4	63.3	67.3	72.5	81.9
77.5°	58.3	51.9	50.1	48.9	48.9	48.9	48.9	48.9	50.1	51.9	58.3
80°	44.7	40.4	40.4	40.4	40.4	40.4	40.4	40.4	40.4	40.4	44.7
82.5°	33.6	31.2	31.2	31.1	30.7	30.4	30.7	31.1	31.2	31.2	33.6
85°	18.3	17.0	14.4	12.2	10.9	9.6	10.9	12.2	14.4	17.0	18.3
87.5°	6.1	6.1	7.0	7.5	8.0	7.7	8.0	7.5	7.0	6.1	6.1
90°	14.5	19.0	23.4	25.9	28.5	27.2	28.5	25.9	23.4	19.0	14.5
92.5°	29.2	36.7	42.1	46.7	48.7	48.4	48.7	46.7	42.1	36.7	29.2
95°	58.8	67.7	76.5	82.8	86.6	85.4	86.6	82.8	76.5	67.7	58.8
97.5°	90.7	102.6	112.4	118.4	122.2	124.7	122.2	118.4	112.4	102.6	90.7
100°	111.9	123.3	134.7	141.7	148.0	150.5	148.0	141.7	134.7	123.3	111.9
102.5°	129.1	144.1	156.5	163.9	169.2	171.8	169.2	163.9	156.5	144.1	129.1
105°	157.5	173.3	186.6	196.0	201.7	203.6	201.7	196.0	186.6	173.3	157.5
107.5°	185.8	202.1	214.4	224.9	231.8	235.9	231.8	224.9	214.4	202.1	185.8
110°	208.1	221.3	234.6	244.1	251.1	253.6	251.1	244.1	234.6	221.3	208.1



TEST NUMBER: P1428206

CATALOG NUMBER: SQ2W-PR1-K-050U-050D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	226.8	241.6	254.9	264.3	272.3	275.9	272.3	264.3	254.9	241.6	226.8
115°	253.0	272.6	284.6	293.4	299.1	302.3	299.1	293.4	284.6	272.6	253.0
117.5°	274.7	295.2	308.4	315.2	317.8	320.1	317.8	315.2	308.4	295.2	274.7
120°	288.4	307.3	322.5	331.4	334.5	335.8	334.5	331.4	322.5	307.3	288.4
122.5°	301.0	319.0	333.7	344.5	349.7	351.0	349.7	344.5	333.7	319.0	301.0
125°	318.7	335.8	351.0	361.7	367.4	370.6	367.4	361.7	351.0	335.8	318.7
127.5°	334.2	352.6	366.5	376.3	381.8	384.4	381.8	376.3	366.5	352.6	334.2
130°	342.8	361.7	375.6	386.4	391.5	394.0	391.5	386.4	375.6	361.7	342.8
132.5°	349.3	369.3	383.7	393.5	399.0	401.6	399.0	393.5	383.7	369.3	349.3
135°	357.3	378.2	393.4	402.8	407.9	410.4	407.9	402.8	393.4	378.2	357.3
137.5°	364.3	383.2	399.0	409.0	413.6	415.2	413.6	409.0	399.0	383.2	364.3
140°	369.3	385.8	401.6	411.1	416.1	416.8	416.1	411.1	401.6	385.8	369.3
142.5°	375.9	388.8	402.6	412.1	417.1	418.3	417.1	412.1	402.6	388.8	375.9
145°	387.7	395.3	404.7	413.6	418.0	419.3	418.0	413.6	404.7	395.3	387.7
147.5°	402.5	404.9	409.8	415.6	419.9	420.8	419.9	415.6	409.8	404.9	402.5
150°	413.6	413.0	414.9	418.7	422.4	421.8	422.4	418.7	414.9	413.0	413.6
152.5°	426.2	422.6	422.4	424.2	426.0	425.9	426.0	424.2	422.4	422.6	426.2
155°	447.7	440.8	437.0	435.7	435.7	435.1	435.7	435.7	437.0	440.8	447.7
157.5°	471.4	461.7	456.0	452.9	452.0	450.7	452.0	452.9	456.0	461.7	471.4
160°	487.6	476.8	471.1	466.1	464.2	462.3	464.2	466.1	471.1	476.8	487.6
162.5°	502.8	492.5	486.3	481.8	479.9	477.0	479.9	481.8	486.3	492.5	502.8
165°	527.4	516.7	509.7	505.9	503.4	500.9	503.4	505.9	509.7	516.7	527.4
167.5°	552.1	540.3	535.8	531.5	529.1	524.5	529.1	531.5	535.8	540.3	552.1
170°	567.3	556.5	554.0	550.2	545.8	540.7	545.8	550.2	554.0	556.5	567.3
172.5°	580.4	573.2	570.7	566.9	565.5	561.4	565.5	566.9	570.7	573.2	580.4
175°	599.5	593.8	593.8	593.2	591.3	587.5	591.3	593.2	593.8	593.8	599.5
177.5°	615.5	612.4	614.4	614.4	613.9	610.4	613.9	614.4	614.4	612.4	615.5
180°	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1



TEST NUMBER: P1428206

CATALOG NUMBER: SQ2W-PR1-K-050U-050D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	943.5	943.5	943.5	943.5
2.5°	947.6	949.9	944.8	939.7
5°	951.5	953.3	946.0	938.7
7.5°	960.0	959.2	948.9	938.5
10°	964.4	962.6	950.2	937.8
12.5°	960.5	962.0	947.6	933.1
15°	946.7	953.7	936.6	919.5
17.5°	924.9	931.2	913.3	895.4
20°	910.8	915.1	897.6	880.1
22.5°	898.5	901.3	883.7	866.2
25°	877.5	877.2	861.8	846.4
27.5°	849.7	843.7	834.7	825.6
30°	831.0	819.9	813.9	807.9
32.5°	811.5	795.9	792.3	788.7
35°	782.9	762.9	759.9	756.9
37.5°	747.8	731.5	725.4	719.2
40°	723.0	712.1	701.8	691.5
42.5°	692.9	690.5	674.1	657.7
45°	635.8	648.5	626.2	604.0
47.5°	562.4	586.4	563.6	540.7
50°	508.8	535.9	517.6	499.2
52.5°	456.5	483.4	470.1	456.9
55°	380.2	405.1	398.3	391.5
57.5°	316.6	340.2	335.8	331.4
60°	277.3	301.3	298.3	295.3
62.5°	243.7	266.8	264.5	262.2
65°	200.1	219.7	217.6	215.4
67.5°	164.3	180.5	179.4	178.3
70°	143.3	157.6	157.2	156.8
72.5°	123.6	136.3	136.9	137.5
75°	95.5	106.1	107.4	108.7
77.5°	69.6	78.4	79.8	81.2
80°	53.2	60.1	61.8	63.5
82.5°	38.3	42.5	44.9	47.3
85°	18.3	18.8	20.9	23.1
87.5°	7.1	7.5	7.0	6.5
90°	11.4	7.0	4.4	1.9
92.5°	24.5	17.1	12.0	7.0
95°	49.3	39.2	27.8	19.6
97.5°	78.5	62.2	51.0	37.4
100°	94.2	78.4	67.7	53.1
102.5°	111.4	98.1	83.4	68.8
105°	142.3	125.8	108.8	92.3
107.5°	170.9	152.8	132.3	117.5
110°	189.1	169.5	148.0	134.7

TEST NUMBER: P1428206

CATALOG NUMBER: SQ2W-PR1-K-050U-050D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	206.8	186.7	164.7	151.4
115°	230.8	208.7	188.5	177.1
117.5°	254.0	231.2	209.8	200.9
120°	268.1	245.4	224.5	217.5
122.5°	279.8	257.5	238.2	235.3
125°	297.2	274.5	258.0	261.8
127.5°	311.4	290.5	280.2	288.6
130°	320.0	301.7	295.3	307.3
132.5°	327.6	313.3	310.5	327.1
135°	339.0	330.7	333.3	356.0
137.5°	352.5	349.3	357.8	386.5
140°	361.1	363.0	375.0	407.3
142.5°	372.7	377.2	392.7	427.0
145°	390.8	400.3	420.5	454.7
147.5°	411.3	423.6	448.6	483.7
150°	425.0	440.8	467.3	500.9
152.5°	440.7	457.0	483.5	517.6
155°	464.8	483.2	511.0	540.1
157.5°	489.5	508.2	534.8	560.2
160°	504.7	524.9	548.9	572.3
162.5°	521.9	540.6	561.6	582.4
165°	547.0	562.2	579.3	597.0
167.5°	568.2	580.8	594.2	608.0
170°	581.8	591.9	603.3	614.1
172.5°	593.4	601.5	609.9	619.1
175°	609.0	613.4	618.5	624.2
177.5°	621.0	622.5	624.1	626.6
180°	626.1	626.1	626.1	626.1



TEST NUMBER: P1428206
 CATALOG NUMBER: SQ2W-PR1-K-050U-050D-L930-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	16.63	17.49	17.55	18.42	19.62	13.00	13.86	13.92	14.79	15.99
	3H	17.84	18.61	18.77	19.55	20.77	14.16	14.93	15.09	15.87	17.09
	4H	18.32	19.05	19.27	19.99	21.22	14.62	15.35	15.57	16.30	17.53
	6H	18.62	19.29	19.57	20.24	21.48	14.97	15.64	15.92	16.59	17.83
	8H	18.72	19.36	19.68	20.33	21.57	15.10	15.74	16.07	16.71	17.95
	12H	18.76	19.37	19.73	20.33	21.59	15.13	15.74	16.10	16.70	17.97
4H	2H	16.73	17.46	17.68	18.41	19.64	13.71	14.44	14.66	15.38	16.61
	3H	18.19	18.80	19.15	19.77	21.02	15.06	15.67	16.03	16.64	17.89
	4H	18.82	19.37	19.79	20.34	21.61	15.61	16.16	16.58	17.13	18.40
	6H	19.25	19.73	20.24	20.72	21.99	16.04	16.52	17.03	17.51	18.78
	8H	19.41	19.85	20.40	20.84	22.12	16.23	16.67	17.21	17.66	18.94
	12H	19.48	19.88	20.48	20.88	22.16	16.27	16.67	17.28	17.68	18.96
8H	4H	18.85	19.29	19.83	20.28	21.56	15.94	16.38	16.92	17.37	18.65
	6H	19.38	19.74	20.39	20.77	22.05	16.48	16.84	17.49	17.87	19.15
	8H	19.61	19.94	20.63	20.95	22.25	16.74	17.06	17.76	18.08	19.38
	12H	19.73	20.02	20.75	21.03	22.37	16.83	17.12	17.85	18.13	19.47
12H	4H	18.81	19.20	19.81	20.21	21.49	15.96	16.36	16.96	17.36	18.64
	6H	19.37	19.69	20.39	20.71	22.00	16.55	16.87	17.57	17.89	19.19
	8H	19.62	19.90	20.64	20.91	22.26	16.84	17.12	17.86	18.13	19.48