

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1428605

Luminaire Tested: SQ2W-WBN-K-050U-100D-L930-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1428605
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G3-2308-130-2)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-WBN-K-050U-100D-L930-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - WHITE DISCREET BAFFLE, NARROW 35-DEGREE OPTIC
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 1000 LUMENS PER FOOT
UPLIGHT 500 LUMENS PER FOOT
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6040.0 lumens
Efficiency: N/A
Efficacy: 114.0 lumens/watt
Spacing Criteria (0/90/45): 0.59 / 0.58 / 0.63
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 53
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1428605

CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L930-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

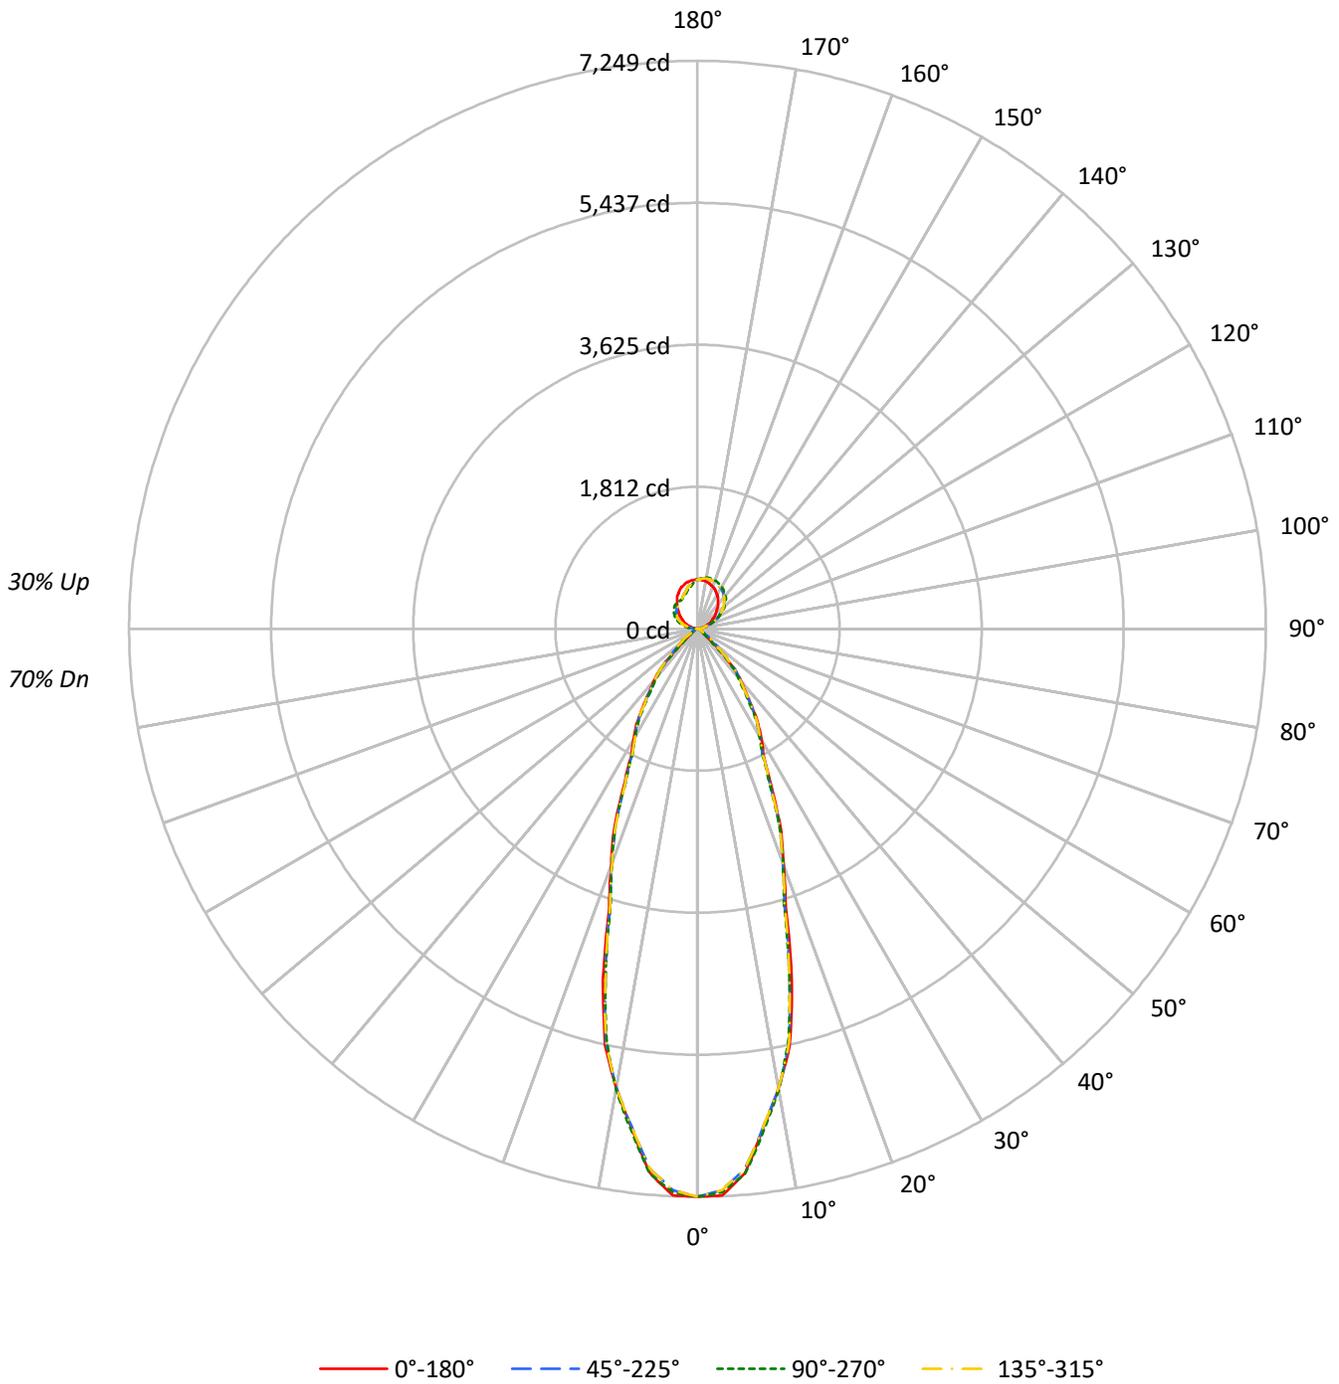



TEST NUMBER: P1428605

CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L930-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	112	112	112	112	106	106	106	106	94	94	94	84	84	84	74	74	74	74	74	74	70	
1	105	102	99	97	100	97	95	92	87	86	84	79	77	76	70	70	69	69	69	69	65	
2	99	93	89	85	94	89	85	82	81	78	75	73	71	69	67	65	64	64	64	64	60	
3	93	86	80	76	88	82	77	73	75	72	68	69	66	64	63	61	59	59	59	59	56	
4	88	79	73	69	83	76	71	67	70	66	63	65	61	59	59	57	55	55	55	55	52	
5	83	73	67	63	79	71	65	61	66	61	58	61	57	54	56	53	51	51	51	51	49	
6	78	68	62	57	74	66	60	56	61	57	53	57	53	51	53	50	48	48	48	48	46	
7	74	64	58	53	70	62	56	52	58	53	50	54	50	47	50	47	45	45	45	45	43	
8	70	60	54	49	67	58	52	48	54	50	46	51	47	44	48	45	42	42	42	42	41	
9	66	56	50	46	64	55	49	45	51	47	43	48	45	42	46	42	40	40	40	40	38	
10	63	53	47	43	61	52	46	42	49	44	41	46	42	39	43	40	38	38	38	38	36	

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	117039	117039	117039	117039
5°	113006	113131	113006	113131
10°	97678	97910	97678	97910
15°	77727	75577	77727	75577
20°	55217	54885	55217	54885
25°	39725	38670	39725	38670
30°	30351	29466	30351	29466
35°	23826	22812	23826	22812
40°	18052	16939	18052	16939
45°	10101	9015	10101	9015
50°	3554	3132	3554	3132
55°	2173	2063	2173	2063
60°	1660	1537	1660	1537
65°	1524	1425	1524	1425
70°	1459	1336	1459	1336
75°	1366	1285	1366	1285
80°	1199	1199	1199	1199
85°	1186	945	1186	945

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 40°
 Vertical Angle: 45°
 Luminance: 11976 cd/sqm



TEST NUMBER: P1428605

CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L930-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	629.3	10.4
10°-20°	1250.6	20.7
20°-30°	1035.7	17.1
30°-40°	745.1	12.3
40°-50°	379.5	6.3
50°-60°	98.7	1.6
60°-70°	41.0	0.7
70°-80°	22.8	0.4
80°-90°	9.3	0.2
90°-100°	49.8	0.8
100°-110°	145.3	2.4
110°-120°	237.1	3.9
120°-130°	300.9	5.0
130°-140°	322.0	5.3
140°-150°	300.7	5.0
150°-160°	247.4	4.1
160°-170°	165.9	2.7
170°-180°	58.9	1.0
0°-30°	2915.6	48.3
0°-40°	3660.7	60.6
0°-60°	4138.9	68.5
0°-90°	4212.0	69.7
90°-120°	432.3	7.2
90°-150°	1355.8	22.4
90°-180°	1828.0	30.3
0°-180°	6040.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	7249	7249	7249	7249	7249	
5°	6973	6980	6973	6980	6973	629
15°	4650	4522	4650	4522	4650	1262
25°	2230	2171	2230	2171	2230	1049
35°	1209	1157	1209	1157	1209	759
45°	442	395	442	395	442	354
55°	77	73	77	73	77	76
65°	40	37	40	37	40	40
75°	22	21	22	21	22	23
85°	6	5	6	5	6	7
90°	2	14	2	27	2	2
95°	20	14	20	85	20	24
105°	92	148	92	204	92	98
115°	177	245	177	302	177	175
125°	262	389	262	371	262	234
135°	356	509	356	410	356	275
145°	455	587	455	419	455	285
155°	540	638	540	435	540	248
165°	597	665	597	501	597	168
175°	624	651	624	588	624	59
180°	626	626	626	626	626	



TEST NUMBER: P1428605

CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	7249.0	7249.0	7249.0	7249.0	7249.0	7249.0	7249.0	7249.0	7249.0	7249.0	7249.0
2.5°	7237.7	7232.2	7226.8	7202.4	7171.8	7169.3	7194.9	7212.5	7206.1	7199.7	7206.1
5°	6972.6	6968.0	6963.4	6942.6	6916.3	6925.4	6970.0	7000.9	6990.6	6980.3	6990.6
7.5°	6425.0	6428.9	6432.8	6422.1	6406.5	6418.5	6457.9	6484.8	6473.8	6462.8	6473.8
10°	5957.9	5968.2	5978.5	5963.9	5941.1	5958.5	6016.2	6049.8	6010.9	5972.1	6010.9
12.5°	5442.5	5435.9	5429.2	5415.9	5400.4	5397.2	5406.5	5408.1	5386.6	5365.1	5386.6
15°	4650.1	4626.1	4602.1	4565.2	4524.1	4510.6	4524.9	4534.1	4527.8	4521.5	4527.8
17.5°	3745.5	3754.8	3764.1	3739.1	3702.8	3683.9	3682.5	3679.7	3672.6	3665.5	3672.6
20°	3213.7	3216.5	3219.4	3203.8	3182.1	3176.9	3188.4	3196.7	3195.5	3194.4	3195.5
22.5°	2785.7	2786.3	2786.8	2766.2	2738.6	2733.2	2750.1	2760.2	2749.9	2739.6	2749.9
25°	2229.9	2228.2	2226.5	2212.7	2195.0	2181.9	2173.3	2167.3	2169.0	2170.7	2169.0
27.5°	1828.7	1821.6	1814.5	1802.8	1789.5	1785.7	1791.5	1794.7	1790.5	1786.2	1790.5
30°	1628.0	1622.3	1616.6	1604.9	1591.2	1586.0	1589.5	1590.8	1585.6	1580.5	1585.6
32.5°	1448.0	1448.2	1448.5	1437.9	1423.7	1415.8	1414.2	1412.1	1408.3	1404.5	1408.3
35°	1208.8	1212.2	1215.7	1207.1	1194.5	1184.0	1175.4	1167.7	1162.5	1157.4	1162.5
37.5°	995.3	998.5	1001.7	994.6	983.9	972.3	959.8	949.3	944.9	940.6	944.9
40°	856.5	858.7	861.0	856.0	848.6	837.5	822.6	810.6	807.2	803.7	807.2
42.5°	705.2	714.8	724.4	721.3	713.8	703.1	689.2	676.9	669.3	661.8	669.3
45°	442.4	472.7	503.0	516.5	524.5	520.8	505.4	482.8	438.8	394.8	438.8
47.5°	223.8	265.7	307.7	337.8	364.0	355.6	312.7	269.8	226.6	183.4	226.6
50°	141.5	170.6	199.8	236.6	276.1	267.5	210.9	163.6	144.2	124.7	144.2
52.5°	108.5	123.5	138.5	173.5	215.2	211.2	161.5	121.5	110.8	100.0	110.8
55°	77.2	82.9	88.6	108.0	132.0	130.6	103.7	82.4	77.9	73.3	77.9
57.5°	59.7	62.9	66.1	73.3	81.9	81.1	70.9	62.6	59.7	56.8	59.7
60°	51.4	53.7	56.0	59.6	63.6	63.0	57.9	53.3	50.4	47.6	50.4
62.5°	46.3	47.7	49.0	50.7	52.4	51.6	48.3	45.5	44.5	43.5	44.5
65°	39.9	40.4	41.0	41.2	41.2	40.6	39.4	38.4	37.9	37.3	37.9
67.5°	33.9	34.5	35.1	35.2	35.0	34.7	34.1	33.5	33.0	32.4	33.0
70°	30.9	31.4	32.0	31.7	31.1	30.6	30.0	29.4	28.9	28.3	28.9
72.5°	26.7	27.3	27.9	27.6	27.0	26.7	26.6	26.3	25.8	25.2	25.8
75°	21.9	21.9	21.9	21.9	21.9	21.6	21.0	20.6	20.6	20.6	20.6
77.5°	17.0	17.1	17.2	16.8	16.2	15.9	15.9	15.8	15.4	14.9	15.4
80°	12.9	13.4	14.0	13.7	13.1	12.9	12.9	12.9	12.9	12.9	12.9
82.5°	10.8	10.9	11.0	10.6	10.1	9.8	9.8	9.8	9.8	9.8	9.8
85°	6.4	6.4	6.4	6.0	5.4	5.4	6.0	6.3	5.7	5.1	5.7
87.5°	2.4	2.9	3.6	4.1	4.5	4.6	4.6	4.7	4.8	4.8	4.8
90°	1.9	4.4	7.6	10.1	12.0	12.6	12.6	13.3	13.9	13.9	13.9
92.5°	7.0	11.0	11.1	11.1	13.5	14.7	15.7	15.8	16.4	16.4	16.4
95°	19.6	21.5	32.3	31.6	21.5	17.1	14.5	14.5	14.5	14.5	14.5
97.5°	37.4	40.2	42.0	56.3	59.4	57.4	46.8	39.3	35.2	33.3	35.2
100°	53.1	54.4	58.2	58.8	74.6	89.8	82.2	72.7	69.6	67.7	69.6
102.5°	68.8	69.6	75.4	78.0	81.7	90.3	116.6	113.7	111.6	111.2	111.6
105°	92.3	93.0	103.7	108.8	111.3	111.3	110.7	123.3	143.6	148.0	143.6
107.5°	117.5	120.4	133.1	146.6	149.5	150.3	147.0	145.1	144.3	144.8	144.3
110°	134.7	139.1	154.3	171.4	175.8	177.1	175.8	173.9	172.6	172.6	172.6



TEST NUMBER: P1428605

CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	151.4	157.8	175.0	194.7	202.1	205.9	203.1	201.7	200.5	201.5	200.5
115°	177.1	186.6	209.3	229.6	244.7	246.6	246.0	246.0	245.4	245.4	245.4
117.5°	200.9	216.0	241.6	265.1	282.7	287.7	290.3	289.5	288.8	290.0	288.8
120°	217.5	235.3	264.3	290.9	308.0	315.6	318.1	316.8	318.1	316.8	318.1
122.5°	235.3	257.0	285.6	313.2	333.3	341.9	344.9	345.2	345.4	344.7	345.4
125°	261.8	288.4	321.9	350.4	371.2	381.3	383.9	384.5	385.8	388.9	385.8
127.5°	288.6	318.7	355.5	383.0	404.4	416.6	420.5	421.9	424.6	426.0	424.6
130°	307.3	341.5	378.8	404.7	425.6	438.9	445.8	447.7	450.9	450.3	450.9
132.5°	327.1	362.7	400.6	427.5	446.9	461.2	467.1	472.5	473.7	474.6	473.7
135°	356.0	394.6	432.6	459.1	477.5	491.4	499.0	504.0	507.2	509.1	507.2
137.5°	386.5	427.3	463.7	487.3	505.8	517.8	526.4	531.7	535.0	536.5	535.0
140°	407.3	446.5	481.9	506.6	523.0	535.0	542.6	548.9	552.7	552.7	552.7
142.5°	427.0	465.7	500.1	524.8	539.2	550.2	558.3	563.1	567.4	567.4	567.4
145°	454.7	493.3	524.9	549.6	561.6	571.7	580.5	584.3	586.9	586.9	586.9
147.5°	483.7	517.8	546.7	570.3	580.4	592.3	599.3	602.3	605.5	604.1	605.5
150°	500.9	532.5	560.3	582.4	592.6	603.9	610.9	613.4	616.6	614.7	616.6
152.5°	517.6	547.7	573.0	593.6	602.2	613.6	621.5	624.1	626.2	624.8	626.2
155°	540.1	566.6	590.0	609.0	616.6	627.3	634.9	638.1	640.6	637.5	640.6
157.5°	560.2	583.1	603.4	620.9	629.0	638.2	645.3	649.2	651.8	650.4	651.8
160°	572.3	593.2	611.5	628.0	635.6	643.8	651.4	655.8	658.3	656.4	658.3
162.5°	582.4	601.3	618.6	633.5	640.1	647.3	656.4	660.4	662.9	660.5	662.9
165°	597.0	612.2	627.3	640.0	645.7	651.4	660.9	665.3	667.2	664.7	667.2
167.5°	608.0	619.6	631.9	642.8	647.0	652.5	662.0	665.7	668.1	664.9	668.1
170°	614.1	624.2	634.9	643.8	647.0	652.0	661.5	664.7	666.6	663.4	666.6
172.5°	619.1	626.7	635.4	643.3	644.9	649.0	658.0	661.1	662.5	659.9	662.5
175°	624.2	628.6	634.9	640.0	639.4	641.9	649.5	652.0	654.5	650.7	654.5
177.5°	626.6	628.6	630.6	633.7	631.6	631.6	637.2	638.7	639.2	637.2	639.2
180°	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1



TEST NUMBER: P1428605

CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	7249.0	7249.0	7249.0	7249.0	7249.0	7249.0	7249.0	7249.0	7249.0	7249.0	7249.0
2.5°	7212.5	7194.9	7169.3	7171.8	7202.4	7226.8	7232.2	7237.7	7232.2	7226.8	7202.4
5°	7000.9	6970.0	6925.4	6916.3	6942.6	6963.4	6968.0	6972.6	6968.0	6963.4	6942.6
7.5°	6484.8	6457.9	6418.5	6406.5	6422.1	6432.8	6428.9	6425.0	6428.9	6432.8	6422.1
10°	6049.8	6016.2	5958.5	5941.1	5963.9	5978.5	5968.2	5957.9	5968.2	5978.5	5963.9
12.5°	5408.1	5406.5	5397.2	5400.4	5415.9	5429.2	5435.9	5442.5	5435.9	5429.2	5415.9
15°	4534.1	4524.9	4510.6	4524.1	4565.2	4602.1	4626.1	4650.1	4626.1	4602.1	4565.2
17.5°	3679.7	3682.5	3683.9	3702.8	3739.1	3764.1	3754.8	3745.5	3754.8	3764.1	3739.1
20°	3196.7	3188.4	3176.9	3182.1	3203.8	3219.4	3216.5	3213.7	3216.5	3219.4	3203.8
22.5°	2760.2	2750.1	2733.2	2738.6	2766.2	2786.8	2786.3	2785.7	2786.3	2786.8	2766.2
25°	2167.3	2173.3	2181.9	2195.0	2212.7	2226.5	2228.2	2229.9	2228.2	2226.5	2212.7
27.5°	1794.7	1791.5	1785.7	1789.5	1802.8	1814.5	1821.6	1828.7	1821.6	1814.5	1802.8
30°	1590.8	1589.5	1586.0	1591.2	1604.9	1616.6	1622.3	1628.0	1622.3	1616.6	1604.9
32.5°	1412.1	1414.2	1415.8	1423.7	1437.9	1448.5	1448.2	1448.0	1448.2	1448.5	1437.9
35°	1167.7	1175.4	1184.0	1194.5	1207.1	1215.7	1212.2	1208.8	1212.2	1215.7	1207.1
37.5°	949.3	959.8	972.3	983.9	994.6	1001.7	998.5	995.3	998.5	1001.7	994.6
40°	810.6	822.6	837.5	848.6	856.0	861.0	858.7	856.5	858.7	861.0	856.0
42.5°	676.9	689.2	703.1	713.8	721.3	724.4	714.8	705.2	714.8	724.4	721.3
45°	482.8	505.4	520.8	524.5	516.5	503.0	472.7	442.4	472.7	503.0	516.5
47.5°	269.8	312.7	355.6	364.0	337.8	307.7	265.7	223.8	265.7	307.7	337.8
50°	163.6	210.9	267.5	276.1	236.6	199.8	170.6	141.5	170.6	199.8	236.6
52.5°	121.5	161.5	211.2	215.2	173.5	138.5	123.5	108.5	123.5	138.5	173.5
55°	82.4	103.7	130.6	132.0	108.0	88.6	82.9	77.2	82.9	88.6	108.0
57.5°	62.6	70.9	81.1	81.9	73.3	66.1	62.9	59.7	62.9	66.1	73.3
60°	53.3	57.9	63.0	63.6	59.6	56.0	53.7	51.4	53.7	56.0	59.6
62.5°	45.5	48.3	51.6	52.4	50.7	49.0	47.7	46.3	47.7	49.0	50.7
65°	38.4	39.4	40.6	41.2	41.2	41.0	40.4	39.9	40.4	41.0	41.2
67.5°	33.5	34.1	34.7	35.0	35.2	35.1	34.5	33.9	34.5	35.1	35.2
70°	29.4	30.0	30.6	31.1	31.7	32.0	31.4	30.9	31.4	32.0	31.7
72.5°	26.3	26.6	26.7	27.0	27.6	27.9	27.3	26.7	27.3	27.9	27.6
75°	20.6	21.0	21.6	21.9	21.9	21.9	21.9	21.9	21.9	21.9	21.9
77.5°	15.8	15.9	15.9	16.2	16.8	17.2	17.1	17.0	17.1	17.2	16.8
80°	12.9	12.9	12.9	13.1	13.7	14.0	13.4	12.9	13.4	14.0	13.7
82.5°	9.8	9.8	9.8	10.1	10.6	11.0	10.9	10.8	10.9	11.0	10.6
85°	6.3	6.0	5.4	5.4	6.0	6.4	6.4	6.4	6.4	6.4	6.0
87.5°	4.7	4.6	4.6	4.5	4.1	3.6	2.9	2.4	2.9	3.4	4.3
90°	13.3	12.6	12.6	12.0	10.1	7.6	4.4	1.9	4.4	7.0	11.4
92.5°	15.8	15.7	14.7	13.5	11.1	11.1	11.0	7.0	12.0	17.1	24.5
95°	14.5	14.5	17.1	21.5	31.6	32.3	21.5	19.6	27.8	39.2	49.3
97.5°	39.3	46.8	57.4	59.4	56.3	42.0	40.2	37.4	51.0	62.2	78.5
100°	72.7	82.2	89.8	74.6	58.8	58.2	54.4	53.1	67.7	78.4	94.2
102.5°	113.7	116.6	90.3	81.7	78.0	75.4	69.6	68.8	83.4	98.1	111.4
105°	123.3	110.7	111.3	111.3	108.8	103.7	93.0	92.3	108.8	125.8	142.3
107.5°	145.1	147.0	150.3	149.5	146.6	133.1	120.4	117.5	132.3	152.8	170.9
110°	173.9	175.8	177.1	175.8	171.4	154.3	139.1	134.7	148.0	169.5	189.1



TEST NUMBER: P1428605

CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	201.7	203.1	205.9	202.1	194.7	175.0	157.8	151.4	164.7	186.7	206.8
115°	246.0	246.0	246.6	244.7	229.6	209.3	186.6	177.1	188.5	208.7	230.8
117.5°	289.5	290.3	287.7	282.7	265.1	241.6	216.0	200.9	209.8	231.2	254.0
120°	316.8	318.1	315.6	308.0	290.9	264.3	235.3	217.5	224.5	245.4	268.1
122.5°	345.2	344.9	341.9	333.3	313.2	285.6	257.0	235.3	238.2	257.5	279.8
125°	384.5	383.9	381.3	371.2	350.4	321.9	288.4	261.8	258.0	274.5	297.2
127.5°	421.9	420.5	416.6	404.4	383.0	355.5	318.7	288.6	280.2	290.5	311.4
130°	447.7	445.8	438.9	425.6	404.7	378.8	341.5	307.3	295.3	301.7	320.0
132.5°	472.5	467.1	461.2	446.9	427.5	400.6	362.7	327.1	310.5	313.3	327.6
135°	504.0	499.0	491.4	477.5	459.1	432.6	394.6	356.0	333.3	330.7	339.0
137.5°	531.7	526.4	517.8	505.8	487.3	463.7	427.3	386.5	357.8	349.3	352.5
140°	548.9	542.6	535.0	523.0	506.6	481.9	446.5	407.3	375.0	363.0	361.1
142.5°	563.1	558.3	550.2	539.2	524.8	500.1	465.7	427.0	392.7	377.2	372.7
145°	584.3	580.5	571.7	561.6	549.6	524.9	493.3	454.7	420.5	400.3	390.8
147.5°	602.3	599.3	592.3	580.4	570.3	546.7	517.8	483.7	448.6	423.6	411.3
150°	613.4	610.9	603.9	592.6	582.4	560.3	532.5	500.9	467.3	440.8	425.0
152.5°	624.1	621.5	613.6	602.2	593.6	573.0	547.7	517.6	483.5	457.0	440.7
155°	638.1	634.9	627.3	616.6	609.0	590.0	566.6	540.1	511.0	483.2	464.8
157.5°	649.2	645.3	638.2	629.0	620.9	603.4	583.1	560.2	534.8	508.2	489.5
160°	655.8	651.4	643.8	635.6	628.0	611.5	593.2	572.3	548.9	524.9	504.7
162.5°	660.4	656.4	647.3	640.1	633.5	618.6	601.3	582.4	561.6	540.6	521.9
165°	665.3	660.9	651.4	645.7	640.0	627.3	612.2	597.0	579.3	562.2	547.0
167.5°	665.7	662.0	652.5	647.0	642.8	631.9	619.6	608.0	594.2	580.8	568.2
170°	664.7	661.5	652.0	647.0	643.8	634.9	624.2	614.1	603.3	591.9	581.8
172.5°	661.1	658.0	649.0	644.9	643.3	635.4	626.7	619.1	609.9	601.5	593.4
175°	652.0	649.5	641.9	639.4	640.0	634.9	628.6	624.2	618.5	613.4	609.0
177.5°	638.7	637.2	631.6	631.6	633.7	630.6	628.6	626.6	624.1	622.5	621.0
180°	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1



TEST NUMBER: P1428605

CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	7249.0	7249.0	7249.0	7249.0	7249.0	7249.0	7249.0	7249.0	7249.0	7249.0	7249.0
2.5°	7171.8	7169.3	7194.9	7212.5	7206.1	7199.7	7206.1	7212.5	7194.9	7169.3	7171.8
5°	6916.3	6925.4	6970.0	7000.9	6990.6	6980.3	6990.6	7000.9	6970.0	6925.4	6916.3
7.5°	6406.5	6418.5	6457.9	6484.8	6473.8	6462.8	6473.8	6484.8	6457.9	6418.5	6406.5
10°	5941.1	5958.5	6016.2	6049.8	6010.9	5972.1	6010.9	6049.8	6016.2	5958.5	5941.1
12.5°	5400.4	5397.2	5406.5	5408.1	5386.6	5365.1	5386.6	5408.1	5406.5	5397.2	5400.4
15°	4524.1	4510.6	4524.9	4534.1	4527.8	4521.5	4527.8	4534.1	4524.9	4510.6	4524.1
17.5°	3702.8	3683.9	3682.5	3679.7	3672.6	3665.5	3672.6	3679.7	3682.5	3683.9	3702.8
20°	3182.1	3176.9	3188.4	3196.7	3195.5	3194.4	3195.5	3196.7	3188.4	3176.9	3182.1
22.5°	2738.6	2733.2	2750.1	2760.2	2749.9	2739.6	2749.9	2760.2	2750.1	2733.2	2738.6
25°	2195.0	2181.9	2173.3	2167.3	2169.0	2170.7	2169.0	2167.3	2173.3	2181.9	2195.0
27.5°	1789.5	1785.7	1791.5	1794.7	1790.5	1786.2	1790.5	1794.7	1791.5	1785.7	1789.5
30°	1591.2	1586.0	1589.5	1590.8	1585.6	1580.5	1585.6	1590.8	1589.5	1586.0	1591.2
32.5°	1423.7	1415.8	1414.2	1412.1	1408.3	1404.5	1408.3	1412.1	1414.2	1415.8	1423.7
35°	1194.5	1184.0	1175.4	1167.7	1162.5	1157.4	1162.5	1167.7	1175.4	1184.0	1194.5
37.5°	983.9	972.3	959.8	949.3	944.9	940.6	944.9	949.3	959.8	972.3	983.9
40°	848.6	837.5	822.6	810.6	807.2	803.7	807.2	810.6	822.6	837.5	848.6
42.5°	713.8	703.1	689.2	676.9	669.3	661.8	669.3	676.9	689.2	703.1	713.8
45°	524.5	520.8	505.4	482.8	438.8	394.8	438.8	482.8	505.4	520.8	524.5
47.5°	364.0	355.6	312.7	269.8	226.6	183.4	226.6	269.8	312.7	355.6	364.0
50°	276.1	267.5	210.9	163.6	144.2	124.7	144.2	163.6	210.9	267.5	276.1
52.5°	215.2	211.2	161.5	121.5	110.8	100.0	110.8	121.5	161.5	211.2	215.2
55°	132.0	130.6	103.7	82.4	77.9	73.3	77.9	82.4	103.7	130.6	132.0
57.5°	81.9	81.1	70.9	62.6	59.7	56.8	59.7	62.6	70.9	81.1	81.9
60°	63.6	63.0	57.9	53.3	50.4	47.6	50.4	53.3	57.9	63.0	63.6
62.5°	52.4	51.6	48.3	45.5	44.5	43.5	44.5	45.5	48.3	51.6	52.4
65°	41.2	40.6	39.4	38.4	37.9	37.3	37.9	38.4	39.4	40.6	41.2
67.5°	35.0	34.7	34.1	33.5	33.0	32.4	33.0	33.5	34.1	34.7	35.0
70°	31.1	30.6	30.0	29.4	28.9	28.3	28.9	29.4	30.0	30.6	31.1
72.5°	27.0	26.7	26.6	26.3	25.8	25.2	25.8	26.3	26.6	26.7	27.0
75°	21.9	21.6	21.0	20.6	20.6	20.6	20.6	20.6	21.0	21.6	21.9
77.5°	16.2	15.9	15.9	15.8	15.4	14.9	15.4	15.8	15.9	15.9	16.2
80°	13.1	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	12.9	13.1
82.5°	10.1	9.8	9.8	9.8	9.8	9.8	9.8	9.8	9.8	9.8	10.1
85°	5.4	5.4	6.0	6.3	5.7	5.1	5.7	6.3	6.0	5.4	5.4
87.5°	5.0	5.9	6.7	7.2	7.7	7.5	7.7	7.2	6.7	5.9	5.0
90°	14.5	19.0	23.4	25.9	28.5	27.2	28.5	25.9	23.4	19.0	14.5
92.5°	29.2	36.7	42.1	46.7	48.7	48.4	48.7	46.7	42.1	36.7	29.2
95°	58.8	67.7	76.5	82.8	86.6	85.4	86.6	82.8	76.5	67.7	58.8
97.5°	90.7	102.6	112.4	118.4	122.2	124.7	122.2	118.4	112.4	102.6	90.7
100°	111.9	123.3	134.7	141.7	148.0	150.5	148.0	141.7	134.7	123.3	111.9
102.5°	129.1	144.1	156.5	163.9	169.2	171.8	169.2	163.9	156.5	144.1	129.1
105°	157.5	173.3	186.6	196.0	201.7	203.6	201.7	196.0	186.6	173.3	157.5
107.5°	185.8	202.1	214.4	224.9	231.8	235.9	231.8	224.9	214.4	202.1	185.8
110°	208.1	221.3	234.6	244.1	251.1	253.6	251.1	244.1	234.6	221.3	208.1



TEST NUMBER: P1428605

CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	226.8	241.6	254.9	264.3	272.3	275.9	272.3	264.3	254.9	241.6	226.8
115°	253.0	272.6	284.6	293.4	299.1	302.3	299.1	293.4	284.6	272.6	253.0
117.5°	274.7	295.2	308.4	315.2	317.8	320.1	317.8	315.2	308.4	295.2	274.7
120°	288.4	307.3	322.5	331.4	334.5	335.8	334.5	331.4	322.5	307.3	288.4
122.5°	301.0	319.0	333.7	344.5	349.7	351.0	349.7	344.5	333.7	319.0	301.0
125°	318.7	335.8	351.0	361.7	367.4	370.6	367.4	361.7	351.0	335.8	318.7
127.5°	334.2	352.6	366.5	376.3	381.8	384.4	381.8	376.3	366.5	352.6	334.2
130°	342.8	361.7	375.6	386.4	391.5	394.0	391.5	386.4	375.6	361.7	342.8
132.5°	349.3	369.3	383.7	393.5	399.0	401.6	399.0	393.5	383.7	369.3	349.3
135°	357.3	378.2	393.4	402.8	407.9	410.4	407.9	402.8	393.4	378.2	357.3
137.5°	364.3	383.2	399.0	409.0	413.6	415.2	413.6	409.0	399.0	383.2	364.3
140°	369.3	385.8	401.6	411.1	416.1	416.8	416.1	411.1	401.6	385.8	369.3
142.5°	375.9	388.8	402.6	412.1	417.1	418.3	417.1	412.1	402.6	388.8	375.9
145°	387.7	395.3	404.7	413.6	418.0	419.3	418.0	413.6	404.7	395.3	387.7
147.5°	402.5	404.9	409.8	415.6	419.9	420.8	419.9	415.6	409.8	404.9	402.5
150°	413.6	413.0	414.9	418.7	422.4	421.8	422.4	418.7	414.9	413.0	413.6
152.5°	426.2	422.6	422.4	424.2	426.0	425.9	426.0	424.2	422.4	422.6	426.2
155°	447.7	440.8	437.0	435.7	435.7	435.1	435.7	435.7	437.0	440.8	447.7
157.5°	471.4	461.7	456.0	452.9	452.0	450.7	452.0	452.9	456.0	461.7	471.4
160°	487.6	476.8	471.1	466.1	464.2	462.3	464.2	466.1	471.1	476.8	487.6
162.5°	502.8	492.5	486.3	481.8	479.9	477.0	479.9	481.8	486.3	492.5	502.8
165°	527.4	516.7	509.7	505.9	503.4	500.9	503.4	505.9	509.7	516.7	527.4
167.5°	552.1	540.3	535.8	531.5	529.1	524.5	529.1	531.5	535.8	540.3	552.1
170°	567.3	556.5	554.0	550.2	545.8	540.7	545.8	550.2	554.0	556.5	567.3
172.5°	580.4	573.2	570.7	566.9	565.5	561.4	565.5	566.9	570.7	573.2	580.4
175°	599.5	593.8	593.8	593.2	591.3	587.5	591.3	593.2	593.8	593.8	599.5
177.5°	615.5	612.4	614.4	614.4	613.9	610.4	613.9	614.4	614.4	612.4	615.5
180°	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1	626.1



TEST NUMBER: P1428605

CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	7249.0	7249.0	7249.0	7249.0
2.5°	7202.4	7226.8	7232.2	7237.7
5°	6942.6	6963.4	6968.0	6972.6
7.5°	6422.1	6432.8	6428.9	6425.0
10°	5963.9	5978.5	5968.2	5957.9
12.5°	5415.9	5429.2	5435.9	5442.5
15°	4565.2	4602.1	4626.1	4650.1
17.5°	3739.1	3764.1	3754.8	3745.5
20°	3203.8	3219.4	3216.5	3213.7
22.5°	2766.2	2786.8	2786.3	2785.7
25°	2212.7	2226.5	2228.2	2229.9
27.5°	1802.8	1814.5	1821.6	1828.7
30°	1604.9	1616.6	1622.3	1628.0
32.5°	1437.9	1448.5	1448.2	1448.0
35°	1207.1	1215.7	1212.2	1208.8
37.5°	994.6	1001.7	998.5	995.3
40°	856.0	861.0	858.7	856.5
42.5°	721.3	724.4	714.8	705.2
45°	516.5	503.0	472.7	442.4
47.5°	337.8	307.7	265.7	223.8
50°	236.6	199.8	170.6	141.5
52.5°	173.5	138.5	123.5	108.5
55°	108.0	88.6	82.9	77.2
57.5°	73.3	66.1	62.9	59.7
60°	59.6	56.0	53.7	51.4
62.5°	50.7	49.0	47.7	46.3
65°	41.2	41.0	40.4	39.9
67.5°	35.2	35.1	34.5	33.9
70°	31.7	32.0	31.4	30.9
72.5°	27.6	27.9	27.3	26.7
75°	21.9	21.9	21.9	21.9
77.5°	16.8	17.2	17.1	17.0
80°	13.7	14.0	13.4	12.9
82.5°	10.6	11.0	10.9	10.8
85°	6.0	6.4	6.4	6.4
87.5°	4.3	3.4	2.9	2.4
90°	11.4	7.0	4.4	1.9
92.5°	24.5	17.1	12.0	7.0
95°	49.3	39.2	27.8	19.6
97.5°	78.5	62.2	51.0	37.4
100°	94.2	78.4	67.7	53.1
102.5°	111.4	98.1	83.4	68.8
105°	142.3	125.8	108.8	92.3
107.5°	170.9	152.8	132.3	117.5
110°	189.1	169.5	148.0	134.7



TEST NUMBER: P1428605

CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L930-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	206.8	186.7	164.7	151.4
115°	230.8	208.7	188.5	177.1
117.5°	254.0	231.2	209.8	200.9
120°	268.1	245.4	224.5	217.5
122.5°	279.8	257.5	238.2	235.3
125°	297.2	274.5	258.0	261.8
127.5°	311.4	290.5	280.2	288.6
130°	320.0	301.7	295.3	307.3
132.5°	327.6	313.3	310.5	327.1
135°	339.0	330.7	333.3	356.0
137.5°	352.5	349.3	357.8	386.5
140°	361.1	363.0	375.0	407.3
142.5°	372.7	377.2	392.7	427.0
145°	390.8	400.3	420.5	454.7
147.5°	411.3	423.6	448.6	483.7
150°	425.0	440.8	467.3	500.9
152.5°	440.7	457.0	483.5	517.6
155°	464.8	483.2	511.0	540.1
157.5°	489.5	508.2	534.8	560.2
160°	504.7	524.9	548.9	572.3
162.5°	521.9	540.6	561.6	582.4
165°	547.0	562.2	579.3	597.0
167.5°	568.2	580.8	594.2	608.0
170°	581.8	591.9	603.3	614.1
172.5°	593.4	601.5	609.9	619.1
175°	609.0	613.4	618.5	624.2
177.5°	621.0	622.5	624.1	626.6
180°	626.1	626.1	626.1	626.1

TEST NUMBER: P1428605
 CATALOG NUMBER: SQ2W-WBN-K-050U-100D-L930-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.50	5.28	5.31	6.08	7.06	4.13	4.91	4.94	5.71	6.68
	3H	5.73	6.42	6.55	7.23	8.23	5.34	6.03	6.16	6.84	7.85
	4H	6.25	6.90	7.09	7.71	8.73	5.85	6.50	6.70	7.32	8.34
	6H	6.60	7.20	7.45	8.02	9.05	6.19	6.78	7.04	7.61	8.64
	8H	6.75	7.31	7.61	8.15	9.18	6.33	6.89	7.19	7.73	8.76
	12H	6.84	7.38	7.70	8.21	9.26	6.40	6.93	7.26	7.77	8.82
4H	2H	4.83	5.48	5.67	6.29	7.31	4.52	5.17	5.36	5.98	7.00
	3H	6.32	6.85	7.17	7.71	8.74	5.98	6.52	6.83	7.37	8.40
	4H	6.97	7.45	7.83	8.30	9.36	6.62	7.10	7.48	7.95	9.01
	6H	7.46	7.87	8.34	8.74	9.81	7.08	7.49	7.95	8.36	9.43
	8H	7.67	8.05	8.55	8.92	9.99	7.27	7.65	8.15	8.52	9.60
	12H	7.80	8.14	8.70	9.03	10.11	7.38	7.72	8.27	8.61	9.69
8H	4H	7.13	7.51	8.01	8.38	9.45	6.81	7.20	7.69	8.07	9.14
	6H	7.76	8.07	8.67	8.98	10.06	7.41	7.72	8.31	8.63	9.71
	8H	8.07	8.35	8.99	9.25	10.35	7.70	7.97	8.61	8.88	9.97
	12H	8.30	8.54	9.22	9.44	10.58	7.90	8.14	8.81	9.03	10.18
12H	4H	7.11	7.45	8.00	8.34	9.41	6.80	7.15	7.70	8.03	9.11
	6H	7.79	8.07	8.71	8.97	10.06	7.46	7.73	8.37	8.64	9.73
	8H	8.14	8.38	9.06	9.28	10.43	7.78	8.02	8.70	8.92	10.06