

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1427778

Luminaire Tested: SQ2W-F-K-125U-075D-L835-UNV-STD-W-WM-4

Issue Date: 3/10/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1427778  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-20)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/10/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ2W-F-K-125U-075D-L835-UNV-STD-W-WM-4  
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE  
DOWNLIGHT - FROSTED CONTINUOUS ROLL LENS  
UPLIGHT - ASYMMETRIC ROLL LENS  
DOWNLIGHT 750 LUMENS PER FOOT  
UPLIGHT 1250 LUMENS PER FOOT  
Light Source: 3500K CCT, 80 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 8919.0 lumens  
Efficiency: N/A  
Efficacy: 126.2 lumens/watt  
Spacing Criteria (0/90/45): 1.24 / 1.25 / 1.36  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Indirect

Input Watts (W): 70.7  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1427778

CATALOG NUMBER: SQ2W-F-K-125U-075D-L835-UNV-STD-W-WM-4

### Luminous Intensity Polar Plot

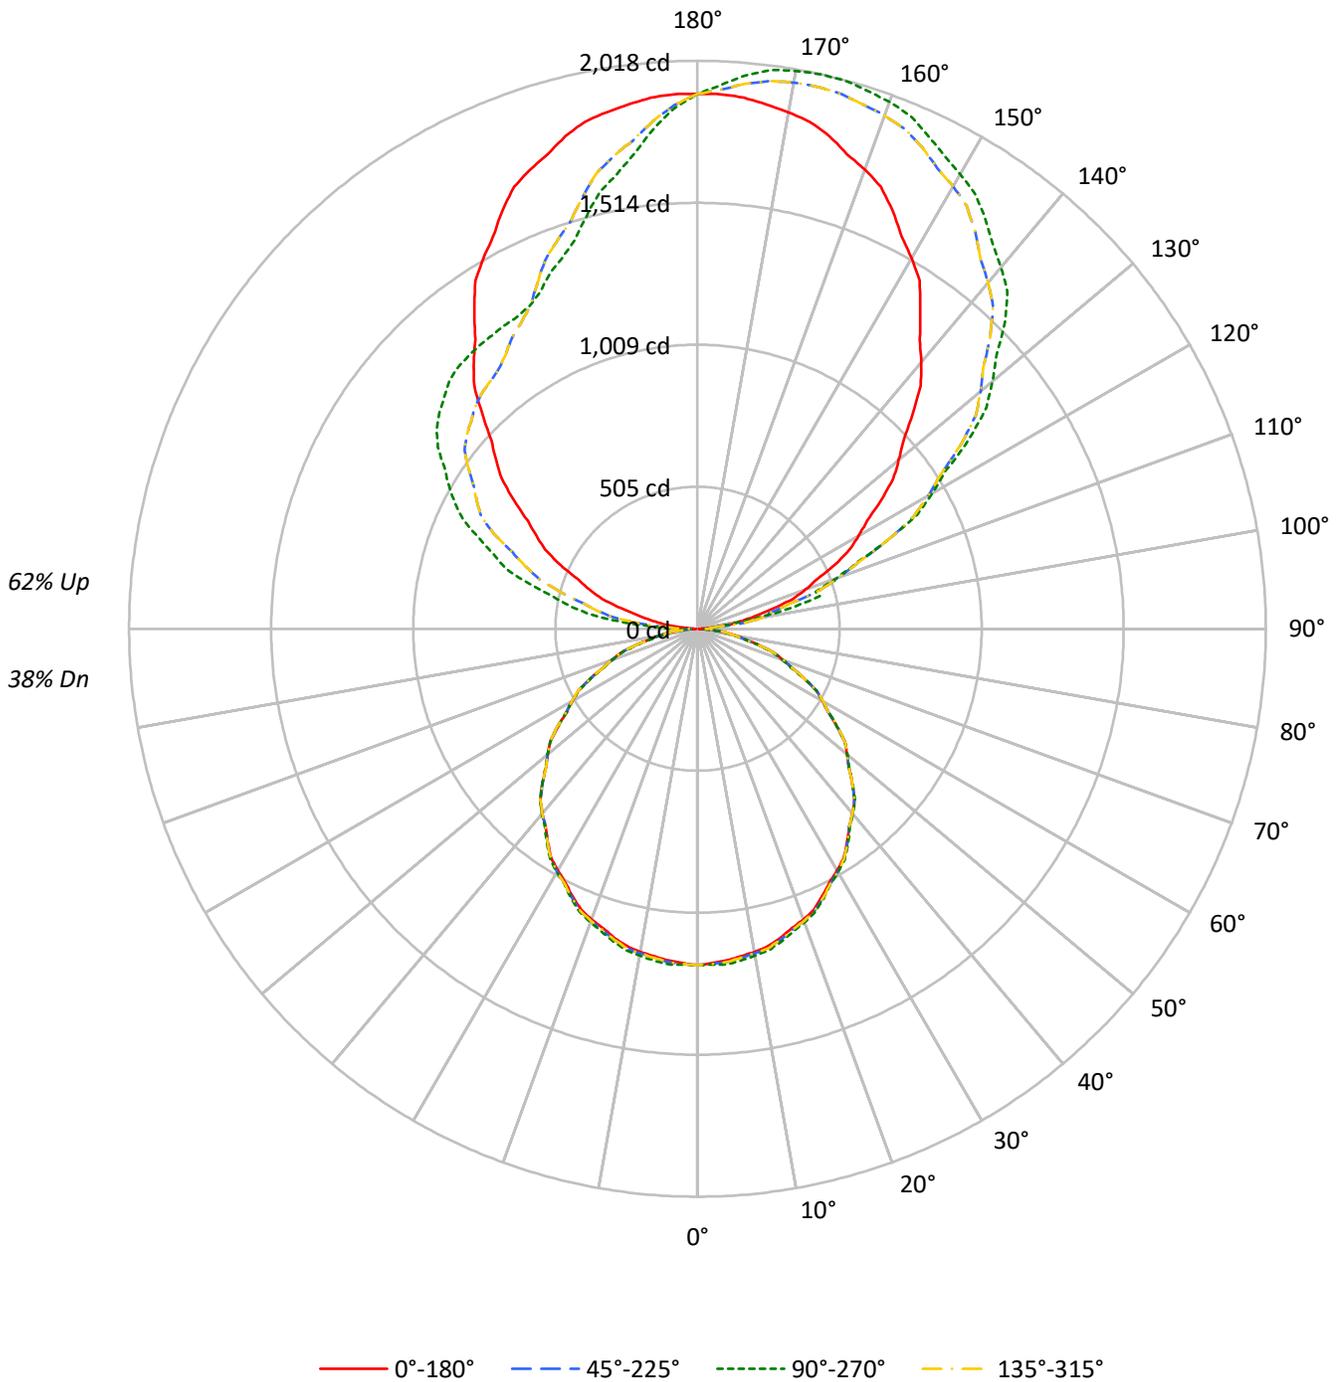



TEST NUMBER: P1427778

CATALOG NUMBER: SQ2W-F-K-125U-075D-L835-UNV-STD-W-WM-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	95	95	95	95	77	77	77	60	60	60	45	45	45	38
1	95	91	87	83	86	82	79	76	67	65	62	53	51	50	39	39	38	32
2	86	79	73	68	78	72	67	62	58	55	51	46	43	41	35	33	31	26
3	79	69	62	56	71	63	57	52	51	47	43	41	37	35	30	28	27	22
4	72	61	53	47	65	56	49	44	45	40	37	36	32	30	27	25	23	19
5	66	54	46	40	59	50	43	37	41	35	31	32	28	25	24	22	20	16
6	60	49	41	35	55	44	37	32	36	31	27	29	25	22	22	19	17	14
7	56	44	36	30	50	40	33	28	33	28	24	26	22	20	20	17	15	13
8	52	40	32	27	47	36	30	25	30	25	21	24	20	17	18	16	14	11
9	48	36	29	24	44	33	27	22	27	22	19	22	18	16	17	14	12	10
10	45	33	26	21	41	30	24	20	25	20	17	20	17	14	16	13	11	9

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	19297	19297	19297	19297
5°	19180	19398	19180	19398
10°	19111	19333	19111	19333
15°	19007	19246	19007	19246
20°	18886	19075	18886	19075
25°	18682	18848	18682	18848
30°	18485	18610	18485	18610
35°	18250	18366	18250	18366
40°	18041	18094	18041	18094
45°	17778	17778	17778	17778
50°	17422	17462	17422	17462
55°	17010	17036	17010	17036
60°	16552	16552	16552	16552
65°	16015	15950	16015	15950
70°	15257	15097	15257	15097
75°	14229	13911	14229	13911
80°	12682	12050	12682	12050
85°	10133	8577	10133	8577

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 20°  
 Vertical Angle: 45°  
 Luminance: 17897 cd/sqm



TEST NUMBER: P1427778

CATALOG NUMBER: SQ2W-F-K-125U-075D-L835-UNV-STD-W-WM-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	113.1	1.3
10°-20°	323.1	3.6
20°-30°	486.4	5.5
30°-40°	581.7	6.5
40°-50°	600.6	6.7
50°-60°	541.7	6.1
60°-70°	415.0	4.7
70°-80°	239.8	2.7
80°-90°	70.2	0.8
90°-100°	151.2	1.7
100°-110°	440.9	4.9
110°-120°	719.6	8.1
120°-130°	913.1	10.2
130°-140°	977.1	11.0
140°-150°	912.4	10.2
150°-160°	750.8	8.4
160°-170°	503.5	5.6
170°-180°	178.8	2.0
0°-30°	922.6	10.3
0°-40°	1504.3	16.9
0°-60°	2646.6	29.7
0°-90°	3371.6	37.8
90°-120°	1311.8	14.7
90°-150°	4114.3	46.1
90°-180°	5547.0	62.2
0°-180°	8919.0	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1195	1195	1195	1195	1195	
5°	1183	1197	1183	1197	1183	112
15°	1137	1151	1137	1151	1137	321
25°	1049	1058	1049	1058	1049	483
35°	926	932	926	932	926	579
45°	779	779	779	779	779	600
55°	604	605	604	605	604	540
65°	419	418	419	418	419	414
75°	228	223	228	223	228	242
85°	55	46	55	46	55	64
90°	6	42	6	82	6	7
95°	60	44	60	259	60	72
105°	280	449	280	618	280	298
115°	537	745	537	917	537	530
125°	794	1180	794	1125	794	711
135°	1080	1545	1080	1246	1080	835
145°	1380	1781	1380	1272	1380	863
155°	1639	1934	1639	1320	1639	753
165°	1812	2017	1812	1520	1812	510
175°	1894	1975	1894	1783	1894	180
180°	1900	1900	1900	1900	1900	



TEST NUMBER: P1427778

CATALOG NUMBER: SQ2W-F-K-125U-075D-L835-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	1195.2	1195.2	1195.2	1195.2	1195.2	1195.2	1195.2	1195.2	1195.2	1195.2	1195.2
2.5°	1189.1	1194.8	1200.5	1198.1	1193.0	1191.1	1192.3	1193.3	1193.9	1194.5	1193.9
5°	1183.4	1190.9	1198.4	1195.8	1189.8	1187.2	1187.9	1189.4	1193.1	1196.9	1193.1
7.5°	1173.8	1181.3	1188.8	1186.4	1180.7	1178.3	1179.2	1180.9	1184.7	1188.6	1184.7
10°	1165.7	1173.2	1180.7	1178.1	1172.1	1169.9	1171.4	1173.2	1176.2	1179.2	1176.2
12.5°	1155.6	1163.1	1170.6	1168.4	1163.1	1160.8	1161.7	1163.2	1166.5	1169.8	1166.5
15°	1137.1	1144.6	1152.1	1150.0	1144.8	1142.7	1143.9	1145.4	1148.4	1151.4	1148.4
17.5°	1114.7	1121.8	1128.8	1126.9	1122.1	1120.3	1121.5	1123.1	1125.8	1128.4	1125.8
20°	1099.2	1106.0	1112.7	1110.8	1105.9	1103.6	1104.0	1105.0	1107.6	1110.2	1107.6
22.5°	1080.4	1087.1	1093.9	1092.1	1087.6	1084.9	1084.0	1084.2	1087.4	1090.7	1087.4
25°	1048.7	1055.5	1062.2	1060.8	1056.7	1054.1	1053.0	1052.8	1055.4	1058.0	1055.4
27.5°	1015.8	1021.4	1027.0	1025.8	1022.4	1020.3	1019.5	1019.4	1021.3	1023.2	1021.3
30°	991.5	997.1	1002.7	1001.3	997.6	995.3	994.6	994.5	996.4	998.2	996.4
32.5°	965.9	971.2	976.5	974.6	970.3	968.0	967.9	968.3	970.5	972.7	970.5
35°	925.9	930.4	934.8	932.9	928.8	926.9	927.3	928.0	929.9	931.8	929.9
37.5°	885.6	889.1	892.5	890.5	886.7	884.7	884.7	885.0	886.6	888.2	886.6
40°	856.0	859.7	863.5	861.3	857.2	855.0	854.6	854.8	856.7	858.5	856.7
42.5°	825.7	828.5	831.4	829.5	825.9	824.3	824.5	824.9	825.9	826.9	825.9
45°	778.6	781.2	783.8	781.9	778.6	776.9	776.9	777.1	777.8	778.6	777.8
47.5°	729.2	731.3	733.3	731.8	729.2	727.7	727.2	727.2	728.4	729.6	728.4
50°	693.6	696.2	698.8	697.5	694.9	693.2	692.4	692.2	693.7	695.2	693.7
52.5°	658.5	661.5	664.4	663.1	660.5	658.7	657.6	657.2	658.4	659.5	658.4
55°	604.3	607.7	611.1	610.2	608.0	606.1	604.6	603.7	604.4	605.2	604.4
57.5°	549.0	552.2	555.5	554.9	553.0	551.1	549.3	548.2	549.3	550.3	549.3
60°	512.6	515.6	518.6	517.6	515.4	513.5	512.0	511.1	511.8	512.6	511.8
62.5°	475.6	478.5	481.5	480.4	477.8	475.8	474.3	473.4	474.1	474.9	474.1
65°	419.2	421.8	424.4	423.4	421.1	419.3	417.8	416.7	417.1	417.5	417.1
67.5°	362.3	364.5	366.8	365.7	363.5	361.3	359.2	357.7	358.3	358.9	358.3
70°	323.2	325.5	327.7	326.9	325.0	323.1	321.2	319.8	319.8	319.8	319.8
72.5°	285.5	287.4	289.4	288.3	286.1	284.2	282.6	281.5	281.5	281.5	281.5
75°	228.1	229.2	230.3	229.8	228.7	227.2	225.3	223.8	223.4	223.0	223.4
77.5°	172.7	172.7	172.7	171.6	170.2	168.8	167.4	166.2	165.8	165.3	165.8
80°	136.4	136.4	136.4	135.5	134.4	133.3	132.1	131.1	130.4	129.6	130.4
82.5°	102.7	102.1	101.5	100.5	99.4	98.0	96.2	95.1	95.9	96.6	95.9
85°	54.7	54.0	53.2	52.2	51.1	49.8	48.3	47.0	46.7	46.3	46.7
87.5°	18.0	18.9	20.2	21.0	21.2	20.5	19.3	18.8	18.8	18.5	18.8
90°	5.8	13.4	23.0	30.7	36.5	38.4	38.4	40.3	42.2	42.2	42.2
92.5°	21.1	33.4	33.8	33.8	41.1	44.5	47.6	48.0	49.9	49.9	49.9
95°	59.5	65.2	97.9	96.0	65.2	51.8	44.1	44.1	44.1	44.1	44.1
97.5°	113.6	122.1	127.4	170.8	180.4	174.3	142.0	119.4	106.7	100.9	106.7
100°	161.2	165.0	176.6	178.5	226.5	272.5	249.5	220.7	211.1	205.3	211.1
102.5°	208.8	211.1	228.8	236.8	247.9	274.0	353.9	345.1	338.5	337.4	338.5
105°	280.2	282.1	314.7	330.1	337.8	337.8	335.8	374.2	435.6	449.1	435.6
107.5°	356.6	365.4	403.8	444.8	453.7	456.0	446.0	440.2	437.9	439.5	437.9
110°	408.8	422.2	468.3	520.1	533.5	537.3	533.5	527.8	523.9	523.9	523.9



TEST NUMBER: P1427778

CATALOG NUMBER: SQ2W-F-K-125U-075D-L835-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	459.4	479.0	531.2	590.7	613.3	624.9	616.4	612.2	608.4	611.4	608.4
115°	537.3	566.1	635.2	696.6	742.7	748.4	746.5	746.5	744.6	744.6	744.6
117.5°	609.5	655.6	733.1	804.5	857.8	873.2	880.9	878.6	876.3	880.1	876.3
120°	660.2	713.9	802.2	882.8	934.6	957.6	965.3	961.5	965.3	961.5	965.3
122.5°	713.9	779.9	866.7	950.3	1011.4	1037.5	1046.7	1047.4	1048.2	1045.9	1048.2
125°	794.5	875.1	976.8	1063.2	1126.5	1157.2	1164.9	1166.8	1170.6	1180.2	1170.6
127.5°	875.9	967.2	1078.9	1162.2	1227.1	1264.3	1276.2	1280.4	1288.5	1292.7	1288.5
130°	932.7	1036.3	1149.5	1228.2	1291.6	1331.9	1353.0	1358.7	1368.3	1366.4	1368.3
132.5°	992.6	1100.8	1215.6	1297.3	1356.0	1399.4	1417.4	1433.9	1437.4	1440.1	1437.4
135°	1080.5	1197.5	1312.7	1393.3	1448.9	1491.1	1514.2	1529.5	1539.1	1544.9	1539.1
137.5°	1173.0	1296.5	1407.1	1478.9	1534.9	1571.4	1597.5	1613.6	1623.6	1628.2	1623.6
140°	1235.9	1354.9	1462.4	1537.2	1587.1	1623.6	1646.6	1665.8	1677.3	1677.3	1677.3
142.5°	1295.8	1413.2	1517.6	1592.5	1636.2	1669.6	1694.2	1708.8	1721.8	1721.8	1721.8
145°	1379.8	1496.9	1592.8	1667.7	1704.2	1734.9	1761.7	1773.2	1780.9	1780.9	1780.9
147.5°	1467.7	1571.4	1658.9	1730.6	1761.3	1797.4	1818.5	1827.7	1837.3	1833.1	1837.3
150°	1519.9	1615.9	1700.3	1767.5	1798.2	1832.7	1853.8	1861.5	1871.1	1865.4	1871.1
152.5°	1570.6	1661.9	1738.7	1801.3	1827.4	1861.9	1886.1	1893.8	1900.3	1896.1	1900.3
155°	1638.9	1719.5	1790.5	1848.1	1871.1	1903.7	1926.8	1936.4	1944.0	1934.4	1944.0
157.5°	1699.9	1769.4	1831.2	1884.2	1908.7	1936.8	1958.2	1970.1	1977.8	1973.6	1977.8
160°	1736.8	1800.1	1855.8	1905.7	1928.7	1953.6	1976.7	1990.1	1997.8	1992.0	1997.8
162.5°	1767.5	1824.7	1877.3	1922.5	1942.5	1964.4	1992.0	2003.9	2011.6	2004.3	2011.6
165°	1811.6	1857.7	1903.7	1942.1	1959.4	1976.7	2005.5	2018.9	2024.6	2017.0	2024.6
167.5°	1845.0	1880.3	1917.6	1950.6	1963.2	1980.1	2008.9	2020.0	2027.3	2017.7	2027.3
170°	1863.4	1894.1	1926.8	1953.6	1963.2	1978.6	2007.4	2017.0	2022.7	2013.1	2022.7
172.5°	1878.8	1901.8	1928.3	1952.1	1957.1	1969.4	1996.6	2006.2	2010.4	2002.4	2010.4
175°	1894.1	1907.6	1926.8	1942.1	1940.2	1947.9	1970.9	1978.6	1986.3	1974.7	1986.3
177.5°	1901.4	1907.6	1913.7	1922.9	1916.8	1916.8	1933.7	1938.3	1939.8	1933.7	1939.8
180°	1899.9	1899.9	1899.9	1899.9	1899.9	1899.9	1899.9	1899.9	1899.9	1899.9	1899.9



TEST NUMBER: P1427778

CATALOG NUMBER: SQ2W-F-K-125U-075D-L835-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	1195.2	1195.2	1195.2	1195.2	1195.2	1195.2	1195.2	1195.2	1195.2	1195.2	1195.2
2.5°	1193.3	1192.3	1191.1	1193.0	1198.1	1200.5	1194.8	1189.1	1194.8	1200.5	1198.1
5°	1189.4	1187.9	1187.2	1189.8	1195.8	1198.4	1190.9	1183.4	1190.9	1198.4	1195.8
7.5°	1180.9	1179.2	1178.3	1180.7	1186.4	1188.8	1181.3	1173.8	1181.3	1188.8	1186.4
10°	1173.2	1171.4	1169.9	1172.1	1178.1	1180.7	1173.2	1165.7	1173.2	1180.7	1178.1
12.5°	1163.2	1161.7	1160.8	1163.1	1168.4	1170.6	1163.1	1155.6	1163.1	1170.6	1168.4
15°	1145.4	1143.9	1142.7	1144.8	1150.0	1152.1	1144.6	1137.1	1144.6	1152.1	1150.0
17.5°	1123.1	1121.5	1120.3	1122.1	1126.9	1128.8	1121.8	1114.7	1121.8	1128.8	1126.9
20°	1105.0	1104.0	1103.6	1105.9	1110.8	1112.7	1106.0	1099.2	1106.0	1112.7	1110.8
22.5°	1084.2	1084.0	1084.9	1087.6	1092.1	1093.9	1087.1	1080.4	1087.1	1093.9	1092.1
25°	1052.8	1053.0	1054.1	1056.7	1060.8	1062.2	1055.5	1048.7	1055.5	1062.2	1060.8
27.5°	1019.4	1019.5	1020.3	1022.4	1025.8	1027.0	1021.4	1015.8	1021.4	1027.0	1025.8
30°	994.5	994.6	995.3	997.6	1001.3	1002.7	997.1	991.5	997.1	1002.7	1001.3
32.5°	968.3	967.9	968.0	970.3	974.6	976.5	971.2	965.9	971.2	976.5	974.6
35°	928.0	927.3	926.9	928.8	932.9	934.8	930.4	925.9	930.4	934.8	932.9
37.5°	885.0	884.7	884.7	886.7	890.5	892.5	889.1	885.6	889.1	892.5	890.5
40°	854.8	854.6	855.0	857.2	861.3	863.5	859.7	856.0	859.7	863.5	861.3
42.5°	824.9	824.5	824.3	825.9	829.5	831.4	828.5	825.7	828.5	831.4	829.5
45°	777.1	776.9	776.9	778.6	781.9	783.8	781.2	778.6	781.2	783.8	781.9
47.5°	727.2	727.2	727.7	729.2	731.8	733.3	731.3	729.2	731.3	733.3	731.8
50°	692.2	692.4	693.2	694.9	697.5	698.8	696.2	693.6	696.2	698.8	697.5
52.5°	657.2	657.6	658.7	660.5	663.1	664.4	661.5	658.5	661.5	664.4	663.1
55°	603.7	604.6	606.1	608.0	610.2	611.1	607.7	604.3	607.7	611.1	610.2
57.5°	548.2	549.3	551.1	553.0	554.9	555.5	552.2	549.0	552.2	555.5	554.9
60°	511.1	512.0	513.5	515.4	517.6	518.6	515.6	512.6	515.6	518.6	517.6
62.5°	473.4	474.3	475.8	477.8	480.4	481.5	478.5	475.6	478.5	481.5	480.4
65°	416.7	417.8	419.3	421.1	423.4	424.4	421.8	419.2	421.8	424.4	423.4
67.5°	357.7	359.2	361.3	363.5	365.7	366.8	364.5	362.3	364.5	366.8	365.7
70°	319.8	321.2	323.1	325.0	326.9	327.7	325.5	323.2	325.5	327.7	326.9
72.5°	281.5	282.6	284.2	286.1	288.3	289.4	287.4	285.5	287.4	289.4	288.3
75°	223.8	225.3	227.2	228.7	229.8	230.3	229.2	228.1	229.2	230.3	229.8
77.5°	166.2	167.4	168.8	170.2	171.6	172.7	172.7	172.7	172.7	172.7	171.6
80°	131.1	132.1	133.3	134.4	135.5	136.4	136.4	136.4	136.4	136.4	135.5
82.5°	95.1	96.2	98.0	99.4	100.5	101.5	102.1	102.7	102.1	101.5	100.5
85°	47.0	48.3	49.8	51.1	52.2	53.2	54.0	54.7	54.0	53.2	52.2
87.5°	18.8	19.3	20.5	21.2	21.0	20.2	18.9	18.0	18.9	19.9	21.7
90°	40.3	38.4	38.4	36.5	30.7	23.0	13.4	5.8	13.4	21.1	34.5
92.5°	48.0	47.6	44.5	41.1	33.8	33.8	33.4	21.1	36.5	51.8	74.5
95°	44.1	44.1	51.8	65.2	96.0	97.9	65.2	59.5	84.4	119.0	149.7
97.5°	119.4	142.0	174.3	180.4	170.8	127.4	122.1	113.6	154.7	188.8	238.4
100°	220.7	249.5	272.5	226.5	178.5	176.6	165.0	161.2	205.3	238.0	285.9
102.5°	345.1	353.9	274.0	247.9	236.8	228.8	211.1	208.8	252.9	297.8	338.1
105°	374.2	335.8	337.8	337.8	330.1	314.7	282.1	280.2	330.1	381.9	431.8
107.5°	440.2	446.0	456.0	453.7	444.8	403.8	365.4	356.6	401.5	463.7	518.5
110°	527.8	533.5	537.3	533.5	520.1	468.3	422.2	408.8	449.1	514.3	573.8



TEST NUMBER: P1427778

CATALOG NUMBER: SQ2W-F-K-125U-075D-L835-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	612.2	616.4	624.9	613.3	590.7	531.2	479.0	459.4	499.7	566.5	627.5
115°	746.5	746.5	748.4	742.7	696.6	635.2	566.1	537.3	571.9	633.3	700.5
117.5°	878.6	880.9	873.2	857.8	804.5	733.1	655.6	609.5	636.8	701.6	770.7
120°	961.5	965.3	957.6	934.6	882.8	802.2	713.9	660.2	681.3	744.6	813.7
122.5°	1047.4	1046.7	1037.5	1011.4	950.3	866.7	779.9	713.9	722.7	781.5	849.0
125°	1166.8	1164.9	1157.2	1126.5	1063.2	976.8	875.1	794.5	783.0	832.9	902.0
127.5°	1280.4	1276.2	1264.3	1227.1	1162.2	1078.9	967.2	875.9	850.2	881.6	945.0
130°	1358.7	1353.0	1331.9	1291.6	1228.2	1149.5	1036.3	932.7	896.2	915.4	971.1
132.5°	1433.9	1417.4	1399.4	1356.0	1297.3	1215.6	1100.8	992.6	942.3	950.7	994.1
135°	1529.5	1514.2	1491.1	1448.9	1393.3	1312.7	1197.5	1080.5	1011.4	1003.7	1028.6
137.5°	1613.6	1597.5	1571.4	1534.9	1478.9	1407.1	1296.5	1173.0	1085.8	1060.1	1069.7
140°	1665.8	1646.6	1623.6	1587.1	1537.2	1462.4	1354.9	1235.9	1138.0	1101.6	1095.8
142.5°	1708.8	1694.2	1669.6	1636.2	1592.5	1517.6	1413.2	1295.8	1191.8	1144.5	1131.1
145°	1773.2	1761.7	1734.9	1704.2	1667.7	1592.8	1496.9	1379.8	1276.2	1214.8	1186.0
147.5°	1827.7	1818.5	1797.4	1761.3	1730.6	1658.9	1571.4	1467.7	1361.4	1285.4	1248.2
150°	1861.5	1853.8	1832.7	1798.2	1767.5	1700.3	1615.9	1519.9	1418.2	1337.6	1289.6
152.5°	1893.8	1886.1	1861.9	1827.4	1801.3	1738.7	1661.9	1570.6	1467.3	1386.7	1337.2
155°	1936.4	1926.8	1903.7	1871.1	1848.1	1790.5	1719.5	1638.9	1550.6	1466.2	1410.5
157.5°	1970.1	1958.2	1936.8	1908.7	1884.2	1831.2	1769.4	1699.9	1622.8	1542.2	1485.4
160°	1990.1	1976.7	1953.6	1928.7	1905.7	1855.8	1800.1	1736.8	1665.8	1592.8	1531.4
162.5°	2003.9	1992.0	1964.4	1942.5	1922.5	1877.3	1824.7	1767.5	1704.2	1640.4	1583.6
165°	2018.9	2005.5	1976.7	1959.4	1942.1	1903.7	1857.7	1811.6	1757.9	1706.1	1660.0
167.5°	2020.0	2008.9	1980.1	1963.2	1950.6	1917.6	1880.3	1845.0	1803.2	1762.5	1724.1
170°	2017.0	2007.4	1978.6	1963.2	1953.6	1926.8	1894.1	1863.4	1830.8	1796.3	1765.6
172.5°	2006.2	1996.6	1969.4	1957.1	1952.1	1928.3	1901.8	1878.8	1850.8	1825.4	1800.9
175°	1978.6	1970.9	1947.9	1940.2	1942.1	1926.8	1907.6	1894.1	1876.9	1861.5	1848.1
177.5°	1938.3	1933.7	1916.8	1916.8	1922.9	1913.7	1907.6	1901.4	1893.8	1889.2	1884.6
180°	1899.9	1899.9	1899.9	1899.9	1899.9	1899.9	1899.9	1899.9	1899.9	1899.9	1899.9



TEST NUMBER: P1427778

CATALOG NUMBER: SQ2W-F-K-125U-075D-L835-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	1195.2	1195.2	1195.2	1195.2	1195.2	1195.2	1195.2	1195.2	1195.2	1195.2	1195.2
2.5°	1193.0	1191.1	1192.3	1193.3	1193.9	1194.5	1193.9	1193.3	1192.3	1191.1	1193.0
5°	1189.8	1187.2	1187.9	1189.4	1193.1	1196.9	1193.1	1189.4	1187.9	1187.2	1189.8
7.5°	1180.7	1178.3	1179.2	1180.9	1184.7	1188.6	1184.7	1180.9	1179.2	1178.3	1180.7
10°	1172.1	1169.9	1171.4	1173.2	1176.2	1179.2	1176.2	1173.2	1171.4	1169.9	1172.1
12.5°	1163.1	1160.8	1161.7	1163.2	1166.5	1169.8	1166.5	1163.2	1161.7	1160.8	1163.1
15°	1144.8	1142.7	1143.9	1145.4	1148.4	1151.4	1148.4	1145.4	1143.9	1142.7	1144.8
17.5°	1122.1	1120.3	1121.5	1123.1	1125.8	1128.4	1125.8	1123.1	1121.5	1120.3	1122.1
20°	1105.9	1103.6	1104.0	1105.0	1107.6	1110.2	1107.6	1105.0	1104.0	1103.6	1105.9
22.5°	1087.6	1084.9	1084.0	1084.2	1087.4	1090.7	1087.4	1084.2	1084.0	1084.9	1087.6
25°	1056.7	1054.1	1053.0	1052.8	1055.4	1058.0	1055.4	1052.8	1053.0	1054.1	1056.7
27.5°	1022.4	1020.3	1019.5	1019.4	1021.3	1023.2	1021.3	1019.4	1019.5	1020.3	1022.4
30°	997.6	995.3	994.6	994.5	996.4	998.2	996.4	994.5	994.6	995.3	997.6
32.5°	970.3	968.0	967.9	968.3	970.5	972.7	970.5	968.3	967.9	968.0	970.3
35°	928.8	926.9	927.3	928.0	929.9	931.8	929.9	928.0	927.3	926.9	928.8
37.5°	886.7	884.7	884.7	885.0	886.6	888.2	886.6	885.0	884.7	884.7	886.7
40°	857.2	855.0	854.6	854.8	856.7	858.5	856.7	854.8	854.6	855.0	857.2
42.5°	825.9	824.3	824.5	824.9	825.9	826.9	825.9	824.9	824.5	824.3	825.9
45°	778.6	776.9	776.9	777.1	777.8	778.6	777.8	777.1	776.9	776.9	778.6
47.5°	729.2	727.7	727.2	727.2	728.4	729.6	728.4	727.2	727.2	727.7	729.2
50°	694.9	693.2	692.4	692.2	693.7	695.2	693.7	692.2	692.4	693.2	694.9
52.5°	660.5	658.7	657.6	657.2	658.4	659.5	658.4	657.2	657.6	658.7	660.5
55°	608.0	606.1	604.6	603.7	604.4	605.2	604.4	603.7	604.6	606.1	608.0
57.5°	553.0	551.1	549.3	548.2	549.3	550.3	549.3	548.2	549.3	551.1	553.0
60°	515.4	513.5	512.0	511.1	511.8	512.6	511.8	511.1	512.0	513.5	515.4
62.5°	477.8	475.8	474.3	473.4	474.1	474.9	474.1	473.4	474.3	475.8	477.8
65°	421.1	419.3	417.8	416.7	417.1	417.5	417.1	416.7	417.8	419.3	421.1
67.5°	363.5	361.3	359.2	357.7	358.3	358.9	358.3	357.7	359.2	361.3	363.5
70°	325.0	323.1	321.2	319.8	319.8	319.8	319.8	319.8	321.2	323.1	325.0
72.5°	286.1	284.2	282.6	281.5	281.5	281.5	281.5	281.5	282.6	284.2	286.1
75°	228.7	227.2	225.3	223.8	223.4	223.0	223.4	223.8	225.3	227.2	228.7
77.5°	170.2	168.8	167.4	166.2	165.8	165.3	165.8	166.2	167.4	168.8	170.2
80°	134.4	133.3	132.1	131.1	130.4	129.6	130.4	131.1	132.1	133.3	134.4
82.5°	99.4	98.0	96.2	95.1	95.9	96.6	95.9	95.1	96.2	98.0	99.4
85°	51.1	49.8	48.3	47.0	46.7	46.3	46.7	47.0	48.3	49.8	51.1
87.5°	22.7	24.4	25.9	26.4	27.7	26.6	27.7	26.4	25.9	24.4	22.7
90°	44.1	57.6	71.0	78.7	86.4	82.5	86.4	78.7	71.0	57.6	44.1
92.5°	88.7	111.3	127.8	141.6	147.8	147.0	147.8	141.6	127.8	111.3	88.7
95°	178.5	205.3	232.2	251.4	262.9	259.1	262.9	251.4	232.2	205.3	178.5
97.5°	275.2	311.3	341.2	359.3	370.8	378.4	370.8	359.3	341.2	311.3	275.2
100°	339.7	374.2	408.8	429.9	449.1	456.7	449.1	429.9	408.8	374.2	339.7
102.5°	391.9	437.2	474.8	497.4	513.5	521.2	513.5	497.4	474.8	437.2	391.9
105°	477.9	525.8	566.1	594.9	612.2	617.9	612.2	594.9	566.1	525.8	477.9
107.5°	563.8	613.3	650.6	682.4	703.5	715.8	703.5	682.4	650.6	613.3	563.8
110°	631.4	671.7	712.0	740.8	761.9	769.6	761.9	740.8	712.0	671.7	631.4



TEST NUMBER: P1427778

CATALOG NUMBER: SQ2W-F-K-125U-075D-L835-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	688.2	733.1	773.4	802.2	826.4	837.1	826.4	802.2	773.4	733.1	688.2
115°	767.6	827.1	863.6	890.5	907.7	917.3	907.7	890.5	863.6	827.1	767.6
117.5°	833.7	895.8	935.8	956.5	964.5	971.4	964.5	956.5	935.8	895.8	833.7
120°	875.1	932.7	978.7	1005.6	1015.2	1019.0	1015.2	1005.6	978.7	932.7	875.1
122.5°	913.5	968.0	1012.5	1045.5	1061.3	1065.1	1061.3	1045.5	1012.5	968.0	913.5
125°	967.2	1019.0	1065.1	1097.7	1115.0	1124.6	1115.0	1097.7	1065.1	1019.0	967.2
127.5°	1014.1	1070.1	1112.3	1141.9	1158.7	1166.4	1158.7	1141.9	1112.3	1070.1	1014.1
130°	1040.1	1097.7	1139.9	1172.6	1187.9	1195.6	1187.9	1172.6	1139.9	1097.7	1040.1
132.5°	1060.1	1120.8	1164.5	1194.1	1210.9	1218.6	1210.9	1194.1	1164.5	1120.8	1060.1
135°	1084.3	1147.6	1193.7	1222.5	1237.8	1245.5	1237.8	1222.5	1193.7	1147.6	1084.3
137.5°	1105.4	1163.0	1210.9	1241.3	1255.1	1260.1	1255.1	1241.3	1210.9	1163.0	1105.4
140°	1120.8	1170.6	1218.6	1247.4	1262.8	1264.7	1262.8	1247.4	1218.6	1170.6	1120.8
142.5°	1140.7	1179.9	1221.7	1250.5	1265.8	1269.3	1265.8	1250.5	1221.7	1179.9	1140.7
145°	1176.4	1199.4	1228.2	1255.1	1268.5	1272.4	1268.5	1255.1	1228.2	1199.4	1176.4
147.5°	1221.3	1228.6	1243.6	1261.2	1274.3	1277.0	1274.3	1261.2	1243.6	1228.6	1221.3
150°	1255.1	1253.2	1258.9	1270.4	1282.0	1280.0	1282.0	1270.4	1258.9	1253.2	1255.1
152.5°	1293.5	1282.3	1282.0	1287.3	1292.7	1292.3	1292.7	1287.3	1282.0	1282.3	1293.5
155°	1358.7	1337.6	1326.1	1322.3	1322.3	1320.3	1322.3	1322.3	1326.1	1337.6	1358.7
157.5°	1430.5	1400.9	1383.7	1374.5	1371.8	1367.5	1371.8	1374.5	1383.7	1400.9	1430.5
160°	1479.6	1447.0	1429.7	1414.4	1408.6	1402.9	1408.6	1414.4	1429.7	1447.0	1479.6
162.5°	1525.7	1494.6	1475.8	1462.0	1456.2	1447.4	1456.2	1462.0	1475.8	1494.6	1525.7
165°	1600.5	1567.9	1546.8	1535.3	1527.6	1519.9	1527.6	1535.3	1546.8	1567.9	1600.5
167.5°	1675.4	1639.7	1625.9	1612.8	1605.5	1591.7	1605.5	1612.8	1625.9	1639.7	1675.4
170°	1721.4	1688.8	1681.1	1669.6	1656.2	1640.8	1656.2	1669.6	1681.1	1688.8	1721.4
172.5°	1761.3	1739.5	1731.8	1720.3	1716.1	1703.8	1716.1	1720.3	1731.8	1739.5	1761.3
175°	1819.3	1802.0	1802.0	1800.1	1794.4	1782.8	1794.4	1800.1	1802.0	1802.0	1819.3
177.5°	1867.7	1858.5	1864.6	1864.6	1863.1	1852.3	1863.1	1864.6	1864.6	1858.5	1867.7
180°	1899.9	1899.9	1899.9	1899.9	1899.9	1899.9	1899.9	1899.9	1899.9	1899.9	1899.9



TEST NUMBER: P1427778

CATALOG NUMBER: SQ2W-F-K-125U-075D-L835-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	330°	340°	350°	360°
0°	1195.2	1195.2	1195.2	1195.2
2.5°	1198.1	1200.5	1194.8	1189.1
5°	1195.8	1198.4	1190.9	1183.4
7.5°	1186.4	1188.8	1181.3	1173.8
10°	1178.1	1180.7	1173.2	1165.7
12.5°	1168.4	1170.6	1163.1	1155.6
15°	1150.0	1152.1	1144.6	1137.1
17.5°	1126.9	1128.8	1121.8	1114.7
20°	1110.8	1112.7	1106.0	1099.2
22.5°	1092.1	1093.9	1087.1	1080.4
25°	1060.8	1062.2	1055.5	1048.7
27.5°	1025.8	1027.0	1021.4	1015.8
30°	1001.3	1002.7	997.1	991.5
32.5°	974.6	976.5	971.2	965.9
35°	932.9	934.8	930.4	925.9
37.5°	890.5	892.5	889.1	885.6
40°	861.3	863.5	859.7	856.0
42.5°	829.5	831.4	828.5	825.7
45°	781.9	783.8	781.2	778.6
47.5°	731.8	733.3	731.3	729.2
50°	697.5	698.8	696.2	693.6
52.5°	663.1	664.4	661.5	658.5
55°	610.2	611.1	607.7	604.3
57.5°	554.9	555.5	552.2	549.0
60°	517.6	518.6	515.6	512.6
62.5°	480.4	481.5	478.5	475.6
65°	423.4	424.4	421.8	419.2
67.5°	365.7	366.8	364.5	362.3
70°	326.9	327.7	325.5	323.2
72.5°	288.3	289.4	287.4	285.5
75°	229.8	230.3	229.2	228.1
77.5°	171.6	172.7	172.7	172.7
80°	135.5	136.4	136.4	136.4
82.5°	100.5	101.5	102.1	102.7
85°	52.2	53.2	54.0	54.7
87.5°	21.7	19.9	18.9	18.0
90°	34.5	21.1	13.4	5.8
92.5°	74.5	51.8	36.5	21.1
95°	149.7	119.0	84.4	59.5
97.5°	238.4	188.8	154.7	113.6
100°	285.9	238.0	205.3	161.2
102.5°	338.1	297.8	252.9	208.8
105°	431.8	381.9	330.1	280.2
107.5°	518.5	463.7	401.5	356.6
110°	573.8	514.3	449.1	408.8



TEST NUMBER: P1427778

CATALOG NUMBER: SQ2W-F-K-125U-075D-L835-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	330°	340°	350°	360°
112.5°	627.5	566.5	499.7	459.4
115°	700.5	633.3	571.9	537.3
117.5°	770.7	701.6	636.8	609.5
120°	813.7	744.6	681.3	660.2
122.5°	849.0	781.5	722.7	713.9
125°	902.0	832.9	783.0	794.5
127.5°	945.0	881.6	850.2	875.9
130°	971.1	915.4	896.2	932.7
132.5°	994.1	950.7	942.3	992.6
135°	1028.6	1003.7	1011.4	1080.5
137.5°	1069.7	1060.1	1085.8	1173.0
140°	1095.8	1101.6	1138.0	1235.9
142.5°	1131.1	1144.5	1191.8	1295.8
145°	1186.0	1214.8	1276.2	1379.8
147.5°	1248.2	1285.4	1361.4	1467.7
150°	1289.6	1337.6	1418.2	1519.9
152.5°	1337.2	1386.7	1467.3	1570.6
155°	1410.5	1466.2	1550.6	1638.9
157.5°	1485.4	1542.2	1622.8	1699.9
160°	1531.4	1592.8	1665.8	1736.8
162.5°	1583.6	1640.4	1704.2	1767.5
165°	1660.0	1706.1	1757.9	1811.6
167.5°	1724.1	1762.5	1803.2	1845.0
170°	1765.6	1796.3	1830.8	1863.4
172.5°	1800.9	1825.4	1850.8	1878.8
175°	1848.1	1861.5	1876.9	1894.1
177.5°	1884.6	1889.2	1893.8	1901.4
180°	1899.9	1899.9	1899.9	1899.9



TEST NUMBER: P1427778  
 CATALOG NUMBER: SQ2W-F-K-125U-075D-L835-UNV-STD-W-WM-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	16.90	17.67	17.95	18.73	20.16	16.82	17.59	17.87	18.65	20.08
	3H	18.69	19.38	19.75	20.44	21.90	18.58	19.27	19.65	20.34	21.79
	4H	19.38	20.03	20.45	21.10	22.56	19.26	19.92	20.34	20.99	22.45
	6H	19.81	20.41	20.89	21.48	22.96	19.67	20.27	20.75	21.34	22.82
	8H	19.97	20.54	21.05	21.63	23.10	19.81	20.38	20.90	21.47	22.94
	12H	20.05	20.59	21.14	21.68	23.17	19.87	20.42	20.96	21.50	22.99
4H	2H	17.47	18.13	18.55	19.19	20.65	17.40	18.06	18.49	19.13	20.59
	3H	19.48	20.03	20.57	21.13	22.60	19.39	19.94	20.48	21.03	22.51
	4H	20.29	20.80	21.39	21.88	23.38	20.18	20.69	21.28	21.77	23.27
	6H	20.84	21.27	21.94	22.38	23.87	20.70	21.13	21.80	22.24	23.73
	8H	21.05	21.46	22.16	22.56	24.06	20.89	21.30	22.00	22.40	23.90
	12H	21.16	21.53	22.28	22.64	24.15	20.98	21.34	22.10	22.46	23.97
8H	4H	20.53	20.93	21.63	22.04	23.54	20.43	20.84	21.54	21.94	23.44
	6H	21.22	21.55	22.34	22.69	24.19	21.08	21.42	22.21	22.56	24.06
	8H	21.52	21.81	22.65	22.94	24.46	21.36	21.66	22.49	22.78	24.30
	12H	21.70	21.96	22.83	23.08	24.63	21.51	21.76	22.64	22.89	24.44
12H	4H	20.52	20.89	21.64	22.00	23.51	20.43	20.79	21.55	21.91	23.42
	6H	21.26	21.56	22.40	22.68	24.20	21.14	21.43	22.27	22.56	24.08
	8H	21.59	21.85	22.73	22.97	24.53	21.44	21.70	22.58	22.82	24.38