

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1435860

Luminaire Tested: SQ2W-FA-K-150U-050D-L835-UNV-STD-W-WM-4

Issue Date: 3/24/2026

Test Information

Test Method: LM-79-2019
Report Number: P1435860
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2502-345-2)
Test Lab: INNOVATION CENTER
Issue Date: 3/24/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-FA-K-150U-050D-L835-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - FROSTED CONTINUOUS ASYMMETRIC ROLL LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 1500 LUMENS PER FOOT
Light Source: 3500K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8777.0 lumens
Efficiency: N/A
Efficacy: 120.4 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.23 / 1.34
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 72.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1435860

CATALOG NUMBER: SQ2W-FA-K-150U-050D-L835-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

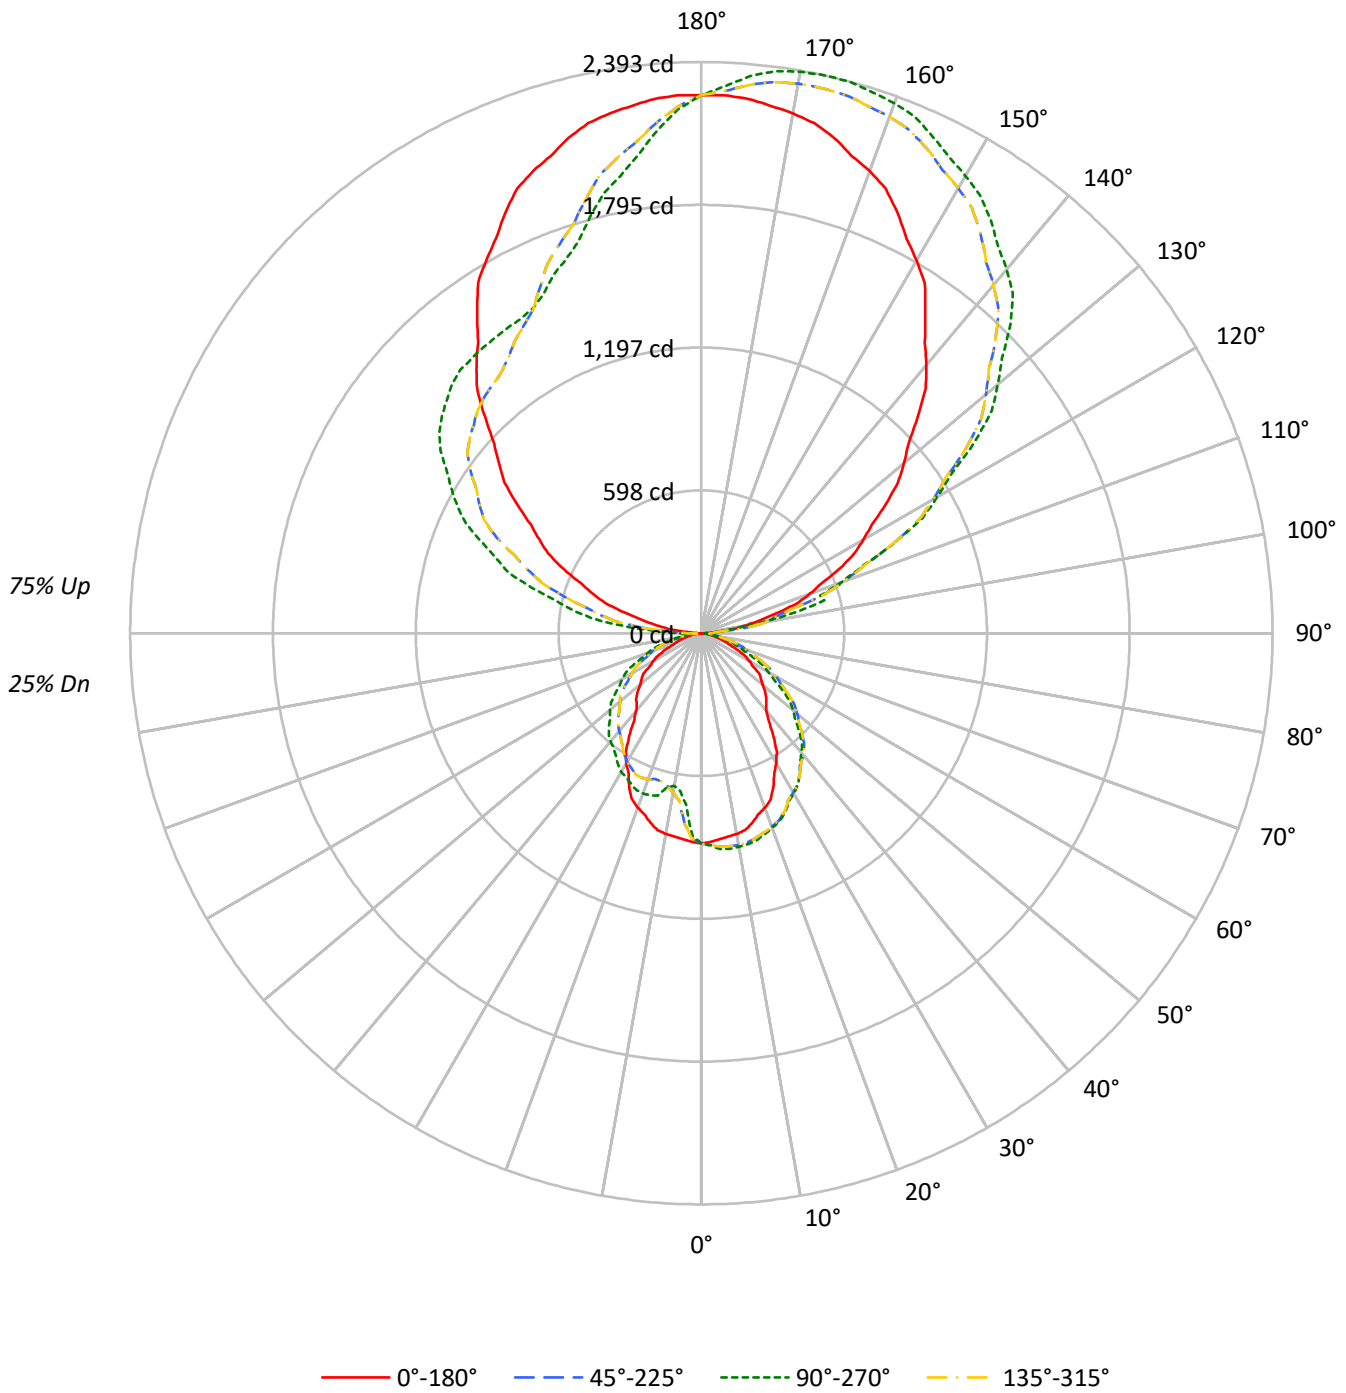



TEST NUMBER: P1435860

CATALOG NUMBER: SQ2W-FA-K-150U-050D-L835-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	69	69	69	51	51	51	33	33	33	25
1	92	88	84	81	82	79	75	73	61	59	57	44	43	42	29	29	28	21
2	84	77	71	66	75	69	64	60	53	50	47	39	37	35	26	25	24	18
3	77	68	61	55	68	60	54	50	47	43	39	34	32	30	23	21	20	15
4	70	60	52	46	62	53	47	42	42	37	34	31	28	25	20	19	17	13
5	64	53	45	39	57	47	41	36	37	32	29	27	24	22	18	16	15	11
6	59	47	40	34	52	42	36	31	33	28	25	25	21	19	17	15	13	10
7	54	43	35	30	48	38	32	27	30	25	22	22	19	17	15	13	12	9
8	50	38	31	26	45	35	28	24	27	23	19	20	17	15	14	12	10	8
9	47	35	28	23	41	31	25	21	25	20	17	19	15	13	13	11	9	7
10	43	32	25	20	39	29	23	19	23	18	15	17	14	12	12	10	8	6

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	14223	14223	14223	14223
5°	14055	14719	14055	11731
10°	13994	14890	13994	10635
15°	13755	15010	13755	11757
20°	13376	14900	13376	12261
25°	12713	14781	12713	12408
30°	11712	14450	11712	12539
35°	10364	14132	10364	12315
40°	8924	13744	8924	12450
45°	8809	13252	8809	12474
50°	8404	12607	8404	12521
55°	8363	11628	8363	12400
60°	7498	10365	7498	12348
65°	6391	9131	6391	12000
70°	5160	7737	5160	11122
75°	4473	6388	4473	10224
80°	3812	4760	3812	8256
85°	2538	2538	2538	5057

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 40°
 Vertical Angle: 45°
 Luminance: 13670 cd/sqm



TEST NUMBER: P1435860

CATALOG NUMBER: SQ2W-FA-K-150U-050D-L835-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.3	0.9
10°-20°	221.5	2.5
20°-30°	336.3	3.8
30°-40°	394.9	4.5
40°-50°	400.7	4.6
50°-60°	351.0	4.0
60°-70°	249.0	2.8
70°-80°	128.2	1.5
80°-90°	36.2	0.4
90°-100°	179.4	2.0
100°-110°	523.0	6.0
110°-120°	853.6	9.7
120°-130°	1083.1	12.3
130°-140°	1158.9	13.2
140°-150°	1082.2	12.3
150°-160°	890.5	10.1
160°-170°	597.2	6.8
170°-180°	212.1	2.4
0°-30°	637.1	7.3
0°-40°	1031.9	11.8
0°-60°	1783.7	20.3
0°-90°	2197.0	25.0
90°-120°	1556.0	17.7
90°-150°	4880.2	55.6
90°-180°	6580.0	75.0
0°-180°	8777.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	881	881	881	881	881	
5°	867	908	867	724	867	82
15°	823	898	823	703	823	231
25°	714	830	714	696	714	326
35°	526	717	526	625	526	328
45°	386	580	386	546	386	295
55°	297	413	297	440	297	257
65°	167	239	167	314	167	167
75°	72	102	72	164	72	78
85°	14	14	14	27	14	17
90°	7	50	7	98	7	6
95°	71	52	71	307	71	85
105°	332	533	332	733	332	353
115°	637	883	637	1088	637	628
125°	942	1400	942	1334	942	843
135°	1282	1832	1282	1477	1282	990
145°	1637	2112	1637	1509	1637	1024
155°	1944	2294	1944	1566	1944	894
165°	2149	2392	2149	1803	2149	605
175°	2247	2342	2247	2115	2247	213
180°	2254	2254	2254	2254	2254	



TEST NUMBER: P1435860

CATALOG NUMBER: SQ2W-FA-K-150U-050D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	880.9	880.9	880.9	880.9	880.9	880.9	880.9	880.9	880.9	880.9	880.9
2.5°	875.4	881.5	887.6	889.1	889.1	889.1	889.1	889.1	889.1	889.1	889.1
5°	867.2	877.9	888.5	893.4	896.5	898.7	900.3	902.2	905.2	908.2	905.2
7.5°	859.1	873.3	887.6	894.6	899.1	902.8	905.5	907.9	909.4	911.0	909.4
10°	853.6	870.3	887.0	894.6	899.1	902.2	903.7	905.2	906.7	908.2	906.7
12.5°	845.4	863.3	881.2	890.0	895.8	899.4	900.9	902.5	904.0	905.5	904.0
15°	822.9	847.1	871.4	880.9	885.5	889.3	892.3	894.9	896.5	898.0	896.5
17.5°	794.9	824.3	853.7	865.7	871.7	876.1	878.9	881.2	882.4	883.6	882.4
20°	778.5	810.3	842.2	854.7	860.8	864.6	866.1	867.2	867.2	867.2	867.2
22.5°	756.6	792.1	827.6	841.1	847.1	850.3	850.6	851.2	852.4	853.6	852.4
25°	713.6	754.6	795.5	812.6	821.7	825.5	824.0	823.6	826.7	829.7	826.7
27.5°	661.0	712.6	764.2	781.7	787.7	791.5	793.0	794.2	794.2	794.2	794.2
30°	628.2	685.9	743.6	762.5	768.6	772.4	773.9	775.1	775.1	775.1	775.1
32.5°	587.3	655.9	724.5	745.2	750.1	752.7	753.0	753.2	753.2	753.2	753.2
35°	525.8	609.3	692.7	715.9	718.9	720.4	720.4	720.1	718.5	717.0	718.5
37.5°	464.4	559.0	653.7	680.8	685.4	686.6	684.5	682.5	681.0	679.5	681.0
40°	423.4	526.6	629.8	659.0	663.5	663.5	659.0	655.2	653.7	652.1	653.7
42.5°	401.5	503.5	605.5	634.4	638.9	638.3	632.6	627.9	626.3	624.8	626.3
45°	385.8	476.9	567.9	594.1	598.7	597.9	591.8	586.5	583.5	580.4	583.5
47.5°	361.9	442.0	522.2	547.9	555.5	554.7	545.6	538.0	535.0	532.0	535.0
50°	334.6	413.5	492.4	517.8	525.4	524.7	515.6	508.0	504.9	501.9	504.9
52.5°	315.5	389.5	463.6	486.9	493.3	491.3	481.0	472.5	469.4	466.4	469.4
55°	297.1	359.3	421.5	440.5	445.0	442.0	431.3	422.2	417.7	413.1	417.7
57.5°	254.0	313.2	372.4	390.8	395.7	392.0	379.9	369.5	364.4	359.2	364.4
60°	232.2	285.3	338.4	356.2	362.3	359.3	347.1	336.1	328.5	321.0	328.5
62.5°	207.6	254.6	301.7	319.8	328.3	326.5	314.3	303.3	295.8	288.2	295.8
65°	167.3	208.3	249.2	267.5	278.1	277.3	265.2	254.2	246.6	239.0	246.6
67.5°	131.1	166.3	201.5	219.4	231.6	231.0	217.6	206.1	200.0	193.9	200.0
70°	109.3	139.6	170.0	186.7	198.8	198.8	186.7	176.0	170.0	163.9	170.0
72.5°	95.6	118.7	141.7	157.5	170.9	170.9	157.5	146.3	141.4	136.6	141.4
75°	71.7	85.4	99.0	113.8	129.0	130.5	118.4	108.5	105.5	102.4	105.5
77.5°	51.9	58.3	64.6	76.3	89.6	91.1	80.8	72.8	71.5	70.3	71.5
80°	41.0	42.5	44.0	53.5	65.6	67.1	58.0	51.2	51.2	51.2	51.2
82.5°	27.3	28.8	30.3	37.1	45.6	46.5	39.8	34.5	33.3	32.1	33.3
85°	13.7	13.7	13.7	15.9	19.0	19.0	15.9	13.7	13.7	13.7	13.7
87.5°	4.1	5.9	8.2	10.9	13.5	14.0	12.7	12.3	12.7	12.7	12.7
90°	6.8	15.9	27.3	36.4	43.3	45.5	45.5	47.8	50.1	50.1	50.1
92.5°	25.0	39.6	40.1	40.1	48.7	52.8	56.5	56.9	59.2	59.2	59.2
95°	70.6	77.4	116.1	113.8	77.4	61.5	52.4	52.4	52.4	52.4	52.4
97.5°	134.8	144.8	151.1	202.6	214.0	206.7	168.4	141.6	126.6	119.7	126.6
100°	191.2	195.8	209.4	211.7	268.6	323.2	295.9	261.8	250.4	243.6	250.4
102.5°	247.7	250.4	271.3	280.9	294.1	325.1	419.8	409.3	401.5	400.2	401.5
105°	332.3	334.6	373.3	391.5	400.6	400.6	398.4	443.9	516.7	532.7	516.7
107.5°	422.9	433.4	478.9	527.7	538.1	540.9	529.0	522.2	519.5	521.3	519.5
110°	484.9	500.8	555.4	616.9	632.8	637.4	632.8	626.0	621.4	621.4	621.4



TEST NUMBER: P1435860

CATALOG NUMBER: SQ2W-FA-K-150U-050D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	545.0	568.2	630.1	700.7	727.5	741.2	731.2	726.1	721.6	725.2	721.6
115°	637.4	671.5	753.5	826.3	880.9	887.8	885.5	885.5	883.2	883.2	883.2
117.5°	723.0	777.6	869.6	954.2	1017.5	1035.7	1044.8	1042.1	1039.4	1043.9	1039.4
120°	783.1	846.8	951.5	1047.1	1108.6	1135.9	1145.0	1140.4	1145.0	1140.4	1145.0
122.5°	846.8	925.1	1028.0	1127.2	1199.6	1230.6	1241.5	1242.4	1243.3	1240.6	1243.3
125°	942.4	1038.0	1158.6	1261.1	1336.2	1372.6	1381.7	1384.0	1388.6	1399.9	1388.6
127.5°	1038.9	1147.3	1279.7	1378.5	1455.5	1499.6	1513.8	1518.8	1528.3	1533.3	1528.3
130°	1106.3	1229.2	1363.5	1456.8	1532.0	1579.8	1604.8	1611.6	1623.0	1620.7	1623.0
132.5°	1177.3	1305.7	1441.8	1538.8	1608.4	1659.9	1681.3	1700.9	1705.0	1708.2	1705.0
135°	1281.6	1420.4	1557.0	1652.6	1718.6	1768.7	1796.0	1814.2	1825.6	1832.4	1825.6
137.5°	1391.3	1537.9	1669.0	1754.1	1820.6	1863.9	1894.8	1913.9	1925.8	1931.2	1925.8
140°	1466.0	1607.1	1734.6	1823.3	1882.5	1925.8	1953.1	1975.8	1989.5	1989.5	1989.5
142.5°	1537.0	1676.3	1800.1	1888.9	1940.8	1980.4	2009.5	2026.8	2042.3	2042.3	2042.3
145°	1636.7	1775.5	1889.3	1978.1	2021.4	2057.8	2089.7	2103.3	2112.4	2112.4	2112.4
147.5°	1740.9	1863.9	1967.7	2052.8	2089.2	2132.0	2157.0	2168.0	2179.4	2174.3	2179.4
150°	1802.8	1916.7	2016.8	2096.5	2132.9	2173.9	2198.9	2208.0	2219.4	2212.6	2219.4
152.5°	1862.9	1971.3	2062.3	2136.6	2167.5	2208.5	2237.2	2246.3	2254.0	2249.0	2254.0
155°	1944.0	2039.6	2123.8	2192.1	2219.4	2258.1	2285.4	2296.8	2305.9	2294.5	2305.9
157.5°	2016.4	2098.8	2172.1	2234.9	2264.0	2297.3	2322.8	2336.9	2346.0	2341.0	2346.0
160°	2060.1	2135.2	2201.2	2260.4	2287.7	2317.3	2344.6	2360.5	2369.7	2362.8	2369.7
162.5°	2096.5	2164.3	2226.7	2280.4	2304.1	2330.0	2362.8	2376.9	2386.0	2377.4	2386.0
165°	2148.8	2203.5	2258.1	2303.6	2324.1	2344.6	2378.8	2394.7	2401.5	2392.4	2401.5
167.5°	2188.5	2230.3	2274.5	2313.7	2328.7	2348.7	2382.9	2396.1	2404.7	2393.3	2404.7
170°	2210.3	2246.7	2285.4	2317.3	2328.7	2346.9	2381.0	2392.4	2399.2	2387.9	2399.2
172.5°	2228.5	2255.8	2287.2	2315.5	2321.4	2336.0	2368.3	2379.7	2384.7	2375.1	2384.7
175°	2246.7	2262.7	2285.4	2303.6	2301.4	2310.5	2337.8	2346.9	2356.0	2342.3	2356.0
177.5°	2255.4	2262.7	2269.9	2280.9	2273.6	2273.6	2293.6	2299.1	2300.9	2293.6	2300.9
180°	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6



TEST NUMBER: P1435860

CATALOG NUMBER: SQ2W-FA-K-150U-050D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	880.9	880.9	880.9	880.9	880.9	880.9	880.9	880.9	880.9	880.9	880.9
2.5°	889.1	889.1	889.1	889.1	889.1	887.6	881.5	875.4	875.4	875.4	870.9
5°	902.2	900.3	898.7	896.5	893.4	888.5	877.9	867.2	862.7	858.1	838.8
7.5°	907.9	905.5	902.8	899.1	894.6	887.6	873.3	859.1	838.7	818.4	775.3
10°	905.2	903.7	902.2	899.1	894.6	887.0	870.3	853.6	812.6	771.6	730.7
12.5°	902.5	900.9	899.4	895.8	890.0	881.2	863.3	845.4	787.4	729.5	692.4
15°	894.9	892.3	889.3	885.5	880.9	871.4	847.1	822.9	757.6	692.4	661.2
17.5°	881.2	878.9	876.1	871.7	865.7	853.7	824.3	794.9	726.6	658.3	638.3
20°	867.2	866.1	864.6	860.8	854.7	842.2	810.3	778.5	710.2	641.9	632.8
22.5°	851.2	850.6	850.3	847.1	841.1	827.6	792.1	756.6	689.6	622.5	622.8
25°	823.6	824.0	825.5	821.7	812.6	795.5	754.6	713.6	654.4	595.2	605.5
27.5°	794.2	793.0	791.5	787.7	781.7	764.2	712.6	661.0	614.3	567.5	584.5
30°	775.1	773.9	772.4	768.6	762.5	743.6	685.9	628.2	588.8	549.3	569.1
32.5°	753.2	753.0	752.7	750.1	745.2	724.5	655.9	587.3	558.7	530.2	550.9
35°	720.1	720.4	720.4	718.9	715.9	692.7	609.3	525.8	513.7	501.5	525.8
37.5°	682.5	684.5	686.6	685.4	680.8	653.7	559.0	464.4	468.3	472.2	501.7
40°	655.2	659.0	663.5	663.5	659.0	629.8	526.6	423.4	437.0	450.7	482.6
42.5°	627.9	632.6	638.3	638.9	634.4	605.5	503.5	401.5	416.4	431.3	464.4
45°	586.5	591.8	597.9	598.7	594.1	567.9	476.9	385.8	394.9	404.0	435.9
47.5°	538.0	545.6	554.7	555.5	547.9	522.2	442.0	361.9	368.6	375.3	407.9
50°	508.0	515.6	524.7	525.4	517.8	492.4	413.5	334.6	343.7	352.8	387.0
52.5°	472.5	481.0	491.3	493.3	486.9	463.6	389.5	315.5	321.0	326.4	363.3
55°	422.2	431.3	442.0	445.0	440.5	421.5	359.3	297.1	292.5	287.9	325.5
57.5°	369.5	379.9	392.0	395.7	390.8	372.4	313.2	254.0	250.1	246.1	286.8
60°	336.1	347.1	359.3	362.3	356.2	338.4	285.3	232.2	224.6	217.0	259.5
62.5°	303.3	314.3	326.5	328.3	319.8	301.7	254.6	207.6	202.4	197.3	238.6
65°	254.2	265.2	277.3	278.1	267.5	249.2	208.3	167.3	170.3	173.4	210.6
67.5°	206.1	217.6	231.0	231.6	219.4	201.5	166.3	131.1	141.1	151.1	184.6
70°	176.0	186.7	198.8	198.8	186.7	170.0	139.6	109.3	122.9	136.6	167.3
72.5°	146.3	157.5	170.9	170.9	157.5	141.7	118.7	95.6	109.3	122.9	148.2
75°	108.5	118.4	130.5	129.0	113.8	99.0	85.4	71.7	85.4	99.0	118.4
77.5°	72.8	80.8	91.1	89.6	76.3	64.6	58.3	51.9	63.1	74.4	87.9
80°	51.2	58.0	67.1	65.6	53.5	44.0	42.5	41.0	48.6	56.1	66.0
82.5°	34.5	39.8	46.5	45.6	37.1	30.3	28.8	27.3	33.7	40.1	46.9
85°	13.7	15.9	19.0	19.0	15.9	13.7	13.7	13.7	16.7	19.7	22.8
87.5°	12.3	12.7	14.0	13.5	10.9	8.2	5.9	4.1	7.1	10.2	13.7
90°	47.8	45.5	45.5	43.3	36.4	27.3	15.9	6.8	15.9	25.0	41.0
92.5°	56.9	56.5	52.8	48.7	40.1	40.1	39.6	25.0	43.3	61.5	88.3
95°	52.4	52.4	61.5	77.4	113.8	116.1	77.4	70.6	100.2	141.1	177.6
97.5°	141.6	168.4	206.7	214.0	202.6	151.1	144.8	134.8	183.5	224.0	282.7
100°	261.8	295.9	323.2	268.6	211.7	209.4	195.8	191.2	243.6	282.3	339.2
102.5°	409.3	419.8	325.1	294.1	280.9	271.3	250.4	247.7	300.0	353.3	401.1
105°	443.9	398.4	400.6	400.6	391.5	373.3	334.6	332.3	391.5	453.0	512.2
107.5°	522.2	529.0	540.9	538.1	527.7	478.9	433.4	422.9	476.2	550.0	615.1
110°	626.0	632.8	637.4	632.8	616.9	555.4	500.8	484.9	532.7	610.1	680.6



TEST NUMBER: P1435860

CATALOG NUMBER: SQ2W-FA-K-150U-050D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	726.1	731.2	741.2	727.5	700.7	630.1	568.2	545.0	592.8	672.0	744.4
115°	885.5	885.5	887.8	880.9	826.3	753.5	671.5	637.4	678.3	751.2	830.9
117.5°	1042.1	1044.8	1035.7	1017.5	954.2	869.6	777.6	723.0	755.3	832.2	914.2
120°	1140.4	1145.0	1135.9	1108.6	1047.1	951.5	846.8	783.1	808.1	883.2	965.2
122.5°	1242.4	1241.5	1230.6	1199.6	1127.2	1028.0	925.1	846.8	857.3	926.9	1007.0
125°	1384.0	1381.7	1372.6	1336.2	1261.1	1158.6	1038.0	942.4	928.7	987.9	1069.9
127.5°	1518.8	1513.8	1499.6	1455.5	1378.5	1279.7	1147.3	1038.9	1008.4	1045.7	1120.9
130°	1611.6	1604.8	1579.8	1532.0	1456.8	1363.5	1229.2	1106.3	1063.0	1085.8	1151.8
132.5°	1700.9	1681.3	1659.9	1608.4	1538.8	1441.8	1305.7	1177.3	1117.7	1127.7	1179.1
135°	1814.2	1796.0	1768.7	1718.6	1652.6	1557.0	1420.4	1281.6	1199.6	1190.5	1220.1
137.5°	1913.9	1894.8	1863.9	1820.6	1754.1	1669.0	1537.9	1391.3	1287.9	1257.4	1268.8
140°	1975.8	1953.1	1925.8	1882.5	1823.3	1734.6	1607.1	1466.0	1349.9	1306.6	1299.8
142.5°	2026.8	2009.5	1980.4	1940.8	1888.9	1800.1	1676.3	1537.0	1413.6	1357.6	1341.7
145°	2103.3	2089.7	2057.8	2021.4	1978.1	1889.3	1775.5	1636.7	1513.8	1440.9	1406.8
147.5°	2168.0	2157.0	2132.0	2089.2	2052.8	1967.7	1863.9	1740.9	1614.8	1524.7	1480.5
150°	2208.0	2198.9	2173.9	2132.9	2096.5	2016.8	1916.7	1802.8	1682.2	1586.6	1529.7
152.5°	2246.3	2237.2	2208.5	2167.5	2136.6	2062.3	1971.3	1862.9	1740.5	1644.9	1586.1
155°	2296.8	2285.4	2258.1	2219.4	2192.1	2123.8	2039.6	1944.0	1839.3	1739.1	1673.1
157.5°	2336.9	2322.8	2297.3	2264.0	2234.9	2172.1	2098.8	2016.4	1924.9	1829.3	1761.9
160°	2360.5	2344.6	2317.3	2287.7	2260.4	2201.2	2135.2	2060.1	1975.8	1889.3	1816.5
162.5°	2376.9	2362.8	2330.0	2304.1	2280.4	2226.7	2164.3	2096.5	2021.4	1945.8	1878.4
165°	2394.7	2378.8	2344.6	2324.1	2303.6	2258.1	2203.5	2148.8	2085.1	2023.7	1969.0
167.5°	2396.1	2382.9	2348.7	2328.7	2313.7	2274.5	2230.3	2188.5	2138.8	2090.6	2045.0
170°	2392.4	2381.0	2346.9	2328.7	2317.3	2285.4	2246.7	2210.3	2171.6	2130.6	2094.2
172.5°	2379.7	2368.3	2336.0	2321.4	2315.5	2287.2	2255.8	2228.5	2195.3	2165.2	2136.1
175°	2346.9	2337.8	2310.5	2301.4	2303.6	2285.4	2262.7	2246.7	2226.2	2208.0	2192.1
177.5°	2299.1	2293.6	2273.6	2273.6	2280.9	2269.9	2262.7	2255.4	2246.3	2240.8	2235.3
180°	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6



TEST NUMBER: P1435860

CATALOG NUMBER: SQ2W-FA-K-150U-050D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	880.9	880.9	880.9	880.9	880.9	880.9	880.9	880.9	880.9	880.9	880.9
2.5°	864.8	860.0	856.3	853.3	852.1	850.9	852.1	853.3	856.3	860.0	864.8
5°	814.5	788.7	761.4	739.0	731.4	723.8	731.4	739.0	761.4	788.7	814.5
7.5°	724.6	693.5	682.0	672.7	670.3	667.9	670.3	672.7	682.0	693.5	724.6
10°	689.7	664.7	655.6	648.7	648.7	648.7	648.7	648.7	655.6	664.7	689.7
12.5°	662.4	647.1	646.5	647.5	653.6	659.7	653.6	647.5	646.5	647.1	662.4
15°	641.5	643.8	668.1	688.2	695.8	703.4	695.8	688.2	668.1	643.8	641.5
17.5°	634.3	647.4	677.4	701.5	707.5	713.6	707.5	701.5	677.4	647.4	634.3
20°	643.4	660.1	682.9	701.5	707.5	713.6	707.5	701.5	682.9	660.1	643.4
22.5°	645.5	665.9	683.8	698.7	704.8	710.9	704.8	698.7	683.8	665.9	645.5
25°	638.9	663.1	678.3	690.5	693.5	696.5	693.5	690.5	678.3	663.1	638.9
27.5°	622.8	649.5	664.7	676.6	678.7	680.8	678.7	676.6	664.7	649.5	622.8
30°	608.5	635.8	651.0	663.5	668.1	672.6	668.1	663.5	651.0	635.8	608.5
32.5°	587.9	615.8	634.6	649.0	649.9	650.8	649.9	649.0	634.6	615.8	587.9
35°	562.2	591.1	612.3	627.9	626.3	624.8	626.3	627.9	612.3	591.1	562.2
37.5°	539.6	567.8	586.4	600.7	602.5	604.3	602.5	600.7	586.4	567.8	539.6
40°	520.5	549.3	569.1	584.6	587.7	590.7	587.7	584.6	569.1	549.3	520.5
42.5°	503.5	532.9	552.7	568.2	571.3	574.3	571.3	568.2	552.7	532.9	503.5
45°	475.4	505.7	527.0	543.3	544.8	546.3	544.8	543.3	527.0	505.7	475.4
47.5°	449.2	479.7	499.4	514.6	516.1	517.6	516.1	514.6	499.4	479.7	449.2
50°	429.5	460.6	480.3	495.5	497.0	498.5	497.0	495.5	480.3	460.6	429.5
52.5°	410.6	443.0	460.3	473.6	475.1	476.6	475.1	473.6	460.3	443.0	410.6
55°	377.1	411.2	427.9	440.5	440.5	440.5	440.5	427.9	411.2	377.1	377.1
57.5°	342.3	377.4	392.0	403.4	405.2	407.0	405.2	403.4	392.0	377.4	342.3
60°	318.7	354.3	366.5	376.3	379.4	382.4	379.4	376.3	366.5	354.3	318.7
62.5°	295.3	329.8	341.9	351.5	353.3	355.1	353.3	351.5	341.9	329.8	295.3
65°	259.1	289.5	301.6	311.1	312.6	314.1	312.6	311.1	301.6	289.5	259.1
67.5°	225.9	250.8	259.3	265.9	267.2	268.4	267.2	265.9	259.3	250.8	225.9
70°	203.7	225.0	231.0	235.6	235.6	235.6	235.6	235.6	231.0	225.0	203.7
72.5°	177.3	194.9	201.0	205.8	207.1	208.3	207.1	205.8	201.0	194.9	177.3
75°	139.6	152.5	157.1	160.9	162.4	163.9	162.4	160.9	157.1	152.5	139.6
77.5°	102.1	110.6	113.4	115.8	117.3	118.8	117.3	115.8	113.4	110.6	102.1
80°	76.6	82.7	84.2	85.7	87.3	88.8	87.3	85.7	84.2	82.7	76.6
82.5°	53.9	58.1	59.6	60.9	61.2	61.5	61.2	60.9	59.6	58.1	53.9
85°	25.8	27.3	27.3	27.3	27.3	27.3	27.3	27.3	27.3	27.3	25.8
87.5°	15.9	19.1	22.3	24.1	25.9	25.0	25.9	24.1	22.3	19.1	15.9
90°	52.4	68.3	84.2	93.3	102.4	97.9	102.4	93.3	84.2	68.3	52.4
92.5°	105.2	132.0	151.6	168.0	175.3	174.4	175.3	168.0	151.6	132.0	105.2
95°	211.7	243.6	275.4	298.2	311.9	307.3	311.9	298.2	275.4	243.6	211.7
97.5°	326.4	369.2	404.7	426.1	439.8	448.9	439.8	426.1	404.7	369.2	326.4
100°	402.9	443.9	484.9	509.9	532.7	541.8	532.7	509.9	484.9	443.9	402.9
102.5°	464.8	518.5	563.2	590.0	609.1	618.2	609.1	590.0	563.2	518.5	464.8
105°	566.8	623.7	671.5	705.7	726.1	733.0	726.1	705.7	671.5	623.7	566.8
107.5°	668.8	727.5	771.7	809.5	834.5	849.1	834.5	809.5	771.7	727.5	668.8
110°	748.9	796.7	844.5	878.7	903.7	912.8	903.7	878.7	844.5	796.7	748.9



TEST NUMBER: P1435860

CATALOG NUMBER: SQ2W-FA-K-150U-050D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	816.3	869.6	917.4	951.5	980.2	992.9	980.2	951.5	917.4	869.6	816.3
115°	910.5	981.1	1024.3	1056.2	1076.7	1088.1	1076.7	1056.2	1024.3	981.1	910.5
117.5°	988.8	1062.6	1109.9	1134.5	1144.1	1152.3	1144.1	1134.5	1109.9	1062.6	988.8
120°	1038.0	1106.3	1160.9	1192.8	1204.2	1208.7	1204.2	1192.8	1160.9	1106.3	1038.0
122.5°	1083.5	1148.2	1201.0	1240.1	1258.8	1263.4	1258.8	1240.1	1201.0	1148.2	1083.5
125°	1147.3	1208.7	1263.4	1302.1	1322.5	1333.9	1322.5	1302.1	1263.4	1208.7	1147.3
127.5°	1202.8	1269.3	1319.4	1354.4	1374.4	1383.5	1374.4	1354.4	1319.4	1269.3	1202.8
130°	1233.8	1302.1	1352.1	1390.8	1409.0	1418.1	1409.0	1390.8	1352.1	1302.1	1233.8
132.5°	1257.4	1329.4	1381.3	1416.3	1436.4	1445.5	1436.4	1416.3	1381.3	1329.4	1257.4
135°	1286.1	1361.2	1415.9	1450.0	1468.2	1477.3	1468.2	1450.0	1415.9	1361.2	1286.1
137.5°	1311.2	1379.5	1436.4	1472.3	1488.7	1494.6	1488.7	1472.3	1436.4	1379.5	1311.2
140°	1329.4	1388.6	1445.5	1479.6	1497.8	1500.1	1497.8	1479.6	1445.5	1388.6	1329.4
142.5°	1353.0	1399.5	1449.1	1483.3	1501.5	1505.6	1501.5	1483.3	1449.1	1399.5	1353.0
145°	1395.4	1422.7	1456.8	1488.7	1504.6	1509.2	1504.6	1488.7	1456.8	1422.7	1395.4
147.5°	1448.7	1457.3	1475.1	1496.0	1511.5	1514.7	1511.5	1496.0	1475.1	1457.3	1448.7
150°	1488.7	1486.4	1493.3	1506.9	1520.6	1518.3	1520.6	1506.9	1493.3	1486.4	1488.7
152.5°	1534.2	1521.0	1520.6	1527.0	1533.3	1532.9	1533.3	1527.0	1520.6	1521.0	1534.2
155°	1611.6	1586.6	1572.9	1568.4	1568.4	1566.1	1568.4	1568.4	1572.9	1586.6	1611.6
157.5°	1696.8	1661.7	1641.2	1630.3	1627.1	1622.1	1627.1	1630.3	1641.2	1661.7	1696.8
160°	1755.0	1716.3	1695.9	1677.6	1670.8	1664.0	1670.8	1677.6	1695.9	1716.3	1755.0
162.5°	1809.7	1772.8	1750.5	1734.1	1727.3	1716.8	1727.3	1734.1	1750.5	1772.8	1809.7
165°	1898.5	1859.8	1834.7	1821.1	1812.0	1802.8	1812.0	1821.1	1834.7	1859.8	1898.5
167.5°	1987.2	1944.9	1928.5	1913.0	1904.4	1888.0	1904.4	1913.0	1928.5	1944.9	1987.2
170°	2041.9	2003.2	1994.1	1980.4	1964.5	1946.3	1964.5	1980.4	1994.1	2003.2	2041.9
172.5°	2089.2	2063.3	2054.2	2040.5	2035.5	2020.9	2035.5	2040.5	2054.2	2063.3	2089.2
175°	2158.0	2137.5	2137.5	2135.2	2128.4	2114.7	2128.4	2135.2	2137.5	2137.5	2158.0
177.5°	2215.3	2204.4	2211.7	2211.7	2209.9	2197.1	2209.9	2211.7	2211.7	2204.4	2215.3
180°	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6



TEST NUMBER: P1435860

CATALOG NUMBER: SQ2W-FA-K-150U-050D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	880.9	880.9	880.9	880.9
2.5°	870.9	875.4	875.4	875.4
5°	838.8	858.1	862.7	867.2
7.5°	775.3	818.4	838.7	859.1
10°	730.7	771.6	812.6	853.6
12.5°	692.4	729.5	787.4	845.4
15°	661.2	692.4	757.6	822.9
17.5°	638.3	658.3	726.6	794.9
20°	632.8	641.9	710.2	778.5
22.5°	622.8	622.5	689.6	756.6
25°	605.5	595.2	654.4	713.6
27.5°	584.5	567.5	614.3	661.0
30°	569.1	549.3	588.8	628.2
32.5°	550.9	530.2	558.7	587.3
35°	525.8	501.5	513.7	525.8
37.5°	501.7	472.2	468.3	464.4
40°	482.6	450.7	437.0	423.4
42.5°	464.4	431.3	416.4	401.5
45°	435.9	404.0	394.9	385.8
47.5°	407.9	375.3	368.6	361.9
50°	387.0	352.8	343.7	334.6
52.5°	363.3	326.4	321.0	315.5
55°	325.5	287.9	292.5	297.1
57.5°	286.8	246.1	250.1	254.0
60°	259.5	217.0	224.6	232.2
62.5°	238.6	197.3	202.4	207.6
65°	210.6	173.4	170.3	167.3
67.5°	184.6	151.1	141.1	131.1
70°	167.3	136.6	122.9	109.3
72.5°	148.2	122.9	109.3	95.6
75°	118.4	99.0	85.4	71.7
77.5°	87.9	74.4	63.1	51.9
80°	66.0	56.1	48.6	41.0
82.5°	46.9	40.1	33.7	27.3
85°	22.8	19.7	16.7	13.7
87.5°	13.7	10.2	7.1	4.1
90°	41.0	25.0	15.9	6.8
92.5°	88.3	61.5	43.3	25.0
95°	177.6	141.1	100.2	70.6
97.5°	282.7	224.0	183.5	134.8
100°	339.2	282.3	243.6	191.2
102.5°	401.1	353.3	300.0	247.7
105°	512.2	453.0	391.5	332.3
107.5°	615.1	550.0	476.2	422.9
110°	680.6	610.1	532.7	484.9



TEST NUMBER: P1435860

CATALOG NUMBER: SQ2W-FA-K-150U-050D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	744.4	672.0	592.8	545.0
115°	830.9	751.2	678.3	637.4
117.5°	914.2	832.2	755.3	723.0
120°	965.2	883.2	808.1	783.1
122.5°	1007.0	926.9	857.3	846.8
125°	1069.9	987.9	928.7	942.4
127.5°	1120.9	1045.7	1008.4	1038.9
130°	1151.8	1085.8	1063.0	1106.3
132.5°	1179.1	1127.7	1117.7	1177.3
135°	1220.1	1190.5	1199.6	1281.6
137.5°	1268.8	1257.4	1287.9	1391.3
140°	1299.8	1306.6	1349.9	1466.0
142.5°	1341.7	1357.6	1413.6	1537.0
145°	1406.8	1440.9	1513.8	1636.7
147.5°	1480.5	1524.7	1614.8	1740.9
150°	1529.7	1586.6	1682.2	1802.8
152.5°	1586.1	1644.9	1740.5	1862.9
155°	1673.1	1739.1	1839.3	1944.0
157.5°	1761.9	1829.3	1924.9	2016.4
160°	1816.5	1889.3	1975.8	2060.1
162.5°	1878.4	1945.8	2021.4	2096.5
165°	1969.0	2023.7	2085.1	2148.8
167.5°	2045.0	2090.6	2138.8	2188.5
170°	2094.2	2130.6	2171.6	2210.3
172.5°	2136.1	2165.2	2195.3	2228.5
175°	2192.1	2208.0	2226.2	2246.7
177.5°	2235.3	2240.8	2246.3	2255.4
180°	2253.6	2253.6	2253.6	2253.6



TEST NUMBER: P1435860
 CATALOG NUMBER: SQ2W-FA-K-150U-050D-L835-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.65	13.32	13.80	14.46	16.05	13.85	14.52	14.99	15.66	17.25
	3H	13.72	14.33	14.88	15.47	17.07	15.08	15.68	16.23	16.82	18.43
	4H	14.07	14.64	15.23	15.78	17.39	15.46	16.03	16.62	17.17	18.78
	6H	14.22	14.74	15.39	15.89	17.51	15.61	16.14	16.78	17.28	18.90
	8H	14.25	14.75	15.42	15.91	17.52	15.63	16.13	16.80	17.29	18.90
	12H	14.24	14.71	15.41	15.87	17.50	15.61	16.08	16.78	17.23	18.87
4H	2H	13.49	14.07	14.66	15.21	16.82	14.41	14.98	15.58	16.12	17.73
	3H	14.86	15.34	16.04	16.51	18.13	15.85	16.33	17.03	17.50	19.12
	4H	15.31	15.75	16.49	16.91	18.55	16.32	16.76	17.50	17.92	19.56
	6H	15.53	15.91	16.71	17.08	18.71	16.53	16.91	17.71	18.09	19.72
	8H	15.58	15.93	16.76	17.10	18.75	16.58	16.93	17.76	18.10	19.74
	12H	15.58	15.89	16.77	17.08	18.73	16.56	16.87	17.75	18.06	19.71
8H	4H	15.68	16.03	16.86	17.20	18.85	16.50	16.85	17.68	18.02	19.67
	6H	16.02	16.31	17.22	17.52	19.17	16.81	17.10	18.01	18.31	19.95
	8H	16.14	16.39	17.34	17.58	19.24	16.90	17.15	18.11	18.34	20.01
	12H	16.17	16.39	17.37	17.58	19.27	16.91	17.13	18.12	18.32	20.01
12H	4H	15.67	15.99	16.87	17.17	18.82	16.46	16.78	17.66	17.96	19.61
	6H	16.09	16.34	17.29	17.53	19.20	16.82	17.08	18.03	18.27	19.93
	8H	16.23	16.45	17.44	17.64	19.33	16.93	17.15	18.14	18.34	20.03