

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1435974

Luminaire Tested: SQ2W-FB-K-075U-125D-L835-UNV-STD-W-WM-4

Issue Date: 3/24/2026

Test Information

Test Method: LM-79-2019
Report Number: P1435974
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-12)
Test Lab: INNOVATION CENTER
Issue Date: 3/24/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-FB-K-075U-125D-L835-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - FROSTED CONTINUOUS BATWING ROLL LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 1250 LUMENS PER FOOT
UPLIGHT 750 LUMENS PER FOOT
Light Source: 3500K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8886.9 lumens
Efficiency: N/A
Efficacy: 122.1 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 2.98 / 2.52
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 72.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1435974

CATALOG NUMBER: SQ2W-FB-K-075U-125D-L835-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

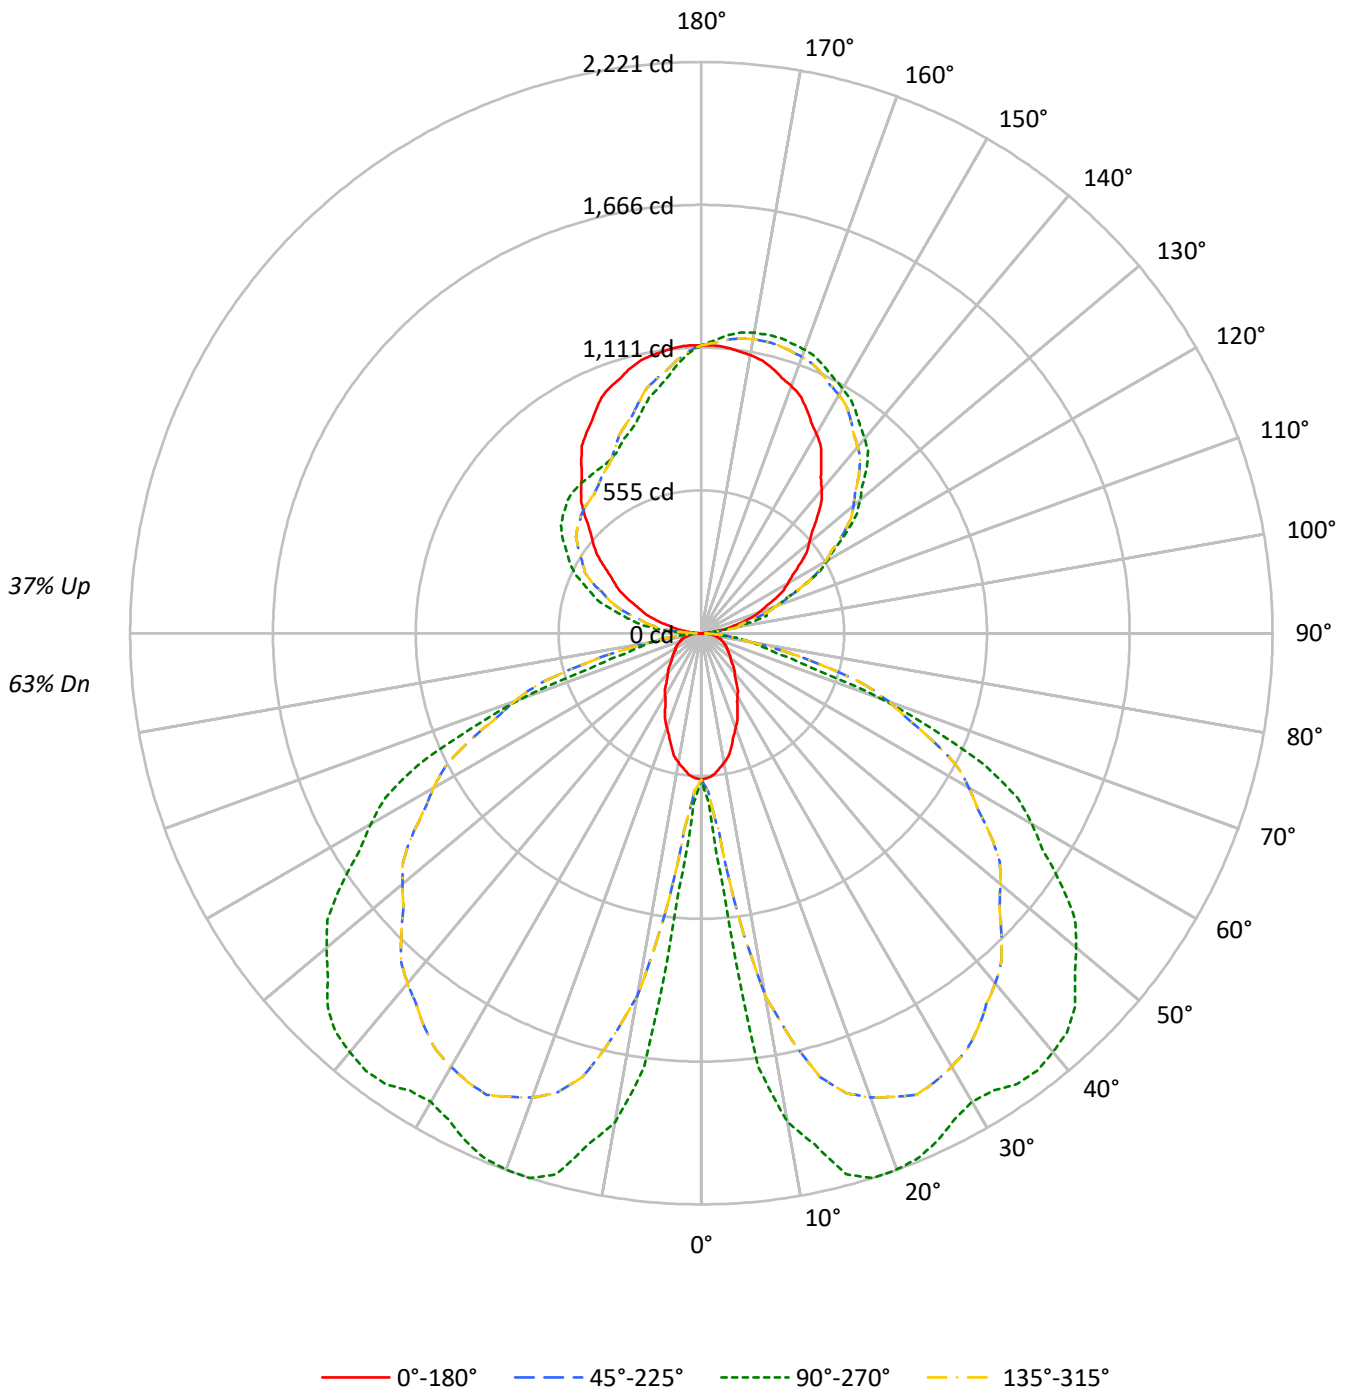



TEST NUMBER: P1435974

CATALOG NUMBER: SQ2W-FB-K-075U-125D-L835-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	91	91	91	79	79	79	68	68	68	63
1	101	96	92	88	94	90	87	83	79	77	74	69	67	65	60	59	57	53
2	91	83	77	71	85	78	73	68	69	64	61	60	57	54	52	50	47	43
3	83	73	65	59	77	68	61	56	60	55	50	53	48	45	46	42	40	36
4	75	64	56	49	70	60	53	47	53	47	42	47	42	38	40	37	34	30
5	69	57	48	42	64	53	46	40	47	41	36	41	36	32	36	32	29	26
6	63	51	42	36	59	48	40	34	42	36	31	37	32	28	32	28	25	22
7	58	45	37	31	54	43	35	30	38	32	27	33	28	24	29	25	22	19
8	54	41	33	27	50	39	31	26	34	28	24	30	25	22	27	22	19	17
9	50	37	29	24	47	35	28	23	31	25	21	28	23	19	24	20	17	15
10	47	34	26	21	44	32	25	21	29	23	19	26	21	17	22	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	9179	9179	9179	9179
5°	8948	16256	8948	16256
10°	8379	31633	8379	31633
15°	7584	36409	7584	36409
20°	6715	38130	6715	38130
25°	5939	38756	5939	38756
30°	5248	39233	5248	39233
35°	4687	42180	4687	42180
40°	4262	44815	4262	44815
45°	3932	46927	3932	46927
50°	3707	47779	3707	47779
55°	3617	48160	3617	48160
60°	3707	47920	3707	47920
65°	3862	46566	3862	46566
70°	3998	35221	3998	35221
75°	4435	19438	4435	19438
80°	4575	18038	4575	18038
85°	4557	7595	4557	7595

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 52.5°
 Luminance: 48594 cd/sqm



TEST NUMBER: P1435974

CATALOG NUMBER: SQ2W-FB-K-075U-125D-L835-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	95.2	1.1
10°-20°	434.6	4.9
20°-30°	764.7	8.6
30°-40°	989.9	11.1
40°-50°	1091.7	12.3
50°-60°	1018.9	11.5
60°-70°	787.2	8.9
70°-80°	362.9	4.1
80°-90°	74.0	0.8
90°-100°	89.1	1.0
100°-110°	259.7	2.9
110°-120°	423.9	4.8
120°-130°	537.9	6.1
130°-140°	575.6	6.5
140°-150°	537.5	6.0
150°-160°	442.3	5.0
160°-170°	296.6	3.3
170°-180°	105.3	1.2
0°-30°	1294.5	14.6
0°-40°	2284.4	25.7
0°-60°	4395.1	49.5
0°-90°	5619.1	63.2
90°-120°	772.7	8.7
90°-150°	2423.6	27.3
90°-180°	3268.0	36.8
0°-180°	8886.9	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	568	568	568	568	568	
5°	552	1003	552	1003	552	51
15°	454	2178	454	2178	454	126
25°	333	2176	333	2176	333	153
35°	238	2140	238	2140	238	150
45°	172	2055	172	2055	172	133
55°	128	1711	128	1711	128	116
65°	101	1219	101	1219	101	99
75°	71	312	71	312	71	73
85°	25	41	25	41	25	26
90°	3	25	3	49	3	4
95°	35	26	35	153	35	42
105°	165	264	165	364	165	176
115°	316	439	316	540	316	312
125°	468	695	468	662	468	419
135°	636	910	636	734	636	492
145°	813	1049	813	750	813	509
155°	965	1140	965	778	965	444
165°	1067	1188	1067	895	1067	300
175°	1116	1163	1116	1050	1116	106
180°	1119	1119	1119	1119	1119	



TEST NUMBER: P1435974

CATALOG NUMBER: SQ2W-FB-K-075U-125D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	568.5	568.5	568.5	568.5	568.5	568.5	568.5	568.5	568.5	568.5	568.5
2.5°	564.1	574.8	585.5	596.9	608.6	621.2	634.8	646.5	652.3	658.1	652.3
5°	552.1	588.5	625.0	677.8	736.1	802.3	876.4	939.9	971.4	1003.0	971.4
7.5°	530.8	604.8	678.9	835.9	1020.6	1212.3	1411.0	1575.8	1639.0	1702.1	1639.0
10°	511.1	614.3	717.6	983.9	1304.6	1551.1	1723.6	1861.5	1895.5	1929.5	1895.5
12.5°	489.2	629.4	769.6	1098.3	1489.9	1746.2	1867.2	1966.7	2001.7	2036.7	2001.7
15°	453.7	654.1	854.5	1226.2	1655.0	1918.6	2017.0	2100.5	2139.4	2178.2	2139.4
17.5°	417.1	683.8	950.5	1329.7	1746.3	2003.4	2100.8	2179.1	2200.3	2221.4	2200.3
20°	390.8	704.2	1017.6	1397.5	1799.5	2042.5	2126.3	2192.5	2205.9	2219.2	2205.9
22.5°	366.8	717.1	1067.4	1447.8	1838.2	2065.1	2128.5	2179.6	2194.0	2208.3	2194.0
25°	333.4	728.2	1123.0	1502.3	1876.4	2083.5	2123.6	2156.1	2165.8	2175.5	2165.8
27.5°	301.2	718.3	1135.4	1509.9	1870.2	2063.4	2089.7	2111.7	2121.2	2130.7	2121.2
30°	281.5	705.4	1129.3	1500.4	1853.9	2040.4	2059.8	2077.7	2091.1	2104.4	2091.1
32.5°	264.0	689.9	1115.7	1482.2	1828.9	2011.4	2029.9	2051.0	2079.9	2108.8	2079.9
35°	237.8	656.8	1075.9	1438.5	1782.2	1968.7	1997.8	2033.1	2086.5	2140.0	2086.5
37.5°	215.4	614.5	1013.7	1372.5	1718.0	1921.2	1982.2	2040.8	2092.3	2143.8	2092.3
40°	202.2	584.9	967.5	1323.7	1671.1	1885.5	1966.9	2038.8	2082.6	2126.3	2082.6
42.5°	189.1	551.3	913.6	1266.9	1617.2	1839.8	1934.8	2017.0	2060.7	2104.4	2060.7
45°	172.2	497.7	823.2	1173.4	1531.7	1766.8	1878.5	1972.6	2013.9	2055.2	2013.9
47.5°	156.3	439.1	721.9	1073.5	1448.1	1694.7	1813.3	1909.7	1939.8	1970.0	1939.8
50°	147.6	400.2	652.9	1005.8	1392.0	1643.5	1760.1	1853.6	1877.9	1902.2	1877.9
52.5°	138.8	362.3	585.8	939.4	1336.4	1589.8	1699.6	1787.5	1809.9	1832.2	1809.9
55°	128.5	310.7	492.9	842.7	1248.4	1499.2	1595.2	1672.0	1691.4	1710.9	1691.4
57.5°	119.2	266.1	413.1	751.9	1154.7	1397.1	1478.9	1544.3	1560.1	1575.9	1560.1
60°	114.8	242.3	369.9	695.1	1086.2	1318.8	1392.9	1452.5	1468.2	1484.0	1468.2
62.5°	108.2	219.2	330.3	638.3	1011.9	1232.8	1301.1	1356.0	1370.8	1385.6	1370.8
65°	101.1	191.0	280.9	558.4	898.6	1097.2	1154.2	1199.5	1209.2	1218.9	1209.2
67.5°	91.3	167.6	243.8	485.4	782.0	948.1	983.5	1005.6	987.4	969.1	987.4
70°	84.7	155.2	225.6	440.9	704.5	842.4	854.5	850.6	798.3	746.1	798.3
72.5°	80.4	143.0	205.7	392.1	619.7	720.2	693.5	648.7	549.8	450.9	549.8
75°	71.1	122.1	173.1	313.4	483.4	510.2	393.6	306.7	309.1	311.6	309.1
77.5°	57.9	96.1	134.2	220.5	322.7	343.0	281.3	235.6	237.8	240.0	237.8
80°	49.2	79.6	109.9	143.9	179.2	195.6	193.1	191.6	192.8	194.0	192.8
82.5°	40.4	63.0	85.6	106.0	125.7	136.8	139.2	140.6	138.9	137.2	138.9
85°	24.6	38.0	51.3	59.2	65.3	63.5	53.7	45.9	43.4	41.0	43.4
87.5°	9.4	15.2	21.2	20.4	17.2	15.5	15.5	15.7	15.9	15.9	15.9
90°	3.4	7.9	13.6	18.1	21.5	22.6	22.6	23.7	24.9	24.9	24.9
92.5°	12.4	19.7	19.9	19.9	24.2	26.2	28.0	28.3	29.4	29.4	29.4
95°	35.0	38.4	57.7	56.5	38.4	30.5	26.0	26.0	26.0	26.0	26.0
97.5°	66.9	71.9	75.1	100.6	106.3	102.6	83.7	70.3	62.9	59.5	62.9
100°	95.0	97.2	104.0	105.1	133.4	160.5	147.0	130.0	124.4	121.0	124.4
102.5°	123.0	124.4	134.8	139.5	146.1	161.4	208.5	203.3	199.4	198.7	199.4
105°	165.1	166.2	185.4	194.4	199.0	199.0	197.8	220.4	256.6	264.5	256.6
107.5°	210.0	215.2	237.9	262.0	267.2	268.6	262.7	259.3	258.0	258.9	258.0
110°	240.8	248.7	275.8	306.4	314.3	316.5	314.3	310.9	308.6	308.6	308.6

TEST NUMBER: P1435974

CATALOG NUMBER: SQ2W-FB-K-075U-125D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	270.6	282.2	312.9	348.0	361.3	368.1	363.1	360.6	358.4	360.2	358.4
115°	316.5	333.5	374.2	410.4	437.5	440.9	439.8	439.8	438.6	438.6	438.6
117.5°	359.0	386.2	431.8	473.9	505.3	514.4	518.9	517.5	516.2	518.4	516.2
120°	388.9	420.5	472.5	520.0	550.6	564.1	568.6	566.4	568.6	566.4	568.6
122.5°	420.5	459.4	510.5	559.8	595.8	611.1	616.6	617.0	617.5	616.1	617.5
125°	468.0	515.5	575.4	626.3	663.6	681.7	686.2	687.3	689.6	695.3	689.6
127.5°	516.0	569.8	635.6	684.6	722.8	744.8	751.8	754.3	759.0	761.5	759.0
130°	549.4	610.5	677.2	723.5	760.8	784.6	797.0	800.4	806.0	804.9	806.0
132.5°	584.7	648.5	716.1	764.2	798.8	824.4	835.0	844.7	846.7	848.3	846.7
135°	636.5	705.4	773.3	820.7	853.5	878.4	892.0	901.0	906.7	910.0	906.7
137.5°	691.0	763.8	828.9	871.2	904.2	925.7	941.0	950.5	956.4	959.1	956.4
140°	728.0	798.1	861.4	905.5	934.9	956.4	970.0	981.3	988.1	988.1	988.1
142.5°	763.3	832.5	894.0	938.1	963.9	983.5	998.0	1006.6	1014.3	1014.3	1014.3
145°	812.8	881.8	938.3	982.4	1003.9	1022.0	1037.8	1044.6	1049.1	1049.1	1049.1
147.5°	864.6	925.7	977.2	1019.5	1037.6	1058.8	1071.3	1076.7	1082.3	1079.9	1082.3
150°	895.4	951.9	1001.6	1041.2	1059.3	1079.6	1092.1	1096.6	1102.2	1098.8	1102.2
152.5°	925.2	979.0	1024.2	1061.1	1076.5	1096.8	1111.1	1115.6	1119.4	1116.9	1119.4
155°	965.4	1012.9	1054.8	1088.7	1102.2	1121.5	1135.0	1140.7	1145.2	1139.5	1145.2
157.5°	1001.4	1042.3	1078.7	1109.9	1124.4	1140.9	1153.6	1160.6	1165.1	1162.6	1165.1
160°	1023.1	1060.4	1093.2	1122.6	1136.1	1150.8	1164.4	1172.3	1176.8	1173.5	1176.8
162.5°	1041.2	1074.9	1105.9	1132.5	1144.3	1157.2	1173.5	1180.5	1185.0	1180.7	1185.0
165°	1067.2	1094.3	1121.5	1144.1	1154.2	1164.4	1181.4	1189.3	1192.7	1188.2	1192.7
167.5°	1086.9	1107.7	1129.6	1149.0	1156.5	1166.4	1183.4	1190.0	1194.3	1188.6	1194.3
170°	1097.7	1115.8	1135.0	1150.8	1156.5	1165.5	1182.5	1188.2	1191.5	1185.9	1191.5
172.5°	1106.8	1120.3	1135.9	1149.9	1152.9	1160.1	1176.2	1181.8	1184.3	1179.6	1184.3
175°	1115.8	1123.7	1135.0	1144.1	1142.9	1147.5	1161.0	1165.5	1170.1	1163.3	1170.1
177.5°	1120.1	1123.7	1127.3	1132.8	1129.1	1129.1	1139.1	1141.8	1142.7	1139.1	1142.7
180°	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2



TEST NUMBER: P1435974

CATALOG NUMBER: SQ2W-FB-K-075U-125D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	568.5	568.5	568.5	568.5	568.5	568.5	568.5	568.5	568.5	568.5	568.5
2.5°	646.5	634.8	621.2	608.6	596.9	585.5	574.8	564.1	574.8	585.5	596.9
5°	939.9	876.4	802.3	736.1	677.8	625.0	588.5	552.1	588.5	625.0	677.8
7.5°	1575.8	1411.0	1212.3	1020.6	835.9	678.9	604.8	530.8	604.8	678.9	835.9
10°	1861.5	1723.6	1551.1	1304.6	983.9	717.6	614.3	511.1	614.3	717.6	983.9
12.5°	1966.7	1867.2	1746.2	1489.9	1098.3	769.6	629.4	489.2	629.4	769.6	1098.3
15°	2100.5	2017.0	1918.6	1655.0	1226.2	854.5	654.1	453.7	654.1	854.5	1226.2
17.5°	2179.1	2100.8	2003.4	1746.3	1329.7	950.5	683.8	417.1	683.8	950.5	1329.7
20°	2192.5	2126.3	2042.5	1799.5	1397.5	1017.6	704.2	390.8	704.2	1017.6	1397.5
22.5°	2179.6	2128.5	2065.1	1838.2	1447.8	1067.4	717.1	366.8	717.1	1067.4	1447.8
25°	2156.1	2123.6	2083.5	1876.4	1502.3	1123.0	728.2	333.4	728.2	1123.0	1502.3
27.5°	2111.7	2089.7	2063.4	1870.2	1509.9	1135.4	718.3	301.2	718.3	1135.4	1509.9
30°	2077.7	2059.8	2040.4	1853.9	1500.4	1129.3	705.4	281.5	705.4	1129.3	1500.4
32.5°	2051.0	2029.9	2011.4	1828.9	1482.2	1115.7	689.9	264.0	689.9	1115.7	1482.2
35°	2033.1	1997.8	1968.7	1782.2	1438.5	1075.9	656.8	237.8	656.8	1075.9	1438.5
37.5°	2040.8	1982.2	1921.2	1718.0	1372.5	1013.7	614.5	215.4	614.5	1013.7	1372.5
40°	2038.8	1966.9	1885.5	1671.1	1323.7	967.5	584.9	202.2	584.9	967.5	1323.7
42.5°	2017.0	1934.8	1839.8	1617.2	1266.9	913.6	551.3	189.1	551.3	913.6	1266.9
45°	1972.6	1878.5	1766.8	1531.7	1173.4	823.2	497.7	172.2	497.7	823.2	1173.4
47.5°	1909.7	1813.3	1694.7	1448.1	1073.5	721.9	439.1	156.3	439.1	721.9	1073.5
50°	1853.6	1760.1	1643.5	1392.0	1005.8	652.9	400.2	147.6	400.2	652.9	1005.8
52.5°	1787.5	1699.6	1589.8	1336.4	939.4	585.8	362.3	138.8	362.3	585.8	939.4
55°	1672.0	1595.2	1499.2	1248.4	842.7	492.9	310.7	128.5	310.7	492.9	842.7
57.5°	1544.3	1478.9	1397.1	1154.7	751.9	413.1	266.1	119.2	266.1	413.1	751.9
60°	1452.5	1392.9	1318.8	1086.2	695.1	369.9	242.3	114.8	242.3	369.9	695.1
62.5°	1356.0	1301.1	1232.8	1011.9	638.3	330.3	219.2	108.2	219.2	330.3	638.3
65°	1199.5	1154.2	1097.2	898.6	558.4	280.9	191.0	101.1	191.0	280.9	558.4
67.5°	1005.6	983.5	948.1	782.0	485.4	243.8	167.6	91.3	167.6	243.8	485.4
70°	850.6	854.5	842.4	704.5	440.9	225.6	155.2	84.7	155.2	225.6	440.9
72.5°	648.7	693.5	720.2	619.7	392.1	205.7	143.0	80.4	143.0	205.7	392.1
75°	306.7	393.6	510.2	483.4	313.4	173.1	122.1	71.1	122.1	173.1	313.4
77.5°	235.6	281.3	343.0	322.7	220.5	134.2	96.1	57.9	96.1	134.2	220.5
80°	191.6	193.1	195.6	179.2	143.9	109.9	79.6	49.2	79.6	109.9	143.9
82.5°	140.6	139.2	136.8	125.7	106.0	85.6	63.0	40.4	63.0	85.6	106.0
85°	45.9	53.7	63.5	65.3	59.2	51.3	38.0	24.6	38.0	51.3	59.2
87.5°	15.7	15.5	15.5	17.2	20.4	21.2	15.2	9.4	15.2	21.0	20.8
90°	23.7	22.6	22.6	21.5	18.1	13.6	7.9	3.4	7.9	12.4	20.3
92.5°	28.3	28.0	26.2	24.2	19.9	19.9	19.7	12.4	21.5	30.5	43.9
95°	26.0	26.0	30.5	38.4	56.5	57.7	38.4	35.0	49.7	70.1	88.2
97.5°	70.3	83.7	102.6	106.3	100.6	75.1	71.9	66.9	91.1	111.2	140.4
100°	130.0	147.0	160.5	133.4	105.1	104.0	97.2	95.0	121.0	140.2	168.4
102.5°	203.3	208.5	161.4	146.1	139.5	134.8	124.4	123.0	149.0	175.5	199.2
105°	220.4	197.8	199.0	199.0	194.4	185.4	166.2	165.1	194.4	225.0	254.4
107.5°	259.3	262.7	268.6	267.2	262.0	237.9	215.2	210.0	236.5	273.1	305.5
110°	310.9	314.3	316.5	314.3	306.4	275.8	248.7	240.8	264.5	303.0	338.0



TEST NUMBER: P1435974

CATALOG NUMBER: SQ2W-FB-K-075U-125D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	360.6	363.1	368.1	361.3	348.0	312.9	282.2	270.6	294.4	333.7	369.7
115°	439.8	439.8	440.9	437.5	410.4	374.2	333.5	316.5	336.9	373.1	412.6
117.5°	517.5	518.9	514.4	505.3	473.9	431.8	386.2	359.0	375.1	413.3	454.0
120°	566.4	568.6	564.1	550.6	520.0	472.5	420.5	388.9	401.3	438.6	479.3
122.5°	617.0	616.6	611.1	595.8	559.8	510.5	459.4	420.5	425.7	460.3	500.1
125°	687.3	686.2	681.7	663.6	626.3	575.4	515.5	468.0	461.2	490.6	531.3
127.5°	754.3	751.8	744.8	722.8	684.6	635.6	569.8	516.0	500.8	519.4	556.7
130°	800.4	797.0	784.6	760.8	723.5	677.2	610.5	549.4	527.9	539.2	572.0
132.5°	844.7	835.0	824.4	798.8	764.2	716.1	648.5	584.7	555.1	560.0	585.6
135°	901.0	892.0	878.4	853.5	820.7	773.3	705.4	636.5	595.8	591.2	605.9
137.5°	950.5	941.0	925.7	904.2	871.2	828.9	763.8	691.0	639.6	624.5	630.1
140°	981.3	970.0	956.4	934.9	905.5	861.4	798.1	728.0	670.4	648.9	645.5
142.5°	1006.6	998.0	983.5	963.9	938.1	894.0	832.5	763.3	702.0	674.2	666.3
145°	1044.6	1037.8	1022.0	1003.9	982.4	938.3	881.8	812.8	751.8	715.6	698.6
147.5°	1076.7	1071.3	1058.8	1037.6	1019.5	977.2	925.7	864.6	802.0	757.2	735.3
150°	1096.6	1092.1	1079.6	1059.3	1041.2	1001.6	951.9	895.4	835.4	788.0	759.7
152.5°	1115.6	1111.1	1096.8	1076.5	1061.1	1024.2	979.0	925.2	864.4	816.9	787.7
155°	1140.7	1135.0	1121.5	1102.2	1088.7	1054.8	1012.9	965.4	913.4	863.7	830.9
157.5°	1160.6	1153.6	1140.9	1124.4	1109.9	1078.7	1042.3	1001.4	955.9	908.5	875.0
160°	1172.3	1164.4	1150.8	1136.1	1122.6	1093.2	1060.4	1023.1	981.3	938.3	902.1
162.5°	1180.5	1173.5	1157.2	1144.3	1132.5	1105.9	1074.9	1041.2	1003.9	966.3	932.9
165°	1189.3	1181.4	1164.4	1154.2	1144.1	1121.5	1094.3	1067.2	1035.5	1005.0	977.9
167.5°	1190.0	1183.4	1166.4	1156.5	1149.0	1129.6	1107.7	1086.9	1062.2	1038.2	1015.6
170°	1188.2	1182.5	1165.5	1156.5	1150.8	1135.0	1115.8	1097.7	1078.5	1058.1	1040.1
172.5°	1181.8	1176.2	1160.1	1152.9	1149.9	1135.9	1120.3	1106.8	1090.3	1075.3	1060.9
175°	1165.5	1161.0	1147.5	1142.9	1144.1	1135.0	1123.7	1115.8	1105.6	1096.6	1088.7
177.5°	1141.8	1139.1	1129.1	1129.1	1132.8	1127.3	1123.7	1120.1	1115.6	1112.9	1110.1
180°	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2



TEST NUMBER: P1435974

CATALOG NUMBER: SQ2W-FB-K-075U-125D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	568.5	568.5	568.5	568.5	568.5	568.5	568.5	568.5	568.5	568.5	568.5
2.5°	608.6	621.2	634.8	646.5	652.3	658.1	652.3	646.5	634.8	621.2	608.6
5°	736.1	802.3	876.4	939.9	971.4	1003.0	971.4	939.9	876.4	802.3	736.1
7.5°	1020.6	1212.3	1411.0	1575.8	1639.0	1702.1	1639.0	1575.8	1411.0	1212.3	1020.6
10°	1304.6	1551.1	1723.6	1861.5	1895.5	1929.5	1895.5	1861.5	1723.6	1551.1	1304.6
12.5°	1489.9	1746.2	1867.2	1966.7	2001.7	2036.7	2001.7	1966.7	1867.2	1746.2	1489.9
15°	1655.0	1918.6	2017.0	2100.5	2139.4	2178.2	2139.4	2100.5	2017.0	1918.6	1655.0
17.5°	1746.3	2003.4	2100.8	2179.1	2200.3	2221.4	2200.3	2179.1	2100.8	2003.4	1746.3
20°	1799.5	2042.5	2126.3	2192.5	2205.9	2219.2	2205.9	2192.5	2126.3	2042.5	1799.5
22.5°	1838.2	2065.1	2128.5	2179.6	2194.0	2208.3	2194.0	2179.6	2128.5	2065.1	1838.2
25°	1876.4	2083.5	2123.6	2156.1	2165.8	2175.5	2165.8	2156.1	2123.6	2083.5	1876.4
27.5°	1870.2	2063.4	2089.7	2111.7	2121.2	2130.7	2121.2	2111.7	2089.7	2063.4	1870.2
30°	1853.9	2040.4	2059.8	2077.7	2091.1	2104.4	2091.1	2077.7	2059.8	2040.4	1853.9
32.5°	1828.9	2011.4	2029.9	2051.0	2079.9	2108.8	2079.9	2051.0	2029.9	2011.4	1828.9
35°	1782.2	1968.7	1997.8	2033.1	2086.5	2140.0	2086.5	2033.1	1997.8	1968.7	1782.2
37.5°	1718.0	1921.2	1982.2	2040.8	2092.3	2143.8	2092.3	2040.8	1982.2	1921.2	1718.0
40°	1671.1	1885.5	1966.9	2038.8	2082.6	2126.3	2082.6	2038.8	1966.9	1885.5	1671.1
42.5°	1617.2	1839.8	1934.8	2017.0	2060.7	2104.4	2060.7	2017.0	1934.8	1839.8	1617.2
45°	1531.7	1766.8	1878.5	1972.6	2013.9	2055.2	2013.9	1972.6	1878.5	1766.8	1531.7
47.5°	1448.1	1694.7	1813.3	1909.7	1939.8	1970.0	1939.8	1909.7	1813.3	1694.7	1448.1
50°	1392.0	1643.5	1760.1	1853.6	1877.9	1902.2	1877.9	1853.6	1760.1	1643.5	1392.0
52.5°	1336.4	1589.8	1699.6	1787.5	1809.9	1832.2	1809.9	1787.5	1699.6	1589.8	1336.4
55°	1248.4	1499.2	1595.2	1672.0	1691.4	1710.9	1691.4	1672.0	1595.2	1499.2	1248.4
57.5°	1154.7	1397.1	1478.9	1544.3	1560.1	1575.9	1560.1	1544.3	1478.9	1397.1	1154.7
60°	1086.2	1318.8	1392.9	1452.5	1468.2	1484.0	1468.2	1452.5	1392.9	1318.8	1086.2
62.5°	1011.9	1232.8	1301.1	1356.0	1370.8	1385.6	1370.8	1356.0	1301.1	1232.8	1011.9
65°	898.6	1097.2	1154.2	1199.5	1209.2	1218.9	1209.2	1199.5	1154.2	1097.2	898.6
67.5°	782.0	948.1	983.5	1005.6	987.4	969.1	987.4	1005.6	983.5	948.1	782.0
70°	704.5	842.4	854.5	850.6	798.3	746.1	798.3	850.6	854.5	842.4	704.5
72.5°	619.7	720.2	693.5	648.7	549.8	450.9	549.8	648.7	693.5	720.2	619.7
75°	483.4	510.2	393.6	306.7	309.1	311.6	309.1	306.7	393.6	510.2	483.4
77.5°	322.7	343.0	281.3	235.6	237.8	240.0	237.8	235.6	281.3	343.0	322.7
80°	179.2	195.6	193.1	191.6	192.8	194.0	192.8	191.6	193.1	195.6	179.2
82.5°	125.7	136.8	139.2	140.6	138.9	137.2	138.9	140.6	139.2	136.8	125.7
85°	65.3	63.5	53.7	45.9	43.4	41.0	43.4	45.9	53.7	63.5	65.3
87.5°	18.1	17.7	19.3	20.2	21.1	20.7	21.1	20.2	19.3	17.7	18.1
90°	26.0	33.9	41.8	46.4	50.9	48.6	50.9	46.4	41.8	33.9	26.0
92.5°	52.2	65.6	75.3	83.4	87.0	86.6	87.0	83.4	75.3	65.6	52.2
95°	105.1	121.0	136.8	148.1	154.9	152.6	154.9	148.1	136.8	121.0	105.1
97.5°	162.1	183.4	201.0	211.6	218.4	222.9	218.4	211.6	201.0	183.4	162.1
100°	200.1	220.4	240.8	253.2	264.5	269.1	264.5	253.2	240.8	220.4	200.1
102.5°	230.8	257.5	279.7	293.0	302.5	307.0	302.5	293.0	279.7	257.5	230.8
105°	281.5	309.8	333.5	350.5	360.6	364.0	360.6	350.5	333.5	309.8	281.5
107.5°	332.1	361.3	383.2	402.0	414.4	421.7	414.4	402.0	383.2	361.3	332.1
110°	371.9	395.7	419.4	436.4	448.8	453.3	448.8	436.4	419.4	395.7	371.9



TEST NUMBER: P1435974

CATALOG NUMBER: SQ2W-FB-K-075U-125D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	405.4	431.8	455.6	472.5	486.8	493.1	486.8	472.5	455.6	431.8	405.4
115°	452.2	487.2	508.7	524.6	534.7	540.4	534.7	524.6	508.7	487.2	452.2
117.5°	491.1	527.7	551.2	563.4	568.2	572.3	568.2	563.4	551.2	527.7	491.1
120°	515.5	549.4	576.6	592.4	598.0	600.3	598.0	592.4	576.6	549.4	515.5
122.5°	538.1	570.2	596.5	615.9	625.2	627.4	625.2	615.9	596.5	570.2	538.1
125°	569.8	600.3	627.4	646.6	656.8	662.5	656.8	646.6	627.4	600.3	569.8
127.5°	597.4	630.4	655.2	672.6	682.6	687.1	682.6	672.6	655.2	630.4	597.4
130°	612.7	646.6	671.5	690.7	699.8	704.3	699.8	690.7	671.5	646.6	612.7
132.5°	624.5	660.2	686.0	703.4	713.3	717.9	713.3	703.4	686.0	660.2	624.5
135°	638.7	676.0	703.2	720.1	729.2	733.7	729.2	720.1	703.2	676.0	638.7
137.5°	651.2	685.1	713.3	731.2	739.3	742.3	739.3	731.2	713.3	685.1	651.2
140°	660.2	689.6	717.9	734.8	743.9	745.0	743.9	734.8	717.9	689.6	660.2
142.5°	672.0	695.0	719.7	736.6	745.7	747.7	745.7	736.6	719.7	695.0	672.0
145°	693.0	706.6	723.5	739.3	747.3	749.5	747.3	739.3	723.5	706.6	693.0
147.5°	719.4	723.7	732.6	743.0	750.6	752.2	750.6	743.0	732.6	723.7	719.4
150°	739.3	738.2	741.6	748.4	755.2	754.0	755.2	748.4	741.6	738.2	739.3
152.5°	762.0	755.4	755.2	758.3	761.5	761.3	761.5	758.3	755.2	755.4	762.0
155°	800.4	788.0	781.2	778.9	778.9	777.8	778.9	778.9	781.2	788.0	800.4
157.5°	842.7	825.3	815.1	809.7	808.1	805.6	808.1	809.7	815.1	825.3	842.7
160°	871.6	852.4	842.2	833.2	829.8	826.4	829.8	833.2	842.2	852.4	871.6
162.5°	898.7	880.4	869.4	861.2	857.8	852.6	857.8	861.2	869.4	880.4	898.7
165°	942.8	923.6	911.2	904.4	899.9	895.4	899.9	904.4	911.2	923.6	942.8
167.5°	986.9	965.9	957.8	950.1	945.8	937.6	945.8	950.1	957.8	965.9	986.9
170°	1014.1	994.8	990.3	983.5	975.6	966.6	975.6	983.5	990.3	994.8	1014.1
172.5°	1037.6	1024.7	1020.2	1013.4	1010.9	1003.7	1010.9	1013.4	1020.2	1024.7	1037.6
175°	1071.7	1061.5	1061.5	1060.4	1057.0	1050.2	1057.0	1060.4	1061.5	1061.5	1071.7
177.5°	1100.2	1094.8	1098.4	1098.4	1097.5	1091.2	1097.5	1098.4	1098.4	1094.8	1100.2
180°	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2



TEST NUMBER: P1435974

CATALOG NUMBER: SQ2W-FB-K-075U-125D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	568.5	568.5	568.5	568.5
2.5°	596.9	585.5	574.8	564.1
5°	677.8	625.0	588.5	552.1
7.5°	835.9	678.9	604.8	530.8
10°	983.9	717.6	614.3	511.1
12.5°	1098.3	769.6	629.4	489.2
15°	1226.2	854.5	654.1	453.7
17.5°	1329.7	950.5	683.8	417.1
20°	1397.5	1017.6	704.2	390.8
22.5°	1447.8	1067.4	717.1	366.8
25°	1502.3	1123.0	728.2	333.4
27.5°	1509.9	1135.4	718.3	301.2
30°	1500.4	1129.3	705.4	281.5
32.5°	1482.2	1115.7	689.9	264.0
35°	1438.5	1075.9	656.8	237.8
37.5°	1372.5	1013.7	614.5	215.4
40°	1323.7	967.5	584.9	202.2
42.5°	1266.9	913.6	551.3	189.1
45°	1173.4	823.2	497.7	172.2
47.5°	1073.5	721.9	439.1	156.3
50°	1005.8	652.9	400.2	147.6
52.5°	939.4	585.8	362.3	138.8
55°	842.7	492.9	310.7	128.5
57.5°	751.9	413.1	266.1	119.2
60°	695.1	369.9	242.3	114.8
62.5°	638.3	330.3	219.2	108.2
65°	558.4	280.9	191.0	101.1
67.5°	485.4	243.8	167.6	91.3
70°	440.9	225.6	155.2	84.7
72.5°	392.1	205.7	143.0	80.4
75°	313.4	173.1	122.1	71.1
77.5°	220.5	134.2	96.1	57.9
80°	143.9	109.9	79.6	49.2
82.5°	106.0	85.6	63.0	40.4
85°	59.2	51.3	38.0	24.6
87.5°	20.8	21.0	15.2	9.4
90°	20.3	12.4	7.9	3.4
92.5°	43.9	30.5	21.5	12.4
95°	88.2	70.1	49.7	35.0
97.5°	140.4	111.2	91.1	66.9
100°	168.4	140.2	121.0	95.0
102.5°	199.2	175.5	149.0	123.0
105°	254.4	225.0	194.4	165.1
107.5°	305.5	273.1	236.5	210.0
110°	338.0	303.0	264.5	240.8

TEST NUMBER: P1435974

CATALOG NUMBER: SQ2W-FB-K-075U-125D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	369.7	333.7	294.4	270.6
115°	412.6	373.1	336.9	316.5
117.5°	454.0	413.3	375.1	359.0
120°	479.3	438.6	401.3	388.9
122.5°	500.1	460.3	425.7	420.5
125°	531.3	490.6	461.2	468.0
127.5°	556.7	519.4	500.8	516.0
130°	572.0	539.2	527.9	549.4
132.5°	585.6	560.0	555.1	584.7
135°	605.9	591.2	595.8	636.5
137.5°	630.1	624.5	639.6	691.0
140°	645.5	648.9	670.4	728.0
142.5°	666.3	674.2	702.0	763.3
145°	698.6	715.6	751.8	812.8
147.5°	735.3	757.2	802.0	864.6
150°	759.7	788.0	835.4	895.4
152.5°	787.7	816.9	864.4	925.2
155°	830.9	863.7	913.4	965.4
157.5°	875.0	908.5	955.9	1001.4
160°	902.1	938.3	981.3	1023.1
162.5°	932.9	966.3	1003.9	1041.2
165°	977.9	1005.0	1035.5	1067.2
167.5°	1015.6	1038.2	1062.2	1086.9
170°	1040.1	1058.1	1078.5	1097.7
172.5°	1060.9	1075.3	1090.3	1106.8
175°	1088.7	1096.6	1105.6	1115.8
177.5°	1110.1	1112.9	1115.6	1120.1
180°	1119.2	1119.2	1119.2	1119.2



TEST NUMBER: P1435974
 CATALOG NUMBER: SQ2W-FB-K-075U-125D-L835-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.00	16.03	15.83	16.89	17.96	24.60	25.63	25.43	26.49	27.55
	3H	15.96	16.88	16.80	17.75	18.84	26.22	27.15	27.06	28.01	29.10
	4H	16.36	17.24	17.22	18.11	19.21	26.40	27.28	27.26	28.15	29.25
	6H	16.62	17.43	17.50	18.31	19.43	26.49	27.30	27.36	28.17	29.29
	8H	16.72	17.49	17.60	18.39	19.51	26.51	27.28	27.39	28.18	29.30
	12H	16.78	17.51	17.66	18.40	19.55	26.50	27.23	27.38	28.12	29.26
4H	2H	19.74	20.62	20.61	21.49	22.59	24.99	25.86	25.85	26.73	27.84
	3H	20.89	21.62	21.76	22.52	23.64	26.89	27.62	27.77	28.52	29.64
	4H	21.18	21.84	22.07	22.74	23.89	27.12	27.78	28.01	28.69	29.83
	6H	21.32	21.90	22.23	22.82	23.97	27.26	27.84	28.16	28.76	29.91
	8H	21.37	21.90	22.27	22.82	23.99	27.31	27.85	28.22	28.77	29.93
	12H	21.38	21.86	22.30	22.80	23.97	27.30	27.78	28.23	28.72	29.89
8H	4H	22.39	22.92	23.29	23.84	25.00	27.23	27.76	28.13	28.68	29.84
	6H	22.65	23.10	23.59	24.06	25.22	27.43	27.87	28.36	28.83	30.00
	8H	22.75	23.14	23.70	24.10	25.28	27.52	27.92	28.47	28.87	30.05
	12H	22.80	23.15	23.75	24.09	25.32	27.54	27.88	28.48	28.83	30.06
12H	4H	22.42	22.90	23.35	23.84	25.01	27.19	27.67	28.11	28.61	29.78
	6H	22.76	23.15	23.70	24.11	25.29	27.42	27.81	28.36	28.76	29.94
	8H	22.91	23.25	23.85	24.20	25.43	27.52	27.87	28.47	28.81	30.04