

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1428132

Luminaire Tested: SQ2W-PP3-K-150U-050D-L835-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1428132
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-7)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-PP3-K-150U-050D-L835-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - PERCEIVE PRISM LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 1500 LUMENS PER FOOT
Light Source: 3500K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9285.5 lumens
Efficiency: N/A
Efficacy: 127.4 lumens/watt
Spacing Criteria (0/90/45): 1.26 / 1.41 / 1.4
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 72.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1428132

CATALOG NUMBER: SQ2W-PP3-K-150U-050D-L835-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

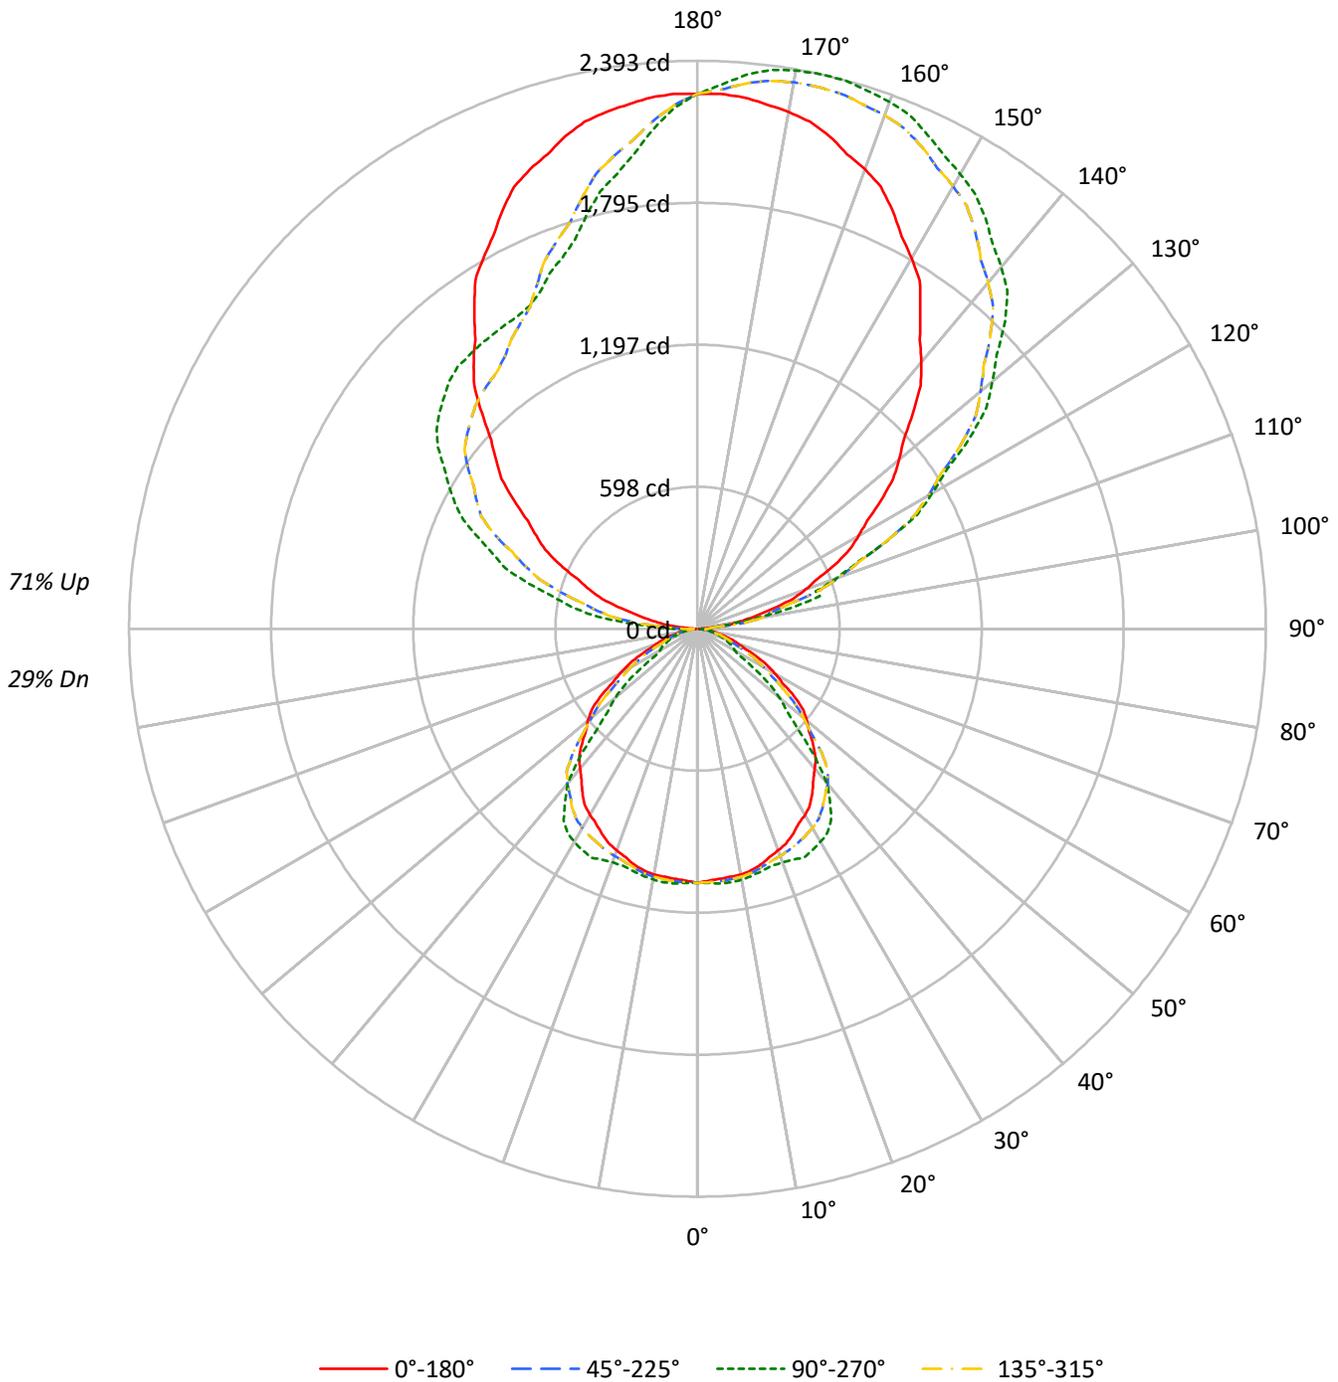



TEST NUMBER: P1428132

CATALOG NUMBER: SQ2W-PP3-K-150U-050D-L835-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	37	37	37	29
1	93	89	86	82	84	80	77	74	63	61	59	48	46	45	33	32	32	25
2	85	78	73	68	76	70	66	61	56	52	49	42	40	38	29	28	27	22
3	78	69	62	57	70	62	56	52	49	45	42	37	35	32	26	25	23	19
4	71	61	54	48	64	55	49	44	44	39	36	33	30	28	24	22	20	16
5	65	54	47	41	58	49	42	38	39	34	31	30	27	24	21	19	18	14
6	60	49	41	35	54	44	37	33	35	30	27	27	24	21	19	17	16	12
7	56	44	36	31	50	40	33	28	32	27	24	25	21	19	18	16	14	11
8	51	40	32	27	46	36	30	25	29	24	21	22	19	17	16	14	12	10
9	48	36	29	24	43	33	27	22	26	22	19	21	17	15	15	13	11	9
10	45	33	26	21	40	30	24	20	24	20	17	19	16	13	14	12	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	17285	17285	17285	17285
5°	17149	17462	17149	17462
10°	17236	17588	17236	17588
15°	17195	17629	17195	17629
20°	17072	17986	17072	17986
25°	16976	18930	16976	18930
30°	16878	19326	16878	19326
35°	16639	19361	16639	19361
40°	16195	17890	16195	17890
45°	15712	13618	15712	13618
50°	15093	11341	15093	11341
55°	14049	8155	14049	8155
60°	12096	5848	12096	5848
65°	10204	5750	10204	5750
70°	8492	5504	8492	5504
75°	7199	5153	7199	5153
80°	6099	4630	6099	4630
85°	4816	2519	4816	2519

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 40°
 Vertical Angle: 45°
 Luminance: 17187 cd/sqm



TEST NUMBER: P1428132

CATALOG NUMBER: SQ2W-PP3-K-150U-050D-L835-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	101.9	1.1
10°-20°	295.0	3.2
20°-30°	462.2	5.0
30°-40°	570.2	6.1
40°-50°	536.8	5.8
50°-60°	380.1	4.1
60°-70°	216.6	2.3
70°-80°	107.2	1.2
80°-90°	35.5	0.4
90°-100°	179.4	1.9
100°-110°	523.0	5.6
110°-120°	853.6	9.2
120°-130°	1083.1	11.7
130°-140°	1158.9	12.5
140°-150°	1082.2	11.7
150°-160°	890.5	9.6
160°-170°	597.2	6.4
170°-180°	212.1	2.3
0°-30°	859.2	9.3
0°-40°	1429.3	15.4
0°-60°	2346.2	25.3
0°-90°	2705.5	29.1
90°-120°	1556.0	16.8
90°-150°	4880.2	52.6
90°-180°	6580.0	70.9
0°-180°	9285.5	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1071	1071	1071	1071	1071	
5°	1058	1077	1058	1077	1058	101
15°	1029	1055	1029	1055	1029	290
25°	953	1063	953	1063	953	439
35°	844	982	844	982	844	526
45°	688	596	688	596	688	530
55°	499	290	499	290	499	440
65°	267	150	267	150	267	268
75°	115	83	115	83	115	125
85°	26	14	26	14	26	31
90°	7	50	7	98	7	7
95°	71	52	71	307	71	85
105°	332	533	332	733	332	353
115°	637	883	637	1088	637	628
125°	942	1400	942	1334	942	843
135°	1282	1832	1282	1477	1282	990
145°	1637	2112	1637	1509	1637	1024
155°	1944	2294	1944	1566	1944	894
165°	2149	2392	2149	1803	2149	605
175°	2247	2342	2247	2115	2247	213
180°	2254	2254	2254	2254	2254	



TEST NUMBER: P1428132

CATALOG NUMBER: SQ2W-PP3-K-150U-050D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	1070.6	1070.6	1070.6	1070.6	1070.6	1070.6	1070.6	1070.6	1070.6	1070.6	1070.6
2.5°	1062.4	1069.3	1076.1	1074.5	1070.1	1068.2	1069.1	1069.9	1070.7	1071.5	1070.7
5°	1058.1	1066.7	1075.2	1074.0	1069.4	1067.7	1068.7	1070.3	1073.8	1077.4	1073.8
7.5°	1054.0	1062.8	1071.5	1070.4	1066.0	1064.6	1066.3	1068.7	1073.0	1077.4	1073.0
10°	1051.3	1058.9	1066.4	1065.3	1061.3	1060.5	1063.0	1065.8	1069.3	1072.8	1069.3
12.5°	1043.2	1050.3	1057.5	1056.5	1052.9	1052.8	1056.1	1059.3	1062.5	1065.6	1062.5
15°	1028.7	1035.2	1041.8	1041.9	1039.9	1041.1	1045.7	1049.7	1052.2	1054.7	1052.2
17.5°	1009.0	1016.9	1024.9	1026.7	1026.5	1029.6	1036.1	1041.6	1044.2	1046.8	1044.2
20°	993.6	1003.2	1012.7	1015.9	1016.9	1021.4	1029.4	1036.7	1041.8	1046.8	1041.8
22.5°	977.3	988.5	999.6	1003.8	1005.6	1012.5	1024.6	1035.8	1044.5	1053.1	1044.5
25°	952.9	963.9	975.0	983.0	990.1	1002.4	1020.0	1036.5	1049.6	1062.6	1049.6
27.5°	924.4	935.3	946.3	960.1	974.9	992.2	1012.0	1029.5	1039.8	1050.2	1039.8
30°	905.3	915.9	926.5	942.3	959.9	979.0	999.6	1017.5	1027.1	1036.6	1027.1
32.5°	881.8	892.8	903.7	920.6	939.4	959.9	982.1	1001.0	1009.8	1018.5	1009.8
35°	844.2	854.8	865.4	885.0	907.6	930.5	953.6	972.2	977.3	982.3	977.3
37.5°	801.0	813.0	824.9	846.9	872.3	891.5	904.4	914.2	914.5	914.8	914.5
40°	768.4	784.0	799.6	821.6	845.7	859.1	861.6	861.8	855.3	848.8	855.3
42.5°	736.7	756.7	776.8	794.4	811.3	814.8	804.8	790.1	761.0	732.0	761.0
45°	688.1	711.7	735.3	746.1	752.7	730.6	679.8	636.6	616.5	596.4	616.5
47.5°	636.2	659.6	682.9	679.9	668.1	634.6	579.4	534.5	520.6	506.8	520.6
50°	600.9	623.0	645.2	629.2	600.5	562.8	516.0	477.7	464.6	451.5	464.6
52.5°	561.1	580.8	600.5	576.4	537.7	497.9	457.2	421.7	401.7	381.8	401.7
55°	499.1	512.6	526.2	499.8	460.1	416.3	368.5	327.9	308.8	289.7	308.8
57.5°	424.4	433.9	443.5	422.7	391.8	348.3	292.2	244.7	223.3	201.9	223.3
60°	374.6	382.1	389.7	370.8	343.1	301.7	246.3	202.2	191.6	181.1	191.6
62.5°	329.3	336.1	342.8	323.1	294.7	257.6	211.9	176.7	173.0	169.3	173.0
65°	267.1	273.6	280.2	259.5	229.9	200.9	172.8	151.5	151.0	150.5	151.0
67.5°	212.5	219.7	226.8	207.4	179.1	157.8	143.3	132.3	131.7	131.0	131.7
70°	179.9	187.5	195.0	176.9	150.3	132.9	124.9	118.6	117.6	116.6	117.6
72.5°	152.8	159.9	167.1	151.3	127.8	113.5	108.3	104.2	103.6	103.0	103.6
75°	115.4	121.0	126.5	115.1	98.0	88.1	85.6	83.6	83.1	82.6	83.1
77.5°	83.7	87.3	90.8	83.3	72.1	65.9	64.6	63.5	63.0	62.5	63.0
80°	65.6	67.1	68.7	63.4	55.8	51.8	51.3	50.8	50.3	49.8	50.3
82.5°	49.3	48.8	48.3	45.3	41.3	39.1	38.6	38.0	37.1	36.2	37.1
85°	26.0	25.0	24.0	23.0	22.0	20.5	18.5	16.6	15.1	13.6	15.1
87.5°	9.5	11.3	13.6	13.9	13.3	12.5	12.1	12.3	12.7	12.7	12.7
90°	6.8	15.9	27.3	36.4	43.3	45.5	45.5	47.8	50.1	50.1	50.1
92.5°	25.0	39.6	40.1	40.1	48.7	52.8	56.5	56.9	59.2	59.2	59.2
95°	70.6	77.4	116.1	113.8	77.4	61.5	52.4	52.4	52.4	52.4	52.4
97.5°	134.8	144.8	151.1	202.6	214.0	206.7	168.4	141.6	126.6	119.7	126.6
100°	191.2	195.8	209.4	211.7	268.6	323.2	295.9	261.8	250.4	243.6	250.4
102.5°	247.7	250.4	271.3	280.9	294.1	325.1	419.8	409.3	401.5	400.2	401.5
105°	332.3	334.6	373.3	391.5	400.6	400.6	398.4	443.9	516.7	532.7	516.7
107.5°	422.9	433.4	478.9	527.7	538.1	540.9	529.0	522.2	519.5	521.3	519.5
110°	484.9	500.8	555.4	616.9	632.8	637.4	632.8	626.0	621.4	621.4	621.4

TEST NUMBER: P1428132

CATALOG NUMBER: SQ2W-PP3-K-150U-050D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	545.0	568.2	630.1	700.7	727.5	741.2	731.2	726.1	721.6	725.2	721.6
115°	637.4	671.5	753.5	826.3	880.9	887.8	885.5	885.5	883.2	883.2	883.2
117.5°	723.0	777.6	869.6	954.2	1017.5	1035.7	1044.8	1042.1	1039.4	1043.9	1039.4
120°	783.1	846.8	951.5	1047.1	1108.6	1135.9	1145.0	1140.4	1145.0	1140.4	1145.0
122.5°	846.8	925.1	1028.0	1127.2	1199.6	1230.6	1241.5	1242.4	1243.3	1240.6	1243.3
125°	942.4	1038.0	1158.6	1261.1	1336.2	1372.6	1381.7	1384.0	1388.6	1399.9	1388.6
127.5°	1038.9	1147.3	1279.7	1378.5	1455.5	1499.6	1513.8	1518.8	1528.3	1533.3	1528.3
130°	1106.3	1229.2	1363.5	1456.8	1532.0	1579.8	1604.8	1611.6	1623.0	1620.7	1623.0
132.5°	1177.3	1305.7	1441.8	1538.8	1608.4	1659.9	1681.3	1700.9	1705.0	1708.2	1705.0
135°	1281.6	1420.4	1557.0	1652.6	1718.6	1768.7	1796.0	1814.2	1825.6	1832.4	1825.6
137.5°	1391.3	1537.9	1669.0	1754.1	1820.6	1863.9	1894.8	1913.9	1925.8	1931.2	1925.8
140°	1466.0	1607.1	1734.6	1823.3	1882.5	1925.8	1953.1	1975.8	1989.5	1989.5	1989.5
142.5°	1537.0	1676.3	1800.1	1888.9	1940.8	1980.4	2009.5	2026.8	2042.3	2042.3	2042.3
145°	1636.7	1775.5	1889.3	1978.1	2021.4	2057.8	2089.7	2103.3	2112.4	2112.4	2112.4
147.5°	1740.9	1863.9	1967.7	2052.8	2089.2	2132.0	2157.0	2168.0	2179.4	2174.3	2179.4
150°	1802.8	1916.7	2016.8	2096.5	2132.9	2173.9	2198.9	2208.0	2219.4	2212.6	2219.4
152.5°	1862.9	1971.3	2062.3	2136.6	2167.5	2208.5	2237.2	2246.3	2254.0	2249.0	2254.0
155°	1944.0	2039.6	2123.8	2192.1	2219.4	2258.1	2285.4	2296.8	2305.9	2294.5	2305.9
157.5°	2016.4	2098.8	2172.1	2234.9	2264.0	2297.3	2322.8	2336.9	2346.0	2341.0	2346.0
160°	2060.1	2135.2	2201.2	2260.4	2287.7	2317.3	2344.6	2360.5	2369.7	2362.8	2369.7
162.5°	2096.5	2164.3	2226.7	2280.4	2304.1	2330.0	2362.8	2376.9	2386.0	2377.4	2386.0
165°	2148.8	2203.5	2258.1	2303.6	2324.1	2344.6	2378.8	2394.7	2401.5	2392.4	2401.5
167.5°	2188.5	2230.3	2274.5	2313.7	2328.7	2348.7	2382.9	2396.1	2404.7	2393.3	2404.7
170°	2210.3	2246.7	2285.4	2317.3	2328.7	2346.9	2381.0	2392.4	2399.2	2387.9	2399.2
172.5°	2228.5	2255.8	2287.2	2315.5	2321.4	2336.0	2368.3	2379.7	2384.7	2375.1	2384.7
175°	2246.7	2262.7	2285.4	2303.6	2301.4	2310.5	2337.8	2346.9	2356.0	2342.3	2356.0
177.5°	2255.4	2262.7	2269.9	2280.9	2273.6	2273.6	2293.6	2299.1	2300.9	2293.6	2300.9
180°	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6



TEST NUMBER: P1428132

CATALOG NUMBER: SQ2W-PP3-K-150U-050D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	1070.6	1070.6	1070.6	1070.6	1070.6	1070.6	1070.6	1070.6	1070.6	1070.6	1070.6
2.5°	1069.9	1069.1	1068.2	1070.1	1074.5	1076.1	1069.3	1062.4	1069.3	1076.1	1074.5
5°	1070.3	1068.7	1067.7	1069.4	1074.0	1075.2	1066.7	1058.1	1066.7	1075.2	1074.0
7.5°	1068.7	1066.3	1064.6	1066.0	1070.4	1071.5	1062.8	1054.0	1062.8	1071.5	1070.4
10°	1065.8	1063.0	1060.5	1061.3	1065.3	1066.4	1058.9	1051.3	1058.9	1066.4	1065.3
12.5°	1059.3	1056.1	1052.8	1052.9	1056.5	1057.5	1050.3	1043.2	1050.3	1057.5	1056.5
15°	1049.7	1045.7	1041.1	1039.9	1041.9	1041.8	1035.2	1028.7	1035.2	1041.8	1041.9
17.5°	1041.6	1036.1	1029.6	1026.5	1026.7	1024.9	1016.9	1009.0	1016.9	1024.9	1026.7
20°	1036.7	1029.4	1021.4	1016.9	1015.9	1012.7	1003.2	993.6	1003.2	1012.7	1015.9
22.5°	1035.8	1024.6	1012.5	1005.6	1003.8	999.6	988.5	977.3	988.5	999.6	1003.8
25°	1036.5	1020.0	1002.4	990.1	983.0	975.0	963.9	952.9	963.9	975.0	983.0
27.5°	1029.5	1012.0	992.2	974.9	960.1	946.3	935.3	924.4	935.3	946.3	960.1
30°	1017.5	999.6	979.0	959.9	942.3	926.5	915.9	905.3	915.9	926.5	942.3
32.5°	1001.0	982.1	959.9	939.4	920.6	903.7	892.8	881.8	892.8	903.7	920.6
35°	972.2	953.6	930.5	907.6	885.0	865.4	854.8	844.2	854.8	865.4	885.0
37.5°	914.2	904.4	891.5	872.3	846.9	824.9	813.0	801.0	813.0	824.9	846.9
40°	861.8	861.6	859.1	845.7	821.6	799.6	784.0	768.4	784.0	799.6	821.6
42.5°	790.1	804.8	814.8	811.3	794.4	776.8	756.7	736.7	756.7	776.8	794.4
45°	636.6	679.8	730.6	752.7	746.1	735.3	711.7	688.1	711.7	735.3	746.1
47.5°	534.5	579.4	634.6	668.1	679.9	682.9	659.6	636.2	659.6	682.9	679.9
50°	477.7	516.0	562.8	600.5	629.2	645.2	623.0	600.9	623.0	645.2	629.2
52.5°	421.7	457.2	497.9	537.7	576.4	600.5	580.8	561.1	580.8	600.5	576.4
55°	327.9	368.5	416.3	460.1	499.8	526.2	512.6	499.1	512.6	526.2	499.8
57.5°	244.7	292.2	348.3	391.8	422.7	443.5	433.9	424.4	433.9	443.5	422.7
60°	202.2	246.3	301.7	343.1	370.8	389.7	382.1	374.6	382.1	389.7	370.8
62.5°	176.7	211.9	257.6	294.7	323.1	342.8	336.1	329.3	336.1	342.8	323.1
65°	151.5	172.8	200.9	229.9	259.5	280.2	273.6	267.1	273.6	280.2	259.5
67.5°	132.3	143.3	157.8	179.1	207.4	226.8	219.7	212.5	219.7	226.8	207.4
70°	118.6	124.9	132.9	150.3	176.9	195.0	187.5	179.9	187.5	195.0	176.9
72.5°	104.2	108.3	113.5	127.8	151.3	167.1	159.9	152.8	159.9	167.1	151.3
75°	83.6	85.6	88.1	98.0	115.1	126.5	121.0	115.4	121.0	126.5	115.1
77.5°	63.5	64.6	65.9	72.1	83.3	90.8	87.3	83.7	87.3	90.8	83.3
80°	50.8	51.3	51.8	55.8	63.4	68.7	67.1	65.6	67.1	68.7	63.4
82.5°	38.0	38.6	39.1	41.3	45.3	48.3	48.8	49.3	48.8	48.3	45.3
85°	16.6	18.5	20.5	22.0	23.0	24.0	25.0	26.0	25.0	24.0	23.0
87.5°	12.3	12.1	12.5	13.3	13.9	13.6	11.3	9.5	11.3	13.2	14.8
90°	47.8	45.5	45.5	43.3	36.4	27.3	15.9	6.8	15.9	25.0	41.0
92.5°	56.9	56.5	52.8	48.7	40.1	40.1	39.6	25.0	43.3	61.5	88.3
95°	52.4	52.4	61.5	77.4	113.8	116.1	77.4	70.6	100.2	141.1	177.6
97.5°	141.6	168.4	206.7	214.0	202.6	151.1	144.8	134.8	183.5	224.0	282.7
100°	261.8	295.9	323.2	268.6	211.7	209.4	195.8	191.2	243.6	282.3	339.2
102.5°	409.3	419.8	325.1	294.1	280.9	271.3	250.4	247.7	300.0	353.3	401.1
105°	443.9	398.4	400.6	400.6	391.5	373.3	334.6	332.3	391.5	453.0	512.2
107.5°	522.2	529.0	540.9	538.1	527.7	478.9	433.4	422.9	476.2	550.0	615.1
110°	626.0	632.8	637.4	632.8	616.9	555.4	500.8	484.9	532.7	610.1	680.6



TEST NUMBER: P1428132

CATALOG NUMBER: SQ2W-PP3-K-150U-050D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	726.1	731.2	741.2	727.5	700.7	630.1	568.2	545.0	592.8	672.0	744.4
115°	885.5	885.5	887.8	880.9	826.3	753.5	671.5	637.4	678.3	751.2	830.9
117.5°	1042.1	1044.8	1035.7	1017.5	954.2	869.6	777.6	723.0	755.3	832.2	914.2
120°	1140.4	1145.0	1135.9	1108.6	1047.1	951.5	846.8	783.1	808.1	883.2	965.2
122.5°	1242.4	1241.5	1230.6	1199.6	1127.2	1028.0	925.1	846.8	857.3	926.9	1007.0
125°	1384.0	1381.7	1372.6	1336.2	1261.1	1158.6	1038.0	942.4	928.7	987.9	1069.9
127.5°	1518.8	1513.8	1499.6	1455.5	1378.5	1279.7	1147.3	1038.9	1008.4	1045.7	1120.9
130°	1611.6	1604.8	1579.8	1532.0	1456.8	1363.5	1229.2	1106.3	1063.0	1085.8	1151.8
132.5°	1700.9	1681.3	1659.9	1608.4	1538.8	1441.8	1305.7	1177.3	1117.7	1127.7	1179.1
135°	1814.2	1796.0	1768.7	1718.6	1652.6	1557.0	1420.4	1281.6	1199.6	1190.5	1220.1
137.5°	1913.9	1894.8	1863.9	1820.6	1754.1	1669.0	1537.9	1391.3	1287.9	1257.4	1268.8
140°	1975.8	1953.1	1925.8	1882.5	1823.3	1734.6	1607.1	1466.0	1349.9	1306.6	1299.8
142.5°	2026.8	2009.5	1980.4	1940.8	1888.9	1800.1	1676.3	1537.0	1413.6	1357.6	1341.7
145°	2103.3	2089.7	2057.8	2021.4	1978.1	1889.3	1775.5	1636.7	1513.8	1440.9	1406.8
147.5°	2168.0	2157.0	2132.0	2089.2	2052.8	1967.7	1863.9	1740.9	1614.8	1524.7	1480.5
150°	2208.0	2198.9	2173.9	2132.9	2096.5	2016.8	1916.7	1802.8	1682.2	1586.6	1529.7
152.5°	2246.3	2237.2	2208.5	2167.5	2136.6	2062.3	1971.3	1862.9	1740.5	1644.9	1586.1
155°	2296.8	2285.4	2258.1	2219.4	2192.1	2123.8	2039.6	1944.0	1839.3	1739.1	1673.1
157.5°	2336.9	2322.8	2297.3	2264.0	2234.9	2172.1	2098.8	2016.4	1924.9	1829.3	1761.9
160°	2360.5	2344.6	2317.3	2287.7	2260.4	2201.2	2135.2	2060.1	1975.8	1889.3	1816.5
162.5°	2376.9	2362.8	2330.0	2304.1	2280.4	2226.7	2164.3	2096.5	2021.4	1945.8	1878.4
165°	2394.7	2378.8	2344.6	2324.1	2303.6	2258.1	2203.5	2148.8	2085.1	2023.7	1969.0
167.5°	2396.1	2382.9	2348.7	2328.7	2313.7	2274.5	2230.3	2188.5	2138.8	2090.6	2045.0
170°	2392.4	2381.0	2346.9	2328.7	2317.3	2285.4	2246.7	2210.3	2171.6	2130.6	2094.2
172.5°	2379.7	2368.3	2336.0	2321.4	2315.5	2287.2	2255.8	2228.5	2195.3	2165.2	2136.1
175°	2346.9	2337.8	2310.5	2301.4	2303.6	2285.4	2262.7	2246.7	2226.2	2208.0	2192.1
177.5°	2299.1	2293.6	2273.6	2273.6	2280.9	2269.9	2262.7	2255.4	2246.3	2240.8	2235.3
180°	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6



TEST NUMBER: P1428132

CATALOG NUMBER: SQ2W-PP3-K-150U-050D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	1070.6	1070.6	1070.6	1070.6	1070.6	1070.6	1070.6	1070.6	1070.6	1070.6	1070.6
2.5°	1070.1	1068.2	1069.1	1069.9	1070.7	1071.5	1070.7	1069.9	1069.1	1068.2	1070.1
5°	1069.4	1067.7	1068.7	1070.3	1073.8	1077.4	1073.8	1070.3	1068.7	1067.7	1069.4
7.5°	1066.0	1064.6	1066.3	1068.7	1073.0	1077.4	1073.0	1068.7	1066.3	1064.6	1066.0
10°	1061.3	1060.5	1063.0	1065.8	1069.3	1072.8	1069.3	1065.8	1063.0	1060.5	1061.3
12.5°	1052.9	1052.8	1056.1	1059.3	1062.5	1065.6	1062.5	1059.3	1056.1	1052.8	1052.9
15°	1039.9	1041.1	1045.7	1049.7	1052.2	1054.7	1052.2	1049.7	1045.7	1041.1	1039.9
17.5°	1026.5	1029.6	1036.1	1041.6	1044.2	1046.8	1044.2	1041.6	1036.1	1029.6	1026.5
20°	1016.9	1021.4	1029.4	1036.7	1041.8	1046.8	1041.8	1036.7	1029.4	1021.4	1016.9
22.5°	1005.6	1012.5	1024.6	1035.8	1044.5	1053.1	1044.5	1035.8	1024.6	1012.5	1005.6
25°	990.1	1002.4	1020.0	1036.5	1049.6	1062.6	1049.6	1036.5	1020.0	1002.4	990.1
27.5°	974.9	992.2	1012.0	1029.5	1039.8	1050.2	1039.8	1029.5	1012.0	992.2	974.9
30°	959.9	979.0	999.6	1017.5	1027.1	1036.6	1027.1	1017.5	999.6	979.0	959.9
32.5°	939.4	959.9	982.1	1001.0	1009.8	1018.5	1009.8	1001.0	982.1	959.9	939.4
35°	907.6	930.5	953.6	972.2	977.3	982.3	977.3	972.2	953.6	930.5	907.6
37.5°	872.3	891.5	904.4	914.2	914.5	914.8	914.5	914.2	904.4	891.5	872.3
40°	845.7	859.1	861.6	861.8	855.3	848.8	855.3	861.8	861.6	859.1	845.7
42.5°	811.3	814.8	804.8	790.1	761.0	732.0	761.0	790.1	804.8	814.8	811.3
45°	752.7	730.6	679.8	636.6	616.5	596.4	616.5	636.6	679.8	730.6	752.7
47.5°	668.1	634.6	579.4	534.5	520.6	506.8	520.6	534.5	579.4	634.6	668.1
50°	600.5	562.8	516.0	477.7	464.6	451.5	464.6	477.7	516.0	562.8	600.5
52.5°	537.7	497.9	457.2	421.7	401.7	381.8	401.7	421.7	457.2	497.9	537.7
55°	460.1	416.3	368.5	327.9	308.8	289.7	308.8	327.9	368.5	416.3	460.1
57.5°	391.8	348.3	292.2	244.7	223.3	201.9	223.3	244.7	292.2	348.3	391.8
60°	343.1	301.7	246.3	202.2	191.6	181.1	191.6	202.2	246.3	301.7	343.1
62.5°	294.7	257.6	211.9	176.7	173.0	169.3	173.0	176.7	211.9	257.6	294.7
65°	229.9	200.9	172.8	151.5	151.0	150.5	151.0	151.5	172.8	200.9	229.9
67.5°	179.1	157.8	143.3	132.3	131.7	131.0	131.7	132.3	143.3	157.8	179.1
70°	150.3	132.9	124.9	118.6	117.6	116.6	117.6	118.6	124.9	132.9	150.3
72.5°	127.8	113.5	108.3	104.2	103.6	103.0	103.6	104.2	108.3	113.5	127.8
75°	98.0	88.1	85.6	83.6	83.1	82.6	83.1	83.6	85.6	88.1	98.0
77.5°	72.1	65.9	64.6	63.5	63.0	62.5	63.0	63.5	64.6	65.9	72.1
80°	55.8	51.8	51.3	50.8	50.3	49.8	50.3	50.8	51.3	51.8	55.8
82.5°	41.3	39.1	38.6	38.0	37.1	36.2	37.1	38.0	38.6	39.1	41.3
85°	22.0	20.5	18.5	16.6	15.1	13.6	15.1	16.6	18.5	20.5	22.0
87.5°	15.1	17.1	19.9	21.4	23.2	22.3	23.2	21.4	19.9	17.1	15.1
90°	52.4	68.3	84.2	93.3	102.4	97.9	102.4	93.3	84.2	68.3	52.4
92.5°	105.2	132.0	151.6	168.0	175.3	174.4	175.3	168.0	151.6	132.0	105.2
95°	211.7	243.6	275.4	298.2	311.9	307.3	311.9	298.2	275.4	243.6	211.7
97.5°	326.4	369.2	404.7	426.1	439.8	448.9	439.8	426.1	404.7	369.2	326.4
100°	402.9	443.9	484.9	509.9	532.7	541.8	532.7	509.9	484.9	443.9	402.9
102.5°	464.8	518.5	563.2	590.0	609.1	618.2	609.1	590.0	563.2	518.5	464.8
105°	566.8	623.7	671.5	705.7	726.1	733.0	726.1	705.7	671.5	623.7	566.8
107.5°	668.8	727.5	771.7	809.5	834.5	849.1	834.5	809.5	771.7	727.5	668.8
110°	748.9	796.7	844.5	878.7	903.7	912.8	903.7	878.7	844.5	796.7	748.9



TEST NUMBER: P1428132

CATALOG NUMBER: SQ2W-PP3-K-150U-050D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	816.3	869.6	917.4	951.5	980.2	992.9	980.2	951.5	917.4	869.6	816.3
115°	910.5	981.1	1024.3	1056.2	1076.7	1088.1	1076.7	1056.2	1024.3	981.1	910.5
117.5°	988.8	1062.6	1109.9	1134.5	1144.1	1152.3	1144.1	1134.5	1109.9	1062.6	988.8
120°	1038.0	1106.3	1160.9	1192.8	1204.2	1208.7	1204.2	1192.8	1160.9	1106.3	1038.0
122.5°	1083.5	1148.2	1201.0	1240.1	1258.8	1263.4	1258.8	1240.1	1201.0	1148.2	1083.5
125°	1147.3	1208.7	1263.4	1302.1	1322.5	1333.9	1322.5	1302.1	1263.4	1208.7	1147.3
127.5°	1202.8	1269.3	1319.4	1354.4	1374.4	1383.5	1374.4	1354.4	1319.4	1269.3	1202.8
130°	1233.8	1302.1	1352.1	1390.8	1409.0	1418.1	1409.0	1390.8	1352.1	1302.1	1233.8
132.5°	1257.4	1329.4	1381.3	1416.3	1436.4	1445.5	1436.4	1416.3	1381.3	1329.4	1257.4
135°	1286.1	1361.2	1415.9	1450.0	1468.2	1477.3	1468.2	1450.0	1415.9	1361.2	1286.1
137.5°	1311.2	1379.5	1436.4	1472.3	1488.7	1494.6	1488.7	1472.3	1436.4	1379.5	1311.2
140°	1329.4	1388.6	1445.5	1479.6	1497.8	1500.1	1497.8	1479.6	1445.5	1388.6	1329.4
142.5°	1353.0	1399.5	1449.1	1483.3	1501.5	1505.6	1501.5	1483.3	1449.1	1399.5	1353.0
145°	1395.4	1422.7	1456.8	1488.7	1504.6	1509.2	1504.6	1488.7	1456.8	1422.7	1395.4
147.5°	1448.7	1457.3	1475.1	1496.0	1511.5	1514.7	1511.5	1496.0	1475.1	1457.3	1448.7
150°	1488.7	1486.4	1493.3	1506.9	1520.6	1518.3	1520.6	1506.9	1493.3	1486.4	1488.7
152.5°	1534.2	1521.0	1520.6	1527.0	1533.3	1532.9	1533.3	1527.0	1520.6	1521.0	1534.2
155°	1611.6	1586.6	1572.9	1568.4	1568.4	1566.1	1568.4	1568.4	1572.9	1586.6	1611.6
157.5°	1696.8	1661.7	1641.2	1630.3	1627.1	1622.1	1627.1	1630.3	1641.2	1661.7	1696.8
160°	1755.0	1716.3	1695.9	1677.6	1670.8	1664.0	1670.8	1677.6	1695.9	1716.3	1755.0
162.5°	1809.7	1772.8	1750.5	1734.1	1727.3	1716.8	1727.3	1734.1	1750.5	1772.8	1809.7
165°	1898.5	1859.8	1834.7	1821.1	1812.0	1802.8	1812.0	1821.1	1834.7	1859.8	1898.5
167.5°	1987.2	1944.9	1928.5	1913.0	1904.4	1888.0	1904.4	1913.0	1928.5	1944.9	1987.2
170°	2041.9	2003.2	1994.1	1980.4	1964.5	1946.3	1964.5	1980.4	1994.1	2003.2	2041.9
172.5°	2089.2	2063.3	2054.2	2040.5	2035.5	2020.9	2035.5	2040.5	2054.2	2063.3	2089.2
175°	2158.0	2137.5	2137.5	2135.2	2128.4	2114.7	2128.4	2135.2	2137.5	2137.5	2158.0
177.5°	2215.3	2204.4	2211.7	2211.7	2209.9	2197.1	2209.9	2211.7	2211.7	2204.4	2215.3
180°	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6	2253.6



TEST NUMBER: P1428132

CATALOG NUMBER: SQ2W-PP3-K-150U-050D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	1070.6	1070.6	1070.6	1070.6
2.5°	1074.5	1076.1	1069.3	1062.4
5°	1074.0	1075.2	1066.7	1058.1
7.5°	1070.4	1071.5	1062.8	1054.0
10°	1065.3	1066.4	1058.9	1051.3
12.5°	1056.5	1057.5	1050.3	1043.2
15°	1041.9	1041.8	1035.2	1028.7
17.5°	1026.7	1024.9	1016.9	1009.0
20°	1015.9	1012.7	1003.2	993.6
22.5°	1003.8	999.6	988.5	977.3
25°	983.0	975.0	963.9	952.9
27.5°	960.1	946.3	935.3	924.4
30°	942.3	926.5	915.9	905.3
32.5°	920.6	903.7	892.8	881.8
35°	885.0	865.4	854.8	844.2
37.5°	846.9	824.9	813.0	801.0
40°	821.6	799.6	784.0	768.4
42.5°	794.4	776.8	756.7	736.7
45°	746.1	735.3	711.7	688.1
47.5°	679.9	682.9	659.6	636.2
50°	629.2	645.2	623.0	600.9
52.5°	576.4	600.5	580.8	561.1
55°	499.8	526.2	512.6	499.1
57.5°	422.7	443.5	433.9	424.4
60°	370.8	389.7	382.1	374.6
62.5°	323.1	342.8	336.1	329.3
65°	259.5	280.2	273.6	267.1
67.5°	207.4	226.8	219.7	212.5
70°	176.9	195.0	187.5	179.9
72.5°	151.3	167.1	159.9	152.8
75°	115.1	126.5	121.0	115.4
77.5°	83.3	90.8	87.3	83.7
80°	63.4	68.7	67.1	65.6
82.5°	45.3	48.3	48.8	49.3
85°	23.0	24.0	25.0	26.0
87.5°	14.8	13.2	11.3	9.5
90°	41.0	25.0	15.9	6.8
92.5°	88.3	61.5	43.3	25.0
95°	177.6	141.1	100.2	70.6
97.5°	282.7	224.0	183.5	134.8
100°	339.2	282.3	243.6	191.2
102.5°	401.1	353.3	300.0	247.7
105°	512.2	453.0	391.5	332.3
107.5°	615.1	550.0	476.2	422.9
110°	680.6	610.1	532.7	484.9



TEST NUMBER: P1428132

CATALOG NUMBER: SQ2W-PP3-K-150U-050D-L835-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	744.4	672.0	592.8	545.0
115°	830.9	751.2	678.3	637.4
117.5°	914.2	832.2	755.3	723.0
120°	965.2	883.2	808.1	783.1
122.5°	1007.0	926.9	857.3	846.8
125°	1069.9	987.9	928.7	942.4
127.5°	1120.9	1045.7	1008.4	1038.9
130°	1151.8	1085.8	1063.0	1106.3
132.5°	1179.1	1127.7	1117.7	1177.3
135°	1220.1	1190.5	1199.6	1281.6
137.5°	1268.8	1257.4	1287.9	1391.3
140°	1299.8	1306.6	1349.9	1466.0
142.5°	1341.7	1357.6	1413.6	1537.0
145°	1406.8	1440.9	1513.8	1636.7
147.5°	1480.5	1524.7	1614.8	1740.9
150°	1529.7	1586.6	1682.2	1802.8
152.5°	1586.1	1644.9	1740.5	1862.9
155°	1673.1	1739.1	1839.3	1944.0
157.5°	1761.9	1829.3	1924.9	2016.4
160°	1816.5	1889.3	1975.8	2060.1
162.5°	1878.4	1945.8	2021.4	2096.5
165°	1969.0	2023.7	2085.1	2148.8
167.5°	2045.0	2090.6	2138.8	2188.5
170°	2094.2	2130.6	2171.6	2210.3
172.5°	2136.1	2165.2	2195.3	2228.5
175°	2192.1	2208.0	2226.2	2246.7
177.5°	2235.3	2240.8	2246.3	2255.4
180°	2253.6	2253.6	2253.6	2253.6



TEST NUMBER: P1428132
 CATALOG NUMBER: SQ2W-PP3-K-150U-050D-L835-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.00	15.68	16.12	16.80	18.34	10.77	11.45	11.89	12.57	14.11
	3H	16.04	16.66	17.18	17.78	19.34	12.06	12.68	13.20	13.80	15.36
	4H	16.40	16.99	17.55	18.11	19.67	12.61	13.19	13.75	14.31	15.88
	6H	16.59	17.12	17.74	18.25	19.82	12.97	13.50	14.12	14.63	16.20
	8H	16.65	17.15	17.80	18.29	19.86	13.09	13.60	14.24	14.74	16.31
	12H	16.66	17.14	17.82	18.28	19.87	13.12	13.60	14.28	14.74	16.33
4H	2H	15.09	15.67	16.24	16.80	18.36	11.65	12.24	12.80	13.36	14.92
	3H	16.37	16.85	17.52	18.00	19.58	13.06	13.54	14.21	14.69	16.27
	4H	16.87	17.32	18.03	18.45	20.05	13.68	14.12	14.83	15.26	16.85
	6H	17.18	17.56	18.34	18.72	20.30	14.11	14.49	15.27	15.65	17.24
	8H	17.28	17.64	18.44	18.79	20.39	14.28	14.63	15.44	15.78	17.39
	12H	17.32	17.64	18.50	18.80	20.41	14.32	14.64	15.50	15.80	17.41
8H	4H	16.88	17.23	18.04	18.38	19.99	13.97	14.33	15.13	15.48	17.08
	6H	17.29	17.58	18.47	18.77	20.37	14.53	14.82	15.71	16.01	17.61
	8H	17.47	17.72	18.65	18.89	20.51	14.77	15.03	15.96	16.20	17.82
	12H	17.55	17.78	18.74	18.95	20.60	14.87	15.09	16.06	16.26	17.91
12H	4H	16.83	17.15	18.01	18.31	19.92	13.98	14.30	15.15	15.46	17.07
	6H	17.28	17.53	18.46	18.70	20.32	14.59	14.85	15.78	16.02	17.64
	8H	17.47	17.69	18.65	18.86	20.51	14.86	15.08	16.05	16.25	17.90