

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1428408

Luminaire Tested: SQ2W-PW1-K-075U-100D-L835-UNV-STD-W-WM-4

Issue Date: 3/10/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1428408  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-8)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/10/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ2W-PW1-K-075U-100D-L835-UNV-STD-W-WM-4  
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE  
DOWNLIGHT - PERCEIVE WAVES LENS  
UPLIGHT - ASYMMETRIC ROLL LENS  
DOWNLIGHT 1000 LUMENS PER FOOT  
UPLIGHT 750 LUMENS PER FOOT  
Light Source: 3500K CCT, 80 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8386.4 lumens  
Efficiency: N/A  
Efficacy: 137.0 lumens/watt  
Spacing Criteria (0/90/45): 1.27 / 1.11 / 1.23  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Direct  
  
Input Watts (W): 61.2  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1428408

CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L835-UNV-STD-W-WM-4

### Luminous Intensity Polar Plot

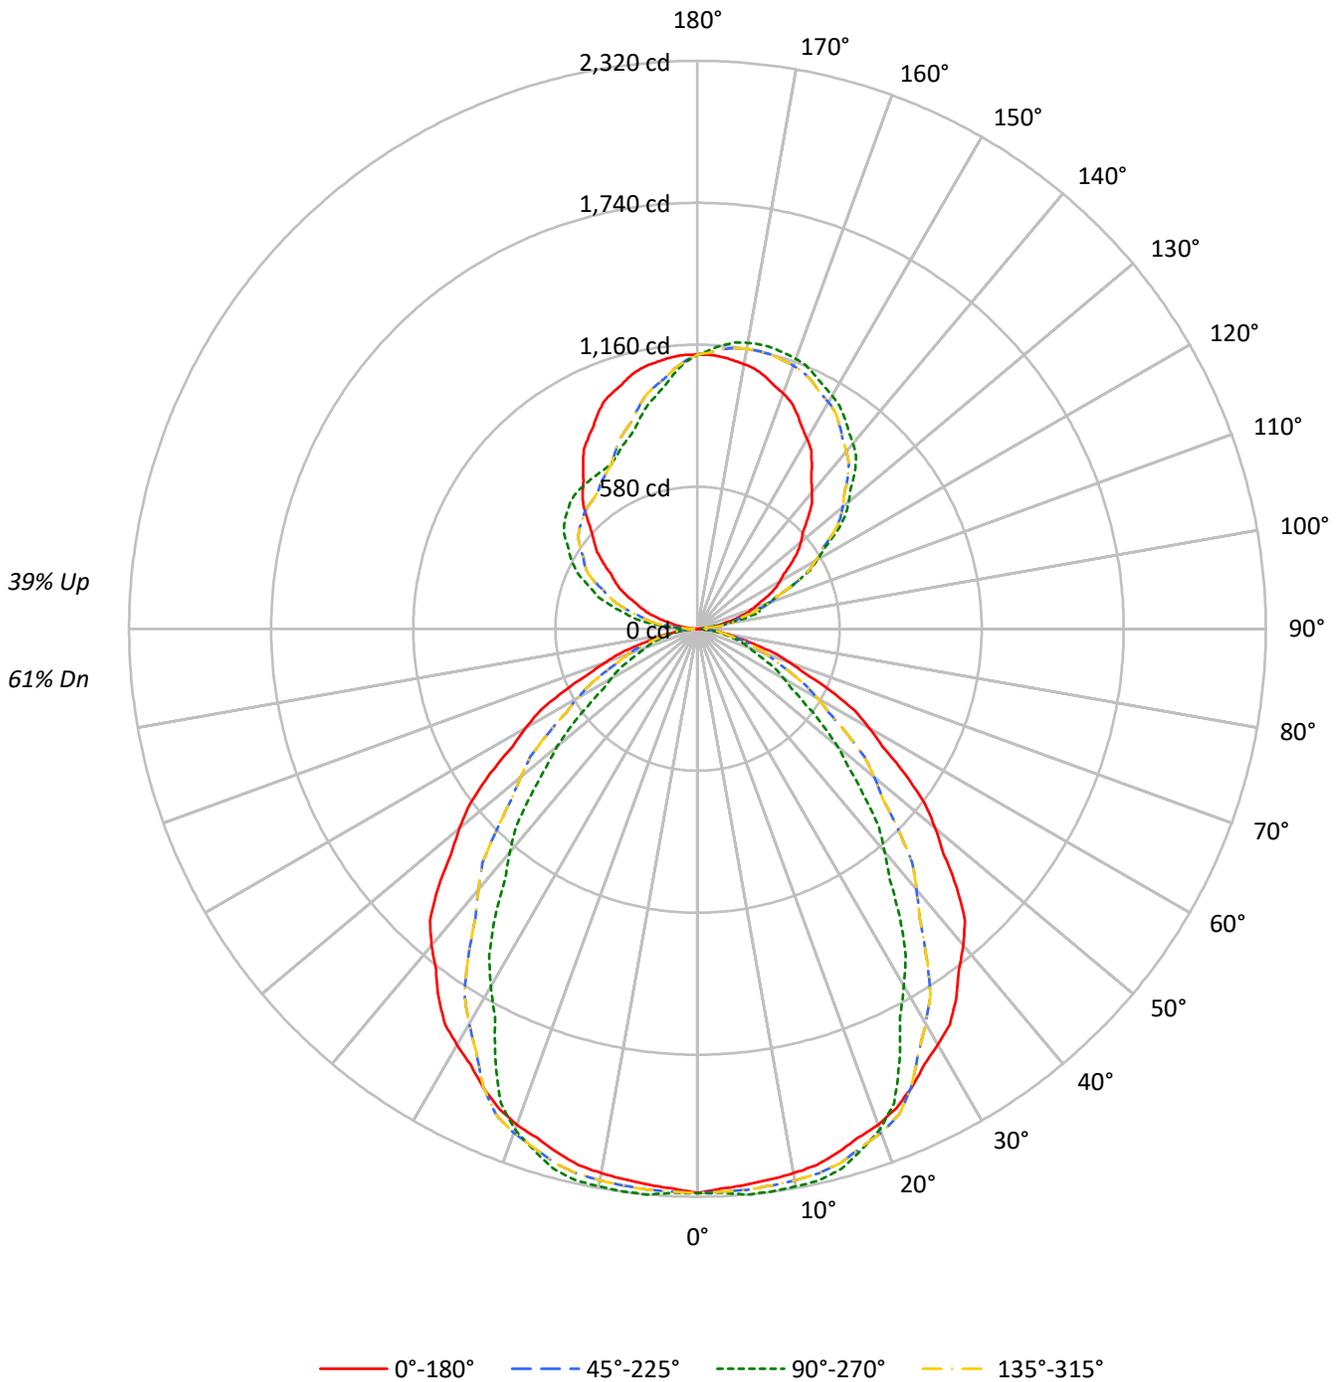



TEST NUMBER: P1428408

CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L835-UNV-STD-W-WM-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66	66	66	66	61	
1	101	97	93	90	94	91	88	85	80	77	75	69	68	66	60	58	57	57	57	57	53	
2	93	85	79	75	86	80	75	71	71	67	63	62	59	56	53	51	49	49	49	49	45	
3	85	76	69	63	79	71	65	60	63	58	54	55	51	48	48	45	43	43	43	43	39	
4	78	67	60	54	73	64	57	51	56	51	47	50	45	42	43	40	37	37	37	37	34	
5	72	61	53	47	67	57	50	45	51	45	41	45	40	37	39	36	33	33	33	33	30	
6	66	55	47	41	62	52	44	39	46	40	36	41	36	33	36	32	29	29	29	29	27	
7	62	50	42	36	58	47	40	35	42	36	32	37	33	29	33	29	26	26	26	26	24	
8	57	45	38	32	54	43	36	31	38	33	29	34	30	26	30	27	24	24	24	24	22	
9	54	41	34	29	50	39	33	28	35	30	26	32	27	24	28	24	22	22	22	22	20	
10	50	38	31	26	47	36	30	25	33	27	23	29	25	22	26	22	20	20	20	20	18	

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	37211	37211	37211	37211
5°	36961	37602	36961	37602
10°	37029	37929	37029	37929
15°	37019	38156	37019	38156
20°	37034	37412	37034	37412
25°	36834	34762	36834	34762
30°	36584	31427	36584	31427
35°	36298	28381	36298	28381
40°	35575	25075	35575	25075
45°	34181	21902	34181	21902
50°	31812	18746	31812	18746
55°	29100	15200	29100	15200
60°	26082	13113	26082	13113
65°	22808	11656	22808	11656
70°	18651	10570	18651	10570
75°	14516	9719	14516	9719
80°	10813	8573	10813	8573
85°	7317	4872	7317	4872

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 34181 cd/sqm



TEST NUMBER: P1428408

CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L835-UNV-STD-W-WM-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	219.5	2.6
10°-20°	635.9	7.6
20°-30°	935.8	11.2
30°-40°	1023.1	12.2
40°-50°	917.8	10.9
50°-60°	684.6	8.2
60°-70°	432.7	5.2
70°-80°	214.4	2.6
80°-90°	54.8	0.7
90°-100°	89.1	1.1
100°-110°	259.7	3.1
110°-120°	423.9	5.1
120°-130°	537.9	6.4
130°-140°	575.6	6.9
140°-150°	537.5	6.4
150°-160°	442.3	5.3
160°-170°	296.6	3.5
170°-180°	105.3	1.3
0°-30°	1791.1	21.4
0°-40°	2814.2	33.6
0°-60°	4416.7	52.7
0°-90°	5118.6	61.0
90°-120°	772.7	9.2
90°-150°	2423.6	28.9
90°-180°	3268.0	39.0
0°-180°	8386.4	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	2305	2305	2305	2305	2305	
5°	2280	2320	2280	2320	2280	217
15°	2215	2283	2215	2283	2215	625
25°	2068	1951	2068	1951	2068	952
35°	1842	1440	1842	1440	1842	1149
45°	1497	959	1497	959	1497	1148
55°	1034	540	1034	540	1034	923
65°	597	305	597	305	597	592
75°	233	156	233	156	233	256
85°	40	26	40	26	40	50
90°	3	25	3	49	3	4
95°	35	26	35	153	35	42
105°	165	264	165	364	165	176
115°	316	439	316	540	316	312
125°	468	695	468	662	468	419
135°	636	910	636	734	636	492
145°	813	1049	813	750	813	509
155°	965	1140	965	778	965	444
165°	1067	1188	1067	895	1067	300
175°	1116	1163	1116	1050	1116	106
180°	1119	1119	1119	1119	1119	



TEST NUMBER: P1428408

CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L835-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	2304.7	2304.7	2304.7	2304.7	2304.7	2304.7	2304.7	2304.7	2304.7	2304.7	2304.7
2.5°	2288.9	2302.2	2315.4	2312.3	2303.7	2299.8	2300.6	2301.8	2304.1	2306.4	2304.1
5°	2280.5	2297.1	2313.7	2311.3	2302.5	2298.6	2299.6	2302.5	2311.3	2320.1	2311.3
7.5°	2269.1	2285.9	2302.7	2301.9	2295.3	2293.6	2296.9	2301.6	2310.2	2318.7	2310.2
10°	2258.6	2276.2	2293.7	2293.7	2287.9	2287.4	2292.3	2297.9	2305.7	2313.5	2305.7
12.5°	2244.5	2262.9	2281.2	2282.6	2278.3	2279.0	2284.6	2290.8	2298.6	2306.4	2298.6
15°	2214.7	2234.2	2253.7	2257.9	2256.9	2259.8	2266.6	2273.0	2277.9	2282.7	2277.9
17.5°	2180.0	2199.5	2219.0	2222.9	2221.5	2221.7	2223.5	2225.4	2227.7	2230.1	2227.7
20°	2155.4	2174.9	2194.5	2197.1	2194.2	2189.3	2182.5	2177.4	2177.4	2177.4	2177.4
22.5°	2120.3	2141.4	2162.5	2162.6	2155.8	2143.1	2124.6	2109.1	2102.9	2096.6	2102.9
25°	2067.6	2088.1	2108.6	2099.1	2079.6	2050.8	2012.8	1980.6	1965.9	1951.3	1965.9
27.5°	2006.2	2022.8	2039.3	2014.5	1975.9	1929.5	1875.5	1829.9	1809.6	1789.3	1809.6
30°	1962.3	1975.0	1987.6	1948.4	1891.8	1833.8	1774.2	1724.7	1705.2	1685.7	1705.2
32.5°	1916.6	1921.5	1926.4	1874.6	1804.0	1737.8	1675.9	1624.3	1603.2	1582.1	1603.2
35°	1841.6	1832.8	1824.0	1755.2	1666.4	1590.8	1528.4	1477.0	1458.4	1439.9	1458.4
37.5°	1752.9	1726.7	1700.6	1623.1	1528.5	1448.5	1383.1	1329.0	1308.5	1288.0	1308.5
40°	1687.9	1650.8	1613.8	1530.6	1432.1	1350.1	1284.8	1230.6	1210.1	1189.7	1210.1
42.5°	1615.9	1569.5	1523.0	1437.5	1339.0	1257.1	1191.7	1137.4	1116.1	1094.8	1116.1
45°	1497.0	1442.3	1387.7	1298.7	1198.2	1116.3	1052.8	1000.2	979.7	959.2	979.7
47.5°	1363.1	1308.8	1254.6	1165.8	1065.5	984.7	923.2	872.7	855.1	837.6	855.1
50°	1266.5	1213.8	1161.1	1076.3	980.7	902.1	840.7	789.2	767.7	746.3	767.7
52.5°	1168.1	1120.9	1073.7	992.0	898.7	820.6	757.5	703.0	673.7	644.4	673.7
55°	1033.8	988.9	944.1	867.0	779.2	700.2	629.9	573.1	556.5	540.0	556.5
57.5°	895.5	856.7	817.9	748.6	669.2	597.6	533.8	482.5	468.9	455.2	468.9
60°	807.7	773.6	739.5	673.1	596.0	530.7	477.0	433.4	419.7	406.1	419.7
62.5°	723.5	693.2	663.0	599.4	524.6	465.9	423.2	388.3	377.0	365.7	377.0
65°	597.0	574.6	552.2	499.7	437.3	388.5	353.4	324.6	314.9	305.1	314.9
67.5°	474.1	461.6	449.1	409.9	361.7	322.2	291.3	266.6	260.2	253.7	260.2
70°	395.1	391.2	387.3	354.8	312.9	279.2	253.9	233.6	228.8	223.9	228.8
72.5°	326.6	328.2	329.7	302.8	266.3	238.1	218.2	202.4	199.1	195.8	199.1
75°	232.7	240.5	248.3	230.5	204.1	184.1	170.5	159.7	157.8	155.8	157.8
77.5°	158.5	170.2	181.9	170.3	151.0	136.3	126.1	118.1	116.6	115.0	116.6
80°	116.3	128.0	139.7	131.7	117.1	105.8	98.0	92.2	92.2	92.2	92.2
82.5°	81.2	90.6	99.9	94.2	83.5	76.2	72.3	69.4	69.4	69.4	69.4
85°	39.5	44.4	49.3	47.6	43.7	38.8	32.9	28.3	27.3	26.3	27.3
87.5°	11.2	14.5	17.9	16.5	13.3	11.2	10.4	10.0	10.2	10.2	10.2
90°	3.4	7.9	13.6	18.1	21.5	22.6	22.6	23.7	24.9	24.9	24.9
92.5°	12.4	19.7	19.9	19.9	24.2	26.2	28.0	28.3	29.4	29.4	29.4
95°	35.0	38.4	57.7	56.5	38.4	30.5	26.0	26.0	26.0	26.0	26.0
97.5°	66.9	71.9	75.1	100.6	106.3	102.6	83.7	70.3	62.9	59.5	62.9
100°	95.0	97.2	104.0	105.1	133.4	160.5	147.0	130.0	124.4	121.0	124.4
102.5°	123.0	124.4	134.8	139.5	146.1	161.4	208.5	203.3	199.4	198.7	199.4
105°	165.1	166.2	185.4	194.4	199.0	199.0	197.8	220.4	256.6	264.5	256.6
107.5°	210.0	215.2	237.9	262.0	267.2	268.6	262.7	259.3	258.0	258.9	258.0
110°	240.8	248.7	275.8	306.4	314.3	316.5	314.3	310.9	308.6	308.6	308.6



TEST NUMBER: P1428408

CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L835-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	270.6	282.2	312.9	348.0	361.3	368.1	363.1	360.6	358.4	360.2	358.4
115°	316.5	333.5	374.2	410.4	437.5	440.9	439.8	439.8	438.6	438.6	438.6
117.5°	359.0	386.2	431.8	473.9	505.3	514.4	518.9	517.5	516.2	518.4	516.2
120°	388.9	420.5	472.5	520.0	550.6	564.1	568.6	566.4	568.6	566.4	568.6
122.5°	420.5	459.4	510.5	559.8	595.8	611.1	616.6	617.0	617.5	616.1	617.5
125°	468.0	515.5	575.4	626.3	663.6	681.7	686.2	687.3	689.6	695.3	689.6
127.5°	516.0	569.8	635.6	684.6	722.8	744.8	751.8	754.3	759.0	761.5	759.0
130°	549.4	610.5	677.2	723.5	760.8	784.6	797.0	800.4	806.0	804.9	806.0
132.5°	584.7	648.5	716.1	764.2	798.8	824.4	835.0	844.7	846.7	848.3	846.7
135°	636.5	705.4	773.3	820.7	853.5	878.4	892.0	901.0	906.7	910.0	906.7
137.5°	691.0	763.8	828.9	871.2	904.2	925.7	941.0	950.5	956.4	959.1	956.4
140°	728.0	798.1	861.4	905.5	934.9	956.4	970.0	981.3	988.1	988.1	988.1
142.5°	763.3	832.5	894.0	938.1	963.9	983.5	998.0	1006.6	1014.3	1014.3	1014.3
145°	812.8	881.8	938.3	982.4	1003.9	1022.0	1037.8	1044.6	1049.1	1049.1	1049.1
147.5°	864.6	925.7	977.2	1019.5	1037.6	1058.8	1071.3	1076.7	1082.3	1079.9	1082.3
150°	895.4	951.9	1001.6	1041.2	1059.3	1079.6	1092.1	1096.6	1102.2	1098.8	1102.2
152.5°	925.2	979.0	1024.2	1061.1	1076.5	1096.8	1111.1	1115.6	1119.4	1116.9	1119.4
155°	965.4	1012.9	1054.8	1088.7	1102.2	1121.5	1135.0	1140.7	1145.2	1139.5	1145.2
157.5°	1001.4	1042.3	1078.7	1109.9	1124.4	1140.9	1153.6	1160.6	1165.1	1162.6	1165.1
160°	1023.1	1060.4	1093.2	1122.6	1136.1	1150.8	1164.4	1172.3	1176.8	1173.5	1176.8
162.5°	1041.2	1074.9	1105.9	1132.5	1144.3	1157.2	1173.5	1180.5	1185.0	1180.7	1185.0
165°	1067.2	1094.3	1121.5	1144.1	1154.2	1164.4	1181.4	1189.3	1192.7	1188.2	1192.7
167.5°	1086.9	1107.7	1129.6	1149.0	1156.5	1166.4	1183.4	1190.0	1194.3	1188.6	1194.3
170°	1097.7	1115.8	1135.0	1150.8	1156.5	1165.5	1182.5	1188.2	1191.5	1185.9	1191.5
172.5°	1106.8	1120.3	1135.9	1149.9	1152.9	1160.1	1176.2	1181.8	1184.3	1179.6	1184.3
175°	1115.8	1123.7	1135.0	1144.1	1142.9	1147.5	1161.0	1165.5	1170.1	1163.3	1170.1
177.5°	1120.1	1123.7	1127.3	1132.8	1129.1	1129.1	1139.1	1141.8	1142.7	1139.1	1142.7
180°	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2



TEST NUMBER: P1428408

CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L835-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	2304.7	2304.7	2304.7	2304.7	2304.7	2304.7	2304.7	2304.7	2304.7	2304.7	2304.7
2.5°	2301.8	2300.6	2299.8	2303.7	2312.3	2315.4	2302.2	2288.9	2302.2	2315.4	2312.3
5°	2302.5	2299.6	2298.6	2302.5	2311.3	2313.7	2297.1	2280.5	2297.1	2313.7	2311.3
7.5°	2301.6	2296.9	2293.6	2295.3	2301.9	2302.7	2285.9	2269.1	2285.9	2302.7	2301.9
10°	2297.9	2292.3	2287.4	2287.9	2293.7	2293.7	2276.2	2258.6	2276.2	2293.7	2293.7
12.5°	2290.8	2284.6	2279.0	2278.3	2282.6	2281.2	2262.9	2244.5	2262.9	2281.2	2282.6
15°	2273.0	2266.6	2259.8	2256.9	2257.9	2253.7	2234.2	2214.7	2234.2	2253.7	2257.9
17.5°	2225.4	2223.5	2221.7	2221.5	2222.9	2219.0	2199.5	2180.0	2199.5	2219.0	2222.9
20°	2177.4	2182.5	2189.3	2194.2	2197.1	2194.5	2174.9	2155.4	2174.9	2194.5	2197.1
22.5°	2109.1	2124.6	2143.1	2155.8	2162.6	2162.5	2141.4	2120.3	2141.4	2162.5	2162.6
25°	1980.6	2012.8	2050.8	2079.6	2099.1	2108.6	2088.1	2067.6	2088.1	2108.6	2099.1
27.5°	1829.9	1875.5	1929.5	1975.9	2014.5	2039.3	2022.8	2006.2	2022.8	2039.3	2014.5
30°	1724.7	1774.2	1833.8	1891.8	1948.4	1987.6	1975.0	1962.3	1975.0	1987.6	1948.4
32.5°	1624.3	1675.9	1737.8	1804.0	1874.6	1926.4	1921.5	1916.6	1921.5	1926.4	1874.6
35°	1477.0	1528.4	1590.8	1666.4	1755.2	1824.0	1832.8	1841.6	1832.8	1824.0	1755.2
37.5°	1329.0	1383.1	1448.5	1528.5	1623.1	1700.6	1726.7	1752.9	1726.7	1700.6	1623.1
40°	1230.6	1284.8	1350.1	1432.1	1530.6	1613.8	1650.8	1687.9	1650.8	1613.8	1530.6
42.5°	1137.4	1191.7	1257.1	1339.0	1437.5	1523.0	1569.5	1615.9	1569.5	1523.0	1437.5
45°	1000.2	1052.8	1116.3	1198.2	1298.7	1387.7	1442.3	1497.0	1442.3	1387.7	1298.7
47.5°	872.7	923.2	984.7	1065.5	1165.8	1254.6	1308.8	1363.1	1308.8	1254.6	1165.8
50°	789.2	840.7	902.1	980.7	1076.3	1161.1	1213.8	1266.5	1213.8	1161.1	1076.3
52.5°	703.0	757.5	820.6	898.7	992.0	1073.7	1120.9	1168.1	1120.9	1073.7	992.0
55°	573.1	629.9	700.2	779.2	867.0	944.1	988.9	1033.8	988.9	944.1	867.0
57.5°	482.5	533.8	597.6	669.2	748.6	817.9	856.7	895.5	856.7	817.9	748.6
60°	433.4	477.0	530.7	596.0	673.1	739.5	773.6	807.7	773.6	739.5	673.1
62.5°	388.3	423.2	465.9	524.6	599.4	663.0	693.2	723.5	693.2	663.0	599.4
65°	324.6	353.4	388.5	437.3	499.7	552.2	574.6	597.0	574.6	552.2	499.7
67.5°	266.6	291.3	322.2	361.7	409.9	449.1	461.6	474.1	461.6	449.1	409.9
70°	233.6	253.9	279.2	312.9	354.8	387.3	391.2	395.1	391.2	387.3	354.8
72.5°	202.4	218.2	238.1	266.3	302.8	329.7	328.2	326.6	328.2	329.7	302.8
75°	159.7	170.5	184.1	204.1	230.5	248.3	240.5	232.7	240.5	248.3	230.5
77.5°	118.1	126.1	136.3	151.0	170.3	181.9	170.2	158.5	170.2	181.9	170.3
80°	92.2	98.0	105.8	117.1	131.7	139.7	128.0	116.3	128.0	139.7	131.7
82.5°	69.4	72.3	76.2	83.5	94.2	99.9	90.6	81.2	90.6	99.9	94.2
85°	28.3	32.9	38.8	43.7	47.6	49.3	44.4	39.5	44.4	49.3	47.6
87.5°	10.0	10.4	11.2	13.3	16.5	17.9	14.5	11.2	14.5	17.7	16.9
90°	23.7	22.6	22.6	21.5	18.1	13.6	7.9	3.4	7.9	12.4	20.3
92.5°	28.3	28.0	26.2	24.2	19.9	19.9	19.7	12.4	21.5	30.5	43.9
95°	26.0	26.0	30.5	38.4	56.5	57.7	38.4	35.0	49.7	70.1	88.2
97.5°	70.3	83.7	102.6	106.3	100.6	75.1	71.9	66.9	91.1	111.2	140.4
100°	130.0	147.0	160.5	133.4	105.1	104.0	97.2	95.0	121.0	140.2	168.4
102.5°	203.3	208.5	161.4	146.1	139.5	134.8	124.4	123.0	149.0	175.5	199.2
105°	220.4	197.8	199.0	199.0	194.4	185.4	166.2	165.1	194.4	225.0	254.4
107.5°	259.3	262.7	268.6	267.2	262.0	237.9	215.2	210.0	236.5	273.1	305.5
110°	310.9	314.3	316.5	314.3	306.4	275.8	248.7	240.8	264.5	303.0	338.0



TEST NUMBER: P1428408

CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L835-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	360.6	363.1	368.1	361.3	348.0	312.9	282.2	270.6	294.4	333.7	369.7
115°	439.8	439.8	440.9	437.5	410.4	374.2	333.5	316.5	336.9	373.1	412.6
117.5°	517.5	518.9	514.4	505.3	473.9	431.8	386.2	359.0	375.1	413.3	454.0
120°	566.4	568.6	564.1	550.6	520.0	472.5	420.5	388.9	401.3	438.6	479.3
122.5°	617.0	616.6	611.1	595.8	559.8	510.5	459.4	420.5	425.7	460.3	500.1
125°	687.3	686.2	681.7	663.6	626.3	575.4	515.5	468.0	461.2	490.6	531.3
127.5°	754.3	751.8	744.8	722.8	684.6	635.6	569.8	516.0	500.8	519.4	556.7
130°	800.4	797.0	784.6	760.8	723.5	677.2	610.5	549.4	527.9	539.2	572.0
132.5°	844.7	835.0	824.4	798.8	764.2	716.1	648.5	584.7	555.1	560.0	585.6
135°	901.0	892.0	878.4	853.5	820.7	773.3	705.4	636.5	595.8	591.2	605.9
137.5°	950.5	941.0	925.7	904.2	871.2	828.9	763.8	691.0	639.6	624.5	630.1
140°	981.3	970.0	956.4	934.9	905.5	861.4	798.1	728.0	670.4	648.9	645.5
142.5°	1006.6	998.0	983.5	963.9	938.1	894.0	832.5	763.3	702.0	674.2	666.3
145°	1044.6	1037.8	1022.0	1003.9	982.4	938.3	881.8	812.8	751.8	715.6	698.6
147.5°	1076.7	1071.3	1058.8	1037.6	1019.5	977.2	925.7	864.6	802.0	757.2	735.3
150°	1096.6	1092.1	1079.6	1059.3	1041.2	1001.6	951.9	895.4	835.4	788.0	759.7
152.5°	1115.6	1111.1	1096.8	1076.5	1061.1	1024.2	979.0	925.2	864.4	816.9	787.7
155°	1140.7	1135.0	1121.5	1102.2	1088.7	1054.8	1012.9	965.4	913.4	863.7	830.9
157.5°	1160.6	1153.6	1140.9	1124.4	1109.9	1078.7	1042.3	1001.4	955.9	908.5	875.0
160°	1172.3	1164.4	1150.8	1136.1	1122.6	1093.2	1060.4	1023.1	981.3	938.3	902.1
162.5°	1180.5	1173.5	1157.2	1144.3	1132.5	1105.9	1074.9	1041.2	1003.9	966.3	932.9
165°	1189.3	1181.4	1164.4	1154.2	1144.1	1121.5	1094.3	1067.2	1035.5	1005.0	977.9
167.5°	1190.0	1183.4	1166.4	1156.5	1149.0	1129.6	1107.7	1086.9	1062.2	1038.2	1015.6
170°	1188.2	1182.5	1165.5	1156.5	1150.8	1135.0	1115.8	1097.7	1078.5	1058.1	1040.1
172.5°	1181.8	1176.2	1160.1	1152.9	1149.9	1135.9	1120.3	1106.8	1090.3	1075.3	1060.9
175°	1165.5	1161.0	1147.5	1142.9	1144.1	1135.0	1123.7	1115.8	1105.6	1096.6	1088.7
177.5°	1141.8	1139.1	1129.1	1129.1	1132.8	1127.3	1123.7	1120.1	1115.6	1112.9	1110.1
180°	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2



TEST NUMBER: P1428408

CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L835-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	2304.7	2304.7	2304.7	2304.7	2304.7	2304.7	2304.7	2304.7	2304.7	2304.7	2304.7
2.5°	2303.7	2299.8	2300.6	2301.8	2304.1	2306.4	2304.1	2301.8	2300.6	2299.8	2303.7
5°	2302.5	2298.6	2299.6	2302.5	2311.3	2320.1	2311.3	2302.5	2299.6	2298.6	2302.5
7.5°	2295.3	2293.6	2296.9	2301.6	2310.2	2318.7	2310.2	2301.6	2296.9	2293.6	2295.3
10°	2287.9	2287.4	2292.3	2297.9	2305.7	2313.5	2305.7	2297.9	2292.3	2287.4	2287.9
12.5°	2278.3	2279.0	2284.6	2290.8	2298.6	2306.4	2298.6	2290.8	2284.6	2279.0	2278.3
15°	2256.9	2259.8	2266.6	2273.0	2277.9	2282.7	2277.9	2273.0	2266.6	2259.8	2256.9
17.5°	2221.5	2221.7	2223.5	2225.4	2227.7	2230.1	2227.7	2225.4	2223.5	2221.7	2221.5
20°	2194.2	2189.3	2182.5	2177.4	2177.4	2177.4	2177.4	2177.4	2182.5	2189.3	2194.2
22.5°	2155.8	2143.1	2124.6	2109.1	2102.9	2096.6	2102.9	2109.1	2124.6	2143.1	2155.8
25°	2079.6	2050.8	2012.8	1980.6	1965.9	1951.3	1965.9	1980.6	2012.8	2050.8	2079.6
27.5°	1975.9	1929.5	1875.5	1829.9	1809.6	1789.3	1809.6	1829.9	1875.5	1929.5	1975.9
30°	1891.8	1833.8	1774.2	1724.7	1705.2	1685.7	1705.2	1724.7	1774.2	1833.8	1891.8
32.5°	1804.0	1737.8	1675.9	1624.3	1603.2	1582.1	1603.2	1624.3	1675.9	1737.8	1804.0
35°	1666.4	1590.8	1528.4	1477.0	1458.4	1439.9	1458.4	1477.0	1528.4	1590.8	1666.4
37.5°	1528.5	1448.5	1383.1	1329.0	1308.5	1288.0	1308.5	1329.0	1383.1	1448.5	1528.5
40°	1432.1	1350.1	1284.8	1230.6	1210.1	1189.7	1210.1	1230.6	1284.8	1350.1	1432.1
42.5°	1339.0	1257.1	1191.7	1137.4	1116.1	1094.8	1116.1	1137.4	1191.7	1257.1	1339.0
45°	1198.2	1116.3	1052.8	1000.2	979.7	959.2	979.7	1000.2	1052.8	1116.3	1198.2
47.5°	1065.5	984.7	923.2	872.7	855.1	837.6	855.1	872.7	923.2	984.7	1065.5
50°	980.7	902.1	840.7	789.2	767.7	746.3	767.7	789.2	840.7	902.1	980.7
52.5°	898.7	820.6	757.5	703.0	673.7	644.4	673.7	703.0	757.5	820.6	898.7
55°	779.2	700.2	629.9	573.1	556.5	540.0	556.5	573.1	629.9	700.2	779.2
57.5°	669.2	597.6	533.8	482.5	468.9	455.2	468.9	482.5	533.8	597.6	669.2
60°	596.0	530.7	477.0	433.4	419.7	406.1	419.7	433.4	477.0	530.7	596.0
62.5°	524.6	465.9	423.2	388.3	377.0	365.7	377.0	388.3	423.2	465.9	524.6
65°	437.3	388.5	353.4	324.6	314.9	305.1	314.9	324.6	353.4	388.5	437.3
67.5°	361.7	322.2	291.3	266.6	260.2	253.7	260.2	266.6	291.3	322.2	361.7
70°	312.9	279.2	253.9	233.6	228.8	223.9	228.8	233.6	253.9	279.2	312.9
72.5°	266.3	238.1	218.2	202.4	199.1	195.8	199.1	202.4	218.2	238.1	266.3
75°	204.1	184.1	170.5	159.7	157.8	155.8	157.8	159.7	170.5	184.1	204.1
77.5°	151.0	136.3	126.1	118.1	116.6	115.0	116.6	118.1	126.1	136.3	151.0
80°	117.1	105.8	98.0	92.2	92.2	92.2	92.2	92.2	98.0	105.8	117.1
82.5°	83.5	76.2	72.3	69.4	69.4	69.4	69.4	69.4	72.3	76.2	83.5
85°	43.7	38.8	32.9	28.3	27.3	26.3	27.3	28.3	32.9	38.8	43.7
87.5°	14.2	13.4	14.2	14.5	15.4	15.0	15.4	14.5	14.2	13.4	14.2
90°	26.0	33.9	41.8	46.4	50.9	48.6	50.9	46.4	41.8	33.9	26.0
92.5°	52.2	65.6	75.3	83.4	87.0	86.6	87.0	83.4	75.3	65.6	52.2
95°	105.1	121.0	136.8	148.1	154.9	152.6	154.9	148.1	136.8	121.0	105.1
97.5°	162.1	183.4	201.0	211.6	218.4	222.9	218.4	211.6	201.0	183.4	162.1
100°	200.1	220.4	240.8	253.2	264.5	269.1	264.5	253.2	240.8	220.4	200.1
102.5°	230.8	257.5	279.7	293.0	302.5	307.0	302.5	293.0	279.7	257.5	230.8
105°	281.5	309.8	333.5	350.5	360.6	364.0	360.6	350.5	333.5	309.8	281.5
107.5°	332.1	361.3	383.2	402.0	414.4	421.7	414.4	402.0	383.2	361.3	332.1
110°	371.9	395.7	419.4	436.4	448.8	453.3	448.8	436.4	419.4	395.7	371.9



TEST NUMBER: P1428408

CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L835-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	405.4	431.8	455.6	472.5	486.8	493.1	486.8	472.5	455.6	431.8	405.4
115°	452.2	487.2	508.7	524.6	534.7	540.4	534.7	524.6	508.7	487.2	452.2
117.5°	491.1	527.7	551.2	563.4	568.2	572.3	568.2	563.4	551.2	527.7	491.1
120°	515.5	549.4	576.6	592.4	598.0	600.3	598.0	592.4	576.6	549.4	515.5
122.5°	538.1	570.2	596.5	615.9	625.2	627.4	625.2	615.9	596.5	570.2	538.1
125°	569.8	600.3	627.4	646.6	656.8	662.5	656.8	646.6	627.4	600.3	569.8
127.5°	597.4	630.4	655.2	672.6	682.6	687.1	682.6	672.6	655.2	630.4	597.4
130°	612.7	646.6	671.5	690.7	699.8	704.3	699.8	690.7	671.5	646.6	612.7
132.5°	624.5	660.2	686.0	703.4	713.3	717.9	713.3	703.4	686.0	660.2	624.5
135°	638.7	676.0	703.2	720.1	729.2	733.7	729.2	720.1	703.2	676.0	638.7
137.5°	651.2	685.1	713.3	731.2	739.3	742.3	739.3	731.2	713.3	685.1	651.2
140°	660.2	689.6	717.9	734.8	743.9	745.0	743.9	734.8	717.9	689.6	660.2
142.5°	672.0	695.0	719.7	736.6	745.7	747.7	745.7	736.6	719.7	695.0	672.0
145°	693.0	706.6	723.5	739.3	747.3	749.5	747.3	739.3	723.5	706.6	693.0
147.5°	719.4	723.7	732.6	743.0	750.6	752.2	750.6	743.0	732.6	723.7	719.4
150°	739.3	738.2	741.6	748.4	755.2	754.0	755.2	748.4	741.6	738.2	739.3
152.5°	762.0	755.4	755.2	758.3	761.5	761.3	761.5	758.3	755.2	755.4	762.0
155°	800.4	788.0	781.2	778.9	778.9	777.8	778.9	778.9	781.2	788.0	800.4
157.5°	842.7	825.3	815.1	809.7	808.1	805.6	808.1	809.7	815.1	825.3	842.7
160°	871.6	852.4	842.2	833.2	829.8	826.4	829.8	833.2	842.2	852.4	871.6
162.5°	898.7	880.4	869.4	861.2	857.8	852.6	857.8	861.2	869.4	880.4	898.7
165°	942.8	923.6	911.2	904.4	899.9	895.4	899.9	904.4	911.2	923.6	942.8
167.5°	986.9	965.9	957.8	950.1	945.8	937.6	945.8	950.1	957.8	965.9	986.9
170°	1014.1	994.8	990.3	983.5	975.6	966.6	975.6	983.5	990.3	994.8	1014.1
172.5°	1037.6	1024.7	1020.2	1013.4	1010.9	1003.7	1010.9	1013.4	1020.2	1024.7	1037.6
175°	1071.7	1061.5	1061.5	1060.4	1057.0	1050.2	1057.0	1060.4	1061.5	1061.5	1071.7
177.5°	1100.2	1094.8	1098.4	1098.4	1097.5	1091.2	1097.5	1098.4	1098.4	1094.8	1100.2
180°	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2	1119.2



TEST NUMBER: P1428408

CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L835-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	330°	340°	350°	360°
0°	2304.7	2304.7	2304.7	2304.7
2.5°	2312.3	2315.4	2302.2	2288.9
5°	2311.3	2313.7	2297.1	2280.5
7.5°	2301.9	2302.7	2285.9	2269.1
10°	2293.7	2293.7	2276.2	2258.6
12.5°	2282.6	2281.2	2262.9	2244.5
15°	2257.9	2253.7	2234.2	2214.7
17.5°	2222.9	2219.0	2199.5	2180.0
20°	2197.1	2194.5	2174.9	2155.4
22.5°	2162.6	2162.5	2141.4	2120.3
25°	2099.1	2108.6	2088.1	2067.6
27.5°	2014.5	2039.3	2022.8	2006.2
30°	1948.4	1987.6	1975.0	1962.3
32.5°	1874.6	1926.4	1921.5	1916.6
35°	1755.2	1824.0	1832.8	1841.6
37.5°	1623.1	1700.6	1726.7	1752.9
40°	1530.6	1613.8	1650.8	1687.9
42.5°	1437.5	1523.0	1569.5	1615.9
45°	1298.7	1387.7	1442.3	1497.0
47.5°	1165.8	1254.6	1308.8	1363.1
50°	1076.3	1161.1	1213.8	1266.5
52.5°	992.0	1073.7	1120.9	1168.1
55°	867.0	944.1	988.9	1033.8
57.5°	748.6	817.9	856.7	895.5
60°	673.1	739.5	773.6	807.7
62.5°	599.4	663.0	693.2	723.5
65°	499.7	552.2	574.6	597.0
67.5°	409.9	449.1	461.6	474.1
70°	354.8	387.3	391.2	395.1
72.5°	302.8	329.7	328.2	326.6
75°	230.5	248.3	240.5	232.7
77.5°	170.3	181.9	170.2	158.5
80°	131.7	139.7	128.0	116.3
82.5°	94.2	99.9	90.6	81.2
85°	47.6	49.3	44.4	39.5
87.5°	16.9	17.7	14.5	11.2
90°	20.3	12.4	7.9	3.4
92.5°	43.9	30.5	21.5	12.4
95°	88.2	70.1	49.7	35.0
97.5°	140.4	111.2	91.1	66.9
100°	168.4	140.2	121.0	95.0
102.5°	199.2	175.5	149.0	123.0
105°	254.4	225.0	194.4	165.1
107.5°	305.5	273.1	236.5	210.0
110°	338.0	303.0	264.5	240.8



TEST NUMBER: P1428408

CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L835-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	330°	340°	350°	360°
112.5°	369.7	333.7	294.4	270.6
115°	412.6	373.1	336.9	316.5
117.5°	454.0	413.3	375.1	359.0
120°	479.3	438.6	401.3	388.9
122.5°	500.1	460.3	425.7	420.5
125°	531.3	490.6	461.2	468.0
127.5°	556.7	519.4	500.8	516.0
130°	572.0	539.2	527.9	549.4
132.5°	585.6	560.0	555.1	584.7
135°	605.9	591.2	595.8	636.5
137.5°	630.1	624.5	639.6	691.0
140°	645.5	648.9	670.4	728.0
142.5°	666.3	674.2	702.0	763.3
145°	698.6	715.6	751.8	812.8
147.5°	735.3	757.2	802.0	864.6
150°	759.7	788.0	835.4	895.4
152.5°	787.7	816.9	864.4	925.2
155°	830.9	863.7	913.4	965.4
157.5°	875.0	908.5	955.9	1001.4
160°	902.1	938.3	981.3	1023.1
162.5°	932.9	966.3	1003.9	1041.2
165°	977.9	1005.0	1035.5	1067.2
167.5°	1015.6	1038.2	1062.2	1086.9
170°	1040.1	1058.1	1078.5	1097.7
172.5°	1060.9	1075.3	1090.3	1106.8
175°	1088.7	1096.6	1105.6	1115.8
177.5°	1110.1	1112.9	1115.6	1120.1
180°	1119.2	1119.2	1119.2	1119.2



TEST NUMBER: P1428408  
 CATALOG NUMBER: SQ2W-PW1-K-075U-100D-L835-UNV-STD-W-WM-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	20.45	21.38	21.32	22.26	23.36	16.70	17.62	17.57	18.50	19.61
	3H	21.76	22.58	22.64	23.47	24.61	17.98	18.80	18.86	19.69	20.82
	4H	22.17	22.95	23.07	23.84	24.99	18.49	19.26	19.38	20.16	21.30
	6H	22.36	23.07	23.26	23.97	25.13	18.80	19.51	19.70	20.41	21.57
	8H	22.40	23.08	23.31	24.00	25.16	18.91	19.59	19.83	20.51	21.67
	12H	22.40	23.05	23.32	23.96	25.14	18.95	19.59	19.86	20.51	21.69
4H	2H	20.59	21.37	21.49	22.27	23.41	17.52	18.30	18.42	19.19	20.34
	3H	22.14	22.78	23.05	23.71	24.87	18.97	19.62	19.88	20.54	21.70
	4H	22.69	23.27	23.61	24.20	25.38	19.55	20.14	20.47	21.06	22.25
	6H	23.00	23.51	23.94	24.45	25.64	19.94	20.44	20.87	21.39	22.58
	8H	23.09	23.56	24.03	24.51	25.70	20.09	20.56	21.03	21.50	22.70
	12H	23.12	23.54	24.07	24.50	25.71	20.14	20.56	21.09	21.52	22.72
8H	4H	22.73	23.20	23.67	24.14	25.34	19.90	20.37	20.84	21.31	22.51
	6H	23.15	23.54	24.12	24.53	25.72	20.40	20.78	21.36	21.77	22.97
	8H	23.32	23.67	24.30	24.64	25.86	20.61	20.96	21.59	21.93	23.15
	12H	23.41	23.71	24.38	24.67	25.94	20.70	21.00	21.67	21.97	23.23
12H	4H	22.69	23.12	23.65	24.07	25.28	19.92	20.34	20.88	21.30	22.51
	6H	23.15	23.49	24.12	24.46	25.68	20.47	20.81	21.44	21.79	23.00
	8H	23.34	23.64	24.31	24.61	25.87	20.72	21.02	21.69	21.99	23.25