

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1427514

Luminaire Tested: SQ2W-BBM-K-050U-100D-L935-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2024
Report Number: P1427514
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G3-2104-222-2)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-BBM-K-050U-100D-L935-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - BLACK DISCREET BAFFLE, MEDIUM 80-DEGREE OPTIC
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 1000 LUMENS PER FOOT
UPLIGHT 500 LUMENS PER FOOT
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5895.7 lumens
Efficiency: N/A
Efficacy: 111.2 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.17 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 53
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1427514

CATALOG NUMBER: SQ2W-BBM-K-050U-100D-L935-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

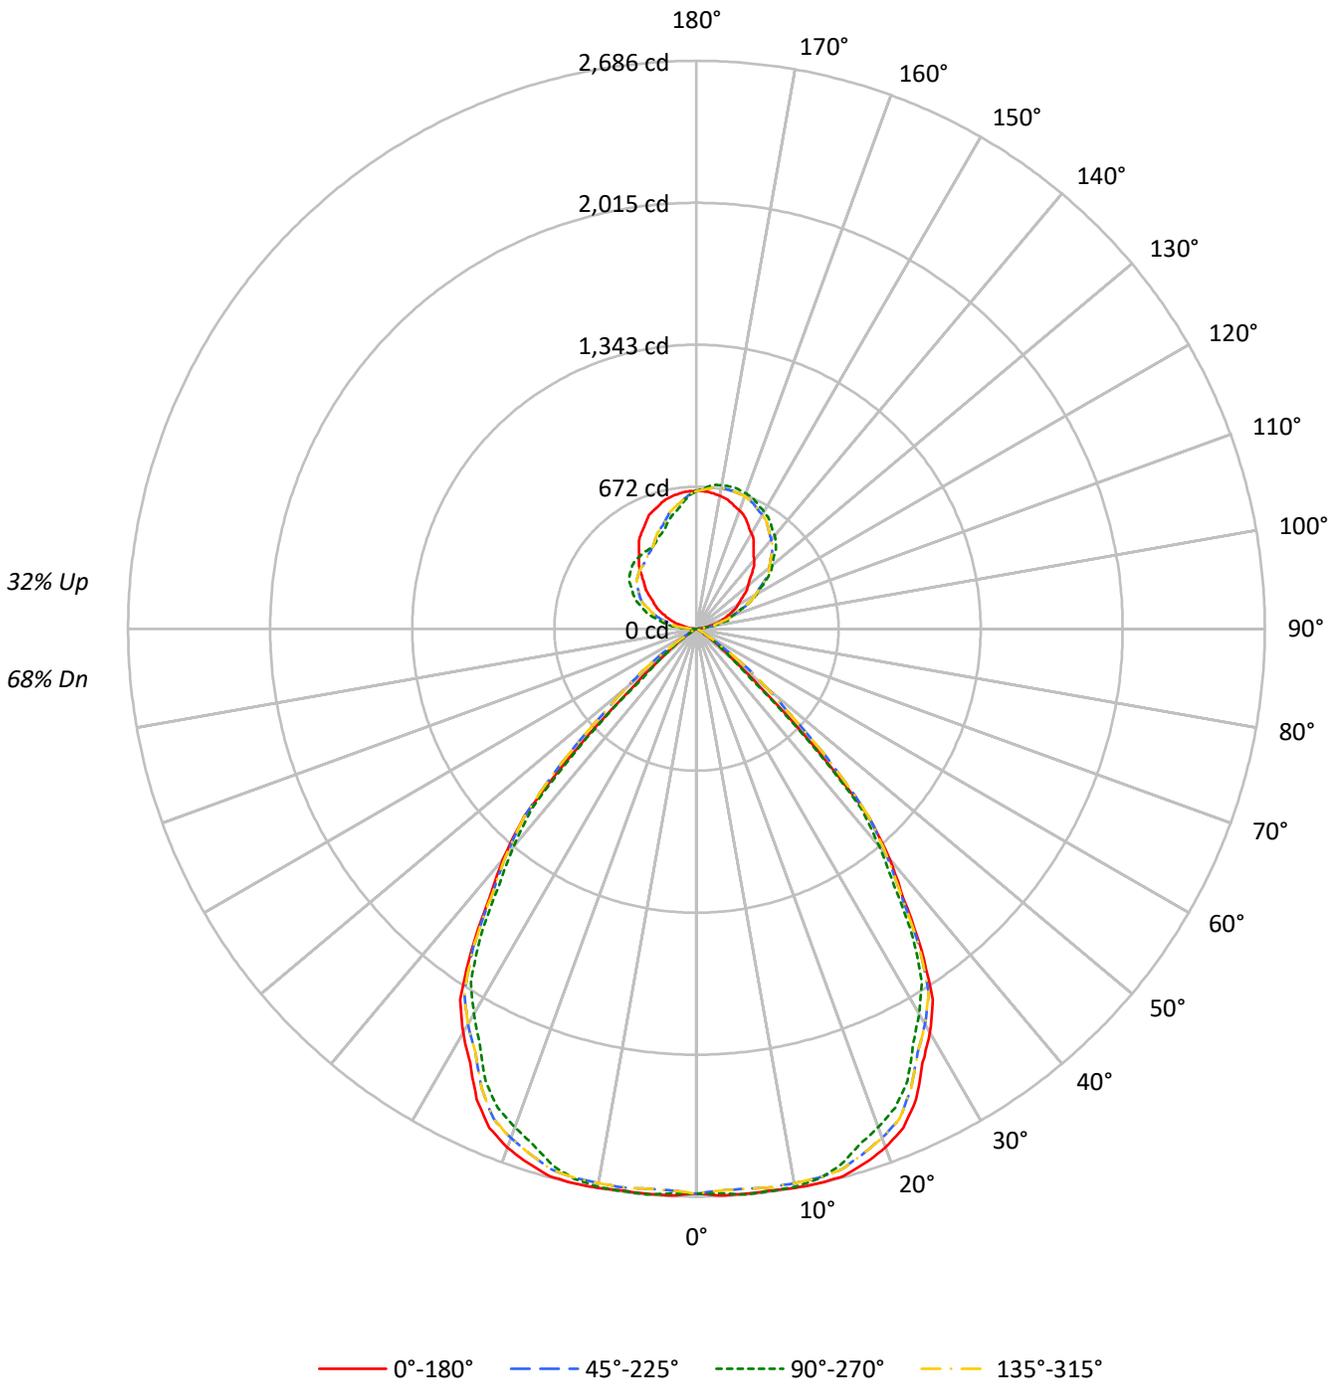



TEST NUMBER: P1427514

CATALOG NUMBER: SQ2W-BBM-K-050U-100D-L935-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	72	72	72	68				
1	104	101	98	95	99	96	93	91	86	84	82	77	75	74	68	67	66	62				
2	97	92	87	83	92	87	83	79	79	75	73	71	68	66	64	62	60	57				
3	91	83	77	72	86	79	74	70	72	68	65	65	62	60	59	57	55	52				
4	85	76	69	64	80	72	67	62	66	62	58	60	57	54	55	52	50	47				
5	79	69	62	57	75	66	60	55	61	56	52	56	52	49	51	48	45	43				
6	74	63	56	51	70	61	55	50	56	51	47	51	47	44	47	44	42	39				
7	69	58	51	46	66	56	50	45	52	47	43	48	44	40	44	41	38	36				
8	65	54	47	42	62	52	45	41	48	43	39	44	40	37	41	38	35	33				
9	61	50	43	38	58	48	42	38	45	39	36	41	37	34	38	35	32	30				
10	57	46	40	35	54	45	39	34	42	36	33	39	34	31	36	32	30	28				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	43123	43123	43123	43123
5°	43461	43526	43461	43526
10°	44006	43941	44006	43941
15°	44800	43907	44800	43907
20°	44858	43112	44858	43112
25°	43749	42035	43749	42035
30°	41125	39207	41125	39207
35°	36501	35131	36501	35131
40°	29935	28329	29935	28329
45°	17846	16748	17846	16748
50°	5571	5270	5571	5270
55°	2106	2106	2106	2106
60°	129	42	129	42
65°	0	0	0	0
70°	0	0	0	0
75°	0	0	0	0
80°	0	0	0	0
85°	0	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 40°
 Vertical Angle: 45°
 Luminance: 20895 cd/sqm



TEST NUMBER: P1427514

CATALOG NUMBER: SQ2W-BBM-K-050U-100D-L935-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	255.4	4.3
10°-20°	748.1	12.7
20°-30°	1100.5	18.7
30°-40°	1124.8	19.1
40°-50°	648.0	11.0
50°-60°	111.5	1.9
60°-70°	4.0	0.1
70°-80°	0.0	0.0
80°-90°	3.5	0.1
90°-100°	51.8	0.9
100°-110°	151.1	2.6
110°-120°	246.5	4.2
120°-130°	312.9	5.3
130°-140°	334.8	5.7
140°-150°	312.6	5.3
150°-160°	257.2	4.4
160°-170°	172.5	2.9
170°-180°	61.3	1.0
0°-30°	2104.0	35.7
0°-40°	3228.8	54.8
0°-60°	3988.3	67.6
0°-90°	3995.8	67.8
90°-120°	449.4	7.6
90°-150°	1409.7	23.9
90°-180°	1901.0	32.2
0°-180°	5895.7	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	2671	2671	2671	2671	2671	
5°	2682	2686	2682	2686	2682	256
15°	2680	2627	2680	2627	2680	755
25°	2456	2360	2456	2360	2456	1121
35°	1852	1782	1852	1782	1852	1144
45°	782	734	782	734	782	605
55°	75	75	75	75	75	79
65°	0	0	0	0	0	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	2	14	2	28	2	2
95°	20	15	20	89	20	25
105°	96	154	96	212	96	102
115°	184	255	184	314	184	181
125°	272	404	272	385	272	244
135°	370	529	370	427	370	286
145°	473	610	473	436	473	296
155°	562	663	562	452	562	258
165°	621	691	621	521	621	175
175°	649	677	649	611	649	62
180°	651	651	651	651	651	



TEST NUMBER: P1427514

CATALOG NUMBER: SQ2W-BBM-K-050U-100D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	2670.9	2670.9	2670.9	2670.9	2670.9	2670.9	2670.9	2670.9	2670.9	2670.9	2670.9
2.5°	2682.6	2679.3	2676.0	2668.0	2658.5	2659.2	2670.2	2677.8	2675.4	2673.0	2675.4
5°	2681.6	2678.6	2675.6	2667.3	2657.2	2660.2	2676.2	2688.0	2686.8	2685.6	2686.8
7.5°	2680.0	2678.0	2675.9	2670.1	2663.0	2666.0	2679.2	2688.3	2685.3	2682.4	2685.3
10°	2684.2	2683.7	2683.1	2674.0	2662.1	2663.0	2676.7	2686.2	2683.2	2680.2	2683.2
12.5°	2686.4	2690.1	2693.8	2680.8	2662.2	2658.4	2669.2	2676.0	2670.6	2665.3	2670.6
15°	2680.2	2690.3	2700.4	2682.0	2654.1	2641.0	2642.8	2642.2	2634.5	2626.8	2634.5
17.5°	2650.3	2664.6	2678.8	2654.5	2617.3	2595.5	2588.9	2581.3	2570.4	2559.5	2570.4
20°	2610.8	2627.4	2644.0	2617.4	2576.5	2550.3	2539.1	2528.2	2518.7	2509.2	2518.7
22.5°	2555.2	2570.4	2585.6	2560.1	2521.0	2494.4	2480.3	2467.8	2460.2	2452.6	2460.2
25°	2455.8	2465.9	2476.0	2450.0	2412.0	2387.6	2376.9	2367.9	2363.7	2359.6	2363.7
27.5°	2314.9	2317.8	2320.6	2300.0	2271.5	2250.6	2237.3	2226.0	2220.6	2215.3	2220.6
30°	2205.9	2205.9	2205.9	2189.9	2168.5	2150.7	2136.4	2123.2	2113.1	2103.0	2113.1
32.5°	2078.7	2077.3	2075.9	2064.1	2048.9	2033.5	2017.8	2003.5	1993.4	1983.3	1993.4
35°	1851.9	1858.4	1864.9	1856.8	1843.7	1829.4	1814.0	1800.2	1791.3	1782.4	1791.3
37.5°	1606.3	1608.8	1611.3	1604.5	1594.6	1581.4	1564.8	1550.4	1542.9	1535.5	1542.9
40°	1420.3	1420.9	1421.5	1413.2	1401.9	1390.3	1378.4	1366.7	1355.4	1344.1	1355.4
42.5°	1203.3	1215.3	1227.3	1222.2	1211.4	1196.5	1177.5	1162.1	1157.4	1152.8	1157.4
45°	781.6	834.5	887.3	906.8	915.1	908.6	887.2	855.9	794.7	733.5	794.7
47.5°	392.8	458.6	524.4	570.0	608.8	597.8	536.8	475.0	410.2	345.5	410.2
50°	221.8	261.0	300.2	361.2	429.5	418.2	327.3	253.7	231.7	209.8	231.7
52.5°	148.0	165.4	182.7	231.9	291.6	287.7	220.1	166.3	153.8	141.4	153.8
55°	74.8	79.6	84.3	106.0	133.3	132.7	104.2	81.9	78.4	74.8	78.4
57.5°	25.4	31.8	38.2	47.8	58.5	58.8	48.7	39.7	33.9	28.1	33.9
60°	4.0	9.9	15.9	23.6	31.9	31.0	20.9	12.0	6.7	1.3	6.7
62.5°	0.8	2.5	4.1	10.4	18.3	18.1	9.9	3.4	1.8	0.3	1.8
65°	0.0	0.0	0.0	0.4	1.0	1.0	0.4	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.4	0.9	1.6	2.1	2.5	2.6	2.6	2.8	2.9	2.9	2.9
90°	2.0	4.6	7.9	10.5	12.5	13.2	13.2	13.8	14.5	14.5	14.5
92.5°	7.2	11.4	11.6	11.6	14.1	15.3	16.3	16.4	17.1	17.1	17.1
95°	20.4	22.4	33.5	32.9	22.4	17.8	15.1	15.1	15.1	15.1	15.1
97.5°	38.9	41.8	43.7	58.5	61.8	59.7	48.7	40.9	36.6	34.6	36.6
100°	55.2	56.5	60.5	61.1	77.6	93.4	85.5	75.6	72.3	70.4	72.3
102.5°	71.5	72.3	78.4	81.1	85.0	93.9	121.2	118.2	116.0	115.6	116.0
105°	96.0	96.7	107.8	113.1	115.7	115.7	115.1	128.2	149.3	153.9	149.3
107.5°	122.2	125.2	138.3	152.4	155.4	156.2	152.8	150.8	150.0	150.6	150.0
110°	140.1	144.7	160.4	178.2	182.8	184.1	182.8	180.8	179.5	179.5	179.5



TEST NUMBER: P1427514

CATALOG NUMBER: SQ2W-BBM-K-050U-100D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	157.4	164.1	182.0	202.4	210.1	214.1	211.2	209.8	208.4	209.5	208.4
115°	184.1	194.0	217.6	238.7	254.5	256.4	255.8	255.8	255.1	255.1	255.1
117.5°	208.8	224.6	251.2	275.6	293.9	299.2	301.8	301.0	300.2	301.5	300.2
120°	226.2	244.6	274.8	302.5	320.2	328.1	330.7	329.4	330.7	329.4	330.7
122.5°	244.6	267.2	296.9	325.6	346.5	355.5	358.6	358.9	359.1	358.4	359.1
125°	272.2	299.8	334.7	364.3	386.0	396.5	399.1	399.8	401.1	404.4	401.1
127.5°	300.1	331.4	369.7	398.2	420.4	433.2	437.3	438.7	441.5	442.9	441.5
130°	319.6	355.1	393.9	420.8	442.5	456.3	463.6	465.5	468.8	468.2	468.8
132.5°	340.1	377.2	416.5	444.5	464.6	479.5	485.6	491.3	492.5	493.4	492.5
135°	370.2	410.3	449.7	477.4	496.4	510.9	518.8	524.0	527.3	529.3	527.3
137.5°	401.9	444.2	482.1	506.7	525.9	538.4	547.3	552.8	556.3	557.8	556.3
140°	423.4	464.2	501.0	526.7	543.8	556.3	564.2	570.7	574.7	574.7	574.7
142.5°	444.0	484.2	520.0	545.6	560.6	572.0	580.5	585.5	589.9	589.9	589.9
145°	472.8	512.9	545.7	571.4	583.9	594.4	603.6	607.6	610.2	610.2	610.2
147.5°	502.9	538.4	568.4	593.0	603.5	615.8	623.1	626.2	629.5	628.1	629.5
150°	520.8	553.6	582.6	605.6	616.1	627.9	635.2	637.8	641.1	639.1	641.1
152.5°	538.1	569.4	595.7	617.2	626.1	637.9	646.2	648.8	651.1	649.6	651.1
155°	561.5	589.1	613.5	633.2	641.1	652.3	660.2	663.4	666.1	662.8	666.1
157.5°	582.4	606.2	627.4	645.6	654.0	663.6	670.9	675.0	677.6	676.2	677.6
160°	595.1	616.8	635.8	652.9	660.8	669.4	677.3	681.9	684.5	682.5	684.5
162.5°	605.6	625.2	643.2	658.7	665.5	673.0	682.5	686.6	689.2	686.7	689.2
165°	620.7	636.5	652.3	665.4	671.3	677.3	687.1	691.7	693.7	691.1	693.7
167.5°	632.1	644.2	657.0	668.3	672.6	678.4	688.3	692.1	694.6	691.3	694.6
170°	638.5	649.0	660.2	669.4	672.6	677.9	687.8	691.1	693.0	689.7	693.0
172.5°	643.7	651.6	660.7	668.8	670.5	674.8	684.1	687.4	688.8	686.1	688.8
175°	649.0	653.6	660.2	665.4	664.8	667.4	675.3	677.9	680.5	676.6	680.5
177.5°	651.5	653.6	655.7	658.8	656.7	656.7	662.5	664.1	664.6	662.5	664.6
180°	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9



TEST NUMBER: P1427514

CATALOG NUMBER: SQ2W-BBM-K-050U-100D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	2670.9	2670.9	2670.9	2670.9	2670.9	2670.9	2670.9	2670.9	2670.9	2670.9	2670.9
2.5°	2677.8	2670.2	2659.2	2658.5	2668.0	2676.0	2679.3	2682.6	2679.3	2676.0	2668.0
5°	2688.0	2676.2	2660.2	2657.2	2667.3	2675.6	2678.6	2681.6	2678.6	2675.6	2667.3
7.5°	2688.3	2679.2	2666.0	2663.0	2670.1	2675.9	2678.0	2680.0	2678.0	2675.9	2670.1
10°	2686.2	2676.7	2663.0	2662.1	2674.0	2683.1	2683.7	2684.2	2683.7	2683.1	2674.0
12.5°	2676.0	2669.2	2658.4	2662.2	2680.8	2693.8	2690.1	2686.4	2690.1	2693.8	2680.8
15°	2642.2	2642.8	2641.0	2654.1	2682.0	2700.4	2690.3	2680.2	2690.3	2700.4	2682.0
17.5°	2581.3	2588.9	2595.5	2617.3	2654.5	2678.8	2664.6	2650.3	2664.6	2678.8	2654.5
20°	2528.2	2539.1	2550.3	2576.5	2617.4	2644.0	2627.4	2610.8	2627.4	2644.0	2617.4
22.5°	2467.8	2480.3	2494.4	2521.0	2560.1	2585.6	2570.4	2555.2	2570.4	2585.6	2560.1
25°	2367.9	2376.9	2387.6	2412.0	2450.0	2476.0	2465.9	2455.8	2465.9	2476.0	2450.0
27.5°	2226.0	2237.3	2250.6	2271.5	2300.0	2320.6	2317.8	2314.9	2317.8	2320.6	2300.0
30°	2123.2	2136.4	2150.7	2168.5	2189.9	2205.9	2205.9	2205.9	2205.9	2205.9	2189.9
32.5°	2003.5	2017.8	2033.5	2048.9	2064.1	2075.9	2077.3	2078.7	2077.3	2075.9	2064.1
35°	1800.2	1814.0	1829.4	1843.7	1856.8	1864.9	1858.4	1851.9	1858.4	1864.9	1856.8
37.5°	1550.4	1564.8	1581.4	1594.6	1604.5	1611.3	1608.8	1606.3	1608.8	1611.3	1604.5
40°	1366.7	1378.4	1390.3	1401.9	1413.2	1421.5	1420.9	1420.3	1420.9	1421.5	1413.2
42.5°	1162.1	1177.5	1196.5	1211.4	1222.2	1227.3	1215.3	1203.3	1215.3	1227.3	1222.2
45°	855.9	887.2	908.6	915.1	906.8	887.3	834.5	781.6	834.5	887.3	906.8
47.5°	475.0	536.8	597.8	608.8	570.0	524.4	458.6	392.8	458.6	524.4	570.0
50°	253.7	327.3	418.2	429.5	361.2	300.2	261.0	221.8	261.0	300.2	361.2
52.5°	166.3	220.1	287.7	291.6	231.9	182.7	165.4	148.0	165.4	182.7	231.9
55°	81.9	104.2	132.7	133.3	106.0	84.3	79.6	74.8	79.6	84.3	106.0
57.5°	39.7	48.7	58.8	58.5	47.8	38.2	31.8	25.4	31.8	38.2	47.8
60°	12.0	20.9	31.0	31.9	23.6	15.9	9.9	4.0	9.9	15.9	23.6
62.5°	3.4	9.9	18.1	18.3	10.4	4.1	2.5	0.8	2.5	4.1	10.4
65°	0.0	0.4	1.0	1.0	0.4	0.0	0.0	0.0	0.0	0.0	0.4
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	2.8	2.6	2.6	2.5	2.1	1.6	0.9	0.4	0.9	1.4	2.4
90°	13.8	13.2	13.2	12.5	10.5	7.9	4.6	2.0	4.6	7.2	11.8
92.5°	16.4	16.3	15.3	14.1	11.6	11.6	11.4	7.2	12.5	17.8	25.5
95°	15.1	15.1	17.8	22.4	32.9	33.5	22.4	20.4	28.9	40.8	51.3
97.5°	40.9	48.7	59.7	61.8	58.5	43.7	41.8	38.9	53.0	64.7	81.7
100°	75.6	85.5	93.4	77.6	61.1	60.5	56.5	55.2	70.4	81.5	98.0
102.5°	118.2	121.2	93.9	85.0	81.1	78.4	72.3	71.5	86.7	102.0	115.9
105°	128.2	115.1	115.7	115.7	113.1	107.8	96.7	96.0	113.1	130.8	147.9
107.5°	150.8	152.8	156.2	155.4	152.4	138.3	125.2	122.2	137.6	158.9	177.7
110°	180.8	182.8	184.1	182.8	178.2	160.4	144.7	140.1	153.9	176.2	196.6



TEST NUMBER: P1427514

CATALOG NUMBER: SQ2W-BBM-K-050U-100D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	209.8	211.2	214.1	210.1	202.4	182.0	164.1	157.4	171.2	194.1	215.0
115°	255.8	255.8	256.4	254.5	238.7	217.6	194.0	184.1	195.9	217.0	240.0
117.5°	301.0	301.8	299.2	293.9	275.6	251.2	224.6	208.8	218.2	240.4	264.1
120°	329.4	330.7	328.1	320.2	302.5	274.8	244.6	226.2	233.4	255.1	278.8
122.5°	358.9	358.6	355.5	346.5	325.6	296.9	267.2	244.6	247.6	267.7	290.9
125°	399.8	399.1	396.5	386.0	364.3	334.7	299.8	272.2	268.3	285.4	309.0
127.5°	438.7	437.3	433.2	420.4	398.2	369.7	331.4	300.1	291.3	302.1	323.8
130°	465.5	463.6	456.3	442.5	420.8	393.9	355.1	319.6	307.1	313.6	332.7
132.5°	491.3	485.6	479.5	464.6	444.5	416.5	377.2	340.1	322.8	325.7	340.6
135°	524.0	518.8	510.9	496.4	477.4	449.7	410.3	370.2	346.5	343.9	352.4
137.5°	552.8	547.3	538.4	525.9	506.7	482.1	444.2	401.9	372.0	363.2	366.5
140°	570.7	564.2	556.3	543.8	526.7	501.0	464.2	423.4	389.9	377.4	375.4
142.5°	585.5	580.5	572.0	560.6	545.6	520.0	484.2	444.0	408.3	392.1	387.5
145°	607.6	603.6	594.4	583.9	571.4	545.7	512.9	472.8	437.3	416.2	406.4
147.5°	626.2	623.1	615.8	603.5	593.0	568.4	538.4	502.9	466.4	440.4	427.7
150°	637.8	635.2	627.9	616.1	605.6	582.6	553.6	520.8	485.9	458.3	441.9
152.5°	648.8	646.2	637.9	626.1	617.2	595.7	569.4	538.1	502.7	475.1	458.2
155°	663.4	660.2	652.3	641.1	633.2	613.5	589.1	561.5	531.3	502.3	483.3
157.5°	675.0	670.9	663.6	654.0	645.6	627.4	606.2	582.4	556.0	528.4	508.9
160°	681.9	677.3	669.4	660.8	652.9	635.8	616.8	595.1	570.7	545.7	524.7
162.5°	686.6	682.5	673.0	665.5	658.7	643.2	625.2	605.6	583.9	562.1	542.6
165°	691.7	687.1	677.3	671.3	665.4	652.3	636.5	620.7	602.3	584.5	568.8
167.5°	692.1	688.3	678.4	672.6	668.3	657.0	644.2	632.1	617.8	603.9	590.7
170°	691.1	687.8	677.9	672.6	669.4	660.2	649.0	638.5	627.3	615.4	604.9
172.5°	687.4	684.1	674.8	670.5	668.8	660.7	651.6	643.7	634.1	625.4	617.0
175°	677.9	675.3	667.4	664.8	665.4	660.2	653.6	649.0	643.1	637.8	633.2
177.5°	664.1	662.5	656.7	656.7	658.8	655.7	653.6	651.5	648.8	647.3	645.7
180°	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9

TEST NUMBER: P1427514

CATALOG NUMBER: SQ2W-BBM-K-050U-100D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	2670.9	2670.9	2670.9	2670.9	2670.9	2670.9	2670.9	2670.9	2670.9	2670.9	2670.9
2.5°	2658.5	2659.2	2670.2	2677.8	2675.4	2673.0	2675.4	2677.8	2670.2	2659.2	2658.5
5°	2657.2	2660.2	2676.2	2688.0	2686.8	2685.6	2686.8	2688.0	2676.2	2660.2	2657.2
7.5°	2663.0	2666.0	2679.2	2688.3	2685.3	2682.4	2685.3	2688.3	2679.2	2666.0	2663.0
10°	2662.1	2663.0	2676.7	2686.2	2683.2	2680.2	2683.2	2686.2	2676.7	2663.0	2662.1
12.5°	2662.2	2658.4	2669.2	2676.0	2670.6	2665.3	2670.6	2676.0	2669.2	2658.4	2662.2
15°	2654.1	2641.0	2642.8	2642.2	2634.5	2626.8	2634.5	2642.2	2642.8	2641.0	2654.1
17.5°	2617.3	2595.5	2588.9	2581.3	2570.4	2559.5	2570.4	2581.3	2588.9	2595.5	2617.3
20°	2576.5	2550.3	2539.1	2528.2	2518.7	2509.2	2518.7	2528.2	2539.1	2550.3	2576.5
22.5°	2521.0	2494.4	2480.3	2467.8	2460.2	2452.6	2460.2	2467.8	2480.3	2494.4	2521.0
25°	2412.0	2387.6	2376.9	2367.9	2363.7	2359.6	2363.7	2367.9	2376.9	2387.6	2412.0
27.5°	2271.5	2250.6	2237.3	2226.0	2220.6	2215.3	2220.6	2226.0	2237.3	2250.6	2271.5
30°	2168.5	2150.7	2136.4	2123.2	2113.1	2103.0	2113.1	2123.2	2136.4	2150.7	2168.5
32.5°	2048.9	2033.5	2017.8	2003.5	1993.4	1983.3	1993.4	2003.5	2017.8	2033.5	2048.9
35°	1843.7	1829.4	1814.0	1800.2	1791.3	1782.4	1791.3	1800.2	1814.0	1829.4	1843.7
37.5°	1594.6	1581.4	1564.8	1550.4	1542.9	1535.5	1542.9	1550.4	1564.8	1581.4	1594.6
40°	1401.9	1390.3	1378.4	1366.7	1355.4	1344.1	1355.4	1366.7	1378.4	1390.3	1401.9
42.5°	1211.4	1196.5	1177.5	1162.1	1157.4	1152.8	1157.4	1162.1	1177.5	1196.5	1211.4
45°	915.1	908.6	887.2	855.9	794.7	733.5	794.7	855.9	887.2	908.6	915.1
47.5°	608.8	597.8	536.8	475.0	410.2	345.5	410.2	475.0	536.8	597.8	608.8
50°	429.5	418.2	327.3	253.7	231.7	209.8	231.7	253.7	327.3	418.2	429.5
52.5°	291.6	287.7	220.1	166.3	153.8	141.4	153.8	166.3	220.1	287.7	291.6
55°	133.3	132.7	104.2	81.9	78.4	74.8	78.4	81.9	104.2	132.7	133.3
57.5°	58.5	58.8	48.7	39.7	33.9	28.1	33.9	39.7	48.7	58.8	58.5
60°	31.9	31.0	20.9	12.0	6.7	1.3	6.7	12.0	20.9	31.0	31.9
62.5°	18.3	18.1	9.9	3.4	1.8	0.3	1.8	3.4	9.9	18.1	18.3
65°	1.0	1.0	0.4	0.0	0.0	0.0	0.0	0.4	1.0	1.0	1.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	3.0	3.9	4.9	5.4	5.9	5.7	5.9	5.4	4.9	3.9	3.0
90°	15.1	19.7	24.3	27.0	29.6	28.3	29.6	27.0	24.3	19.7	15.1
92.5°	30.4	38.1	43.8	48.5	50.6	50.4	50.6	48.5	43.8	38.1	30.4
95°	61.1	70.4	79.6	86.1	90.1	88.8	90.1	86.1	79.6	70.4	61.1
97.5°	94.3	106.7	116.9	123.1	127.0	129.7	127.0	123.1	116.9	106.7	94.3
100°	116.4	128.2	140.1	147.3	153.9	156.5	153.9	147.3	140.1	128.2	116.4
102.5°	134.3	149.8	162.7	170.4	176.0	178.6	176.0	170.4	162.7	149.8	134.3
105°	163.7	180.2	194.0	203.8	209.8	211.7	209.8	203.8	194.0	180.2	163.7
107.5°	193.2	210.1	222.9	233.8	241.0	245.3	241.0	233.8	222.9	210.1	193.2
110°	216.3	230.1	243.9	253.8	261.0	263.7	261.0	253.8	243.9	230.1	216.3



TEST NUMBER: P1427514

CATALOG NUMBER: SQ2W-BBM-K-050U-100D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	235.8	251.2	265.0	274.8	283.1	286.8	283.1	274.8	265.0	251.2	235.8
115°	263.0	283.4	295.9	305.1	311.0	314.3	311.0	305.1	295.9	283.4	263.0
117.5°	285.6	306.9	320.6	327.7	330.5	332.8	330.5	327.7	320.6	306.9	285.6
120°	299.8	319.6	335.3	344.5	347.8	349.1	347.8	344.5	335.3	319.6	299.8
122.5°	313.0	331.7	346.9	358.2	363.6	364.9	363.6	358.2	346.9	331.7	313.0
125°	331.4	349.1	364.9	376.1	382.0	385.3	382.0	376.1	364.9	349.1	331.4
127.5°	347.4	366.6	381.1	391.2	397.0	399.6	397.0	391.2	381.1	366.6	347.4
130°	356.4	376.1	390.6	401.7	407.0	409.6	407.0	401.7	390.6	376.1	356.4
132.5°	363.2	384.0	399.0	409.1	414.9	417.5	414.9	409.1	399.0	384.0	363.2
135°	371.5	393.2	409.0	418.8	424.1	426.7	424.1	418.8	409.0	393.2	371.5
137.5°	378.7	398.5	414.9	425.3	430.0	431.7	430.0	425.3	414.9	398.5	378.7
140°	384.0	401.1	417.5	427.4	432.7	433.3	432.7	427.4	417.5	401.1	384.0
142.5°	390.8	404.2	418.6	428.4	433.7	434.9	433.7	428.4	418.6	404.2	390.8
145°	403.1	411.0	420.8	430.0	434.6	435.9	434.6	430.0	420.8	411.0	403.1
147.5°	418.4	420.9	426.1	432.1	436.6	437.5	436.6	432.1	426.1	420.9	418.4
150°	430.0	429.4	431.3	435.3	439.2	438.6	439.2	435.3	431.3	429.4	430.0
152.5°	443.2	439.4	439.2	441.1	442.9	442.8	442.9	441.1	439.2	439.4	443.2
155°	465.5	458.3	454.3	453.0	453.0	452.4	453.0	453.0	454.3	458.3	465.5
157.5°	490.1	480.0	474.1	470.9	470.0	468.6	470.0	470.9	474.1	480.0	490.1
160°	507.0	495.8	489.9	484.6	482.6	480.7	482.6	484.6	489.9	495.8	507.0
162.5°	522.7	512.1	505.6	500.9	498.9	495.9	498.9	500.9	505.6	512.1	522.7
165°	548.4	537.2	530.0	526.0	523.4	520.8	523.4	526.0	530.0	537.2	548.4
167.5°	574.0	561.8	557.1	552.6	550.1	545.4	550.1	552.6	557.1	561.8	574.0
170°	589.8	578.6	576.0	572.0	567.4	562.2	567.4	572.0	576.0	578.6	589.8
172.5°	603.5	596.0	593.4	589.4	588.0	583.8	588.0	589.4	593.4	596.0	603.5
175°	623.3	617.4	617.4	616.8	614.8	610.8	614.8	616.8	617.4	617.4	623.3
177.5°	639.9	636.7	638.9	638.9	638.3	634.6	638.3	638.9	638.9	636.7	639.9
180°	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9



TEST NUMBER: P1427514

CATALOG NUMBER: SQ2W-BBM-K-050U-100D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	2670.9	2670.9	2670.9	2670.9
2.5°	2668.0	2676.0	2679.3	2682.6
5°	2667.3	2675.6	2678.6	2681.6
7.5°	2670.1	2675.9	2678.0	2680.0
10°	2674.0	2683.1	2683.7	2684.2
12.5°	2680.8	2693.8	2690.1	2686.4
15°	2682.0	2700.4	2690.3	2680.2
17.5°	2654.5	2678.8	2664.6	2650.3
20°	2617.4	2644.0	2627.4	2610.8
22.5°	2560.1	2585.6	2570.4	2555.2
25°	2450.0	2476.0	2465.9	2455.8
27.5°	2300.0	2320.6	2317.8	2314.9
30°	2189.9	2205.9	2205.9	2205.9
32.5°	2064.1	2075.9	2077.3	2078.7
35°	1856.8	1864.9	1858.4	1851.9
37.5°	1604.5	1611.3	1608.8	1606.3
40°	1413.2	1421.5	1420.9	1420.3
42.5°	1222.2	1227.3	1215.3	1203.3
45°	906.8	887.3	834.5	781.6
47.5°	570.0	524.4	458.6	392.8
50°	361.2	300.2	261.0	221.8
52.5°	231.9	182.7	165.4	148.0
55°	106.0	84.3	79.6	74.8
57.5°	47.8	38.2	31.8	25.4
60°	23.6	15.9	9.9	4.0
62.5°	10.4	4.1	2.5	0.8
65°	0.4	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0
87.5°	2.4	1.4	0.9	0.4
90°	11.8	7.2	4.6	2.0
92.5°	25.5	17.8	12.5	7.2
95°	51.3	40.8	28.9	20.4
97.5°	81.7	64.7	53.0	38.9
100°	98.0	81.5	70.4	55.2
102.5°	115.9	102.0	86.7	71.5
105°	147.9	130.8	113.1	96.0
107.5°	177.7	158.9	137.6	122.2
110°	196.6	176.2	153.9	140.1

TEST NUMBER: P1427514

CATALOG NUMBER: SQ2W-BBM-K-050U-100D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	215.0	194.1	171.2	157.4
115°	240.0	217.0	195.9	184.1
117.5°	264.1	240.4	218.2	208.8
120°	278.8	255.1	233.4	226.2
122.5°	290.9	267.7	247.6	244.6
125°	309.0	285.4	268.3	272.2
127.5°	323.8	302.1	291.3	300.1
130°	332.7	313.6	307.1	319.6
132.5°	340.6	325.7	322.8	340.1
135°	352.4	343.9	346.5	370.2
137.5°	366.5	363.2	372.0	401.9
140°	375.4	377.4	389.9	423.4
142.5°	387.5	392.1	408.3	444.0
145°	406.4	416.2	437.3	472.8
147.5°	427.7	440.4	466.4	502.9
150°	441.9	458.3	485.9	520.8
152.5°	458.2	475.1	502.7	538.1
155°	483.3	502.3	531.3	561.5
157.5°	508.9	528.4	556.0	582.4
160°	524.7	545.7	570.7	595.1
162.5°	542.6	562.1	583.9	605.6
165°	568.8	584.5	602.3	620.7
167.5°	590.7	603.9	617.8	632.1
170°	604.9	615.4	627.3	638.5
172.5°	617.0	625.4	634.1	643.7
175°	633.2	637.8	643.1	649.0
177.5°	645.7	647.3	648.8	651.5
180°	650.9	650.9	650.9	650.9



TEST NUMBER: P1427514
 CATALOG NUMBER: SQ2W-BBM-K-050U-100D-L935-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.29	1.10	1.12	1.91	2.92	0.52	1.32	1.35	2.14	3.15
	3H	0.10	0.81	0.95	1.64	2.68	0.33	1.04	1.17	1.87	2.91
	4H	0.00	0.67	0.86	1.50	2.55	0.23	0.89	1.09	1.73	2.78
	6H	0.00	0.50	0.76	1.35	2.41	0.12	0.73	0.99	1.58	2.64
	8H	0.00	0.41	0.71	1.27	2.33	0.06	0.64	0.94	1.50	2.56
	12H	0.00	0.32	0.66	1.18	2.26	0.01	0.55	0.88	1.41	2.49
4H	2H	0.01	0.67	0.87	1.51	2.56	0.24	0.90	1.10	1.74	2.79
	3H	0.00	0.36	0.68	1.23	2.29	0.04	0.59	0.91	1.46	2.52
	4H	0.00	0.19	0.58	1.06	2.15	0.00	0.42	0.81	1.29	2.38
	6H	0.00	0.01	0.49	0.91	2.00	0.00	0.24	0.72	1.13	2.23
	8H	0.00	0.00	0.43	0.81	1.91	0.00	0.15	0.65	1.03	2.14
	12H	0.00	0.00	0.37	0.71	1.82	0.00	0.04	0.60	0.94	2.05
8H	4H	0.00	0.00	0.43	0.81	1.91	0.00	0.15	0.65	1.03	2.14
	6H	0.00	0.00	0.33	0.66	1.76	0.00	0.00	0.56	0.89	1.99
	8H	0.00	0.00	0.28	0.55	1.67	0.00	0.00	0.51	0.78	1.90
	12H	0.00	0.00	0.21	0.44	1.62	0.00	0.00	0.44	0.67	1.85
12H	4H	0.00	0.00	0.37	0.71	1.82	0.00	0.04	0.60	0.94	2.05
	6H	0.00	0.00	0.28	0.55	1.67	0.00	0.00	0.51	0.78	1.90
	8H	0.00	0.00	0.21	0.44	1.62	0.00	0.00	0.44	0.67	1.85