

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1427535

Luminaire Tested: SQ2W-BBM-K-100U-075D-L935-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2024
Report Number: P1427535
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G3-2104-222-2)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-BBM-K-100U-075D-L935-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - BLACK DISCREET BAFFLE, MEDIUM 80-DEGREE OPTIC
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 750 LUMENS PER FOOT
UPLIGHT 1000 LUMENS PER FOOT
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6859.8 lumens
Efficiency: N/A
Efficacy: 113.0 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.17 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 60.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1427535

CATALOG NUMBER: SQ2W-BBM-K-100U-075D-L935-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

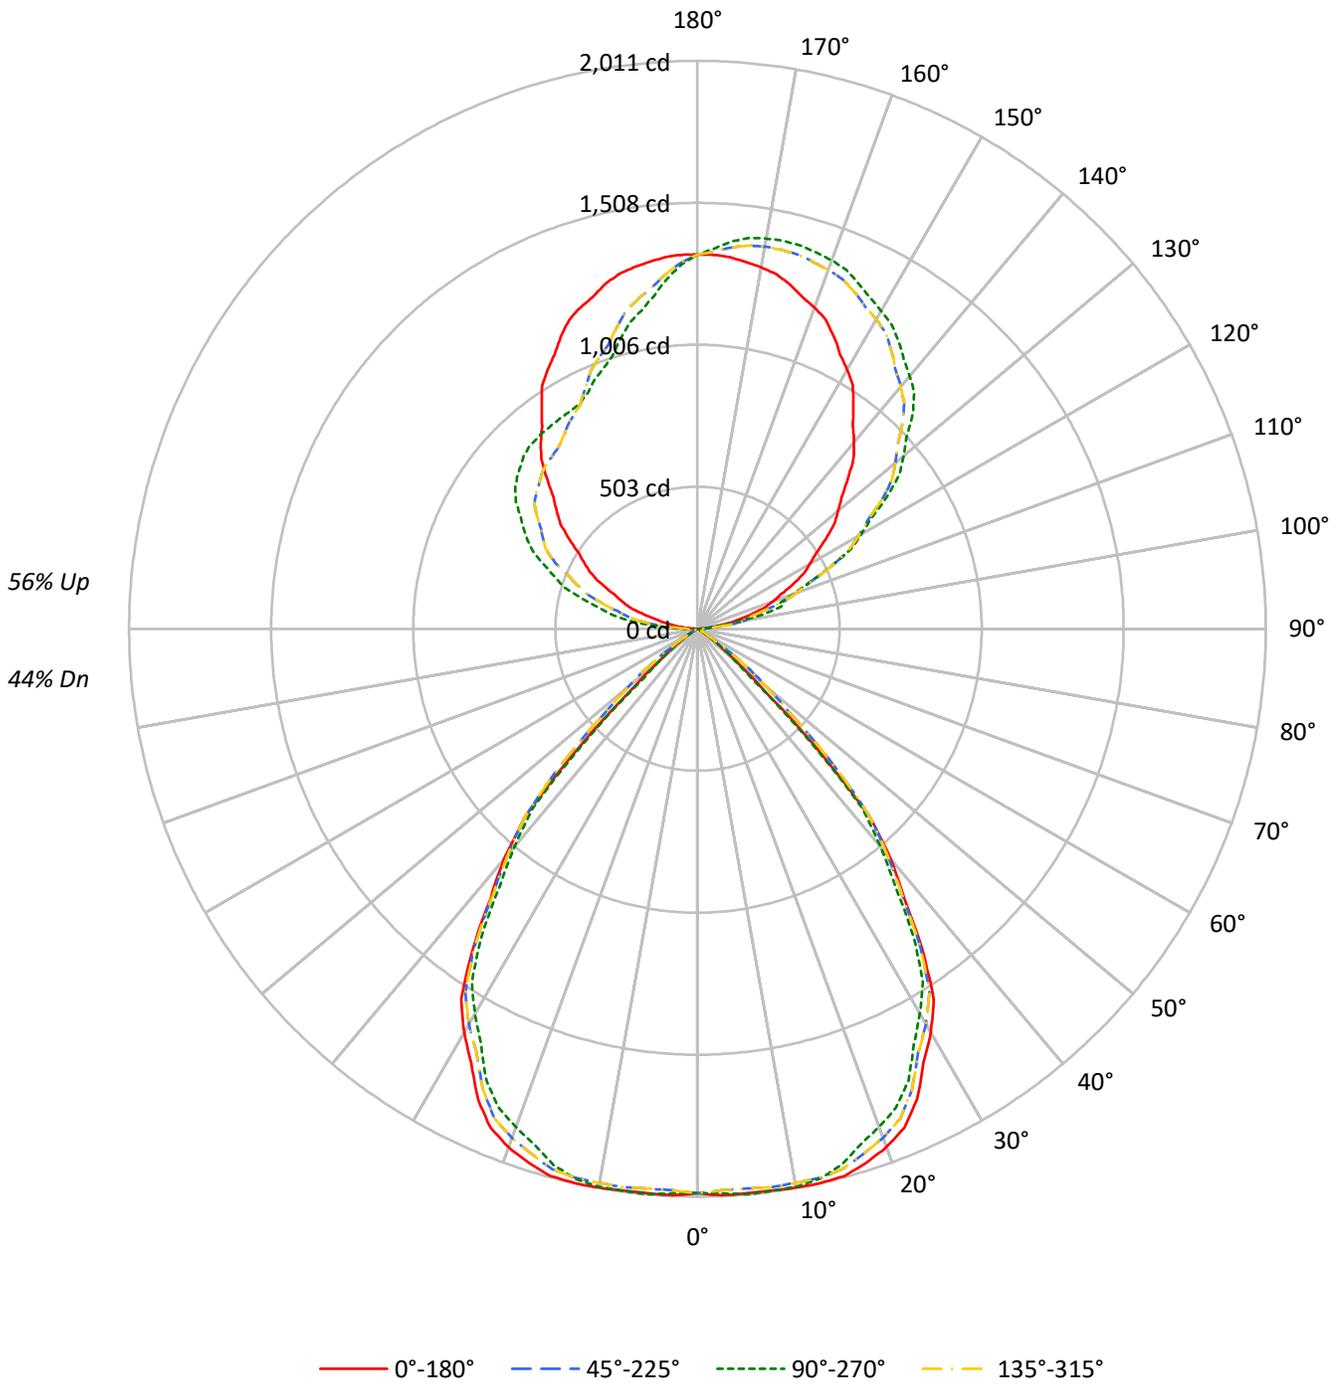



TEST NUMBER: P1427535

CATALOG NUMBER: SQ2W-BBM-K-100U-075D-L935-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	80	80	80	64	64	64	50	50	50	44
1	98	94	91	88	90	87	84	82	72	71	69	59	58	57	47	46	46	40
2	91	85	79	75	83	78	74	70	66	63	60	54	52	50	44	42	41	37
3	84	76	70	65	77	70	65	61	60	56	53	50	47	45	40	39	37	33
4	78	69	62	57	71	64	58	53	54	50	47	46	43	40	37	35	34	30
5	72	62	55	50	66	58	52	47	49	45	41	42	39	36	35	33	31	28
6	67	56	49	44	62	53	46	42	45	41	37	38	35	33	32	30	28	25
7	62	51	44	39	58	48	42	37	42	37	33	36	32	30	30	27	26	23
8	58	47	40	35	54	44	38	34	38	34	30	33	29	27	28	25	24	21
9	54	43	37	32	50	41	35	31	35	31	28	31	27	25	26	23	22	20
10	51	40	33	29	47	38	32	28	33	28	25	28	25	23	24	22	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	32275	32275	32275	32275
5°	32528	32577	32528	32577
10°	32937	32888	32937	32888
15°	33530	32862	33530	32862
20°	33573	32267	33573	32267
25°	32743	31461	32743	31461
30°	30780	29345	30780	29345
35°	27318	26293	27318	26293
40°	22404	21203	22404	21203
45°	13357	12535	13357	12535
50°	4170	3944	4170	3944
55°	1576	1576	1576	1576
60°	97	32	97	32
65°	0	0	0	0
70°	0	0	0	0
75°	0	0	0	0
80°	0	0	0	0
85°	0	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 40°
 Vertical Angle: 45°
 Luminance: 15638 cd/sqm



TEST NUMBER: P1427535

CATALOG NUMBER: SQ2W-BBM-K-100U-075D-L935-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	191.1	2.8
10°-20°	559.9	8.2
20°-30°	823.7	12.0
30°-40°	841.9	12.3
40°-50°	485.0	7.1
50°-60°	83.5	1.2
60°-70°	3.0	0.0
70°-80°	0.0	0.0
80°-90°	7.0	0.1
90°-100°	105.4	1.5
100°-110°	307.3	4.5
110°-120°	501.5	7.3
120°-130°	636.4	9.3
130°-140°	681.0	9.9
140°-150°	635.9	9.3
150°-160°	523.2	7.6
160°-170°	350.9	5.1
170°-180°	124.6	1.8
0°-30°	1574.7	23.0
0°-40°	2416.6	35.2
0°-60°	2985.0	43.5
0°-90°	2995.1	43.7
90°-120°	914.2	13.3
90°-150°	2867.5	41.8
90°-180°	3866.0	56.4
0°-180°	6859.8	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1999	1999	1999	1999	1999	
5°	2007	2010	2007	2010	2007	192
15°	2006	1966	2006	1966	2006	565
25°	1838	1766	1838	1766	1838	839
35°	1386	1334	1386	1334	1386	856
45°	585	549	585	549	585	453
55°	56	56	56	56	56	59
65°	0	0	0	0	0	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	4	29	4	58	4	3
95°	42	31	42	181	42	50
105°	195	313	195	431	195	208
115°	374	519	374	639	374	369
125°	554	823	554	784	554	495
135°	753	1077	753	868	753	582
145°	962	1241	962	887	962	602
155°	1142	1348	1142	920	1142	525
165°	1263	1406	1263	1059	1263	355
175°	1320	1376	1320	1243	1320	125
180°	1324	1324	1324	1324	1324	



TEST NUMBER: P1427535

CATALOG NUMBER: SQ2W-BBM-K-100U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	1999.0	1999.0	1999.0	1999.0	1999.0	1999.0	1999.0	1999.0	1999.0	1999.0	1999.0
2.5°	2007.8	2005.3	2002.8	1996.9	1989.8	1990.3	1998.5	2004.2	2002.4	2000.6	2002.4
5°	2007.0	2004.8	2002.6	1996.3	1988.8	1991.0	2003.0	2011.8	2010.9	2010.0	2010.9
7.5°	2005.8	2004.3	2002.8	1998.4	1993.1	1995.3	2005.2	2012.0	2009.8	2007.6	2009.8
10°	2009.0	2008.6	2008.1	2001.3	1992.4	1993.1	2003.3	2010.4	2008.2	2006.0	2008.2
12.5°	2010.6	2013.4	2016.1	2006.4	1992.5	1989.6	1997.7	2002.8	1998.8	1994.8	1998.8
15°	2006.0	2013.6	2021.1	2007.3	1986.4	1976.7	1978.0	1977.6	1971.8	1966.0	1971.8
17.5°	1983.6	1994.3	2004.9	1986.7	1958.9	1942.6	1937.7	1932.0	1923.8	1915.6	1923.8
20°	1954.0	1966.4	1978.9	1959.0	1928.3	1908.8	1900.3	1892.2	1885.1	1878.0	1885.1
22.5°	1912.4	1923.8	1935.2	1916.1	1886.8	1866.9	1856.3	1847.0	1841.3	1835.6	1841.3
25°	1838.0	1845.6	1853.1	1833.7	1805.2	1787.0	1779.0	1772.2	1769.1	1766.0	1769.1
27.5°	1732.6	1734.7	1736.9	1721.4	1700.1	1684.4	1674.5	1666.0	1662.0	1658.0	1662.0
30°	1651.0	1651.0	1651.0	1639.0	1623.0	1609.7	1599.0	1589.1	1581.6	1574.0	1581.6
32.5°	1555.8	1554.7	1553.7	1544.9	1533.5	1521.9	1510.2	1499.5	1492.0	1484.4	1492.0
35°	1386.0	1390.9	1395.8	1389.7	1379.9	1369.2	1357.7	1347.3	1340.7	1334.0	1340.7
37.5°	1202.2	1204.1	1205.9	1200.9	1193.5	1183.6	1171.1	1160.4	1154.8	1149.2	1154.8
40°	1063.0	1063.4	1063.9	1057.7	1049.2	1040.6	1031.7	1022.9	1014.4	1006.0	1014.4
42.5°	900.6	909.6	918.6	914.7	906.6	895.5	881.3	869.7	866.3	862.8	866.3
45°	585.0	624.6	664.1	678.7	684.9	680.0	664.0	640.6	594.8	549.0	594.8
47.5°	294.0	343.2	392.5	426.6	455.7	447.4	401.8	355.5	307.0	258.6	307.0
50°	166.0	195.3	224.7	270.3	321.4	313.0	245.0	189.9	173.4	157.0	173.4
52.5°	110.8	123.8	136.8	173.5	218.2	215.3	164.7	124.5	115.1	105.8	115.1
55°	56.0	59.6	63.1	79.3	99.8	99.3	78.0	61.3	58.7	56.0	58.7
57.5°	19.0	23.8	28.6	35.8	43.8	44.0	36.5	29.7	25.4	21.0	25.4
60°	3.0	7.4	11.9	17.7	23.9	23.2	15.7	9.0	5.0	1.0	5.0
62.5°	0.6	1.8	3.1	7.8	13.7	13.5	7.4	2.5	1.4	0.2	1.4
65°	0.0	0.0	0.0	0.3	0.8	0.8	0.3	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.8	1.9	3.2	4.3	5.1	5.4	5.4	5.6	5.9	5.9	5.9
90°	4.0	9.4	16.1	21.4	25.4	26.8	26.8	28.1	29.4	29.4	29.4
92.5°	14.7	23.3	23.5	23.5	28.6	31.0	33.2	33.4	34.8	34.8	34.8
95°	41.5	45.5	68.2	66.9	45.5	36.1	30.8	30.8	30.8	30.8	30.8
97.5°	79.2	85.1	88.8	119.0	125.7	121.4	99.0	83.2	74.4	70.4	74.4
100°	112.4	115.0	123.1	124.4	157.8	189.9	173.9	153.8	147.1	143.1	147.1
102.5°	145.5	147.1	159.4	165.1	172.8	191.0	246.6	240.5	235.9	235.1	235.9
105°	195.3	196.6	219.4	230.1	235.4	235.4	234.1	260.8	303.6	313.0	303.6
107.5°	248.5	254.7	281.4	310.0	316.2	317.8	310.8	306.8	305.2	306.3	305.2
110°	284.9	294.3	326.4	362.5	371.8	374.5	371.8	367.8	365.1	365.1	365.1



TEST NUMBER: P1427535

CATALOG NUMBER: SQ2W-BBM-K-100U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	320.2	333.9	370.2	411.7	427.5	435.5	429.6	426.7	424.0	426.1	424.0
115°	374.5	394.6	442.7	485.5	517.6	521.6	520.3	520.3	519.0	519.0	519.0
117.5°	424.8	456.9	510.9	560.7	597.9	608.6	613.9	612.3	610.7	613.4	610.7
120°	460.1	497.6	559.1	615.3	651.4	667.4	672.8	670.1	672.8	670.1	672.8
122.5°	497.6	543.6	604.0	662.4	704.9	723.1	729.5	730.0	730.6	729.0	730.6
125°	553.7	609.9	680.8	741.0	785.1	806.5	811.9	813.2	815.9	822.6	815.9
127.5°	610.5	674.1	752.0	810.0	855.2	881.2	889.5	892.4	898.0	901.0	898.0
130°	650.0	722.3	801.2	856.0	900.2	928.3	943.0	947.0	953.7	952.3	953.7
132.5°	691.8	767.2	847.2	904.2	945.1	975.3	987.9	999.4	1001.8	1003.7	1001.8
135°	753.0	834.6	914.9	971.1	1009.8	1039.3	1055.3	1066.0	1072.7	1076.7	1072.7
137.5°	817.5	903.6	980.7	1030.7	1069.8	1095.2	1113.4	1124.6	1131.6	1134.8	1131.6
140°	861.4	944.3	1019.2	1071.4	1106.1	1131.6	1147.6	1161.0	1169.0	1169.0	1169.0
142.5°	903.1	985.0	1057.7	1109.9	1140.4	1163.7	1180.8	1190.9	1200.0	1200.0	1200.0
145°	961.7	1043.3	1110.2	1162.3	1187.7	1209.1	1227.9	1235.9	1241.2	1241.2	1241.2
147.5°	1023.0	1095.2	1156.2	1206.2	1227.6	1252.7	1267.5	1273.9	1280.6	1277.6	1280.6
150°	1059.3	1126.2	1185.1	1231.9	1253.3	1277.4	1292.1	1297.4	1304.1	1300.1	1304.1
152.5°	1094.6	1158.3	1211.8	1255.4	1273.6	1297.7	1314.5	1319.9	1324.4	1321.5	1324.4
155°	1142.3	1198.4	1247.9	1288.1	1304.1	1326.8	1342.9	1349.6	1354.9	1348.2	1354.9
157.5°	1184.8	1233.2	1276.3	1313.2	1330.3	1349.9	1364.8	1373.1	1378.5	1375.5	1378.5
160°	1210.5	1254.6	1293.4	1328.2	1344.2	1361.6	1377.7	1387.0	1392.4	1388.4	1392.4
162.5°	1231.9	1271.7	1308.4	1340.0	1353.9	1369.1	1388.4	1396.7	1402.0	1396.9	1402.0
165°	1262.6	1294.7	1326.8	1353.6	1365.6	1377.7	1397.7	1407.1	1411.1	1405.8	1411.1
167.5°	1285.9	1310.5	1336.5	1359.5	1368.3	1380.1	1400.1	1407.9	1413.0	1406.3	1413.0
170°	1298.8	1320.2	1342.9	1361.6	1368.3	1379.0	1399.1	1405.8	1409.8	1403.1	1409.8
172.5°	1309.5	1325.5	1344.0	1360.6	1364.0	1372.6	1391.6	1398.3	1401.2	1395.6	1401.2
175°	1320.2	1329.5	1342.9	1353.6	1352.3	1357.6	1373.7	1379.0	1384.4	1376.3	1384.4
177.5°	1325.2	1329.5	1333.8	1340.2	1335.9	1335.9	1347.7	1350.9	1352.0	1347.7	1352.0
180°	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2



TEST NUMBER: P1427535

CATALOG NUMBER: SQ2W-BBM-K-100U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	1999.0	1999.0	1999.0	1999.0	1999.0	1999.0	1999.0	1999.0	1999.0	1999.0	1999.0
2.5°	2004.2	1998.5	1990.3	1989.8	1996.9	2002.8	2005.3	2007.8	2005.3	2002.8	1996.9
5°	2011.8	2003.0	1991.0	1988.8	1996.3	2002.6	2004.8	2007.0	2004.8	2002.6	1996.3
7.5°	2012.0	2005.2	1995.3	1993.1	1998.4	2002.8	2004.3	2005.8	2004.3	2002.8	1998.4
10°	2010.4	2003.3	1993.1	1992.4	2001.3	2008.1	2008.6	2009.0	2008.6	2008.1	2001.3
12.5°	2002.8	1997.7	1989.6	1992.5	2006.4	2016.1	2013.4	2010.6	2013.4	2016.1	2006.4
15°	1977.6	1978.0	1976.7	1986.4	2007.3	2021.1	2013.6	2006.0	2013.6	2021.1	2007.3
17.5°	1932.0	1937.7	1942.6	1958.9	1986.7	2004.9	1994.3	1983.6	1994.3	2004.9	1986.7
20°	1892.2	1900.3	1908.8	1928.3	1959.0	1978.9	1966.4	1954.0	1966.4	1978.9	1959.0
22.5°	1847.0	1856.3	1866.9	1886.8	1916.1	1935.2	1923.8	1912.4	1923.8	1935.2	1916.1
25°	1772.2	1779.0	1787.0	1805.2	1833.7	1853.1	1845.6	1838.0	1845.6	1853.1	1833.7
27.5°	1666.0	1674.5	1684.4	1700.1	1721.4	1736.9	1734.7	1732.6	1734.7	1736.9	1721.4
30°	1589.1	1599.0	1609.7	1623.0	1639.0	1651.0	1651.0	1651.0	1651.0	1651.0	1639.0
32.5°	1499.5	1510.2	1521.9	1533.5	1544.9	1553.7	1554.7	1555.8	1554.7	1553.7	1544.9
35°	1347.3	1357.7	1369.2	1379.9	1389.7	1395.8	1390.9	1386.0	1390.9	1395.8	1389.7
37.5°	1160.4	1171.1	1183.6	1193.5	1200.9	1205.9	1204.1	1202.2	1204.1	1205.9	1200.9
40°	1022.9	1031.7	1040.6	1049.2	1057.7	1063.9	1063.4	1063.0	1063.4	1063.9	1057.7
42.5°	869.7	881.3	895.5	906.6	914.7	918.6	909.6	900.6	909.6	918.6	914.7
45°	640.6	664.0	680.0	684.9	678.7	664.1	624.6	585.0	624.6	664.1	678.7
47.5°	355.5	401.8	447.4	455.7	426.6	392.5	343.2	294.0	343.2	392.5	426.6
50°	189.9	245.0	313.0	321.4	270.3	224.7	195.3	166.0	195.3	224.7	270.3
52.5°	124.5	164.7	215.3	218.2	173.5	136.8	123.8	110.8	123.8	136.8	173.5
55°	61.3	78.0	99.3	99.8	79.3	63.1	59.6	56.0	59.6	63.1	79.3
57.5°	29.7	36.5	44.0	43.8	35.8	28.6	23.8	19.0	23.8	28.6	35.8
60°	9.0	15.7	23.2	23.9	17.7	11.9	7.4	3.0	7.4	11.9	17.7
62.5°	2.5	7.4	13.5	13.7	7.8	3.1	1.8	0.6	1.8	3.1	7.8
65°	0.0	0.3	0.8	0.8	0.3	0.0	0.0	0.0	0.0	0.0	0.3
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	5.6	5.4	5.4	5.1	4.3	3.2	1.9	0.8	1.9	2.9	4.8
90°	28.1	26.8	26.8	25.4	21.4	16.1	9.4	4.0	9.4	14.7	24.1
92.5°	33.4	33.2	31.0	28.6	23.5	23.5	23.3	14.7	25.4	36.1	51.9
95°	30.8	30.8	36.1	45.5	66.9	68.2	45.5	41.5	58.9	82.9	104.3
97.5°	83.2	99.0	121.4	125.7	119.0	88.8	85.1	79.2	107.8	131.6	166.1
100°	153.8	173.9	189.9	157.8	124.4	123.1	115.0	112.4	143.1	165.9	199.3
102.5°	240.5	246.6	191.0	172.8	165.1	159.4	147.1	145.5	176.3	207.6	235.7
105°	260.8	234.1	235.4	235.4	230.1	219.4	196.6	195.3	230.1	266.2	300.9
107.5°	306.8	310.8	317.8	316.2	310.0	281.4	254.7	248.5	279.8	323.2	361.4
110°	367.8	371.8	374.5	371.8	362.5	326.4	294.3	284.9	313.0	358.5	399.9



TEST NUMBER: P1427535

CATALOG NUMBER: SQ2W-BBM-K-100U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	426.7	429.6	435.5	427.5	411.7	370.2	333.9	320.2	348.3	394.8	437.4
115°	520.3	520.3	521.6	517.6	485.5	442.7	394.6	374.5	398.6	441.4	488.2
117.5°	612.3	613.9	608.6	597.9	560.7	510.9	456.9	424.8	443.8	489.0	537.2
120°	670.1	672.8	667.4	651.4	615.3	559.1	497.6	460.1	474.8	519.0	567.1
122.5°	730.0	729.5	723.1	704.9	662.4	604.0	543.6	497.6	503.7	544.6	591.7
125°	813.2	811.9	806.5	785.1	741.0	680.8	609.9	553.7	545.7	580.5	628.6
127.5°	892.4	889.5	881.2	855.2	810.0	752.0	674.1	610.5	592.5	614.5	658.6
130°	947.0	943.0	928.3	900.2	856.0	801.2	722.3	650.0	624.6	638.0	676.8
132.5°	999.4	987.9	975.3	945.1	904.2	847.2	767.2	691.8	656.7	662.6	692.8
135°	1066.0	1055.3	1039.3	1009.8	971.1	914.9	834.6	753.0	704.9	699.5	716.9
137.5°	1124.6	1113.4	1095.2	1069.8	1030.7	980.7	903.6	817.5	756.8	738.9	745.5
140°	1161.0	1147.6	1131.6	1106.1	1071.4	1019.2	944.3	861.4	793.2	767.8	763.7
142.5°	1190.9	1180.8	1163.7	1140.4	1109.9	1057.7	985.0	903.1	830.6	797.7	788.3
145°	1235.9	1227.9	1209.1	1187.7	1162.3	1110.2	1043.3	961.7	889.5	846.7	826.6
147.5°	1273.9	1267.5	1252.7	1227.6	1206.2	1156.2	1095.2	1023.0	948.9	895.9	869.9
150°	1297.4	1292.1	1277.4	1253.3	1231.9	1185.1	1126.2	1059.3	988.4	932.3	898.8
152.5°	1319.9	1314.5	1297.7	1273.6	1255.4	1211.8	1158.3	1094.6	1022.7	966.5	932.0
155°	1349.6	1342.9	1326.8	1304.1	1288.1	1247.9	1198.4	1142.3	1080.7	1021.9	983.1
157.5°	1373.1	1364.8	1349.9	1330.3	1313.2	1276.3	1233.2	1184.8	1131.0	1074.9	1035.3
160°	1387.0	1377.7	1361.6	1344.2	1328.2	1293.4	1254.6	1210.5	1161.0	1110.2	1067.4
162.5°	1396.7	1388.4	1369.1	1353.9	1340.0	1308.4	1271.7	1231.9	1187.7	1143.3	1103.7
165°	1407.1	1397.7	1377.7	1365.6	1353.6	1326.8	1294.7	1262.6	1225.2	1189.1	1157.0
167.5°	1407.9	1400.1	1380.1	1368.3	1359.5	1336.5	1310.5	1285.9	1256.8	1228.4	1201.7
170°	1405.8	1399.1	1379.0	1368.3	1361.6	1342.9	1320.2	1298.8	1276.0	1251.9	1230.5
172.5°	1398.3	1391.6	1372.6	1364.0	1360.6	1344.0	1325.5	1309.5	1289.9	1272.3	1255.2
175°	1379.0	1373.7	1357.6	1352.3	1353.6	1342.9	1329.5	1320.2	1308.1	1297.4	1288.1
177.5°	1350.9	1347.7	1335.9	1335.9	1340.2	1333.8	1329.5	1325.2	1319.9	1316.7	1313.5
180°	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2



TEST NUMBER: P1427535

CATALOG NUMBER: SQ2W-BBM-K-100U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	1999.0	1999.0	1999.0	1999.0	1999.0	1999.0	1999.0	1999.0	1999.0	1999.0	1999.0
2.5°	1989.8	1990.3	1998.5	2004.2	2002.4	2000.6	2002.4	2004.2	1998.5	1990.3	1989.8
5°	1988.8	1991.0	2003.0	2011.8	2010.9	2010.0	2010.9	2011.8	2003.0	1991.0	1988.8
7.5°	1993.1	1995.3	2005.2	2012.0	2009.8	2007.6	2009.8	2012.0	2005.2	1995.3	1993.1
10°	1992.4	1993.1	2003.3	2010.4	2008.2	2006.0	2008.2	2010.4	2003.3	1993.1	1992.4
12.5°	1992.5	1989.6	1997.7	2002.8	1998.8	1994.8	1998.8	2002.8	1997.7	1989.6	1992.5
15°	1986.4	1976.7	1978.0	1977.6	1971.8	1966.0	1971.8	1977.6	1978.0	1976.7	1986.4
17.5°	1958.9	1942.6	1937.7	1932.0	1923.8	1915.6	1923.8	1932.0	1937.7	1942.6	1958.9
20°	1928.3	1908.8	1900.3	1892.2	1885.1	1878.0	1885.1	1892.2	1900.3	1908.8	1928.3
22.5°	1886.8	1866.9	1856.3	1847.0	1841.3	1835.6	1841.3	1847.0	1856.3	1866.9	1886.8
25°	1805.2	1787.0	1779.0	1772.2	1769.1	1766.0	1769.1	1772.2	1779.0	1787.0	1805.2
27.5°	1700.1	1684.4	1674.5	1666.0	1662.0	1658.0	1662.0	1666.0	1674.5	1684.4	1700.1
30°	1623.0	1609.7	1599.0	1589.1	1581.6	1574.0	1581.6	1589.1	1599.0	1609.7	1623.0
32.5°	1533.5	1521.9	1510.2	1499.5	1492.0	1484.4	1492.0	1499.5	1510.2	1521.9	1533.5
35°	1379.9	1369.2	1357.7	1347.3	1340.7	1334.0	1340.7	1347.3	1357.7	1369.2	1379.9
37.5°	1193.5	1183.6	1171.1	1160.4	1154.8	1149.2	1154.8	1160.4	1171.1	1183.6	1193.5
40°	1049.2	1040.6	1031.7	1022.9	1014.4	1006.0	1014.4	1022.9	1031.7	1040.6	1049.2
42.5°	906.6	895.5	881.3	869.7	866.3	862.8	866.3	869.7	881.3	895.5	906.6
45°	684.9	680.0	664.0	640.6	594.8	549.0	594.8	640.6	664.0	680.0	684.9
47.5°	455.7	447.4	401.8	355.5	307.0	258.6	307.0	355.5	401.8	447.4	455.7
50°	321.4	313.0	245.0	189.9	173.4	157.0	173.4	189.9	245.0	313.0	321.4
52.5°	218.2	215.3	164.7	124.5	115.1	105.8	115.1	124.5	164.7	215.3	218.2
55°	99.8	99.3	78.0	61.3	58.7	56.0	58.7	61.3	78.0	99.3	99.8
57.5°	43.8	44.0	36.5	29.7	25.4	21.0	25.4	29.7	36.5	44.0	43.8
60°	23.9	23.2	15.7	9.0	5.0	1.0	5.0	9.0	15.7	23.2	23.9
62.5°	13.7	13.5	7.4	2.5	1.4	0.2	1.4	2.5	7.4	13.5	13.7
65°	0.8	0.8	0.3	0.0	0.0	0.0	0.0	0.0	0.3	0.8	0.8
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	6.2	8.0	9.9	11.0	12.0	11.5	12.0	11.0	9.9	8.0	6.2
90°	30.8	40.1	49.5	54.8	60.2	57.5	60.2	54.8	49.5	40.1	30.8
92.5°	61.8	77.6	89.1	98.7	103.0	102.5	103.0	98.7	89.1	77.6	61.8
95°	124.4	143.1	161.8	175.2	183.2	180.6	183.2	175.2	161.8	143.1	124.4
97.5°	191.8	216.9	237.8	250.4	258.4	263.8	258.4	250.4	237.8	216.9	191.8
100°	236.7	260.8	284.9	299.6	313.0	318.3	313.0	299.6	284.9	260.8	236.7
102.5°	273.1	304.7	330.9	346.7	357.9	363.3	357.9	346.7	330.9	304.7	273.1
105°	333.0	366.5	394.6	414.6	426.7	430.7	426.7	414.6	394.6	366.5	333.0
107.5°	393.0	427.5	453.4	475.6	490.3	498.9	490.3	475.6	453.4	427.5	393.0
110°	440.1	468.1	496.2	516.3	531.0	536.4	531.0	516.3	496.2	468.1	440.1



TEST NUMBER: P1427535

CATALOG NUMBER: SQ2W-BBM-K-100U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	479.6	510.9	539.0	559.1	575.9	583.4	575.9	559.1	539.0	510.9	479.6
115°	535.0	576.5	601.9	620.6	632.7	639.3	632.7	620.6	601.9	576.5	535.0
117.5°	581.0	624.4	652.2	666.6	672.3	677.1	672.3	666.6	652.2	624.4	581.0
120°	609.9	650.0	682.1	700.9	707.6	710.2	707.6	700.9	682.1	650.0	609.9
122.5°	636.7	674.7	705.7	728.7	739.7	742.3	739.7	728.7	705.7	674.7	636.7
125°	674.1	710.2	742.3	765.1	777.1	783.8	777.1	765.1	742.3	710.2	674.1
127.5°	706.8	745.8	775.2	795.8	807.6	813.0	807.6	795.8	775.2	745.8	706.8
130°	724.9	765.1	794.5	817.2	827.9	833.3	827.9	817.2	794.5	765.1	724.9
132.5°	738.9	781.1	811.6	832.2	844.0	849.3	844.0	832.2	811.6	781.1	738.9
135°	755.7	799.9	832.0	852.0	862.7	868.1	862.7	852.0	832.0	799.9	755.7
137.5°	770.4	810.6	844.0	865.1	874.8	878.2	874.8	865.1	844.0	810.6	770.4
140°	781.1	815.9	849.3	869.4	880.1	881.4	880.1	869.4	849.3	815.9	781.1
142.5°	795.0	822.3	851.5	871.5	882.2	884.7	882.2	871.5	851.5	822.3	795.0
145°	819.9	836.0	856.0	874.8	884.1	886.8	884.1	874.8	856.0	836.0	819.9
147.5°	851.2	856.3	866.7	879.0	888.1	890.0	888.1	879.0	866.7	856.3	851.2
150°	874.8	873.4	877.4	885.5	893.5	892.1	893.5	885.5	877.4	873.4	874.8
152.5°	901.5	893.7	893.5	897.2	901.0	900.7	901.0	897.2	893.5	893.7	901.5
155°	947.0	932.3	924.2	921.6	921.6	920.2	921.6	921.6	924.2	932.3	947.0
157.5°	997.0	976.4	964.4	957.9	956.1	953.1	956.1	957.9	964.4	976.4	997.0
160°	1031.2	1008.5	996.5	985.8	981.8	977.7	981.8	985.8	996.5	1008.5	1031.2
162.5°	1063.3	1041.7	1028.6	1018.9	1014.9	1008.8	1014.9	1018.9	1028.6	1041.7	1063.3
165°	1115.5	1092.8	1078.1	1070.0	1064.7	1059.3	1064.7	1070.0	1078.1	1092.8	1115.5
167.5°	1167.7	1142.8	1133.2	1124.1	1119.0	1109.4	1119.0	1124.1	1133.2	1142.8	1167.7
170°	1199.8	1177.0	1171.7	1163.7	1154.3	1143.6	1154.3	1163.7	1171.7	1177.0	1199.8
172.5°	1227.6	1212.4	1207.0	1199.0	1196.0	1187.5	1196.0	1199.0	1207.0	1212.4	1227.6
175°	1268.0	1256.0	1256.0	1254.6	1250.6	1242.6	1250.6	1254.6	1256.0	1256.0	1268.0
177.5°	1301.7	1295.3	1299.6	1299.6	1298.5	1291.0	1298.5	1299.6	1299.6	1295.3	1301.7
180°	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2



TEST NUMBER: P1427535

CATALOG NUMBER: SQ2W-BBM-K-100U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	1999.0	1999.0	1999.0	1999.0
2.5°	1996.9	2002.8	2005.3	2007.8
5°	1996.3	2002.6	2004.8	2007.0
7.5°	1998.4	2002.8	2004.3	2005.8
10°	2001.3	2008.1	2008.6	2009.0
12.5°	2006.4	2016.1	2013.4	2010.6
15°	2007.3	2021.1	2013.6	2006.0
17.5°	1986.7	2004.9	1994.3	1983.6
20°	1959.0	1978.9	1966.4	1954.0
22.5°	1916.1	1935.2	1923.8	1912.4
25°	1833.7	1853.1	1845.6	1838.0
27.5°	1721.4	1736.9	1734.7	1732.6
30°	1639.0	1651.0	1651.0	1651.0
32.5°	1544.9	1553.7	1554.7	1555.8
35°	1389.7	1395.8	1390.9	1386.0
37.5°	1200.9	1205.9	1204.1	1202.2
40°	1057.7	1063.9	1063.4	1063.0
42.5°	914.7	918.6	909.6	900.6
45°	678.7	664.1	624.6	585.0
47.5°	426.6	392.5	343.2	294.0
50°	270.3	224.7	195.3	166.0
52.5°	173.5	136.8	123.8	110.8
55°	79.3	63.1	59.6	56.0
57.5°	35.8	28.6	23.8	19.0
60°	17.7	11.9	7.4	3.0
62.5°	7.8	3.1	1.8	0.6
65°	0.3	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0
87.5°	4.8	2.9	1.9	0.8
90°	24.1	14.7	9.4	4.0
92.5°	51.9	36.1	25.4	14.7
95°	104.3	82.9	58.9	41.5
97.5°	166.1	131.6	107.8	79.2
100°	199.3	165.9	143.1	112.4
102.5°	235.7	207.6	176.3	145.5
105°	300.9	266.2	230.1	195.3
107.5°	361.4	323.2	279.8	248.5
110°	399.9	358.5	313.0	284.9



TEST NUMBER: P1427535

CATALOG NUMBER: SQ2W-BBM-K-100U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	437.4	394.8	348.3	320.2
115°	488.2	441.4	398.6	374.5
117.5°	537.2	489.0	443.8	424.8
120°	567.1	519.0	474.8	460.1
122.5°	591.7	544.6	503.7	497.6
125°	628.6	580.5	545.7	553.7
127.5°	658.6	614.5	592.5	610.5
130°	676.8	638.0	624.6	650.0
132.5°	692.8	662.6	656.7	691.8
135°	716.9	699.5	704.9	753.0
137.5°	745.5	738.9	756.8	817.5
140°	763.7	767.8	793.2	861.4
142.5°	788.3	797.7	830.6	903.1
145°	826.6	846.7	889.5	961.7
147.5°	869.9	895.9	948.9	1023.0
150°	898.8	932.3	988.4	1059.3
152.5°	932.0	966.5	1022.7	1094.6
155°	983.1	1021.9	1080.7	1142.3
157.5°	1035.3	1074.9	1131.0	1184.8
160°	1067.4	1110.2	1161.0	1210.5
162.5°	1103.7	1143.3	1187.7	1231.9
165°	1157.0	1189.1	1225.2	1262.6
167.5°	1201.7	1228.4	1256.8	1285.9
170°	1230.5	1251.9	1276.0	1298.8
172.5°	1255.2	1272.3	1289.9	1309.5
175°	1288.1	1297.4	1308.1	1320.2
177.5°	1313.5	1316.7	1319.9	1325.2
180°	1324.2	1324.2	1324.2	1324.2



TEST NUMBER: P1427535

CATALOG NUMBER: SQ2W-BBM-K-100U-075D-L935-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.00	0.10	0.00	0.00	0.00	0.00	0.33
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4H	2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00