

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1427592

Luminaire Tested: SQ2W-BBN-K-050U-050D-L935-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2024
Report Number: P1427592
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G3-2308-130-1)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-BBN-K-050U-050D-L935-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - BLACK DISCREET BAFFLE, NARROW 35-DEGREE OPTIC
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 500 LUMENS PER FOOT
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3920.1 lumens
Efficiency: N/A
Efficacy: 118.8 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.62
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 33
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1427592

CATALOG NUMBER: SQ2W-BBN-K-050U-050D-L935-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

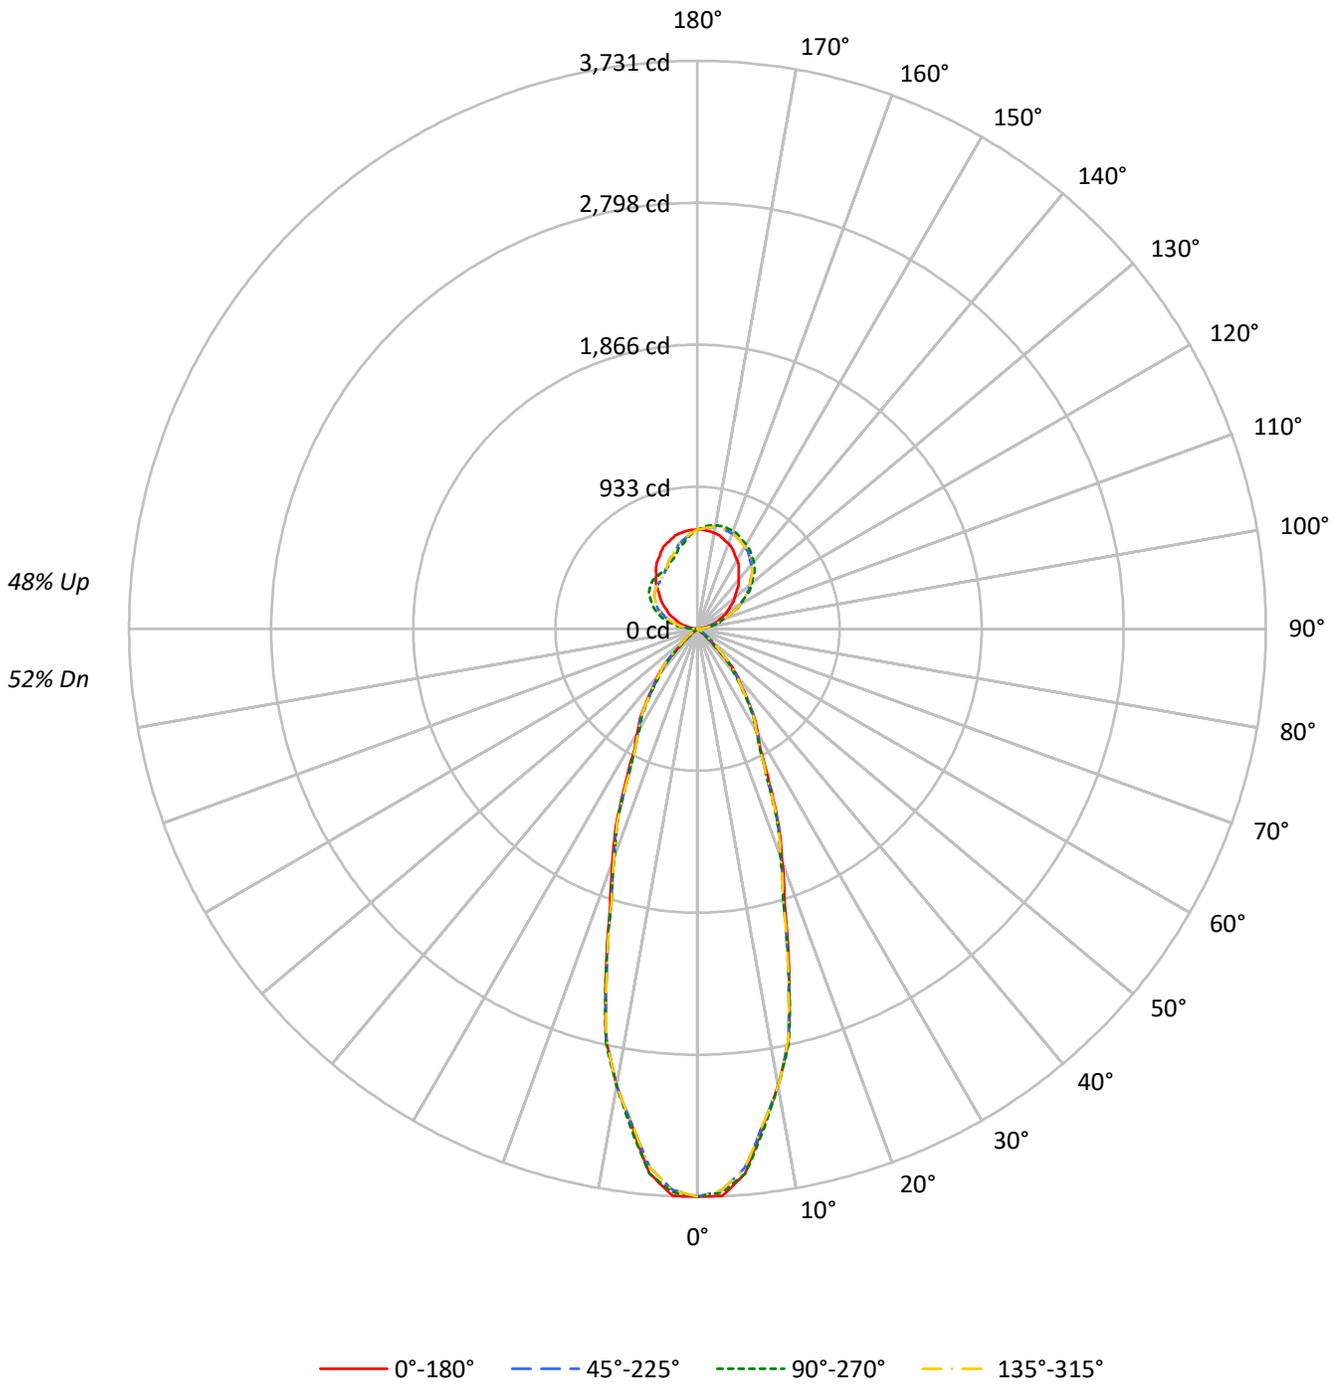



TEST NUMBER: P1427592

CATALOG NUMBER: SQ2W-BBN-K-050U-050D-L935-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20													
RC	80					70					50					30					10					0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0				
RCR																																		
0	108	108	108	108	99	99	99	99	84	84	84	70	70	70	58	58	58	52																
1	101	97	94	92	93	90	88	86	77	76	74	66	65	64	55	54	53	48																
2	94	88	84	80	87	82	78	75	71	69	66	61	59	58	52	51	50	45																
3	88	81	75	70	82	76	71	67	66	63	60	57	55	53	49	47	46	42																
4	82	74	68	63	77	70	64	60	61	57	54	54	51	49	46	45	43	40																
5	77	68	62	57	72	64	59	54	57	53	50	50	47	45	44	42	40	37																
6	73	63	56	52	68	60	54	50	53	49	46	47	44	42	42	39	38	35																
7	68	58	52	47	64	55	50	46	50	45	42	44	41	39	39	37	35	33																
8	65	55	48	44	61	52	46	42	47	42	39	42	39	36	37	35	33	31																
9	61	51	45	41	57	49	43	39	44	40	37	40	36	34	36	33	32	30																
10	58	48	42	38	55	46	40	37	42	37	34	38	34	32	34	32	30	28																

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	60239	60239	60239	60239
5°	58224	58257	58224	58257
10°	49969	49969	49969	49969
15°	38786	38695	38786	38695
20°	27992	27391	27992	27391
25°	19847	19094	19847	19094
30°	14767	14253	14767	14253
35°	11491	10961	11491	10961
40°	8502	7767	8502	7767
45°	4345	3500	4345	3500
50°	947	693	947	693
55°	265	208	265	208
60°	42	23	42	23
65°	0	0	0	0
70°	0	0	0	0
75°	0	0	0	0
80°	0	0	0	0
85°	0	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 40°
 Vertical Angle: 45°
 Luminance: 5300 cd/sqm



TEST NUMBER: P1427592

CATALOG NUMBER: SQ2W-BBN-K-050U-050D-L935-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	322.6	8.2
10°-20°	636.1	16.2
20°-30°	513.1	13.1
30°-40°	356.5	9.1
40°-50°	164.7	4.2
50°-60°	23.1	0.6
60°-70°	0.8	0.0
70°-80°	0.0	0.0
80°-90°	3.5	0.1
90°-100°	51.8	1.3
100°-110°	151.1	3.9
110°-120°	246.5	6.3
120°-130°	312.9	8.0
130°-140°	334.8	8.5
140°-150°	312.6	8.0
150°-160°	257.2	6.6
160°-170°	172.5	4.4
170°-180°	61.3	1.6
0°-30°	1471.8	37.5
0°-40°	1828.3	46.6
0°-60°	2016.0	51.4
0°-90°	2020.2	51.5
90°-120°	449.4	11.5
90°-150°	1409.7	36.0
90°-180°	1901.0	48.5
0°-180°	3920.1	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	3731	3731	3731	3731	3731	
5°	3592	3594	3592	3594	3592	323
15°	2320	2315	2320	2315	2320	639
25°	1114	1072	1114	1072	1114	522
35°	583	556	583	556	583	365
45°	190	153	190	153	190	154
55°	9	7	9	7	9	12
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	2	14	2	28	2	2
95°	20	15	20	89	20	25
105°	96	154	96	212	96	102
115°	184	255	184	314	184	181
125°	272	404	272	385	272	244
135°	370	529	370	427	370	286
145°	473	610	473	436	473	296
155°	562	663	562	452	562	258
165°	621	691	621	521	621	175
175°	649	677	649	611	649	62
180°	651	651	651	651	651	



TEST NUMBER: P1427592

CATALOG NUMBER: SQ2W-BBN-K-050U-050D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	3731.0	3731.0	3731.0	3731.0	3731.0	3731.0	3731.0	3731.0	3731.0	3731.0	3731.0
2.5°	3728.9	3722.7	3716.4	3704.1	3689.8	3689.2	3702.3	3711.2	3707.1	3703.1	3707.1
5°	3592.5	3583.8	3575.2	3564.7	3553.7	3557.8	3577.3	3592.1	3593.3	3594.5	3593.3
7.5°	3291.6	3294.4	3297.2	3290.0	3279.5	3285.0	3306.5	3322.0	3319.7	3317.4	3319.7
10°	3047.9	3050.0	3052.1	3051.7	3050.5	3053.5	3060.7	3064.0	3056.0	3047.9	3056.0
12.5°	2765.5	2773.8	2782.1	2772.5	2757.0	2754.6	2765.4	2774.3	2777.7	2781.1	2777.7
15°	2320.4	2333.8	2347.3	2328.2	2298.3	2290.6	2304.9	2315.6	2315.3	2315.0	2315.3
17.5°	1903.0	1901.6	1900.2	1888.4	1873.2	1866.9	1869.6	1871.4	1870.5	1869.6	1870.5
20°	1629.2	1627.1	1625.0	1614.8	1602.0	1594.5	1592.4	1591.2	1592.7	1594.2	1592.7
22.5°	1394.6	1391.1	1387.6	1383.3	1378.9	1374.0	1368.8	1365.4	1367.4	1369.4	1367.4
25°	1114.1	1102.8	1091.4	1082.3	1073.9	1073.3	1080.5	1084.3	1078.0	1071.8	1078.0
27.5°	894.3	894.1	893.9	888.5	881.4	878.2	879.0	879.9	881.1	882.3	881.1
30°	792.1	790.0	787.9	782.2	775.3	772.0	772.3	771.7	768.1	764.5	768.1
32.5°	701.2	702.6	704.1	698.1	689.6	684.5	682.9	680.8	677.2	673.6	677.2
35°	583.0	583.0	583.0	578.0	571.4	565.9	561.4	557.8	557.0	556.1	557.0
37.5°	473.4	472.8	472.3	468.6	464.0	458.5	452.2	446.8	444.5	442.2	444.5
40°	403.4	401.9	400.4	397.8	394.8	389.5	381.7	375.0	371.8	368.5	371.8
42.5°	323.8	327.8	331.8	330.6	327.6	322.2	314.4	307.4	302.4	297.5	302.4
45°	190.3	207.0	223.8	229.7	232.1	228.8	219.9	206.5	179.9	153.3	179.9
47.5°	81.8	100.2	118.6	134.0	148.5	143.9	120.3	97.1	75.0	52.8	75.0
50°	37.7	52.0	66.3	85.6	106.5	102.2	72.6	47.9	37.7	27.6	37.7
52.5°	22.1	29.2	36.4	54.4	76.1	74.1	48.6	28.1	22.7	17.3	22.7
55°	9.4	11.8	14.2	24.0	36.2	35.6	22.2	11.6	9.5	7.4	9.5
57.5°	3.5	4.8	6.1	9.6	13.9	13.6	8.8	5.0	3.9	2.8	3.9
60°	1.3	1.9	2.5	4.3	6.4	6.2	3.8	1.9	1.3	0.7	1.3
62.5°	0.3	0.6	1.0	1.9	3.1	3.0	1.8	0.9	0.5	0.1	0.5
65°	0.0	0.0	0.0	0.2	0.5	0.5	0.2	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.4	0.9	1.6	2.1	2.5	2.6	2.6	2.8	2.9	2.9	2.9
90°	2.0	4.6	7.9	10.5	12.5	13.2	13.2	13.8	14.5	14.5	14.5
92.5°	7.2	11.4	11.6	11.6	14.1	15.3	16.3	16.4	17.1	17.1	17.1
95°	20.4	22.4	33.5	32.9	22.4	17.8	15.1	15.1	15.1	15.1	15.1
97.5°	38.9	41.8	43.7	58.5	61.8	59.7	48.7	40.9	36.6	34.6	36.6
100°	55.2	56.5	60.5	61.1	77.6	93.4	85.5	75.6	72.3	70.4	72.3
102.5°	71.5	72.3	78.4	81.1	85.0	93.9	121.2	118.2	116.0	115.6	116.0
105°	96.0	96.7	107.8	113.1	115.7	115.7	115.1	128.2	149.3	153.9	149.3
107.5°	122.2	125.2	138.3	152.4	155.4	156.2	152.8	150.8	150.0	150.6	150.0
110°	140.1	144.7	160.4	178.2	182.8	184.1	182.8	180.8	179.5	179.5	179.5



TEST NUMBER: P1427592

CATALOG NUMBER: SQ2W-BBN-K-050U-050D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	157.4	164.1	182.0	202.4	210.1	214.1	211.2	209.8	208.4	209.5	208.4
115°	184.1	194.0	217.6	238.7	254.5	256.4	255.8	255.8	255.1	255.1	255.1
117.5°	208.8	224.6	251.2	275.6	293.9	299.2	301.8	301.0	300.2	301.5	300.2
120°	226.2	244.6	274.8	302.5	320.2	328.1	330.7	329.4	330.7	329.4	330.7
122.5°	244.6	267.2	296.9	325.6	346.5	355.5	358.6	358.9	359.1	358.4	359.1
125°	272.2	299.8	334.7	364.3	386.0	396.5	399.1	399.8	401.1	404.4	401.1
127.5°	300.1	331.4	369.7	398.2	420.4	433.2	437.3	438.7	441.5	442.9	441.5
130°	319.6	355.1	393.9	420.8	442.5	456.3	463.6	465.5	468.8	468.2	468.8
132.5°	340.1	377.2	416.5	444.5	464.6	479.5	485.6	491.3	492.5	493.4	492.5
135°	370.2	410.3	449.7	477.4	496.4	510.9	518.8	524.0	527.3	529.3	527.3
137.5°	401.9	444.2	482.1	506.7	525.9	538.4	547.3	552.8	556.3	557.8	556.3
140°	423.4	464.2	501.0	526.7	543.8	556.3	564.2	570.7	574.7	574.7	574.7
142.5°	444.0	484.2	520.0	545.6	560.6	572.0	580.5	585.5	589.9	589.9	589.9
145°	472.8	512.9	545.7	571.4	583.9	594.4	603.6	607.6	610.2	610.2	610.2
147.5°	502.9	538.4	568.4	593.0	603.5	615.8	623.1	626.2	629.5	628.1	629.5
150°	520.8	553.6	582.6	605.6	616.1	627.9	635.2	637.8	641.1	639.1	641.1
152.5°	538.1	569.4	595.7	617.2	626.1	637.9	646.2	648.8	651.1	649.6	651.1
155°	561.5	589.1	613.5	633.2	641.1	652.3	660.2	663.4	666.1	662.8	666.1
157.5°	582.4	606.2	627.4	645.6	654.0	663.6	670.9	675.0	677.6	676.2	677.6
160°	595.1	616.8	635.8	652.9	660.8	669.4	677.3	681.9	684.5	682.5	684.5
162.5°	605.6	625.2	643.2	658.7	665.5	673.0	682.5	686.6	689.2	686.7	689.2
165°	620.7	636.5	652.3	665.4	671.3	677.3	687.1	691.7	693.7	691.1	693.7
167.5°	632.1	644.2	657.0	668.3	672.6	678.4	688.3	692.1	694.6	691.3	694.6
170°	638.5	649.0	660.2	669.4	672.6	677.9	687.8	691.1	693.0	689.7	693.0
172.5°	643.7	651.6	660.7	668.8	670.5	674.8	684.1	687.4	688.8	686.1	688.8
175°	649.0	653.6	660.2	665.4	664.8	667.4	675.3	677.9	680.5	676.6	680.5
177.5°	651.5	653.6	655.7	658.8	656.7	656.7	662.5	664.1	664.6	662.5	664.6
180°	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9



TEST NUMBER: P1427592

CATALOG NUMBER: SQ2W-BBN-K-050U-050D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	3731.0	3731.0	3731.0	3731.0	3731.0	3731.0	3731.0	3731.0	3731.0	3731.0	3731.0
2.5°	3711.2	3702.3	3689.2	3689.8	3704.1	3716.4	3722.7	3728.9	3722.7	3716.4	3704.1
5°	3592.1	3577.3	3557.8	3553.7	3564.7	3575.2	3583.8	3592.5	3583.8	3575.2	3564.7
7.5°	3322.0	3306.5	3285.0	3279.5	3290.0	3297.2	3294.4	3291.6	3294.4	3297.2	3290.0
10°	3064.0	3060.7	3053.5	3050.5	3051.7	3052.1	3050.0	3047.9	3050.0	3052.1	3051.7
12.5°	2774.3	2765.4	2754.6	2757.0	2772.5	2782.1	2773.8	2765.5	2773.8	2782.1	2772.5
15°	2315.6	2304.9	2290.6	2298.3	2328.2	2347.3	2333.8	2320.4	2333.8	2347.3	2328.2
17.5°	1871.4	1869.6	1866.9	1873.2	1888.4	1900.2	1901.6	1903.0	1901.6	1900.2	1888.4
20°	1591.2	1592.4	1594.5	1602.0	1614.8	1625.0	1627.1	1629.2	1627.1	1625.0	1614.8
22.5°	1365.4	1368.8	1374.0	1378.9	1383.3	1387.6	1391.1	1394.6	1391.1	1387.6	1383.3
25°	1084.3	1080.5	1073.3	1073.9	1082.3	1091.4	1102.8	1114.1	1102.8	1091.4	1082.3
27.5°	879.9	879.0	878.2	881.4	888.5	893.9	894.1	894.3	894.1	893.9	888.5
30°	771.7	772.3	772.0	775.3	782.2	787.9	790.0	792.1	790.0	787.9	782.2
32.5°	680.8	682.9	684.5	689.6	698.1	704.1	702.6	701.2	702.6	704.1	698.1
35°	557.8	561.4	565.9	571.4	578.0	583.0	583.0	583.0	583.0	583.0	578.0
37.5°	446.8	452.2	458.5	464.0	468.6	472.3	472.8	473.4	472.8	472.3	468.6
40°	375.0	381.7	389.5	394.8	397.8	400.4	401.9	403.4	401.9	400.4	397.8
42.5°	307.4	314.4	322.2	327.6	330.6	331.8	327.8	323.8	327.8	331.8	330.6
45°	206.5	219.9	228.8	232.1	229.7	223.8	207.0	190.3	207.0	223.8	229.7
47.5°	97.1	120.3	143.9	148.5	134.0	118.6	100.2	81.8	100.2	118.6	134.0
50°	47.9	72.6	102.2	106.5	85.6	66.3	52.0	37.7	52.0	66.3	85.6
52.5°	28.1	48.6	74.1	76.1	54.4	36.4	29.2	22.1	29.2	36.4	54.4
55°	11.6	22.2	35.6	36.2	24.0	14.2	11.8	9.4	11.8	14.2	24.0
57.5°	5.0	8.8	13.6	13.9	9.6	6.1	4.8	3.5	4.8	6.1	9.6
60°	1.9	3.8	6.2	6.4	4.3	2.5	1.9	1.3	1.9	2.5	4.3
62.5°	0.9	1.8	3.0	3.1	1.9	1.0	0.6	0.3	0.6	1.0	1.9
65°	0.0	0.2	0.5	0.5	0.2	0.0	0.0	0.0	0.0	0.0	0.2
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	2.8	2.6	2.6	2.5	2.1	1.6	0.9	0.4	0.9	1.4	2.4
90°	13.8	13.2	13.2	12.5	10.5	7.9	4.6	2.0	4.6	7.2	11.8
92.5°	16.4	16.3	15.3	14.1	11.6	11.6	11.4	7.2	12.5	17.8	25.5
95°	15.1	15.1	17.8	22.4	32.9	33.5	22.4	20.4	28.9	40.8	51.3
97.5°	40.9	48.7	59.7	61.8	58.5	43.7	41.8	38.9	53.0	64.7	81.7
100°	75.6	85.5	93.4	77.6	61.1	60.5	56.5	55.2	70.4	81.5	98.0
102.5°	118.2	121.2	93.9	85.0	81.1	78.4	72.3	71.5	86.7	102.0	115.9
105°	128.2	115.1	115.7	115.7	113.1	107.8	96.7	96.0	113.1	130.8	147.9
107.5°	150.8	152.8	156.2	155.4	152.4	138.3	125.2	122.2	137.6	158.9	177.7
110°	180.8	182.8	184.1	182.8	178.2	160.4	144.7	140.1	153.9	176.2	196.6



TEST NUMBER: P1427592

CATALOG NUMBER: SQ2W-BBN-K-050U-050D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	209.8	211.2	214.1	210.1	202.4	182.0	164.1	157.4	171.2	194.1	215.0
115°	255.8	255.8	256.4	254.5	238.7	217.6	194.0	184.1	195.9	217.0	240.0
117.5°	301.0	301.8	299.2	293.9	275.6	251.2	224.6	208.8	218.2	240.4	264.1
120°	329.4	330.7	328.1	320.2	302.5	274.8	244.6	226.2	233.4	255.1	278.8
122.5°	358.9	358.6	355.5	346.5	325.6	296.9	267.2	244.6	247.6	267.7	290.9
125°	399.8	399.1	396.5	386.0	364.3	334.7	299.8	272.2	268.3	285.4	309.0
127.5°	438.7	437.3	433.2	420.4	398.2	369.7	331.4	300.1	291.3	302.1	323.8
130°	465.5	463.6	456.3	442.5	420.8	393.9	355.1	319.6	307.1	313.6	332.7
132.5°	491.3	485.6	479.5	464.6	444.5	416.5	377.2	340.1	322.8	325.7	340.6
135°	524.0	518.8	510.9	496.4	477.4	449.7	410.3	370.2	346.5	343.9	352.4
137.5°	552.8	547.3	538.4	525.9	506.7	482.1	444.2	401.9	372.0	363.2	366.5
140°	570.7	564.2	556.3	543.8	526.7	501.0	464.2	423.4	389.9	377.4	375.4
142.5°	585.5	580.5	572.0	560.6	545.6	520.0	484.2	444.0	408.3	392.1	387.5
145°	607.6	603.6	594.4	583.9	571.4	545.7	512.9	472.8	437.3	416.2	406.4
147.5°	626.2	623.1	615.8	603.5	593.0	568.4	538.4	502.9	466.4	440.4	427.7
150°	637.8	635.2	627.9	616.1	605.6	582.6	553.6	520.8	485.9	458.3	441.9
152.5°	648.8	646.2	637.9	626.1	617.2	595.7	569.4	538.1	502.7	475.1	458.2
155°	663.4	660.2	652.3	641.1	633.2	613.5	589.1	561.5	531.3	502.3	483.3
157.5°	675.0	670.9	663.6	654.0	645.6	627.4	606.2	582.4	556.0	528.4	508.9
160°	681.9	677.3	669.4	660.8	652.9	635.8	616.8	595.1	570.7	545.7	524.7
162.5°	686.6	682.5	673.0	665.5	658.7	643.2	625.2	605.6	583.9	562.1	542.6
165°	691.7	687.1	677.3	671.3	665.4	652.3	636.5	620.7	602.3	584.5	568.8
167.5°	692.1	688.3	678.4	672.6	668.3	657.0	644.2	632.1	617.8	603.9	590.7
170°	691.1	687.8	677.9	672.6	669.4	660.2	649.0	638.5	627.3	615.4	604.9
172.5°	687.4	684.1	674.8	670.5	668.8	660.7	651.6	643.7	634.1	625.4	617.0
175°	677.9	675.3	667.4	664.8	665.4	660.2	653.6	649.0	643.1	637.8	633.2
177.5°	664.1	662.5	656.7	656.7	658.8	655.7	653.6	651.5	648.8	647.3	645.7
180°	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9



TEST NUMBER: P1427592

CATALOG NUMBER: SQ2W-BBN-K-050U-050D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	3731.0	3731.0	3731.0	3731.0	3731.0	3731.0	3731.0	3731.0	3731.0	3731.0	3731.0
2.5°	3689.8	3689.2	3702.3	3711.2	3707.1	3703.1	3707.1	3711.2	3702.3	3689.2	3689.8
5°	3553.7	3557.8	3577.3	3592.1	3593.3	3594.5	3593.3	3592.1	3577.3	3557.8	3553.7
7.5°	3279.5	3285.0	3306.5	3322.0	3319.7	3317.4	3319.7	3322.0	3306.5	3285.0	3279.5
10°	3050.5	3053.5	3060.7	3064.0	3056.0	3047.9	3056.0	3064.0	3060.7	3053.5	3050.5
12.5°	2757.0	2754.6	2765.4	2774.3	2777.7	2781.1	2777.7	2774.3	2765.4	2754.6	2757.0
15°	2298.3	2290.6	2304.9	2315.6	2315.3	2315.0	2315.3	2315.6	2304.9	2290.6	2298.3
17.5°	1873.2	1866.9	1869.6	1871.4	1870.5	1869.6	1870.5	1871.4	1869.6	1866.9	1873.2
20°	1602.0	1594.5	1592.4	1591.2	1592.7	1594.2	1592.7	1591.2	1592.4	1594.5	1602.0
22.5°	1378.9	1374.0	1368.8	1365.4	1367.4	1369.4	1367.4	1365.4	1368.8	1374.0	1378.9
25°	1073.9	1073.3	1080.5	1084.3	1078.0	1071.8	1078.0	1084.3	1080.5	1073.3	1073.9
27.5°	881.4	878.2	879.0	879.9	881.1	882.3	881.1	879.9	879.0	878.2	881.4
30°	775.3	772.0	772.3	771.7	768.1	764.5	768.1	771.7	772.3	772.0	775.3
32.5°	689.6	684.5	682.9	680.8	677.2	673.6	677.2	680.8	682.9	684.5	689.6
35°	571.4	565.9	561.4	557.8	557.0	556.1	557.0	557.8	561.4	565.9	571.4
37.5°	464.0	458.5	452.2	446.8	444.5	442.2	444.5	446.8	452.2	458.5	464.0
40°	394.8	389.5	381.7	375.0	371.8	368.5	371.8	375.0	381.7	389.5	394.8
42.5°	327.6	322.2	314.4	307.4	302.4	297.5	302.4	307.4	314.4	322.2	327.6
45°	232.1	228.8	219.9	206.5	179.9	153.3	179.9	206.5	219.9	228.8	232.1
47.5°	148.5	143.9	120.3	97.1	75.0	52.8	75.0	97.1	120.3	143.9	148.5
50°	106.5	102.2	72.6	47.9	37.7	27.6	37.7	47.9	72.6	102.2	106.5
52.5°	76.1	74.1	48.6	28.1	22.7	17.3	22.7	28.1	48.6	74.1	76.1
55°	36.2	35.6	22.2	11.6	9.5	7.4	9.5	11.6	22.2	35.6	36.2
57.5°	13.9	13.6	8.8	5.0	3.9	2.8	3.9	5.0	8.8	13.6	13.9
60°	6.4	6.2	3.8	1.9	1.3	0.7	1.3	1.9	3.8	6.2	6.4
62.5°	3.1	3.0	1.8	0.9	0.5	0.1	0.5	0.9	1.8	3.0	3.1
65°	0.5	0.5	0.2	0.0	0.0	0.0	0.0	0.0	0.2	0.5	0.5
67.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	3.0	3.9	4.9	5.4	5.9	5.7	5.9	5.4	4.9	3.9	3.0
90°	15.1	19.7	24.3	27.0	29.6	28.3	29.6	27.0	24.3	19.7	15.1
92.5°	30.4	38.1	43.8	48.5	50.6	50.4	50.6	48.5	43.8	38.1	30.4
95°	61.1	70.4	79.6	86.1	90.1	88.8	90.1	86.1	79.6	70.4	61.1
97.5°	94.3	106.7	116.9	123.1	127.0	129.7	127.0	123.1	116.9	106.7	94.3
100°	116.4	128.2	140.1	147.3	153.9	156.5	153.9	147.3	140.1	128.2	116.4
102.5°	134.3	149.8	162.7	170.4	176.0	178.6	176.0	170.4	162.7	149.8	134.3
105°	163.7	180.2	194.0	203.8	209.8	211.7	209.8	203.8	194.0	180.2	163.7
107.5°	193.2	210.1	222.9	233.8	241.0	245.3	241.0	233.8	222.9	210.1	193.2
110°	216.3	230.1	243.9	253.8	261.0	263.7	261.0	253.8	243.9	230.1	216.3



TEST NUMBER: P1427592

CATALOG NUMBER: SQ2W-BBN-K-050U-050D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	235.8	251.2	265.0	274.8	283.1	286.8	283.1	274.8	265.0	251.2	235.8
115°	263.0	283.4	295.9	305.1	311.0	314.3	311.0	305.1	295.9	283.4	263.0
117.5°	285.6	306.9	320.6	327.7	330.5	332.8	330.5	327.7	320.6	306.9	285.6
120°	299.8	319.6	335.3	344.5	347.8	349.1	347.8	344.5	335.3	319.6	299.8
122.5°	313.0	331.7	346.9	358.2	363.6	364.9	363.6	358.2	346.9	331.7	313.0
125°	331.4	349.1	364.9	376.1	382.0	385.3	382.0	376.1	364.9	349.1	331.4
127.5°	347.4	366.6	381.1	391.2	397.0	399.6	397.0	391.2	381.1	366.6	347.4
130°	356.4	376.1	390.6	401.7	407.0	409.6	407.0	401.7	390.6	376.1	356.4
132.5°	363.2	384.0	399.0	409.1	414.9	417.5	414.9	409.1	399.0	384.0	363.2
135°	371.5	393.2	409.0	418.8	424.1	426.7	424.1	418.8	409.0	393.2	371.5
137.5°	378.7	398.5	414.9	425.3	430.0	431.7	430.0	425.3	414.9	398.5	378.7
140°	384.0	401.1	417.5	427.4	432.7	433.3	432.7	427.4	417.5	401.1	384.0
142.5°	390.8	404.2	418.6	428.4	433.7	434.9	433.7	428.4	418.6	404.2	390.8
145°	403.1	411.0	420.8	430.0	434.6	435.9	434.6	430.0	420.8	411.0	403.1
147.5°	418.4	420.9	426.1	432.1	436.6	437.5	436.6	432.1	426.1	420.9	418.4
150°	430.0	429.4	431.3	435.3	439.2	438.6	439.2	435.3	431.3	429.4	430.0
152.5°	443.2	439.4	439.2	441.1	442.9	442.8	442.9	441.1	439.2	439.4	443.2
155°	465.5	458.3	454.3	453.0	453.0	452.4	453.0	453.0	454.3	458.3	465.5
157.5°	490.1	480.0	474.1	470.9	470.0	468.6	470.0	470.9	474.1	480.0	490.1
160°	507.0	495.8	489.9	484.6	482.6	480.7	482.6	484.6	489.9	495.8	507.0
162.5°	522.7	512.1	505.6	500.9	498.9	495.9	498.9	500.9	505.6	512.1	522.7
165°	548.4	537.2	530.0	526.0	523.4	520.8	523.4	526.0	530.0	537.2	548.4
167.5°	574.0	561.8	557.1	552.6	550.1	545.4	550.1	552.6	557.1	561.8	574.0
170°	589.8	578.6	576.0	572.0	567.4	562.2	567.4	572.0	576.0	578.6	589.8
172.5°	603.5	596.0	593.4	589.4	588.0	583.8	588.0	589.4	593.4	596.0	603.5
175°	623.3	617.4	617.4	616.8	614.8	610.8	614.8	616.8	617.4	617.4	623.3
177.5°	639.9	636.7	638.9	638.9	638.3	634.6	638.3	638.9	638.9	636.7	639.9
180°	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9



TEST NUMBER: P1427592

CATALOG NUMBER: SQ2W-BBN-K-050U-050D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	3731.0	3731.0	3731.0	3731.0
2.5°	3704.1	3716.4	3722.7	3728.9
5°	3564.7	3575.2	3583.8	3592.5
7.5°	3290.0	3297.2	3294.4	3291.6
10°	3051.7	3052.1	3050.0	3047.9
12.5°	2772.5	2782.1	2773.8	2765.5
15°	2328.2	2347.3	2333.8	2320.4
17.5°	1888.4	1900.2	1901.6	1903.0
20°	1614.8	1625.0	1627.1	1629.2
22.5°	1383.3	1387.6	1391.1	1394.6
25°	1082.3	1091.4	1102.8	1114.1
27.5°	888.5	893.9	894.1	894.3
30°	782.2	787.9	790.0	792.1
32.5°	698.1	704.1	702.6	701.2
35°	578.0	583.0	583.0	583.0
37.5°	468.6	472.3	472.8	473.4
40°	397.8	400.4	401.9	403.4
42.5°	330.6	331.8	327.8	323.8
45°	229.7	223.8	207.0	190.3
47.5°	134.0	118.6	100.2	81.8
50°	85.6	66.3	52.0	37.7
52.5°	54.4	36.4	29.2	22.1
55°	24.0	14.2	11.8	9.4
57.5°	9.6	6.1	4.8	3.5
60°	4.3	2.5	1.9	1.3
62.5°	1.9	1.0	0.6	0.3
65°	0.2	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0
87.5°	2.4	1.4	0.9	0.4
90°	11.8	7.2	4.6	2.0
92.5°	25.5	17.8	12.5	7.2
95°	51.3	40.8	28.9	20.4
97.5°	81.7	64.7	53.0	38.9
100°	98.0	81.5	70.4	55.2
102.5°	115.9	102.0	86.7	71.5
105°	147.9	130.8	113.1	96.0
107.5°	177.7	158.9	137.6	122.2
110°	196.6	176.2	153.9	140.1



TEST NUMBER: P1427592

CATALOG NUMBER: SQ2W-BBN-K-050U-050D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	215.0	194.1	171.2	157.4
115°	240.0	217.0	195.9	184.1
117.5°	264.1	240.4	218.2	208.8
120°	278.8	255.1	233.4	226.2
122.5°	290.9	267.7	247.6	244.6
125°	309.0	285.4	268.3	272.2
127.5°	323.8	302.1	291.3	300.1
130°	332.7	313.6	307.1	319.6
132.5°	340.6	325.7	322.8	340.1
135°	352.4	343.9	346.5	370.2
137.5°	366.5	363.2	372.0	401.9
140°	375.4	377.4	389.9	423.4
142.5°	387.5	392.1	408.3	444.0
145°	406.4	416.2	437.3	472.8
147.5°	427.7	440.4	466.4	502.9
150°	441.9	458.3	485.9	520.8
152.5°	458.2	475.1	502.7	538.1
155°	483.3	502.3	531.3	561.5
157.5°	508.9	528.4	556.0	582.4
160°	524.7	545.7	570.7	595.1
162.5°	542.6	562.1	583.9	605.6
165°	568.8	584.5	602.3	620.7
167.5°	590.7	603.9	617.8	632.1
170°	604.9	615.4	627.3	638.5
172.5°	617.0	625.4	634.1	643.7
175°	633.2	637.8	643.1	649.0
177.5°	645.7	647.3	648.8	651.5
180°	650.9	650.9	650.9	650.9



TEST NUMBER: P1427592

CATALOG NUMBER: SQ2W-BBN-K-050U-050D-L935-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4H	2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00