

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1427763

Luminaire Tested: SQ2W-F-K-100U-100D-L935-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1427763
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-20)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-F-K-100U-100D-L935-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - FROSTED CONTINUOUS ROLL LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 1000 LUMENS PER FOOT
UPLIGHT 1000 LUMENS PER FOOT
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7868.2 lumens
Efficiency: N/A
Efficacy: 111.3 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.25 / 1.36
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 70.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1427763

CATALOG NUMBER: SQ2W-F-K-100U-100D-L935-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

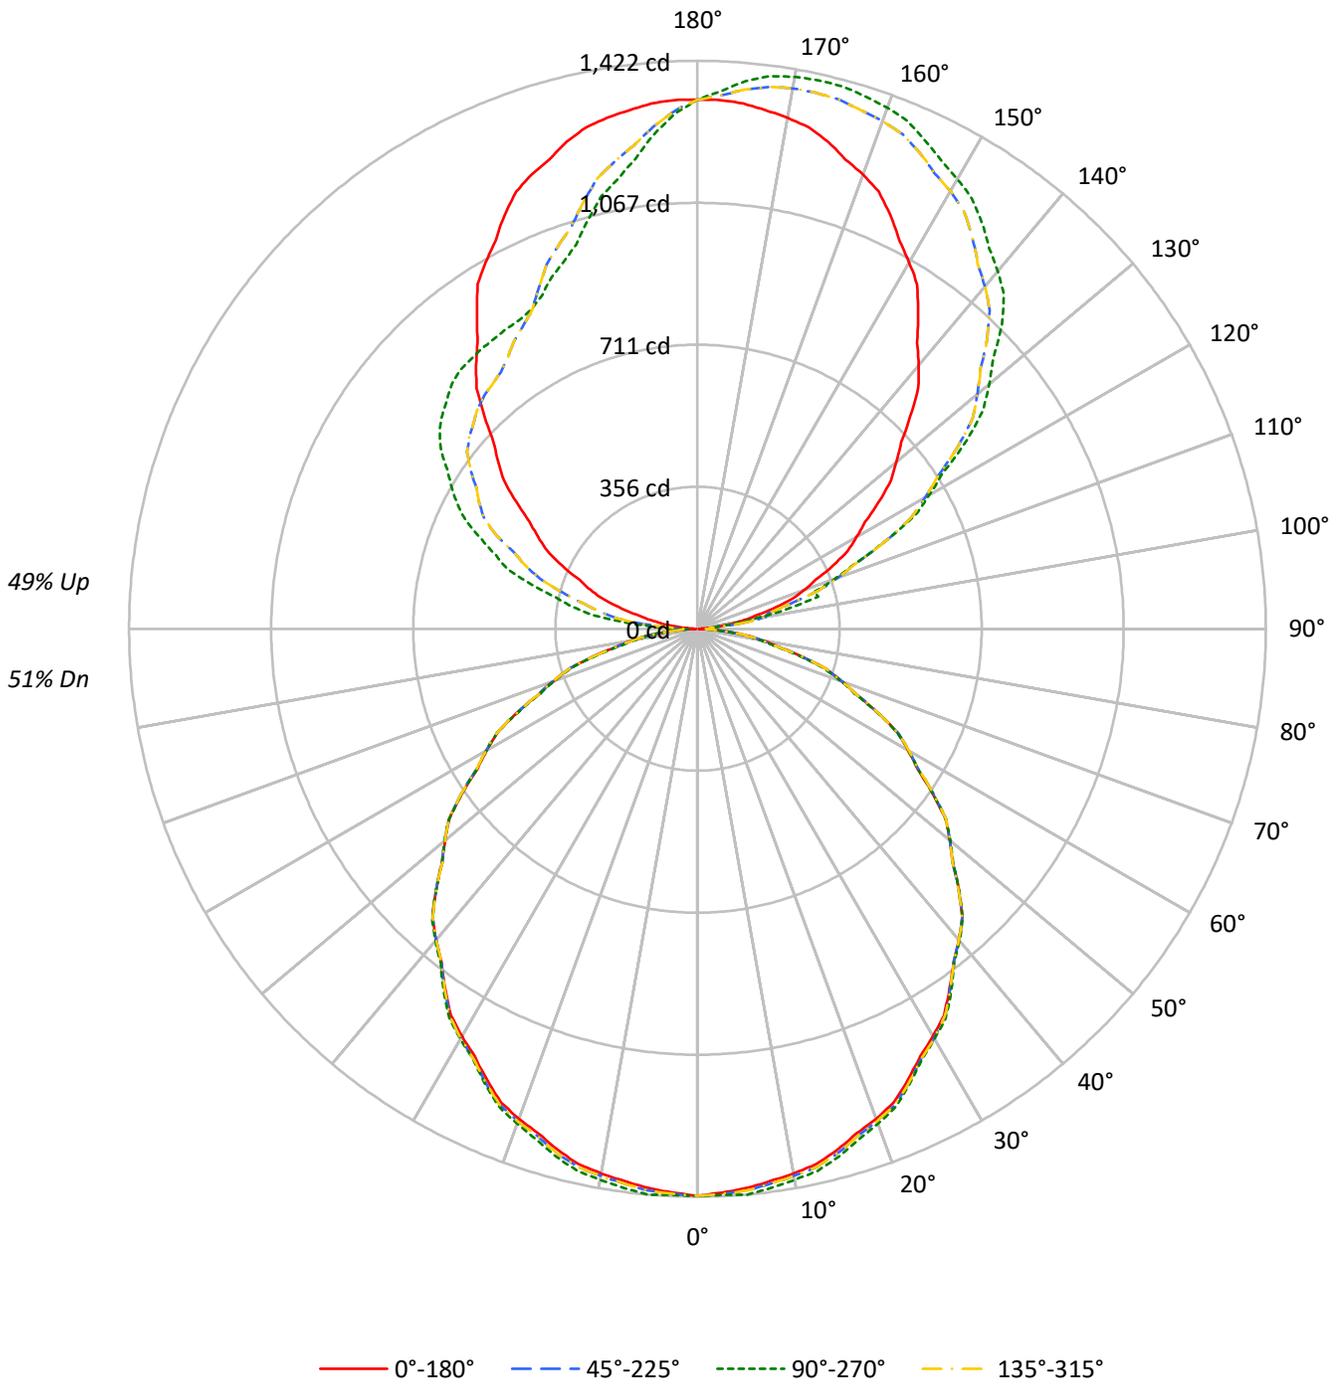



TEST NUMBER: P1427763

CATALOG NUMBER: SQ2W-F-K-100U-100D-L935-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	51				
1	98	93	89	86	90	86	83	80	73	71	68	61	59	58	50	49	48	42				
2	89	81	75	70	82	75	70	65	64	60	56	53	51	48	44	42	40	35				
3	81	71	64	58	74	66	60	54	56	51	47	47	43	40	39	36	34	30				
4	74	63	55	49	68	58	51	46	50	44	40	42	38	34	34	31	29	25				
5	68	56	48	42	62	52	45	39	45	39	34	38	33	30	31	28	25	22				
6	62	50	42	36	57	47	39	34	40	34	30	34	29	26	28	25	22	19				
7	58	45	37	32	53	42	35	30	36	31	26	31	26	23	26	22	20	17				
8	54	41	33	28	49	38	31	26	33	27	23	28	24	20	23	20	17	15				
9	50	37	30	25	46	35	28	23	30	25	21	26	21	18	22	18	16	14				
10	47	34	27	22	43	32	26	21	28	22	19	24	20	16	20	17	14	12				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	22927	22927	22927	22927
5°	22787	23047	22787	23047
10°	22707	22969	22707	22969
15°	22582	22866	22582	22866
20°	22439	22663	22439	22663
25°	22197	22393	22197	22393
30°	21962	22111	21962	22111
35°	21681	21819	21681	21819
40°	21435	21498	21435	21498
45°	21121	21121	21121	21121
50°	20697	20747	20697	20747
55°	20211	20239	20211	20239
60°	19665	19665	19665	19665
65°	19025	18949	19025	18949
70°	18127	17938	18127	17938
75°	16905	16531	16905	16531
80°	15063	14319	15063	14319
85°	12041	10189	12041	10189

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 20°
 Vertical Angle: 45°
 Luminance: 21262 cd/sqm



TEST NUMBER: P1427763

CATALOG NUMBER: SQ2W-F-K-100U-100D-L935-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	134.4	1.7
10°-20°	383.9	4.9
20°-30°	577.9	7.3
30°-40°	691.1	8.8
40°-50°	713.6	9.1
50°-60°	643.6	8.2
60°-70°	493.0	6.3
70°-80°	285.0	3.6
80°-90°	79.5	1.0
90°-100°	105.4	1.3
100°-110°	307.3	3.9
110°-120°	501.5	6.4
120°-130°	636.4	8.1
130°-140°	681.0	8.7
140°-150°	635.9	8.1
150°-160°	523.2	6.7
160°-170°	350.9	4.5
170°-180°	124.6	1.6
0°-30°	1096.2	13.9
0°-40°	1787.2	22.7
0°-60°	3144.4	40.0
0°-90°	4001.9	50.9
90°-120°	914.2	11.6
90°-150°	2867.5	36.4
90°-180°	3866.0	49.1
0°-180°	7868.2	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1420	1420	1420	1420	1420	
5°	1406	1422	1406	1422	1406	133
15°	1351	1368	1351	1368	1351	381
25°	1246	1257	1246	1257	1246	574
35°	1100	1107	1100	1107	1100	688
45°	925	925	925	925	925	713
55°	718	719	718	719	718	642
65°	498	496	498	496	498	492
75°	271	265	271	265	271	287
85°	65	55	65	55	65	76
90°	4	29	4	58	4	6
95°	42	31	42	181	42	50
105°	195	313	195	431	195	208
115°	374	519	374	639	374	369
125°	554	823	554	784	554	495
135°	753	1077	753	868	753	582
145°	962	1241	962	887	962	602
155°	1142	1348	1142	920	1142	525
165°	1263	1406	1263	1059	1263	355
175°	1320	1376	1320	1243	1320	125
180°	1324	1324	1324	1324	1324	



TEST NUMBER: P1427763

CATALOG NUMBER: SQ2W-F-K-100U-100D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0
2.5°	1412.8	1419.6	1426.3	1423.5	1417.4	1415.1	1416.5	1417.8	1418.5	1419.2	1418.5
5°	1406.0	1414.9	1423.8	1420.7	1413.6	1410.4	1411.3	1413.1	1417.6	1422.0	1417.6
7.5°	1394.6	1403.5	1412.4	1409.5	1402.8	1399.9	1401.0	1403.0	1407.6	1412.2	1407.6
10°	1385.0	1393.9	1402.8	1399.7	1392.6	1389.9	1391.7	1393.9	1397.4	1401.0	1397.4
12.5°	1373.0	1381.9	1390.8	1388.2	1381.8	1379.1	1380.2	1382.0	1385.9	1389.8	1385.9
15°	1351.0	1359.9	1368.8	1366.3	1360.1	1357.7	1359.0	1360.9	1364.4	1368.0	1364.4
17.5°	1324.4	1332.8	1341.1	1338.9	1333.1	1331.0	1332.5	1334.4	1337.5	1340.6	1337.5
20°	1306.0	1314.0	1322.0	1319.7	1313.9	1311.2	1311.7	1312.8	1315.9	1319.0	1315.9
22.5°	1283.6	1291.6	1299.6	1297.5	1292.1	1288.9	1287.9	1288.2	1292.0	1295.8	1292.0
25°	1246.0	1254.0	1262.0	1260.3	1255.4	1252.3	1251.0	1250.8	1253.9	1257.0	1253.9
27.5°	1206.8	1213.5	1220.1	1218.7	1214.6	1212.2	1211.3	1211.2	1213.4	1215.6	1213.4
30°	1178.0	1184.7	1191.3	1189.7	1185.2	1182.6	1181.7	1181.6	1183.8	1186.0	1183.8
32.5°	1147.6	1153.9	1160.2	1157.9	1152.8	1150.1	1149.9	1150.4	1153.0	1155.6	1153.0
35°	1100.0	1105.3	1110.7	1108.3	1103.4	1101.2	1101.7	1102.6	1104.8	1107.0	1104.8
37.5°	1052.2	1056.3	1060.4	1058.0	1053.5	1051.2	1051.1	1051.5	1053.3	1055.2	1053.3
40°	1017.0	1021.4	1025.9	1023.3	1018.4	1015.8	1015.3	1015.6	1017.8	1020.0	1017.8
42.5°	981.0	984.4	987.8	985.5	981.3	979.3	979.6	980.1	981.2	982.4	981.2
45°	925.0	928.1	931.2	929.0	925.0	923.0	923.0	923.2	924.1	925.0	924.1
47.5°	866.4	868.8	871.2	869.5	866.4	864.5	864.0	864.0	865.4	866.8	865.4
50°	824.0	827.1	830.2	828.7	825.6	823.6	822.7	822.4	824.2	826.0	824.2
52.5°	782.4	785.9	789.3	787.9	784.8	782.6	781.3	780.8	782.2	783.6	782.2
55°	718.0	722.0	726.0	725.0	722.3	720.1	718.3	717.2	718.1	719.0	718.1
57.5°	652.2	656.1	660.0	659.3	657.0	654.7	652.6	651.3	652.6	653.8	652.6
60°	609.0	612.6	616.1	615.0	612.3	610.1	608.3	607.2	608.1	609.0	608.1
62.5°	565.0	568.6	572.1	570.7	567.7	565.3	563.5	562.4	563.3	564.2	563.3
65°	498.0	501.1	504.2	503.0	500.3	498.1	496.3	495.1	495.6	496.0	495.6
67.5°	430.4	433.1	435.7	434.5	431.9	429.3	426.7	425.0	425.7	426.4	425.7
70°	384.0	386.7	389.3	388.3	386.1	383.9	381.7	380.0	380.0	380.0	380.0
72.5°	339.2	341.5	343.8	342.5	339.9	337.7	335.8	334.4	334.4	334.4	334.4
75°	271.0	272.3	273.7	273.0	271.7	269.9	267.7	265.9	265.4	265.0	265.4
77.5°	205.2	205.2	205.2	203.9	202.2	200.6	198.9	197.5	196.9	196.4	196.9
80°	162.0	162.0	162.0	161.0	159.7	158.3	157.0	155.8	154.9	154.0	154.9
82.5°	122.0	121.3	120.6	119.4	118.1	116.4	114.3	113.0	113.9	114.8	113.9
85°	65.0	64.1	63.2	62.0	60.7	59.1	57.3	55.9	55.4	55.0	55.4
87.5°	20.8	21.2	21.8	21.9	21.6	20.6	19.2	18.3	18.2	17.9	18.2
90°	4.0	9.4	16.1	21.4	25.4	26.8	26.8	28.1	29.4	29.4	29.4
92.5°	14.7	23.3	23.5	23.5	28.6	31.0	33.2	33.4	34.8	34.8	34.8
95°	41.5	45.5	68.2	66.9	45.5	36.1	30.8	30.8	30.8	30.8	30.8
97.5°	79.2	85.1	88.8	119.0	125.7	121.4	99.0	83.2	74.4	70.4	74.4
100°	112.4	115.0	123.1	124.4	157.8	189.9	173.9	153.8	147.1	143.1	147.1
102.5°	145.5	147.1	159.4	165.1	172.8	191.0	246.6	240.5	235.9	235.1	235.9
105°	195.3	196.6	219.4	230.1	235.4	235.4	234.1	260.8	303.6	313.0	303.6
107.5°	248.5	254.7	281.4	310.0	316.2	317.8	310.8	306.8	305.2	306.3	305.2
110°	284.9	294.3	326.4	362.5	371.8	374.5	371.8	367.8	365.1	365.1	365.1



TEST NUMBER: P1427763

CATALOG NUMBER: SQ2W-F-K-100U-100D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	320.2	333.9	370.2	411.7	427.5	435.5	429.6	426.7	424.0	426.1	424.0
115°	374.5	394.6	442.7	485.5	517.6	521.6	520.3	520.3	519.0	519.0	519.0
117.5°	424.8	456.9	510.9	560.7	597.9	608.6	613.9	612.3	610.7	613.4	610.7
120°	460.1	497.6	559.1	615.3	651.4	667.4	672.8	670.1	672.8	670.1	672.8
122.5°	497.6	543.6	604.0	662.4	704.9	723.1	729.5	730.0	730.6	729.0	730.6
125°	553.7	609.9	680.8	741.0	785.1	806.5	811.9	813.2	815.9	822.6	815.9
127.5°	610.5	674.1	752.0	810.0	855.2	881.2	889.5	892.4	898.0	901.0	898.0
130°	650.0	722.3	801.2	856.0	900.2	928.3	943.0	947.0	953.7	952.3	953.7
132.5°	691.8	767.2	847.2	904.2	945.1	975.3	987.9	999.4	1001.8	1003.7	1001.8
135°	753.0	834.6	914.9	971.1	1009.8	1039.3	1055.3	1066.0	1072.7	1076.7	1072.7
137.5°	817.5	903.6	980.7	1030.7	1069.8	1095.2	1113.4	1124.6	1131.6	1134.8	1131.6
140°	861.4	944.3	1019.2	1071.4	1106.1	1131.6	1147.6	1161.0	1169.0	1169.0	1169.0
142.5°	903.1	985.0	1057.7	1109.9	1140.4	1163.7	1180.8	1190.9	1200.0	1200.0	1200.0
145°	961.7	1043.3	1110.2	1162.3	1187.7	1209.1	1227.9	1235.9	1241.2	1241.2	1241.2
147.5°	1023.0	1095.2	1156.2	1206.2	1227.6	1252.7	1267.5	1273.9	1280.6	1277.6	1280.6
150°	1059.3	1126.2	1185.1	1231.9	1253.3	1277.4	1292.1	1297.4	1304.1	1300.1	1304.1
152.5°	1094.6	1158.3	1211.8	1255.4	1273.6	1297.7	1314.5	1319.9	1324.4	1321.5	1324.4
155°	1142.3	1198.4	1247.9	1288.1	1304.1	1326.8	1342.9	1349.6	1354.9	1348.2	1354.9
157.5°	1184.8	1233.2	1276.3	1313.2	1330.3	1349.9	1364.8	1373.1	1378.5	1375.5	1378.5
160°	1210.5	1254.6	1293.4	1328.2	1344.2	1361.6	1377.7	1387.0	1392.4	1388.4	1392.4
162.5°	1231.9	1271.7	1308.4	1340.0	1353.9	1369.1	1388.4	1396.7	1402.0	1396.9	1402.0
165°	1262.6	1294.7	1326.8	1353.6	1365.6	1377.7	1397.7	1407.1	1411.1	1405.8	1411.1
167.5°	1285.9	1310.5	1336.5	1359.5	1368.3	1380.1	1400.1	1407.9	1413.0	1406.3	1413.0
170°	1298.8	1320.2	1342.9	1361.6	1368.3	1379.0	1399.1	1405.8	1409.8	1403.1	1409.8
172.5°	1309.5	1325.5	1344.0	1360.6	1364.0	1372.6	1391.6	1398.3	1401.2	1395.6	1401.2
175°	1320.2	1329.5	1342.9	1353.6	1352.3	1357.6	1373.7	1379.0	1384.4	1376.3	1384.4
177.5°	1325.2	1329.5	1333.8	1340.2	1335.9	1335.9	1347.7	1350.9	1352.0	1347.7	1352.0
180°	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2



TEST NUMBER: P1427763

CATALOG NUMBER: SQ2W-F-K-100U-100D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0
2.5°	1417.8	1416.5	1415.1	1417.4	1423.5	1426.3	1419.6	1412.8	1419.6	1426.3	1423.5
5°	1413.1	1411.3	1410.4	1413.6	1420.7	1423.8	1414.9	1406.0	1414.9	1423.8	1420.7
7.5°	1403.0	1401.0	1399.9	1402.8	1409.5	1412.4	1403.5	1394.6	1403.5	1412.4	1409.5
10°	1393.9	1391.7	1389.9	1392.6	1399.7	1402.8	1393.9	1385.0	1393.9	1402.8	1399.7
12.5°	1382.0	1380.2	1379.1	1381.8	1388.2	1390.8	1381.9	1373.0	1381.9	1390.8	1388.2
15°	1360.9	1359.0	1357.7	1360.1	1366.3	1368.8	1359.9	1351.0	1359.9	1368.8	1366.3
17.5°	1334.4	1332.5	1331.0	1333.1	1338.9	1341.1	1332.8	1324.4	1332.8	1341.1	1338.9
20°	1312.8	1311.7	1311.2	1313.9	1319.7	1322.0	1314.0	1306.0	1314.0	1322.0	1319.7
22.5°	1288.2	1287.9	1288.9	1292.1	1297.5	1299.6	1291.6	1283.6	1291.6	1299.6	1297.5
25°	1250.8	1251.0	1252.3	1255.4	1260.3	1262.0	1254.0	1246.0	1254.0	1262.0	1260.3
27.5°	1211.2	1211.3	1212.2	1214.6	1218.7	1220.1	1213.5	1206.8	1213.5	1220.1	1218.7
30°	1181.6	1181.7	1182.6	1185.2	1189.7	1191.3	1184.7	1178.0	1184.7	1191.3	1189.7
32.5°	1150.4	1149.9	1150.1	1152.8	1157.9	1160.2	1153.9	1147.6	1153.9	1160.2	1157.9
35°	1102.6	1101.7	1101.2	1103.4	1108.3	1110.7	1105.3	1100.0	1105.3	1110.7	1108.3
37.5°	1051.5	1051.1	1051.2	1053.5	1058.0	1060.4	1056.3	1052.2	1056.3	1060.4	1058.0
40°	1015.6	1015.3	1015.8	1018.4	1023.3	1025.9	1021.4	1017.0	1021.4	1025.9	1023.3
42.5°	980.1	979.6	979.3	981.3	985.5	987.8	984.4	981.0	984.4	987.8	985.5
45°	923.2	923.0	923.0	925.0	929.0	931.2	928.1	925.0	928.1	931.2	929.0
47.5°	864.0	864.0	864.5	866.4	869.5	871.2	868.8	866.4	868.8	871.2	869.5
50°	822.4	822.7	823.6	825.6	828.7	830.2	827.1	824.0	827.1	830.2	828.7
52.5°	780.8	781.3	782.6	784.8	787.9	789.3	785.9	782.4	785.9	789.3	787.9
55°	717.2	718.3	720.1	722.3	725.0	726.0	722.0	718.0	722.0	726.0	725.0
57.5°	651.3	652.6	654.7	657.0	659.3	660.0	656.1	652.2	656.1	660.0	659.3
60°	607.2	608.3	610.1	612.3	615.0	616.1	612.6	609.0	612.6	616.1	615.0
62.5°	562.4	563.5	565.3	567.7	570.7	572.1	568.6	565.0	568.6	572.1	570.7
65°	495.1	496.3	498.1	500.3	503.0	504.2	501.1	498.0	501.1	504.2	503.0
67.5°	425.0	426.7	429.3	431.9	434.5	435.7	433.1	430.4	433.1	435.7	434.5
70°	380.0	381.7	383.9	386.1	388.3	389.3	386.7	384.0	386.7	389.3	388.3
72.5°	334.4	335.8	337.7	339.9	342.5	343.8	341.5	339.2	341.5	343.8	342.5
75°	265.9	267.7	269.9	271.7	273.0	273.7	272.3	271.0	272.3	273.7	273.0
77.5°	197.5	198.9	200.6	202.2	203.9	205.2	205.2	205.2	205.2	205.2	203.9
80°	155.8	157.0	158.3	159.7	161.0	162.0	162.0	162.0	162.0	162.0	161.0
82.5°	113.0	114.3	116.4	118.1	119.4	120.6	121.3	122.0	121.3	120.6	119.4
85°	55.9	57.3	59.1	60.7	62.0	63.2	64.1	65.0	64.1	63.2	62.0
87.5°	18.3	19.2	20.6	21.6	21.9	21.8	21.2	20.8	21.2	21.5	22.4
90°	28.1	26.8	26.8	25.4	21.4	16.1	9.4	4.0	9.4	14.7	24.1
92.5°	33.4	33.2	31.0	28.6	23.5	23.5	23.3	14.7	25.4	36.1	51.9
95°	30.8	30.8	36.1	45.5	66.9	68.2	45.5	41.5	58.9	82.9	104.3
97.5°	83.2	99.0	121.4	125.7	119.0	88.8	85.1	79.2	107.8	131.6	166.1
100°	153.8	173.9	189.9	157.8	124.4	123.1	115.0	112.4	143.1	165.9	199.3
102.5°	240.5	246.6	191.0	172.8	165.1	159.4	147.1	145.5	176.3	207.6	235.7
105°	260.8	234.1	235.4	235.4	230.1	219.4	196.6	195.3	230.1	266.2	300.9
107.5°	306.8	310.8	317.8	316.2	310.0	281.4	254.7	248.5	279.8	323.2	361.4
110°	367.8	371.8	374.5	371.8	362.5	326.4	294.3	284.9	313.0	358.5	399.9



TEST NUMBER: P1427763

CATALOG NUMBER: SQ2W-F-K-100U-100D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	426.7	429.6	435.5	427.5	411.7	370.2	333.9	320.2	348.3	394.8	437.4
115°	520.3	520.3	521.6	517.6	485.5	442.7	394.6	374.5	398.6	441.4	488.2
117.5°	612.3	613.9	608.6	597.9	560.7	510.9	456.9	424.8	443.8	489.0	537.2
120°	670.1	672.8	667.4	651.4	615.3	559.1	497.6	460.1	474.8	519.0	567.1
122.5°	730.0	729.5	723.1	704.9	662.4	604.0	543.6	497.6	503.7	544.6	591.7
125°	813.2	811.9	806.5	785.1	741.0	680.8	609.9	553.7	545.7	580.5	628.6
127.5°	892.4	889.5	881.2	855.2	810.0	752.0	674.1	610.5	592.5	614.5	658.6
130°	947.0	943.0	928.3	900.2	856.0	801.2	722.3	650.0	624.6	638.0	676.8
132.5°	999.4	987.9	975.3	945.1	904.2	847.2	767.2	691.8	656.7	662.6	692.8
135°	1066.0	1055.3	1039.3	1009.8	971.1	914.9	834.6	753.0	704.9	699.5	716.9
137.5°	1124.6	1113.4	1095.2	1069.8	1030.7	980.7	903.6	817.5	756.8	738.9	745.5
140°	1161.0	1147.6	1131.6	1106.1	1071.4	1019.2	944.3	861.4	793.2	767.8	763.7
142.5°	1190.9	1180.8	1163.7	1140.4	1109.9	1057.7	985.0	903.1	830.6	797.7	788.3
145°	1235.9	1227.9	1209.1	1187.7	1162.3	1110.2	1043.3	961.7	889.5	846.7	826.6
147.5°	1273.9	1267.5	1252.7	1227.6	1206.2	1156.2	1095.2	1023.0	948.9	895.9	869.9
150°	1297.4	1292.1	1277.4	1253.3	1231.9	1185.1	1126.2	1059.3	988.4	932.3	898.8
152.5°	1319.9	1314.5	1297.7	1273.6	1255.4	1211.8	1158.3	1094.6	1022.7	966.5	932.0
155°	1349.6	1342.9	1326.8	1304.1	1288.1	1247.9	1198.4	1142.3	1080.7	1021.9	983.1
157.5°	1373.1	1364.8	1349.9	1330.3	1313.2	1276.3	1233.2	1184.8	1131.0	1074.9	1035.3
160°	1387.0	1377.7	1361.6	1344.2	1328.2	1293.4	1254.6	1210.5	1161.0	1110.2	1067.4
162.5°	1396.7	1388.4	1369.1	1353.9	1340.0	1308.4	1271.7	1231.9	1187.7	1143.3	1103.7
165°	1407.1	1397.7	1377.7	1365.6	1353.6	1326.8	1294.7	1262.6	1225.2	1189.1	1157.0
167.5°	1407.9	1400.1	1380.1	1368.3	1359.5	1336.5	1310.5	1285.9	1256.8	1228.4	1201.7
170°	1405.8	1399.1	1379.0	1368.3	1361.6	1342.9	1320.2	1298.8	1276.0	1251.9	1230.5
172.5°	1398.3	1391.6	1372.6	1364.0	1360.6	1344.0	1325.5	1309.5	1289.9	1272.3	1255.2
175°	1379.0	1373.7	1357.6	1352.3	1353.6	1342.9	1329.5	1320.2	1308.1	1297.4	1288.1
177.5°	1350.9	1347.7	1335.9	1335.9	1340.2	1333.8	1329.5	1325.2	1319.9	1316.7	1313.5
180°	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2



TEST NUMBER: P1427763

CATALOG NUMBER: SQ2W-F-K-100U-100D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0	1420.0
2.5°	1417.4	1415.1	1416.5	1417.8	1418.5	1419.2	1418.5	1417.8	1416.5	1415.1	1417.4
5°	1413.6	1410.4	1411.3	1413.1	1417.6	1422.0	1417.6	1413.1	1411.3	1410.4	1413.6
7.5°	1402.8	1399.9	1401.0	1403.0	1407.6	1412.2	1407.6	1403.0	1401.0	1399.9	1402.8
10°	1392.6	1389.9	1391.7	1393.9	1397.4	1401.0	1397.4	1393.9	1391.7	1389.9	1392.6
12.5°	1381.8	1379.1	1380.2	1382.0	1385.9	1389.8	1385.9	1382.0	1380.2	1379.1	1381.8
15°	1360.1	1357.7	1359.0	1360.9	1364.4	1368.0	1364.4	1360.9	1359.0	1357.7	1360.1
17.5°	1333.1	1331.0	1332.5	1334.4	1337.5	1340.6	1337.5	1334.4	1332.5	1331.0	1333.1
20°	1313.9	1311.2	1311.7	1312.8	1315.9	1319.0	1315.9	1312.8	1311.7	1311.2	1313.9
22.5°	1292.1	1288.9	1287.9	1288.2	1292.0	1295.8	1292.0	1288.2	1287.9	1288.9	1292.1
25°	1255.4	1252.3	1251.0	1250.8	1253.9	1257.0	1253.9	1250.8	1251.0	1252.3	1255.4
27.5°	1214.6	1212.2	1211.3	1211.2	1213.4	1215.6	1213.4	1211.2	1211.3	1212.2	1214.6
30°	1185.2	1182.6	1181.7	1181.6	1183.8	1186.0	1183.8	1181.6	1181.7	1182.6	1185.2
32.5°	1152.8	1150.1	1149.9	1150.4	1153.0	1155.6	1153.0	1150.4	1149.9	1150.1	1152.8
35°	1103.4	1101.2	1101.7	1102.6	1104.8	1107.0	1104.8	1102.6	1101.7	1101.2	1103.4
37.5°	1053.5	1051.2	1051.1	1051.5	1053.3	1055.2	1053.3	1051.5	1051.1	1051.2	1053.5
40°	1018.4	1015.8	1015.3	1015.6	1017.8	1020.0	1017.8	1015.6	1015.3	1015.8	1018.4
42.5°	981.3	979.3	979.6	980.1	981.2	982.4	981.2	980.1	979.6	979.3	981.3
45°	925.0	923.0	923.0	923.2	924.1	925.0	924.1	923.2	923.0	923.0	925.0
47.5°	866.4	864.5	864.0	864.0	865.4	866.8	865.4	864.0	864.0	864.5	866.4
50°	825.6	823.6	822.7	822.4	824.2	826.0	824.2	822.4	822.7	823.6	825.6
52.5°	784.8	782.6	781.3	780.8	782.2	783.6	782.2	780.8	781.3	782.6	784.8
55°	722.3	720.1	718.3	717.2	718.1	719.0	718.1	717.2	718.3	720.1	722.3
57.5°	657.0	654.7	652.6	651.3	652.6	653.8	652.6	651.3	652.6	654.7	657.0
60°	612.3	610.1	608.3	607.2	608.1	609.0	608.1	607.2	608.3	610.1	612.3
62.5°	567.7	565.3	563.5	562.4	563.3	564.2	563.3	562.4	563.5	565.3	567.7
65°	500.3	498.1	496.3	495.1	495.6	496.0	495.6	495.1	496.3	498.1	500.3
67.5°	431.9	429.3	426.7	425.0	425.7	426.4	425.7	425.0	426.7	429.3	431.9
70°	386.1	383.9	381.7	380.0	380.0	380.0	380.0	380.0	381.7	383.9	386.1
72.5°	339.9	337.7	335.8	334.4	334.4	334.4	334.4	334.4	335.8	337.7	339.9
75°	271.7	269.9	267.7	265.9	265.4	265.0	265.4	265.9	267.7	269.9	271.7
77.5°	202.2	200.6	198.9	197.5	196.9	196.4	196.9	197.5	198.9	200.6	202.2
80°	159.7	158.3	157.0	155.8	154.9	154.0	154.9	155.8	157.0	158.3	159.7
82.5°	118.1	116.4	114.3	113.0	113.9	114.8	113.9	113.0	114.3	116.4	118.1
85°	60.7	59.1	57.3	55.9	55.4	55.0	55.4	55.9	57.3	59.1	60.7
87.5°	22.7	23.3	23.8	23.7	24.4	23.5	24.4	23.7	23.8	23.3	22.7
90°	30.8	40.1	49.5	54.8	60.2	57.5	60.2	54.8	49.5	40.1	30.8
92.5°	61.8	77.6	89.1	98.7	103.0	102.5	103.0	98.7	89.1	77.6	61.8
95°	124.4	143.1	161.8	175.2	183.2	180.6	183.2	175.2	161.8	143.1	124.4
97.5°	191.8	216.9	237.8	250.4	258.4	263.8	258.4	250.4	237.8	216.9	191.8
100°	236.7	260.8	284.9	299.6	313.0	318.3	313.0	299.6	284.9	260.8	236.7
102.5°	273.1	304.7	330.9	346.7	357.9	363.3	357.9	346.7	330.9	304.7	273.1
105°	333.0	366.5	394.6	414.6	426.7	430.7	426.7	414.6	394.6	366.5	333.0
107.5°	393.0	427.5	453.4	475.6	490.3	498.9	490.3	475.6	453.4	427.5	393.0
110°	440.1	468.1	496.2	516.3	531.0	536.4	531.0	516.3	496.2	468.1	440.1



TEST NUMBER: P1427763

CATALOG NUMBER: SQ2W-F-K-100U-100D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	479.6	510.9	539.0	559.1	575.9	583.4	575.9	559.1	539.0	510.9	479.6
115°	535.0	576.5	601.9	620.6	632.7	639.3	632.7	620.6	601.9	576.5	535.0
117.5°	581.0	624.4	652.2	666.6	672.3	677.1	672.3	666.6	652.2	624.4	581.0
120°	609.9	650.0	682.1	700.9	707.6	710.2	707.6	700.9	682.1	650.0	609.9
122.5°	636.7	674.7	705.7	728.7	739.7	742.3	739.7	728.7	705.7	674.7	636.7
125°	674.1	710.2	742.3	765.1	777.1	783.8	777.1	765.1	742.3	710.2	674.1
127.5°	706.8	745.8	775.2	795.8	807.6	813.0	807.6	795.8	775.2	745.8	706.8
130°	724.9	765.1	794.5	817.2	827.9	833.3	827.9	817.2	794.5	765.1	724.9
132.5°	738.9	781.1	811.6	832.2	844.0	849.3	844.0	832.2	811.6	781.1	738.9
135°	755.7	799.9	832.0	852.0	862.7	868.1	862.7	852.0	832.0	799.9	755.7
137.5°	770.4	810.6	844.0	865.1	874.8	878.2	874.8	865.1	844.0	810.6	770.4
140°	781.1	815.9	849.3	869.4	880.1	881.4	880.1	869.4	849.3	815.9	781.1
142.5°	795.0	822.3	851.5	871.5	882.2	884.7	882.2	871.5	851.5	822.3	795.0
145°	819.9	836.0	856.0	874.8	884.1	886.8	884.1	874.8	856.0	836.0	819.9
147.5°	851.2	856.3	866.7	879.0	888.1	890.0	888.1	879.0	866.7	856.3	851.2
150°	874.8	873.4	877.4	885.5	893.5	892.1	893.5	885.5	877.4	873.4	874.8
152.5°	901.5	893.7	893.5	897.2	901.0	900.7	901.0	897.2	893.5	893.7	901.5
155°	947.0	932.3	924.2	921.6	921.6	920.2	921.6	921.6	924.2	932.3	947.0
157.5°	997.0	976.4	964.4	957.9	956.1	953.1	956.1	957.9	964.4	976.4	997.0
160°	1031.2	1008.5	996.5	985.8	981.8	977.7	981.8	985.8	996.5	1008.5	1031.2
162.5°	1063.3	1041.7	1028.6	1018.9	1014.9	1008.8	1014.9	1018.9	1028.6	1041.7	1063.3
165°	1115.5	1092.8	1078.1	1070.0	1064.7	1059.3	1064.7	1070.0	1078.1	1092.8	1115.5
167.5°	1167.7	1142.8	1133.2	1124.1	1119.0	1109.4	1119.0	1124.1	1133.2	1142.8	1167.7
170°	1199.8	1177.0	1171.7	1163.7	1154.3	1143.6	1154.3	1163.7	1171.7	1177.0	1199.8
172.5°	1227.6	1212.4	1207.0	1199.0	1196.0	1187.5	1196.0	1199.0	1207.0	1212.4	1227.6
175°	1268.0	1256.0	1256.0	1254.6	1250.6	1242.6	1250.6	1254.6	1256.0	1256.0	1268.0
177.5°	1301.7	1295.3	1299.6	1299.6	1298.5	1291.0	1298.5	1299.6	1299.6	1295.3	1301.7
180°	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2



TEST NUMBER: P1427763

CATALOG NUMBER: SQ2W-F-K-100U-100D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	1420.0	1420.0	1420.0	1420.0
2.5°	1423.5	1426.3	1419.6	1412.8
5°	1420.7	1423.8	1414.9	1406.0
7.5°	1409.5	1412.4	1403.5	1394.6
10°	1399.7	1402.8	1393.9	1385.0
12.5°	1388.2	1390.8	1381.9	1373.0
15°	1366.3	1368.8	1359.9	1351.0
17.5°	1338.9	1341.1	1332.8	1324.4
20°	1319.7	1322.0	1314.0	1306.0
22.5°	1297.5	1299.6	1291.6	1283.6
25°	1260.3	1262.0	1254.0	1246.0
27.5°	1218.7	1220.1	1213.5	1206.8
30°	1189.7	1191.3	1184.7	1178.0
32.5°	1157.9	1160.2	1153.9	1147.6
35°	1108.3	1110.7	1105.3	1100.0
37.5°	1058.0	1060.4	1056.3	1052.2
40°	1023.3	1025.9	1021.4	1017.0
42.5°	985.5	987.8	984.4	981.0
45°	929.0	931.2	928.1	925.0
47.5°	869.5	871.2	868.8	866.4
50°	828.7	830.2	827.1	824.0
52.5°	787.9	789.3	785.9	782.4
55°	725.0	726.0	722.0	718.0
57.5°	659.3	660.0	656.1	652.2
60°	615.0	616.1	612.6	609.0
62.5°	570.7	572.1	568.6	565.0
65°	503.0	504.2	501.1	498.0
67.5°	434.5	435.7	433.1	430.4
70°	388.3	389.3	386.7	384.0
72.5°	342.5	343.8	341.5	339.2
75°	273.0	273.7	272.3	271.0
77.5°	203.9	205.2	205.2	205.2
80°	161.0	162.0	162.0	162.0
82.5°	119.4	120.6	121.3	122.0
85°	62.0	63.2	64.1	65.0
87.5°	22.4	21.5	21.2	20.8
90°	24.1	14.7	9.4	4.0
92.5°	51.9	36.1	25.4	14.7
95°	104.3	82.9	58.9	41.5
97.5°	166.1	131.6	107.8	79.2
100°	199.3	165.9	143.1	112.4
102.5°	235.7	207.6	176.3	145.5
105°	300.9	266.2	230.1	195.3
107.5°	361.4	323.2	279.8	248.5
110°	399.9	358.5	313.0	284.9



TEST NUMBER: P1427763

CATALOG NUMBER: SQ2W-F-K-100U-100D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	437.4	394.8	348.3	320.2
115°	488.2	441.4	398.6	374.5
117.5°	537.2	489.0	443.8	424.8
120°	567.1	519.0	474.8	460.1
122.5°	591.7	544.6	503.7	497.6
125°	628.6	580.5	545.7	553.7
127.5°	658.6	614.5	592.5	610.5
130°	676.8	638.0	624.6	650.0
132.5°	692.8	662.6	656.7	691.8
135°	716.9	699.5	704.9	753.0
137.5°	745.5	738.9	756.8	817.5
140°	763.7	767.8	793.2	861.4
142.5°	788.3	797.7	830.6	903.1
145°	826.6	846.7	889.5	961.7
147.5°	869.9	895.9	948.9	1023.0
150°	898.8	932.3	988.4	1059.3
152.5°	932.0	966.5	1022.7	1094.6
155°	983.1	1021.9	1080.7	1142.3
157.5°	1035.3	1074.9	1131.0	1184.8
160°	1067.4	1110.2	1161.0	1210.5
162.5°	1103.7	1143.3	1187.7	1231.9
165°	1157.0	1189.1	1225.2	1262.6
167.5°	1201.7	1228.4	1256.8	1285.9
170°	1230.5	1251.9	1276.0	1298.8
172.5°	1255.2	1272.3	1289.9	1309.5
175°	1288.1	1297.4	1308.1	1320.2
177.5°	1313.5	1316.7	1319.9	1325.2
180°	1324.2	1324.2	1324.2	1324.2

TEST NUMBER: P1427763

CATALOG NUMBER: SQ2W-F-K-100U-100D-L935-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.82	19.70	19.77	20.67	21.93	18.74	19.62	19.69	20.58	21.84
	3H	20.62	21.41	21.57	22.38	23.66	20.51	21.30	21.47	22.28	23.56
	4H	21.31	22.06	22.28	23.04	24.33	21.20	21.95	22.17	22.92	24.21
	6H	21.75	22.44	22.73	23.42	24.73	21.61	22.30	22.59	23.28	24.58
	8H	21.91	22.57	22.90	23.57	24.87	21.75	22.41	22.74	23.41	24.71
	12H	22.00	22.62	22.99	23.62	24.94	21.82	22.44	22.81	23.44	24.76
4H	2H	19.41	20.15	20.38	21.13	22.42	19.34	20.09	20.32	21.07	22.36
	3H	21.43	22.06	22.42	23.06	24.37	21.34	21.96	22.32	22.97	24.27
	4H	22.24	22.82	23.24	23.82	25.14	22.13	22.71	23.13	23.71	25.03
	6H	22.80	23.29	23.81	24.32	25.64	22.66	23.15	23.66	24.17	25.50
	8H	23.01	23.47	24.02	24.49	25.83	22.85	23.31	23.86	24.33	25.67
	12H	23.13	23.54	24.16	24.58	25.92	22.94	23.36	23.97	24.39	25.74
8H	4H	22.49	22.95	23.50	23.97	25.31	22.39	22.85	23.40	23.87	25.21
	6H	23.18	23.56	24.21	24.62	25.96	23.05	23.43	24.08	24.49	25.83
	8H	23.49	23.82	24.53	24.87	26.22	23.33	23.67	24.37	24.71	26.07
	12H	23.67	23.97	24.72	25.00	26.40	23.48	23.77	24.52	24.81	26.21
12H	4H	22.49	22.90	23.51	23.94	25.28	22.39	22.81	23.42	23.84	25.19
	6H	23.23	23.57	24.27	24.61	25.97	23.10	23.44	24.15	24.49	25.84
	8H	23.57	23.86	24.61	24.90	26.30	23.41	23.71	24.46	24.75	26.15