

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1427793

Luminaire Tested: SQ2W-F-K-125U-125D-L935-UNV-STD-W-WM-4

Issue Date: 3/10/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1427793  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-20)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/10/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ2W-F-K-125U-125D-L935-UNV-STD-W-WM-4  
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE  
DOWNLIGHT - FROSTED CONTINUOUS ROLL LENS  
UPLIGHT - ASYMMETRIC ROLL LENS  
DOWNLIGHT 1250 LUMENS PER FOOT  
UPLIGHT 1250 LUMENS PER FOOT  
Light Source: 3500K CCT, 90 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 9885.1 lumens  
Efficiency: N/A  
Efficacy: 106.1 lumens/watt  
Spacing Criteria (0/90/45): 1.24 / 1.25 / 1.36  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse

Input Watts (W): 93.2  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1427793

CATALOG NUMBER: SQ2W-F-K-125U-125D-L935-UNV-STD-W-WM-4

### Luminous Intensity Polar Plot

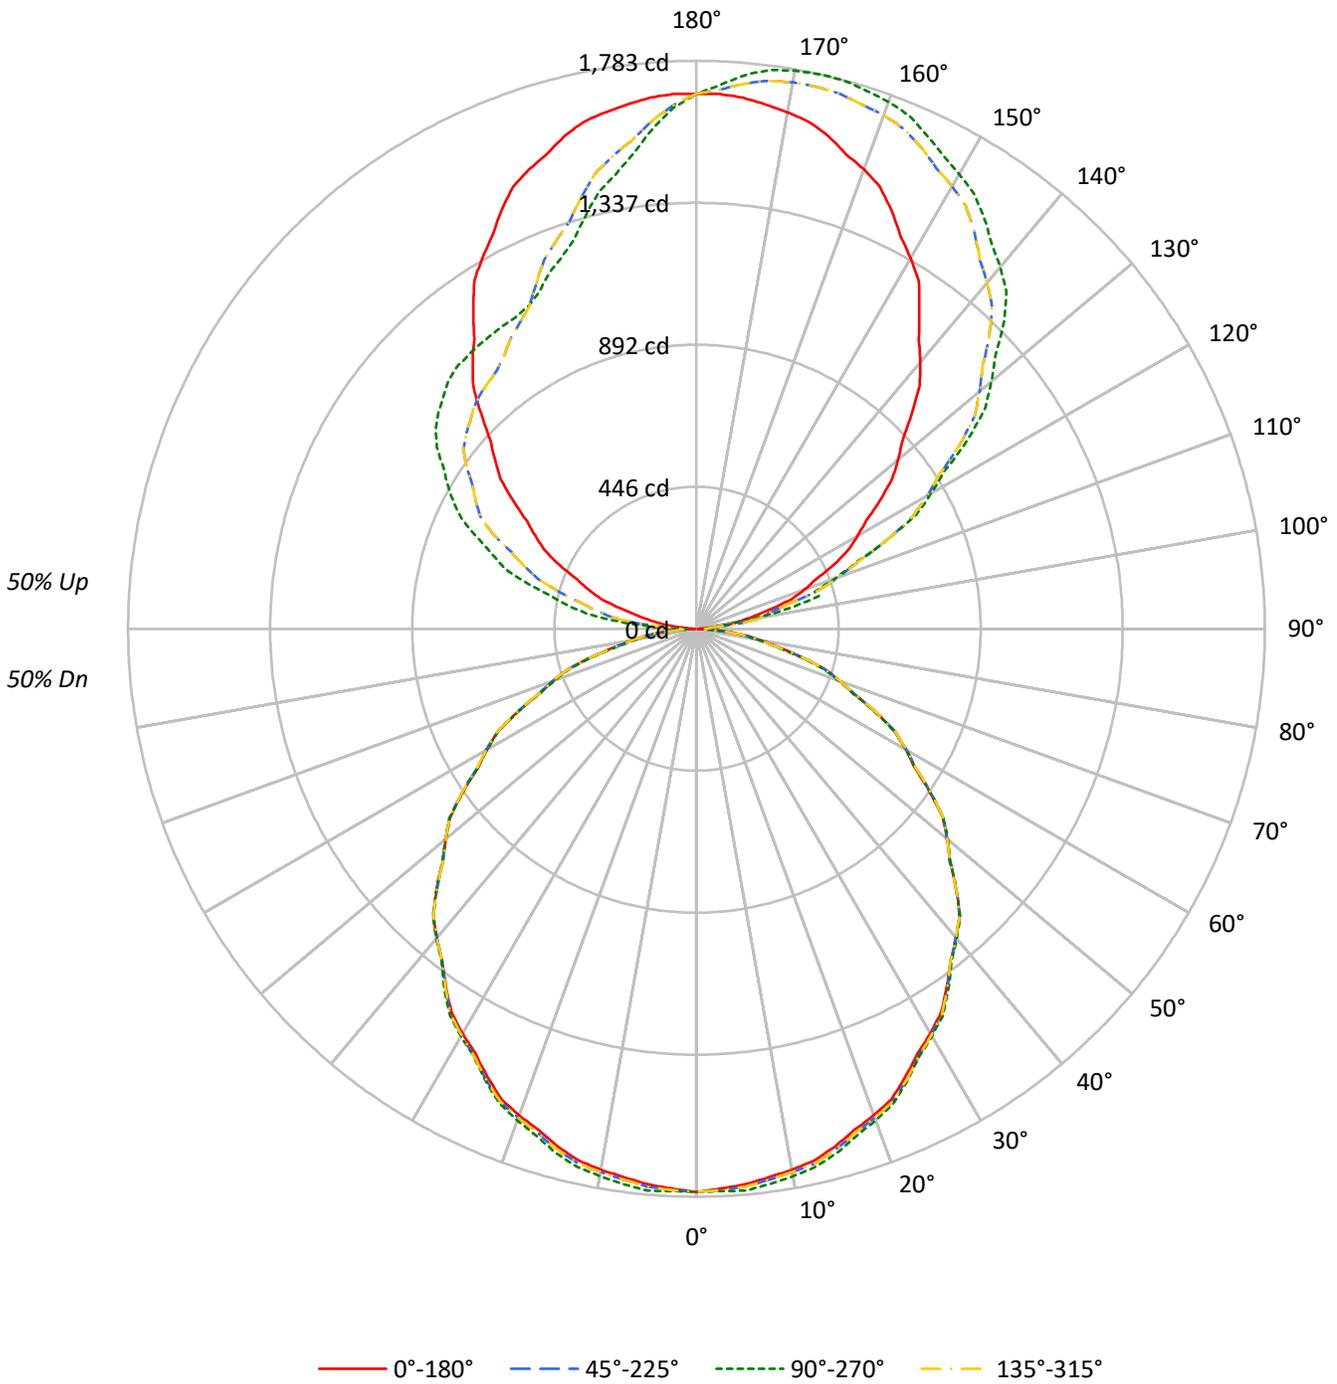



TEST NUMBER: P1427793

CATALOG NUMBER: SQ2W-F-K-125U-125D-L935-UNV-STD-W-WM-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	84	84	84	69	69	69	56	56	56	50
1	98	93	89	86	90	86	83	80	73	71	68	61	59	57	50	48	47	42
2	89	81	75	70	82	75	70	65	64	60	56	53	50	48	43	41	40	35
3	81	71	64	58	74	66	59	54	56	51	47	47	43	40	38	36	34	29
4	74	63	55	49	68	58	51	46	50	44	40	42	38	34	34	31	29	25
5	68	56	48	42	62	52	45	39	44	39	34	37	33	30	31	28	25	22
6	62	50	42	36	57	47	39	34	40	34	30	34	29	26	28	24	22	19
7	58	45	37	32	53	42	35	30	36	30	26	31	26	23	25	22	19	17
8	53	41	33	28	49	38	31	26	33	27	23	28	24	20	23	20	17	15
9	50	37	30	25	46	35	28	23	30	25	21	26	21	18	21	18	16	13
10	46	34	27	22	43	32	25	21	28	22	19	24	19	16	20	17	14	12

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	28547	28547	28547	28547
5°	28374	28697	28374	28697
10°	28273	28600	28273	28600
15°	28118	28473	28118	28473
20°	27941	28219	27941	28219
25°	27639	27883	27639	27883
30°	27346	27532	27346	27532
35°	26997	27168	26997	27168
40°	26689	26769	26689	26769
45°	26299	26299	26299	26299
50°	25771	25834	25771	25834
55°	25165	25202	25165	25202
60°	24486	24486	24486	24486
65°	23690	23595	23690	23595
70°	22569	22338	22569	22338
75°	21048	20586	21048	20586
80°	18754	17833	18754	17833
85°	14987	12690	14987	12690

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 20°  
 Vertical Angle: 45°  
 Luminance: 26475 cd/sqm



TEST NUMBER: P1427793

CATALOG NUMBER: SQ2W-F-K-125U-125D-L935-UNV-STD-W-WM-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	167.3	1.7
10°-20°	478.0	4.8
20°-30°	719.5	7.3
30°-40°	860.5	8.7
40°-50°	888.5	9.0
50°-60°	801.4	8.1
60°-70°	613.9	6.2
70°-80°	354.8	3.6
80°-90°	99.1	1.0
90°-100°	133.6	1.4
100°-110°	389.6	3.9
110°-120°	635.9	6.4
120°-130°	806.9	8.2
130°-140°	863.4	8.7
140°-150°	806.2	8.2
150°-160°	663.4	6.7
160°-170°	444.9	4.5
170°-180°	158.0	1.6
0°-30°	1364.9	13.8
0°-40°	2225.3	22.5
0°-60°	3915.3	39.6
0°-90°	4983.1	50.4
90°-120°	1159.2	11.7
90°-150°	3635.7	36.8
90°-180°	4902.0	49.6
0°-180°	9885.1	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1768	1768	1768	1768	1768	
5°	1751	1771	1751	1771	1751	166
15°	1682	1703	1682	1703	1682	474
25°	1552	1565	1552	1565	1552	715
35°	1370	1378	1370	1378	1370	857
45°	1152	1152	1152	1152	1152	888
55°	894	895	894	895	894	799
65°	620	618	620	618	620	613
75°	337	330	337	330	337	357
85°	81	68	81	68	81	94
90°	5	37	5	73	5	8
95°	53	39	53	229	53	63
105°	248	397	248	546	248	263
115°	475	658	475	811	475	468
125°	702	1043	702	994	702	628
135°	955	1365	955	1101	955	738
145°	1219	1574	1219	1124	1219	763
155°	1448	1709	1448	1167	1448	666
165°	1601	1782	1601	1343	1601	451
175°	1674	1745	1674	1575	1674	159
180°	1679	1679	1679	1679	1679	



TEST NUMBER: P1427793

CATALOG NUMBER: SQ2W-F-K-125U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	1768.1	1768.1	1768.1	1768.1	1768.1	1768.1	1768.1	1768.1	1768.1	1768.1	1768.1
2.5°	1759.2	1767.6	1776.0	1772.4	1764.9	1762.0	1763.8	1765.4	1766.2	1767.1	1766.2
5°	1750.7	1761.8	1772.8	1768.9	1760.1	1756.2	1757.3	1759.5	1765.1	1770.6	1765.1
7.5°	1736.5	1747.6	1758.6	1755.1	1746.7	1743.1	1744.5	1746.9	1752.7	1758.4	1752.7
10°	1724.5	1735.6	1746.7	1742.8	1733.9	1730.6	1732.8	1735.6	1740.0	1744.5	1740.0
12.5°	1709.6	1720.7	1731.7	1728.5	1720.6	1717.2	1718.6	1720.8	1725.6	1730.5	1725.6
15°	1682.2	1693.3	1704.3	1701.3	1693.5	1690.5	1692.2	1694.5	1698.9	1703.4	1698.9
17.5°	1649.1	1659.5	1669.9	1667.1	1659.9	1657.2	1659.1	1661.5	1665.4	1669.3	1665.4
20°	1626.2	1636.1	1646.1	1643.2	1636.0	1632.7	1633.2	1634.6	1638.5	1642.4	1638.5
22.5°	1598.3	1608.2	1618.2	1615.6	1608.9	1604.9	1603.7	1604.0	1608.7	1613.5	1608.7
25°	1551.5	1561.4	1571.4	1569.3	1563.2	1559.3	1557.7	1557.4	1561.3	1565.2	1561.3
27.5°	1502.7	1511.0	1519.3	1517.5	1512.4	1509.3	1508.2	1508.1	1510.8	1513.6	1510.8
30°	1466.8	1475.1	1483.4	1481.3	1475.8	1472.5	1471.4	1471.2	1474.0	1476.8	1474.0
32.5°	1428.9	1436.8	1444.7	1441.8	1435.4	1432.1	1431.8	1432.5	1435.7	1438.9	1435.7
35°	1369.7	1376.3	1383.0	1380.0	1374.0	1371.2	1371.7	1372.9	1375.6	1378.4	1375.6
37.5°	1310.2	1315.2	1320.3	1317.4	1311.7	1308.9	1308.7	1309.2	1311.6	1313.9	1311.6
40°	1266.3	1271.9	1277.4	1274.2	1268.1	1264.8	1264.2	1264.5	1267.3	1270.1	1267.3
42.5°	1221.5	1225.7	1229.9	1227.1	1221.9	1219.4	1219.8	1220.4	1221.8	1223.2	1221.8
45°	1151.8	1155.6	1159.5	1156.7	1151.8	1149.3	1149.3	1149.6	1150.7	1151.8	1150.7
47.5°	1078.8	1081.8	1084.8	1082.6	1078.7	1076.5	1075.8	1075.8	1077.5	1079.3	1077.5
50°	1026.0	1029.9	1033.8	1031.8	1027.9	1025.5	1024.3	1024.1	1026.3	1028.5	1026.3
52.5°	974.2	978.5	982.8	981.0	977.1	974.4	972.9	972.2	973.9	975.7	973.9
55°	894.0	899.0	904.0	902.7	899.4	896.6	894.4	893.1	894.2	895.3	894.2
57.5°	812.1	817.0	821.8	820.9	818.0	815.2	812.6	811.0	812.5	814.1	812.5
60°	758.3	762.7	767.2	765.8	762.4	759.7	757.5	756.1	757.2	758.3	757.2
62.5°	703.5	707.9	712.4	710.7	706.9	703.9	701.7	700.3	701.4	702.5	701.4
65°	620.1	624.0	627.8	626.3	623.0	620.2	618.0	616.5	617.0	617.6	617.0
67.5°	535.9	539.2	542.6	541.0	537.8	534.6	531.3	529.2	530.0	530.9	530.0
70°	478.1	481.5	484.8	483.5	480.8	478.0	475.2	473.2	473.2	473.2	473.2
72.5°	422.4	425.2	428.1	426.4	423.2	420.4	418.1	416.4	416.4	416.4	416.4
75°	337.4	339.1	340.8	339.9	338.3	336.1	333.3	331.1	330.5	330.0	330.5
77.5°	255.5	255.5	255.5	253.9	251.8	249.7	247.6	245.9	245.2	244.5	245.2
80°	201.7	201.7	201.7	200.5	198.8	197.1	195.5	194.0	192.9	191.8	192.9
82.5°	151.9	151.0	150.1	148.7	147.0	144.9	142.4	140.7	141.8	142.9	141.8
85°	80.9	79.8	78.7	77.2	75.5	73.6	71.4	69.6	69.0	68.5	69.0
87.5°	25.9	26.4	27.2	27.3	27.0	25.8	24.0	22.9	22.8	22.4	22.8
90°	5.1	11.9	20.3	27.1	32.2	33.9	33.9	35.6	37.3	37.3	37.3
92.5°	18.7	29.5	29.8	29.8	36.3	39.3	42.1	42.4	44.1	44.1	44.1
95°	52.6	57.7	86.5	84.8	57.7	45.8	39.0	39.0	39.0	39.0	39.0
97.5°	100.4	107.9	112.6	150.9	159.4	154.0	125.5	105.5	94.3	89.2	94.3
100°	142.4	145.8	156.0	157.7	200.1	240.8	220.5	195.0	186.5	181.5	186.5
102.5°	184.5	186.5	202.1	209.3	219.1	242.2	312.7	304.9	299.1	298.1	299.1
105°	247.6	249.3	278.1	291.7	298.5	298.5	296.8	330.7	385.0	396.8	385.0
107.5°	315.1	322.9	356.8	393.1	400.9	402.9	394.1	389.0	387.0	388.3	387.0
110°	361.2	373.1	413.8	459.6	471.4	474.8	471.4	466.3	463.0	463.0	463.0



TEST NUMBER: P1427793

CATALOG NUMBER: SQ2W-F-K-125U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	406.0	423.3	469.4	522.0	542.0	552.2	544.7	541.0	537.6	540.3	537.6
115°	474.8	500.3	561.3	615.6	656.3	661.4	659.7	659.7	658.0	658.0	658.0
117.5°	538.6	579.3	647.8	710.9	758.0	771.6	778.4	776.3	774.3	777.7	774.3
120°	583.4	630.8	708.9	780.1	825.9	846.2	853.0	849.6	853.0	849.6	853.0
122.5°	630.8	689.2	765.8	839.8	893.7	916.8	924.9	925.6	926.3	924.2	926.3
125°	702.1	773.3	863.2	939.5	995.4	1022.6	1029.4	1031.1	1034.4	1042.9	1034.4
127.5°	774.0	854.7	953.4	1027.0	1084.3	1117.2	1127.7	1131.4	1138.6	1142.3	1138.6
130°	824.2	915.7	1015.8	1085.3	1141.3	1176.9	1195.6	1200.6	1209.1	1207.4	1209.1
132.5°	877.1	972.7	1074.1	1146.4	1198.3	1236.6	1252.5	1267.1	1270.2	1272.5	1270.2
135°	954.7	1058.2	1159.9	1231.2	1280.3	1317.7	1338.0	1351.6	1360.0	1365.1	1360.0
137.5°	1036.5	1145.7	1243.4	1306.8	1356.3	1388.5	1411.6	1425.8	1434.7	1438.7	1434.7
140°	1092.1	1197.2	1292.2	1358.3	1402.4	1434.7	1455.0	1472.0	1482.1	1482.1	1482.1
142.5°	1145.0	1248.8	1341.1	1407.2	1445.9	1475.4	1497.1	1510.0	1521.5	1521.5	1521.5
145°	1219.3	1322.7	1407.5	1473.7	1505.9	1533.0	1556.8	1566.9	1573.7	1573.7	1573.7
147.5°	1297.0	1388.5	1465.9	1529.3	1556.4	1588.3	1607.0	1615.1	1623.6	1619.8	1623.6
150°	1343.1	1427.9	1502.5	1561.8	1589.0	1619.5	1638.2	1644.9	1653.4	1648.3	1653.4
152.5°	1387.9	1468.6	1536.4	1591.7	1614.8	1645.3	1666.6	1673.4	1679.2	1675.5	1679.2
155°	1448.2	1519.5	1582.2	1633.1	1653.4	1682.3	1702.6	1711.1	1717.9	1709.4	1717.9
157.5°	1502.2	1563.5	1618.1	1665.0	1686.7	1711.4	1730.4	1740.9	1747.7	1744.0	1747.7
160°	1534.7	1590.7	1639.9	1683.9	1704.3	1726.3	1746.7	1758.6	1765.3	1760.3	1765.3
162.5°	1561.8	1612.4	1658.8	1698.9	1716.5	1735.8	1760.3	1770.8	1777.6	1771.1	1777.6
165°	1600.9	1641.6	1682.3	1716.2	1731.4	1746.7	1772.1	1784.0	1789.1	1782.3	1789.1
167.5°	1630.4	1661.6	1694.5	1723.6	1734.8	1749.7	1775.2	1785.0	1791.5	1783.0	1791.5
170°	1646.6	1673.8	1702.6	1726.3	1734.8	1748.4	1773.8	1782.3	1787.4	1778.9	1787.4
172.5°	1660.2	1680.6	1704.0	1725.0	1729.4	1740.2	1764.3	1772.8	1776.5	1769.4	1776.5
175°	1673.8	1685.6	1702.6	1716.2	1714.5	1721.3	1741.6	1748.4	1755.2	1745.0	1755.2
177.5°	1680.2	1685.6	1691.1	1699.2	1693.8	1693.8	1708.7	1712.8	1714.1	1708.7	1714.1
180°	1678.9	1678.9	1678.9	1678.9	1678.9	1678.9	1678.9	1678.9	1678.9	1678.9	1678.9



TEST NUMBER: P1427793

CATALOG NUMBER: SQ2W-F-K-125U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	1768.1	1768.1	1768.1	1768.1	1768.1	1768.1	1768.1	1768.1	1768.1	1768.1	1768.1
2.5°	1765.4	1763.8	1762.0	1764.9	1772.4	1776.0	1767.6	1759.2	1767.6	1776.0	1772.4
5°	1759.5	1757.3	1756.2	1760.1	1768.9	1772.8	1761.8	1750.7	1761.8	1772.8	1768.9
7.5°	1746.9	1744.5	1743.1	1746.7	1755.1	1758.6	1747.6	1736.5	1747.6	1758.6	1755.1
10°	1735.6	1732.8	1730.6	1733.9	1742.8	1746.7	1735.6	1724.5	1735.6	1746.7	1742.8
12.5°	1720.8	1718.6	1717.2	1720.6	1728.5	1731.7	1720.7	1709.6	1720.7	1731.7	1728.5
15°	1694.5	1692.2	1690.5	1693.5	1701.3	1704.3	1693.3	1682.2	1693.3	1704.3	1701.3
17.5°	1661.5	1659.1	1657.2	1659.9	1667.1	1669.9	1659.5	1649.1	1659.5	1669.9	1667.1
20°	1634.6	1633.2	1632.7	1636.0	1643.2	1646.1	1636.1	1626.2	1636.1	1646.1	1643.2
22.5°	1604.0	1603.7	1604.9	1608.9	1615.6	1618.2	1608.2	1598.3	1608.2	1618.2	1615.6
25°	1557.4	1557.7	1559.3	1563.2	1569.3	1571.4	1561.4	1551.5	1561.4	1571.4	1569.3
27.5°	1508.1	1508.2	1509.3	1512.4	1517.5	1519.3	1511.0	1502.7	1511.0	1519.3	1517.5
30°	1471.2	1471.4	1472.5	1475.8	1481.3	1483.4	1475.1	1466.8	1475.1	1483.4	1481.3
32.5°	1432.5	1431.8	1432.1	1435.4	1441.8	1444.7	1436.8	1428.9	1436.8	1444.7	1441.8
35°	1372.9	1371.7	1371.2	1374.0	1380.0	1383.0	1376.3	1369.7	1376.3	1383.0	1380.0
37.5°	1309.2	1308.7	1308.9	1311.7	1317.4	1320.3	1315.2	1310.2	1315.2	1320.3	1317.4
40°	1264.5	1264.2	1264.8	1268.1	1274.2	1277.4	1271.9	1266.3	1271.9	1277.4	1274.2
42.5°	1220.4	1219.8	1219.4	1221.9	1227.1	1229.9	1225.7	1221.5	1225.7	1229.9	1227.1
45°	1149.6	1149.3	1149.3	1151.8	1156.7	1159.5	1155.6	1151.8	1155.6	1159.5	1156.7
47.5°	1075.8	1075.8	1076.5	1078.7	1082.6	1084.8	1081.8	1078.8	1081.8	1084.8	1082.6
50°	1024.1	1024.3	1025.5	1027.9	1031.8	1033.8	1029.9	1026.0	1029.9	1033.8	1031.8
52.5°	972.2	972.9	974.4	977.1	981.0	982.8	978.5	974.2	978.5	982.8	981.0
55°	893.1	894.4	896.6	899.4	902.7	904.0	899.0	894.0	899.0	904.0	902.7
57.5°	811.0	812.6	815.2	818.0	820.9	821.8	817.0	812.1	817.0	821.8	820.9
60°	756.1	757.5	759.7	762.4	765.8	767.2	762.7	758.3	762.7	767.2	765.8
62.5°	700.3	701.7	703.9	706.9	710.7	712.4	707.9	703.5	707.9	712.4	710.7
65°	616.5	618.0	620.2	623.0	626.3	627.8	624.0	620.1	624.0	627.8	626.3
67.5°	529.2	531.3	534.6	537.8	541.0	542.6	539.2	535.9	539.2	542.6	541.0
70°	473.2	475.2	478.0	480.8	483.5	484.8	481.5	478.1	481.5	484.8	483.5
72.5°	416.4	418.1	420.4	423.2	426.4	428.1	425.2	422.4	425.2	428.1	426.4
75°	331.1	333.3	336.1	338.3	339.9	340.8	339.1	337.4	339.1	340.8	339.9
77.5°	245.9	247.6	249.7	251.8	253.9	255.5	255.5	255.5	255.5	255.5	253.9
80°	194.0	195.5	197.1	198.8	200.5	201.7	201.7	201.7	201.7	201.7	200.5
82.5°	140.7	142.4	144.9	147.0	148.7	150.1	151.0	151.9	151.0	150.1	148.7
85°	69.6	71.4	73.6	75.5	77.2	78.7	79.8	80.9	79.8	78.7	77.2
87.5°	22.9	24.0	25.8	27.0	27.3	27.2	26.4	25.9	26.4	26.9	28.0
90°	35.6	33.9	33.9	32.2	27.1	20.3	11.9	5.1	11.9	18.7	30.5
92.5°	42.4	42.1	39.3	36.3	29.8	29.8	29.5	18.7	32.2	45.8	65.8
95°	39.0	39.0	45.8	57.7	84.8	86.5	57.7	52.6	74.6	105.1	132.3
97.5°	105.5	125.5	154.0	159.4	150.9	112.6	107.9	100.4	136.7	166.9	210.6
100°	195.0	220.5	240.8	200.1	157.7	156.0	145.8	142.4	181.5	210.3	252.7
102.5°	304.9	312.7	242.2	219.1	209.3	202.1	186.5	184.5	223.5	263.2	298.8
105°	330.7	296.8	298.5	298.5	291.7	278.1	249.3	247.6	291.7	337.5	381.6
107.5°	389.0	394.1	402.9	400.9	393.1	356.8	322.9	315.1	354.8	409.7	458.2
110°	466.3	471.4	474.8	471.4	459.6	413.8	373.1	361.2	396.8	454.5	507.0



TEST NUMBER: P1427793

CATALOG NUMBER: SQ2W-F-K-125U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	541.0	544.7	552.2	542.0	522.0	469.4	423.3	406.0	441.6	500.6	554.5
115°	659.7	659.7	661.4	656.3	615.6	561.3	500.3	474.8	505.4	559.6	619.0
117.5°	776.3	778.4	771.6	758.0	710.9	647.8	579.3	538.6	562.7	620.0	681.0
120°	849.6	853.0	846.2	825.9	780.1	708.9	630.8	583.4	602.0	658.0	719.0
122.5°	925.6	924.9	916.8	893.7	839.8	765.8	689.2	630.8	638.6	690.5	750.2
125°	1031.1	1029.4	1022.6	995.4	939.5	863.2	773.3	702.1	691.9	736.0	797.0
127.5°	1131.4	1127.7	1117.2	1084.3	1027.0	953.4	854.7	774.0	751.2	779.1	835.0
130°	1200.6	1195.6	1176.9	1141.3	1085.3	1015.8	915.7	824.2	791.9	808.9	858.1
132.5°	1267.1	1252.5	1236.6	1198.3	1146.4	1074.1	972.7	877.1	832.6	840.1	878.4
135°	1351.6	1338.0	1317.7	1280.3	1231.2	1159.9	1058.2	954.7	893.7	886.9	909.0
137.5°	1425.8	1411.6	1388.5	1356.3	1306.8	1243.4	1145.7	1036.5	959.5	936.8	945.2
140°	1472.0	1455.0	1434.7	1402.4	1358.3	1292.2	1197.2	1092.1	1005.6	973.4	968.3
142.5°	1510.0	1497.1	1475.4	1445.9	1407.2	1341.1	1248.8	1145.0	1053.1	1011.4	999.5
145°	1566.9	1556.8	1533.0	1505.9	1473.7	1407.5	1322.7	1219.3	1127.7	1073.5	1048.0
147.5°	1615.1	1607.0	1588.3	1556.4	1529.3	1465.9	1388.5	1297.0	1203.0	1135.9	1103.0
150°	1644.9	1638.2	1619.5	1589.0	1561.8	1502.5	1427.9	1343.1	1253.2	1182.0	1139.6
152.5°	1673.4	1666.6	1645.3	1614.8	1591.7	1536.4	1468.6	1387.9	1296.6	1225.4	1181.6
155°	1711.1	1702.6	1682.3	1653.4	1633.1	1582.2	1519.5	1448.2	1370.2	1295.6	1246.4
157.5°	1740.9	1730.4	1711.4	1686.7	1665.0	1618.1	1563.5	1502.2	1434.0	1362.8	1312.6
160°	1758.6	1746.7	1726.3	1704.3	1683.9	1639.9	1590.7	1534.7	1472.0	1407.5	1353.3
162.5°	1770.8	1760.3	1735.8	1716.5	1698.9	1658.8	1612.4	1561.8	1505.9	1449.6	1399.4
165°	1784.0	1772.1	1746.7	1731.4	1716.2	1682.3	1641.6	1600.9	1553.4	1507.6	1466.9
167.5°	1785.0	1775.2	1749.7	1734.8	1723.6	1694.5	1661.6	1630.4	1593.4	1557.4	1523.5
170°	1782.3	1773.8	1748.4	1734.8	1726.3	1702.6	1673.8	1646.6	1617.8	1587.3	1560.2
172.5°	1772.8	1764.3	1740.2	1729.4	1725.0	1704.0	1680.6	1660.2	1635.4	1613.1	1591.4
175°	1748.4	1741.6	1721.3	1714.5	1716.2	1702.6	1685.6	1673.8	1658.5	1644.9	1633.1
177.5°	1712.8	1708.7	1693.8	1693.8	1699.2	1691.1	1685.6	1680.2	1673.4	1669.4	1665.3
180°	1678.9	1678.9	1678.9	1678.9	1678.9	1678.9	1678.9	1678.9	1678.9	1678.9	1678.9



TEST NUMBER: P1427793

CATALOG NUMBER: SQ2W-F-K-125U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	1768.1	1768.1	1768.1	1768.1	1768.1	1768.1	1768.1	1768.1	1768.1	1768.1	1768.1
2.5°	1764.9	1762.0	1763.8	1765.4	1766.2	1767.1	1766.2	1765.4	1763.8	1762.0	1764.9
5°	1760.1	1756.2	1757.3	1759.5	1765.1	1770.6	1765.1	1759.5	1757.3	1756.2	1760.1
7.5°	1746.7	1743.1	1744.5	1746.9	1752.7	1758.4	1752.7	1746.9	1744.5	1743.1	1746.7
10°	1733.9	1730.6	1732.8	1735.6	1740.0	1744.5	1740.0	1735.6	1732.8	1730.6	1733.9
12.5°	1720.6	1717.2	1718.6	1720.8	1725.6	1730.5	1725.6	1720.8	1718.6	1717.2	1720.6
15°	1693.5	1690.5	1692.2	1694.5	1698.9	1703.4	1698.9	1694.5	1692.2	1690.5	1693.5
17.5°	1659.9	1657.2	1659.1	1661.5	1665.4	1669.3	1665.4	1661.5	1659.1	1657.2	1659.9
20°	1636.0	1632.7	1633.2	1634.6	1638.5	1642.4	1638.5	1634.6	1633.2	1632.7	1636.0
22.5°	1608.9	1604.9	1603.7	1604.0	1608.7	1613.5	1608.7	1604.0	1603.7	1604.9	1608.9
25°	1563.2	1559.3	1557.7	1557.4	1561.3	1565.2	1561.3	1557.4	1557.7	1559.3	1563.2
27.5°	1512.4	1509.3	1508.2	1508.1	1510.8	1513.6	1510.8	1508.1	1508.2	1509.3	1512.4
30°	1475.8	1472.5	1471.4	1471.2	1474.0	1476.8	1474.0	1471.2	1471.4	1472.5	1475.8
32.5°	1435.4	1432.1	1431.8	1432.5	1435.7	1438.9	1435.7	1432.5	1431.8	1432.1	1435.4
35°	1374.0	1371.2	1371.7	1372.9	1375.6	1378.4	1375.6	1372.9	1371.7	1371.2	1374.0
37.5°	1311.7	1308.9	1308.7	1309.2	1311.6	1313.9	1311.6	1309.2	1308.7	1308.9	1311.7
40°	1268.1	1264.8	1264.2	1264.5	1267.3	1270.1	1267.3	1264.5	1264.2	1264.8	1268.1
42.5°	1221.9	1219.4	1219.8	1220.4	1221.8	1223.2	1221.8	1220.4	1219.8	1219.4	1221.9
45°	1151.8	1149.3	1149.3	1149.6	1150.7	1151.8	1150.7	1149.6	1149.3	1149.3	1151.8
47.5°	1078.7	1076.5	1075.8	1075.8	1077.5	1079.3	1077.5	1075.8	1075.8	1076.5	1078.7
50°	1027.9	1025.5	1024.3	1024.1	1026.3	1028.5	1026.3	1024.1	1024.3	1025.5	1027.9
52.5°	977.1	974.4	972.9	972.2	973.9	975.7	973.9	972.2	972.9	974.4	977.1
55°	899.4	896.6	894.4	893.1	894.2	895.3	894.2	893.1	894.4	896.6	899.4
57.5°	818.0	815.2	812.6	811.0	812.5	814.1	812.5	811.0	812.6	815.2	818.0
60°	762.4	759.7	757.5	756.1	757.2	758.3	757.2	756.1	757.5	759.7	762.4
62.5°	706.9	703.9	701.7	700.3	701.4	702.5	701.4	700.3	701.7	703.9	706.9
65°	623.0	620.2	618.0	616.5	617.0	617.6	617.0	616.5	618.0	620.2	623.0
67.5°	537.8	534.6	531.3	529.2	530.0	530.9	530.0	529.2	531.3	534.6	537.8
70°	480.8	478.0	475.2	473.2	473.2	473.2	473.2	473.2	475.2	478.0	480.8
72.5°	423.2	420.4	418.1	416.4	416.4	416.4	416.4	416.4	418.1	420.4	423.2
75°	338.3	336.1	333.3	331.1	330.5	330.0	330.5	331.1	333.3	336.1	338.3
77.5°	251.8	249.7	247.6	245.9	245.2	244.5	245.2	245.9	247.6	249.7	251.8
80°	198.8	197.1	195.5	194.0	192.9	191.8	192.9	194.0	195.5	197.1	198.8
82.5°	147.0	144.9	142.4	140.7	141.8	142.9	141.8	140.7	142.4	144.9	147.0
85°	75.5	73.6	71.4	69.6	69.0	68.5	69.0	69.6	71.4	73.6	75.5
87.5°	28.4	29.2	29.8	29.7	30.6	29.5	30.6	29.7	29.8	29.2	28.4
90°	39.0	50.9	62.7	69.5	76.3	72.9	76.3	69.5	62.7	50.9	39.0
92.5°	78.3	98.4	112.9	125.2	130.6	129.9	130.6	125.2	112.9	98.4	78.3
95°	157.7	181.5	205.2	222.2	232.3	228.9	232.3	222.2	205.2	181.5	157.7
97.5°	243.2	275.1	301.5	317.5	327.6	334.4	327.6	317.5	301.5	275.1	243.2
100°	300.2	330.7	361.2	379.9	396.8	403.6	396.8	379.9	361.2	330.7	300.2
102.5°	346.3	386.3	419.5	439.6	453.8	460.6	453.8	439.6	419.5	386.3	346.3
105°	422.3	464.7	500.3	525.7	541.0	546.1	541.0	525.7	500.3	464.7	422.3
107.5°	498.2	542.0	574.9	603.0	621.7	632.5	621.7	603.0	574.9	542.0	498.2
110°	557.9	593.5	629.1	654.6	673.2	680.0	673.2	654.6	629.1	593.5	557.9



TEST NUMBER: P1427793

CATALOG NUMBER: SQ2W-F-K-125U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	608.1	647.8	683.4	708.9	730.2	739.7	730.2	708.9	683.4	647.8	608.1
115°	678.3	730.9	763.1	786.9	802.1	810.6	802.1	786.9	763.1	730.9	678.3
117.5°	736.7	791.6	826.9	845.2	852.3	858.4	852.3	845.2	826.9	791.6	736.7
120°	773.3	824.2	864.9	888.6	897.1	900.5	897.1	888.6	864.9	824.2	773.3
122.5°	807.2	855.4	894.7	923.9	937.8	941.2	937.8	923.9	894.7	855.4	807.2
125°	854.7	900.5	941.2	970.0	985.3	993.7	985.3	970.0	941.2	900.5	854.7
127.5°	896.1	945.6	982.9	1009.0	1023.9	1030.7	1023.9	1009.0	982.9	945.6	896.1
130°	919.1	970.0	1007.3	1036.1	1049.7	1056.5	1049.7	1036.1	1007.3	970.0	919.1
132.5°	936.8	990.4	1029.0	1055.1	1070.1	1076.8	1070.1	1055.1	1029.0	990.4	936.8
135°	958.1	1014.1	1054.8	1080.2	1093.8	1100.6	1093.8	1080.2	1054.8	1014.1	958.1
137.5°	976.8	1027.7	1070.1	1096.9	1109.1	1113.5	1109.1	1096.9	1070.1	1027.7	976.8
140°	990.4	1034.4	1076.8	1102.3	1115.8	1117.5	1115.8	1102.3	1076.8	1034.4	990.4
142.5°	1008.0	1042.6	1079.6	1105.0	1118.6	1121.6	1118.6	1105.0	1079.6	1042.6	1008.0
145°	1039.5	1059.9	1085.3	1109.1	1120.9	1124.3	1120.9	1109.1	1085.3	1059.9	1039.5
147.5°	1079.2	1085.7	1098.9	1114.5	1126.0	1128.4	1126.0	1114.5	1098.9	1085.7	1079.2
150°	1109.1	1107.4	1112.5	1122.6	1132.8	1131.1	1132.8	1122.6	1112.5	1107.4	1109.1
152.5°	1143.0	1133.1	1132.8	1137.6	1142.3	1142.0	1142.3	1137.6	1132.8	1133.1	1143.0
155°	1200.6	1182.0	1171.8	1168.4	1168.4	1166.7	1168.4	1168.4	1171.8	1182.0	1200.6
157.5°	1264.1	1237.9	1222.7	1214.5	1212.2	1208.4	1212.2	1214.5	1222.7	1237.9	1264.1
160°	1307.5	1278.6	1263.4	1249.8	1244.7	1239.6	1244.7	1249.8	1263.4	1278.6	1307.5
162.5°	1348.2	1320.7	1304.1	1291.9	1286.8	1279.0	1286.8	1291.9	1304.1	1320.7	1348.2
165°	1414.3	1385.5	1366.8	1356.7	1349.9	1343.1	1349.9	1356.7	1366.8	1385.5	1414.3
167.5°	1480.4	1448.9	1436.7	1425.2	1418.7	1406.5	1418.7	1425.2	1436.7	1448.9	1480.4
170°	1521.1	1492.3	1485.5	1475.4	1463.5	1449.9	1463.5	1475.4	1485.5	1492.3	1521.1
172.5°	1556.4	1537.1	1530.3	1520.1	1516.4	1505.5	1516.4	1520.1	1530.3	1537.1	1556.4
175°	1607.6	1592.4	1592.4	1590.7	1585.6	1575.4	1585.6	1590.7	1592.4	1592.4	1607.6
177.5°	1650.4	1642.2	1647.7	1647.7	1646.3	1636.8	1646.3	1647.7	1647.7	1642.2	1650.4
180°	1678.9	1678.9	1678.9	1678.9	1678.9	1678.9	1678.9	1678.9	1678.9	1678.9	1678.9

TEST NUMBER: P1427793

CATALOG NUMBER: SQ2W-F-K-125U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	330°	340°	350°	360°
0°	1768.1	1768.1	1768.1	1768.1
2.5°	1772.4	1776.0	1767.6	1759.2
5°	1768.9	1772.8	1761.8	1750.7
7.5°	1755.1	1758.6	1747.6	1736.5
10°	1742.8	1746.7	1735.6	1724.5
12.5°	1728.5	1731.7	1720.7	1709.6
15°	1701.3	1704.3	1693.3	1682.2
17.5°	1667.1	1669.9	1659.5	1649.1
20°	1643.2	1646.1	1636.1	1626.2
22.5°	1615.6	1618.2	1608.2	1598.3
25°	1569.3	1571.4	1561.4	1551.5
27.5°	1517.5	1519.3	1511.0	1502.7
30°	1481.3	1483.4	1475.1	1466.8
32.5°	1441.8	1444.7	1436.8	1428.9
35°	1380.0	1383.0	1376.3	1369.7
37.5°	1317.4	1320.3	1315.2	1310.2
40°	1274.2	1277.4	1271.9	1266.3
42.5°	1227.1	1229.9	1225.7	1221.5
45°	1156.7	1159.5	1155.6	1151.8
47.5°	1082.6	1084.8	1081.8	1078.8
50°	1031.8	1033.8	1029.9	1026.0
52.5°	981.0	982.8	978.5	974.2
55°	902.7	904.0	899.0	894.0
57.5°	820.9	821.8	817.0	812.1
60°	765.8	767.2	762.7	758.3
62.5°	710.7	712.4	707.9	703.5
65°	626.3	627.8	624.0	620.1
67.5°	541.0	542.6	539.2	535.9
70°	483.5	484.8	481.5	478.1
72.5°	426.4	428.1	425.2	422.4
75°	339.9	340.8	339.1	337.4
77.5°	253.9	255.5	255.5	255.5
80°	200.5	201.7	201.7	201.7
82.5°	148.7	150.1	151.0	151.9
85°	77.2	78.7	79.8	80.9
87.5°	28.0	26.9	26.4	25.9
90°	30.5	18.7	11.9	5.1
92.5°	65.8	45.8	32.2	18.7
95°	132.3	105.1	74.6	52.6
97.5°	210.6	166.9	136.7	100.4
100°	252.7	210.3	181.5	142.4
102.5°	298.8	263.2	223.5	184.5
105°	381.6	337.5	291.7	247.6
107.5°	458.2	409.7	354.8	315.1
110°	507.0	454.5	396.8	361.2



TEST NUMBER: P1427793

CATALOG NUMBER: SQ2W-F-K-125U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	330°	340°	350°	360°
112.5°	554.5	500.6	441.6	406.0
115°	619.0	559.6	505.4	474.8
117.5°	681.0	620.0	562.7	538.6
120°	719.0	658.0	602.0	583.4
122.5°	750.2	690.5	638.6	630.8
125°	797.0	736.0	691.9	702.1
127.5°	835.0	779.1	751.2	774.0
130°	858.1	808.9	791.9	824.2
132.5°	878.4	840.1	832.6	877.1
135°	909.0	886.9	893.7	954.7
137.5°	945.2	936.8	959.5	1036.5
140°	968.3	973.4	1005.6	1092.1
142.5°	999.5	1011.4	1053.1	1145.0
145°	1048.0	1073.5	1127.7	1219.3
147.5°	1103.0	1135.9	1203.0	1297.0
150°	1139.6	1182.0	1253.2	1343.1
152.5°	1181.6	1225.4	1296.6	1387.9
155°	1246.4	1295.6	1370.2	1448.2
157.5°	1312.6	1362.8	1434.0	1502.2
160°	1353.3	1407.5	1472.0	1534.7
162.5°	1399.4	1449.6	1505.9	1561.8
165°	1466.9	1507.6	1553.4	1600.9
167.5°	1523.5	1557.4	1593.4	1630.4
170°	1560.2	1587.3	1617.8	1646.6
172.5°	1591.4	1613.1	1635.4	1660.2
175°	1633.1	1644.9	1658.5	1673.8
177.5°	1665.3	1669.4	1673.4	1680.2
180°	1678.9	1678.9	1678.9	1678.9



TEST NUMBER: P1427793  
 CATALOG NUMBER: SQ2W-F-K-125U-125D-L935-UNV-STD-W-WM-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	19.54	20.42	20.49	21.39	22.65	19.46	20.34	20.41	21.30	22.57
	3H	21.34	22.12	22.30	23.10	24.39	21.23	22.02	22.19	23.00	24.28
	4H	22.03	22.78	23.01	23.76	25.05	21.92	22.66	22.89	23.64	24.94
	6H	22.47	23.16	23.46	24.14	25.45	22.33	23.02	23.32	24.00	25.31
	8H	22.63	23.28	23.62	24.29	25.59	22.47	23.13	23.47	24.13	25.44
	12H	22.71	23.34	23.71	24.34	25.67	22.54	23.16	23.54	24.16	25.49
4H	2H	20.13	20.87	21.11	21.85	23.15	20.06	20.81	21.04	21.79	23.08
	3H	22.15	22.77	23.14	23.78	25.09	22.06	22.68	23.05	23.69	25.00
	4H	22.96	23.53	23.96	24.54	25.87	22.85	23.42	23.85	24.43	25.76
	6H	23.52	24.01	24.53	25.04	26.37	23.38	23.87	24.39	24.89	26.22
	8H	23.73	24.19	24.74	25.21	26.56	23.57	24.03	24.58	25.05	26.40
	12H	23.85	24.26	24.88	25.30	26.65	23.66	24.08	24.69	25.11	26.46
8H	4H	23.21	23.67	24.22	24.69	26.03	23.11	23.57	24.12	24.59	25.94
	6H	23.90	24.28	24.94	25.34	26.68	23.77	24.15	24.81	25.21	26.55
	8H	24.20	24.54	25.25	25.59	26.95	24.05	24.38	25.09	25.43	26.79
	12H	24.39	24.68	25.44	25.72	27.13	24.20	24.49	25.25	25.53	26.94
12H	4H	23.20	23.62	24.24	24.65	26.01	23.11	23.53	24.14	24.56	25.91
	6H	23.95	24.28	24.99	25.33	26.69	23.82	24.16	24.87	25.21	26.57
	8H	24.28	24.58	25.33	25.62	27.03	24.13	24.43	25.18	25.47	26.87