

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1435869

Luminaire Tested: SQ2W-FA-K-150U-075D-L935-UNV-STD-W-WM-4

Issue Date: 3/24/2026

Test Information

Test Method: LM-79-2019
Report Number: P1435869
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2502-345-2)
Test Lab: INNOVATION CENTER
Issue Date: 3/24/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-FA-K-150U-075D-L935-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - FROSTED CONTINUOUS ASYMMETRIC ROLL LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 750 LUMENS PER FOOT
UPLIGHT 1500 LUMENS PER FOOT
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8611.4 lumens
Efficiency: N/A
Efficacy: 105.3 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.23 / 1.34
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 81.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1435869

CATALOG NUMBER: SQ2W-FA-K-150U-075D-L935-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

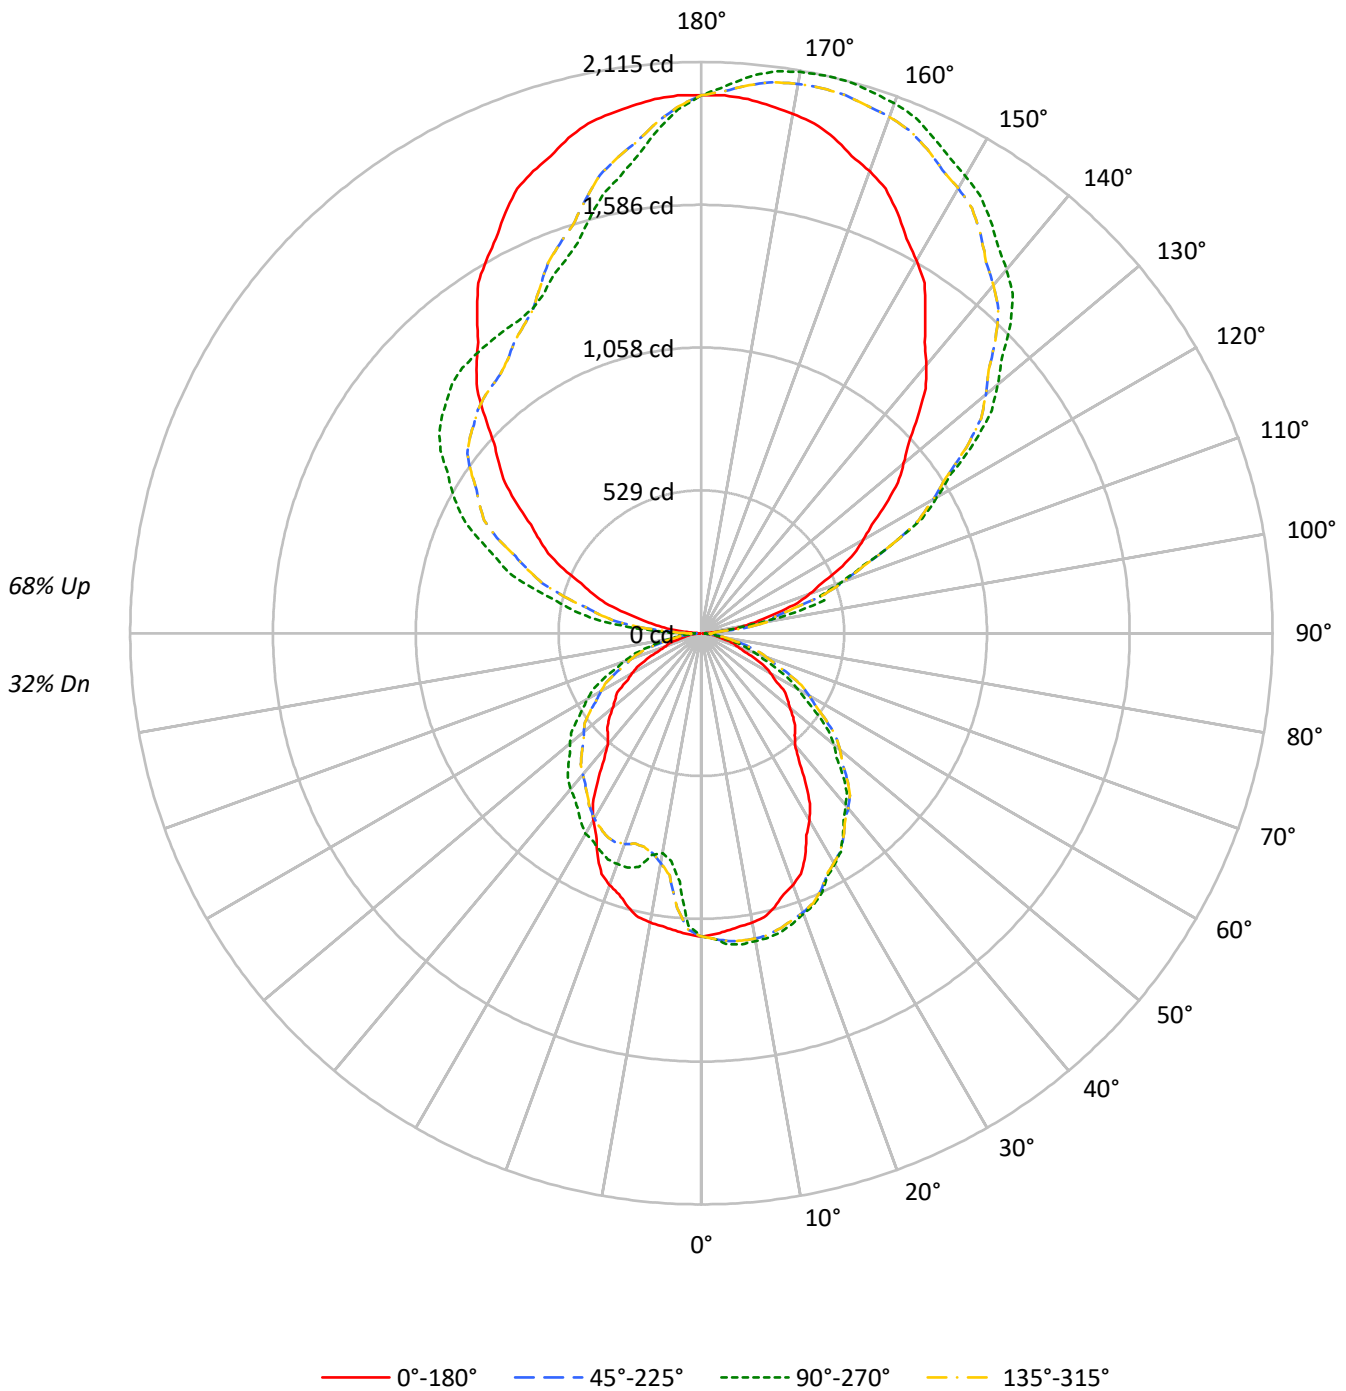



TEST NUMBER: P1435869

CATALOG NUMBER: SQ2W-FA-K-150U-075D-L935-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40	32
1	94	90	86	83	84	81	78	75	64	62	60	49	48	47	35	35	34	27
2	86	78	72	67	77	71	66	61	57	53	50	43	41	39	31	30	29	23
3	78	69	62	56	70	62	56	51	50	46	42	38	35	33	28	26	24	20
4	71	61	53	47	64	55	48	43	44	39	36	34	31	28	25	23	21	17
5	65	54	46	40	59	49	42	37	39	34	31	31	27	24	22	20	18	15
6	60	48	40	35	54	44	37	32	35	30	27	28	24	21	20	18	16	13
7	55	44	36	30	50	40	33	28	32	27	23	25	21	19	18	16	14	11
8	51	39	32	27	46	36	29	25	29	24	21	23	19	17	17	14	13	10
9	48	36	29	24	43	33	26	22	27	22	18	21	17	15	15	13	11	9
10	44	33	26	21	40	30	24	20	24	20	16	19	16	13	14	12	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	18130	18130	18130	18130
5°	17917	18763	17917	14954
10°	17839	18980	17839	13558
15°	17532	19134	17532	14987
20°	17049	18994	17049	15630
25°	16206	18841	16206	15818
30°	14930	18420	14930	15985
35°	13212	18015	13212	15699
40°	11375	17521	11375	15871
45°	11229	16894	11229	15901
50°	10713	16071	10713	15962
55°	10660	14823	10660	15806
60°	9558	13210	9558	15742
65°	8149	11641	8149	15297
70°	6576	9861	6576	14176
75°	5702	8147	5702	13032
80°	4853	6071	4853	10525
85°	3223	3223	3223	6447

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 40°
 Vertical Angle: 45°
 Luminance: 17424 cd/sqm



TEST NUMBER: P1435869

CATALOG NUMBER: SQ2W-FA-K-150U-075D-L935-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	101.0	1.2
10°-20°	282.3	3.3
20°-30°	428.7	5.0
30°-40°	503.4	5.8
40°-50°	510.8	5.9
50°-60°	447.4	5.2
60°-70°	317.4	3.7
70°-80°	163.4	1.9
80°-90°	42.5	0.5
90°-100°	158.5	1.8
100°-110°	462.2	5.4
110°-120°	754.2	8.8
120°-130°	957.1	11.1
130°-140°	1024.1	11.9
140°-150°	956.3	11.1
150°-160°	786.9	9.1
160°-170°	527.7	6.1
170°-180°	187.4	2.2
0°-30°	812.1	9.4
0°-40°	1315.5	15.3
0°-60°	2273.7	26.4
0°-90°	2796.9	32.5
90°-120°	1374.9	16.0
90°-150°	4312.4	50.1
90°-180°	5814.0	67.5
0°-180°	8611.4	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1123	1123	1123	1123	1123	
5°	1106	1158	1106	923	1106	105
15°	1049	1145	1049	897	1049	295
25°	910	1058	910	888	910	415
35°	670	914	670	796	670	418
45°	492	740	492	696	492	376
55°	379	527	379	562	379	328
65°	213	305	213	400	213	213
75°	91	131	91	209	91	99
85°	17	17	17	35	17	22
90°	6	44	6	86	6	5
95°	62	46	62	272	62	75
105°	294	471	294	648	294	312
115°	563	780	563	962	563	555
125°	833	1237	833	1179	833	745
135°	1132	1619	1132	1306	1132	875
145°	1446	1867	1446	1334	1446	905
155°	1718	2028	1718	1384	1718	790
165°	1899	2114	1899	1593	1899	535
175°	1985	2070	1985	1869	1985	188
180°	1991	1991	1991	1991	1991	



TEST NUMBER: P1435869

CATALOG NUMBER: SQ2W-FA-K-150U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	1122.9	1122.9	1122.9	1122.9	1122.9	1122.9	1122.9	1122.9	1122.9	1122.9	1122.9
2.5°	1116.0	1123.7	1131.4	1133.4	1133.4	1133.4	1133.4	1133.4	1133.4	1133.4	1133.4
5°	1105.5	1119.1	1132.6	1138.9	1142.7	1145.6	1147.6	1150.0	1153.9	1157.7	1153.9
7.5°	1095.1	1113.2	1131.4	1140.3	1146.1	1150.8	1154.3	1157.4	1159.3	1161.2	1159.3
10°	1088.1	1109.4	1130.7	1140.3	1146.1	1150.0	1151.9	1153.9	1155.8	1157.7	1155.8
12.5°	1077.7	1100.5	1123.3	1134.5	1141.9	1146.5	1148.5	1150.4	1152.3	1154.3	1152.3
15°	1048.9	1079.9	1110.8	1122.9	1128.7	1133.6	1137.4	1140.8	1142.7	1144.7	1142.7
17.5°	1013.2	1050.8	1088.3	1103.5	1111.2	1116.8	1120.3	1123.3	1124.9	1126.4	1124.9
20°	992.3	1033.0	1073.6	1089.6	1097.3	1102.1	1104.1	1105.5	1105.5	1105.5	1105.5
22.5°	964.5	1009.8	1055.0	1072.1	1079.9	1083.9	1084.3	1085.0	1086.6	1088.1	1086.6
25°	909.7	961.9	1014.1	1035.9	1047.5	1052.3	1050.4	1049.9	1053.8	1057.6	1053.8
27.5°	842.6	908.4	974.2	996.4	1004.1	1009.0	1010.9	1012.4	1012.4	1012.4	1012.4
30°	800.8	874.3	947.9	972.0	979.8	984.6	986.5	988.0	988.0	988.0	988.0
32.5°	748.6	836.0	923.5	950.0	956.2	959.5	959.9	960.1	960.1	960.1	960.1
35°	670.3	776.7	883.1	912.6	916.4	918.4	918.4	917.9	915.9	914.0	915.9
37.5°	591.9	712.6	833.3	867.9	873.7	875.2	872.5	870.0	868.1	866.1	868.1
40°	539.7	671.2	802.8	840.0	845.8	845.8	840.0	835.2	833.2	831.3	833.2
42.5°	511.8	641.8	771.8	808.7	814.5	813.7	806.4	800.4	798.4	796.5	798.4
45°	491.8	607.9	723.9	757.3	763.1	762.2	754.4	747.6	743.8	739.9	743.8
47.5°	461.4	563.5	665.6	698.4	708.1	707.1	695.5	685.8	682.0	678.1	682.0
50°	426.5	527.1	627.7	660.1	669.8	668.8	657.2	647.5	643.7	639.8	643.7
52.5°	402.2	496.6	591.0	620.7	628.8	626.3	613.1	602.3	598.4	594.5	598.4
55°	378.7	458.0	537.3	561.5	567.3	563.4	549.9	538.2	532.4	526.6	532.4
57.5°	323.8	399.3	474.7	498.2	504.4	499.8	484.3	471.0	464.4	457.9	464.4
60°	296.0	363.7	431.4	454.1	461.8	458.0	442.5	428.5	418.8	409.1	418.8
62.5°	264.6	324.6	384.6	407.7	418.5	416.2	400.7	386.7	377.0	367.3	377.0
65°	213.3	265.5	317.7	340.9	354.5	353.5	338.0	324.0	314.3	304.7	314.3
67.5°	167.1	212.0	256.9	279.7	295.2	294.4	277.4	262.7	255.0	247.2	255.0
70°	139.3	178.0	216.7	237.9	253.4	253.4	237.9	224.4	216.7	208.9	216.7
72.5°	121.9	151.3	180.7	200.8	217.8	217.8	200.8	186.5	180.3	174.1	180.3
75°	91.4	108.8	126.2	145.1	164.4	166.4	150.9	138.3	134.4	130.6	134.4
77.5°	66.2	74.3	82.4	97.2	114.2	116.2	103.0	92.8	91.2	89.7	91.2
80°	52.2	54.2	56.1	68.2	83.7	85.6	74.0	65.3	65.3	65.3	65.3
82.5°	34.8	36.8	38.7	47.3	58.1	59.3	50.8	44.0	42.5	40.9	42.5
85°	17.4	17.4	17.4	20.3	24.2	24.2	20.3	17.4	17.4	17.4	17.4
87.5°	4.7	6.3	8.3	11.1	13.8	14.2	12.7	11.9	12.3	12.3	12.3
90°	6.0	14.1	24.1	32.2	38.2	40.2	40.2	42.2	44.3	44.3	44.3
92.5°	22.1	35.0	35.4	35.4	43.0	46.7	49.9	50.3	52.3	52.3	52.3
95°	62.4	68.4	102.6	100.6	68.4	54.3	46.3	46.3	46.3	46.3	46.3
97.5°	119.1	127.9	133.6	179.0	189.1	182.6	148.8	125.1	111.8	105.8	111.8
100°	169.0	173.0	185.1	187.1	237.4	285.6	261.5	231.3	221.3	215.2	221.3
102.5°	218.8	221.3	239.8	248.2	259.9	287.2	370.9	361.7	354.8	353.6	354.8
105°	293.7	295.7	329.9	346.0	354.0	354.0	352.0	392.2	456.6	470.7	456.6
107.5°	373.7	383.0	423.2	466.3	475.5	477.9	467.5	461.4	459.0	460.6	459.0
110°	428.4	442.5	490.8	545.1	559.2	563.2	559.2	553.2	549.1	549.1	549.1



TEST NUMBER: P1435869

CATALOG NUMBER: SQ2W-FA-K-150U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	481.5	502.1	556.8	619.1	642.9	654.9	646.1	641.7	637.6	640.9	637.6
115°	563.2	593.4	665.8	730.2	778.4	784.5	782.5	782.5	780.5	780.5	780.5
117.5°	638.8	687.1	768.4	843.2	899.1	915.2	923.3	920.9	918.4	922.5	918.4
120°	692.0	748.3	840.8	925.3	979.6	1003.7	1011.8	1007.8	1011.8	1007.8	1011.8
122.5°	748.3	817.5	908.4	996.1	1060.1	1087.4	1097.1	1097.9	1098.7	1096.3	1098.7
125°	832.8	917.2	1023.8	1114.4	1180.7	1212.9	1221.0	1223.0	1227.0	1237.1	1227.0
127.5°	918.0	1013.8	1130.9	1218.2	1286.1	1325.2	1337.6	1342.1	1350.5	1354.9	1350.5
130°	977.6	1086.2	1204.9	1287.3	1353.7	1396.0	1418.1	1424.1	1434.2	1432.2	1434.2
132.5°	1040.3	1153.8	1274.1	1359.8	1421.3	1466.8	1485.7	1503.0	1506.6	1509.4	1506.6
135°	1132.5	1255.2	1375.9	1460.3	1518.7	1562.9	1587.1	1603.2	1613.2	1619.2	1613.2
137.5°	1229.4	1359.0	1474.8	1550.0	1608.8	1647.0	1674.4	1691.3	1701.7	1706.5	1701.7
140°	1295.4	1420.1	1532.8	1611.2	1663.5	1701.7	1725.9	1746.0	1758.0	1758.0	1758.0
142.5°	1358.2	1481.3	1590.7	1669.1	1715.0	1750.0	1775.7	1791.0	1804.7	1804.7	1804.7
145°	1446.3	1569.0	1669.5	1748.0	1786.2	1818.4	1846.5	1858.6	1866.7	1866.7	1866.7
147.5°	1538.4	1647.0	1738.7	1814.0	1846.1	1884.0	1906.1	1915.7	1925.8	1921.4	1925.8
150°	1593.1	1693.7	1782.2	1852.6	1884.8	1921.0	1943.1	1951.1	1961.2	1955.2	1961.2
152.5°	1646.2	1741.9	1822.4	1888.0	1915.3	1951.5	1976.9	1984.9	1991.8	1987.3	1991.8
155°	1717.8	1802.3	1876.7	1937.1	1961.2	1995.4	2019.5	2029.6	2037.6	2027.6	2037.6
157.5°	1781.8	1854.6	1919.4	1974.9	2000.6	2030.0	2052.5	2065.0	2073.0	2068.6	2073.0
160°	1820.4	1886.8	1945.1	1997.4	2021.5	2047.7	2071.8	2085.9	2094.0	2087.9	2094.0
162.5°	1852.6	1912.5	1967.6	2015.1	2036.0	2059.0	2087.9	2100.4	2108.4	2100.8	2108.4
165°	1898.8	1947.1	1995.4	2035.6	2053.7	2071.8	2102.0	2116.1	2122.1	2114.1	2122.1
167.5°	1933.8	1970.9	2009.9	2044.5	2057.7	2075.4	2105.6	2117.3	2124.9	2114.9	2124.9
170°	1953.2	1985.3	2019.5	2047.7	2057.7	2073.8	2104.0	2114.1	2120.1	2110.0	2120.1
172.5°	1969.2	1993.4	2021.1	2046.1	2051.3	2064.2	2092.7	2102.8	2107.2	2098.8	2107.2
175°	1985.3	1999.4	2019.5	2035.6	2033.6	2041.7	2065.8	2073.8	2081.9	2069.8	2081.9
177.5°	1993.0	1999.4	2005.9	2015.5	2009.1	2009.1	2026.8	2031.6	2033.2	2026.8	2033.2
180°	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4



TEST NUMBER: P1435869

CATALOG NUMBER: SQ2W-FA-K-150U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	1122.9	1122.9	1122.9	1122.9	1122.9	1122.9	1122.9	1122.9	1122.9	1122.9	1122.9
2.5°	1133.4	1133.4	1133.4	1133.4	1133.4	1131.4	1123.7	1116.0	1116.0	1116.0	1110.2
5°	1150.0	1147.6	1145.6	1142.7	1138.9	1132.6	1119.1	1105.5	1099.7	1093.9	1069.2
7.5°	1157.4	1154.3	1150.8	1146.1	1140.3	1131.4	1113.2	1095.1	1069.1	1043.2	988.3
10°	1153.9	1151.9	1150.0	1146.1	1140.3	1130.7	1109.4	1088.1	1035.9	983.6	931.4
12.5°	1150.4	1148.5	1146.5	1141.9	1134.5	1123.3	1100.5	1077.7	1003.8	929.9	882.7
15°	1140.8	1137.4	1133.6	1128.7	1122.9	1110.8	1079.9	1048.9	965.8	882.6	842.9
17.5°	1123.3	1120.3	1116.8	1111.2	1103.5	1088.3	1050.8	1013.2	926.2	839.1	813.6
20°	1105.5	1104.1	1102.1	1097.3	1089.6	1073.6	1033.0	992.3	905.3	818.3	806.6
22.5°	1085.0	1084.3	1083.9	1079.9	1072.1	1055.0	1009.8	964.5	879.0	793.5	793.9
25°	1049.9	1050.4	1052.3	1047.5	1035.9	1014.1	961.9	909.7	834.2	758.8	771.8
27.5°	1012.4	1010.9	1009.0	1004.1	996.4	974.2	908.4	842.6	783.0	723.5	745.1
30°	988.0	986.5	984.6	979.8	972.0	947.9	874.3	800.8	750.5	700.3	725.4
32.5°	960.1	959.9	959.5	956.2	950.0	923.5	836.0	748.6	712.2	675.9	702.2
35°	917.9	918.4	918.4	916.4	912.6	883.1	776.7	670.3	654.8	639.3	670.3
37.5°	870.0	872.5	875.2	873.7	867.9	833.3	712.6	591.9	597.0	602.0	639.5
40°	835.2	840.0	845.8	845.8	840.0	802.8	671.2	539.7	557.1	574.5	615.1
42.5°	800.4	806.4	813.7	814.5	808.7	771.8	641.8	511.8	530.8	549.8	591.9
45°	747.6	754.4	762.2	763.1	757.3	723.9	607.9	491.8	503.4	515.0	555.7
47.5°	685.8	695.5	707.1	708.1	698.4	665.6	563.5	461.4	469.9	478.4	520.0
50°	647.5	657.2	668.8	669.8	660.1	627.7	527.1	426.5	438.1	449.7	493.3
52.5°	602.3	613.1	626.3	628.8	620.7	591.0	496.6	402.2	409.1	416.1	463.1
55°	538.2	549.9	563.4	567.3	561.5	537.3	458.0	378.7	372.9	367.1	414.9
57.5°	471.0	484.3	499.8	504.4	498.2	474.7	399.3	323.8	318.8	313.8	365.6
60°	428.5	442.5	458.0	461.8	454.1	431.4	363.7	296.0	286.3	276.6	330.8
62.5°	386.7	400.7	416.2	418.5	407.7	384.6	324.6	264.6	258.0	251.5	304.1
65°	324.0	338.0	353.5	354.5	340.9	317.7	265.5	213.3	217.1	221.0	268.4
67.5°	262.7	277.4	294.4	295.2	279.7	256.9	212.0	167.1	179.9	192.7	235.3
70°	224.4	237.9	253.4	253.4	237.9	216.7	178.0	139.3	156.7	174.1	213.3
72.5°	186.5	200.8	217.8	217.8	200.8	180.7	151.3	121.9	139.3	156.7	188.9
75°	138.3	150.9	166.4	164.4	145.1	126.2	108.8	91.4	108.8	126.2	150.9
77.5°	92.8	103.0	116.2	114.2	97.2	82.4	74.3	66.2	80.5	94.8	112.0
80°	65.3	74.0	85.6	83.7	68.2	56.1	54.2	52.2	61.9	71.6	84.1
82.5°	44.0	50.8	59.3	58.1	47.3	38.7	36.8	34.8	42.9	51.1	59.8
85°	17.4	20.3	24.2	24.2	20.3	17.4	17.4	17.4	21.3	25.1	29.0
87.5°	11.9	12.7	14.2	13.8	11.1	8.3	6.3	4.7	7.8	11.0	14.2
90°	42.2	40.2	40.2	38.2	32.2	24.1	14.1	6.0	14.1	22.1	36.2
92.5°	50.3	49.9	46.7	43.0	35.4	35.4	35.0	22.1	38.2	54.3	78.0
95°	46.3	46.3	54.3	68.4	100.6	102.6	68.4	62.4	88.5	124.7	156.9
97.5°	125.1	148.8	182.6	189.1	179.0	133.6	127.9	119.1	162.1	197.9	249.8
100°	231.3	261.5	285.6	237.4	187.1	185.1	173.0	169.0	215.2	249.4	299.7
102.5°	361.7	370.9	287.2	259.9	248.2	239.8	221.3	218.8	265.1	312.2	354.4
105°	392.2	352.0	354.0	354.0	346.0	329.9	295.7	293.7	346.0	400.3	452.6
107.5°	461.4	467.5	477.9	475.5	466.3	423.2	383.0	373.7	420.8	486.0	543.5
110°	553.2	559.2	563.2	559.2	545.1	490.8	442.5	428.4	470.7	539.1	601.4



TEST NUMBER: P1435869

CATALOG NUMBER: SQ2W-FA-K-150U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	641.7	646.1	654.9	642.9	619.1	556.8	502.1	481.5	523.8	593.8	657.8
115°	782.5	782.5	784.5	778.4	730.2	665.8	593.4	563.2	599.4	663.8	734.2
117.5°	920.9	923.3	915.2	899.1	843.2	768.4	687.1	638.8	667.4	735.4	807.8
120°	1007.8	1011.8	1003.7	979.6	925.3	840.8	748.3	692.0	714.1	780.5	852.9
122.5°	1097.9	1097.1	1087.4	1060.1	996.1	908.4	817.5	748.3	757.5	819.1	889.9
125°	1223.0	1221.0	1212.9	1180.7	1114.4	1023.8	917.2	832.8	820.7	873.0	945.4
127.5°	1342.1	1337.6	1325.2	1286.1	1218.2	1130.9	1013.8	918.0	891.1	924.1	990.5
130°	1424.1	1418.1	1396.0	1353.7	1287.3	1204.9	1086.2	977.6	939.4	959.5	1017.8
132.5°	1503.0	1485.7	1466.8	1421.3	1359.8	1274.1	1153.8	1040.3	987.6	996.5	1041.9
135°	1603.2	1587.1	1562.9	1518.7	1460.3	1375.9	1255.2	1132.5	1060.1	1052.0	1078.2
137.5°	1691.3	1674.4	1647.0	1608.8	1550.0	1474.8	1359.0	1229.4	1138.1	1111.1	1121.2
140°	1746.0	1725.9	1701.7	1663.5	1611.2	1532.8	1420.1	1295.4	1192.8	1154.6	1148.6
142.5°	1791.0	1775.7	1750.0	1715.0	1669.1	1590.7	1481.3	1358.2	1249.1	1199.6	1185.6
145°	1858.6	1846.5	1818.4	1786.2	1748.0	1669.5	1569.0	1446.3	1337.6	1273.3	1243.1
147.5°	1915.7	1906.1	1884.0	1846.1	1814.0	1738.7	1647.0	1538.4	1426.9	1347.3	1308.3
150°	1951.1	1943.1	1921.0	1884.8	1852.6	1782.2	1693.7	1593.1	1486.5	1402.0	1351.7
152.5°	1984.9	1976.9	1951.5	1915.3	1888.0	1822.4	1741.9	1646.2	1538.0	1453.5	1401.6
155°	2029.6	2019.5	1995.4	1961.2	1937.1	1876.7	1802.3	1717.8	1625.3	1536.8	1478.4
157.5°	2065.0	2052.5	2030.0	2000.6	1974.9	1919.4	1854.6	1781.8	1700.9	1616.4	1556.9
160°	2085.9	2071.8	2047.7	2021.5	1997.4	1945.1	1886.8	1820.4	1746.0	1669.5	1605.2
162.5°	2100.4	2087.9	2059.0	2036.0	2015.1	1967.6	1912.5	1852.6	1786.2	1719.4	1659.9
165°	2116.1	2102.0	2071.8	2053.7	2035.6	1995.4	1947.1	1898.8	1842.5	1788.2	1739.9
167.5°	2117.3	2105.6	2075.4	2057.7	2044.5	2009.9	1970.9	1933.8	1890.0	1847.3	1807.1
170°	2114.1	2104.0	2073.8	2057.7	2047.7	2019.5	1985.3	1953.2	1919.0	1882.7	1850.6
172.5°	2102.8	2092.7	2064.2	2051.3	2046.1	2021.1	1993.4	1969.2	1939.9	1913.3	1887.6
175°	2073.8	2065.8	2041.7	2033.6	2035.6	2019.5	1999.4	1985.3	1967.2	1951.1	1937.1
177.5°	2031.6	2026.8	2009.1	2009.1	2015.5	2005.9	1999.4	1993.0	1984.9	1980.1	1975.3
180°	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4



TEST NUMBER: P1435869

CATALOG NUMBER: SQ2W-FA-K-150U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	1122.9	1122.9	1122.9	1122.9	1122.9	1122.9	1122.9	1122.9	1122.9	1122.9	1122.9
2.5°	1102.4	1096.2	1091.6	1087.7	1086.2	1084.6	1086.2	1087.7	1091.6	1096.2	1102.4
5°	1038.3	1005.4	970.6	942.1	932.4	922.7	932.4	942.1	970.6	1005.4	1038.3
7.5°	923.7	884.0	869.3	857.5	854.4	851.3	854.4	857.5	869.3	884.0	923.7
10°	879.2	847.3	835.7	827.0	827.0	827.0	827.0	827.0	835.7	847.3	879.2
12.5°	844.4	824.8	824.1	825.4	833.1	840.9	833.1	825.4	824.1	824.8	844.4
15°	817.8	820.7	851.6	877.3	886.9	896.6	886.9	877.3	851.6	820.7	817.8
17.5°	808.6	825.2	863.5	894.2	901.9	909.7	901.9	894.2	863.5	825.2	808.6
20°	820.2	841.5	870.5	894.2	901.9	909.7	901.9	894.2	870.5	841.5	820.2
22.5°	822.9	848.8	871.6	890.7	898.4	906.2	898.4	890.7	871.6	848.8	822.9
25°	814.4	845.3	864.7	880.2	884.0	887.9	884.0	880.2	864.7	845.3	814.4
27.5°	793.9	827.9	847.3	862.5	865.2	867.9	865.2	862.5	847.3	827.9	793.9
30°	775.7	810.5	829.9	845.8	851.6	857.4	851.6	845.8	829.9	810.5	775.7
32.5°	749.4	785.0	809.0	827.2	828.4	829.6	828.4	827.2	809.0	785.0	749.4
35°	716.7	753.4	780.5	800.4	798.4	796.5	798.4	800.4	780.5	753.4	716.7
37.5°	687.9	723.9	747.5	765.7	768.1	770.4	768.1	765.7	747.5	723.9	687.9
40°	663.5	700.3	725.4	745.2	749.1	753.0	749.1	745.2	725.4	700.3	663.5
42.5°	641.8	679.4	704.5	724.3	728.2	732.1	728.2	724.3	704.5	679.4	641.8
45°	606.0	644.6	671.7	692.5	694.5	696.4	694.5	692.5	671.7	644.6	606.0
47.5°	572.6	611.5	636.6	656.0	657.9	659.8	657.9	656.0	636.6	611.5	572.6
50°	547.4	587.1	612.2	631.6	633.5	635.5	633.5	631.6	612.2	587.1	547.4
52.5°	523.4	564.7	586.7	603.7	605.7	607.6	605.7	603.7	586.7	564.7	523.4
55°	480.7	524.2	545.5	561.5	561.5	561.5	561.5	561.5	545.5	524.2	480.7
57.5°	436.4	481.1	499.7	514.2	516.5	518.8	516.5	514.2	499.7	481.1	436.4
60°	406.2	451.7	467.2	479.7	483.6	487.5	483.6	479.7	467.2	451.7	406.2
62.5°	376.4	420.3	435.8	448.0	450.3	452.7	450.3	448.0	435.8	420.3	376.4
65°	330.3	369.0	384.5	396.6	398.5	400.4	398.5	396.6	384.5	369.0	330.3
67.5°	287.9	319.7	330.5	339.0	340.6	342.1	340.6	339.0	330.5	319.7	287.9
70°	259.7	286.8	294.5	300.3	300.3	300.3	300.3	300.3	294.5	286.8	259.7
72.5°	226.0	248.5	256.2	262.4	263.9	265.5	263.9	262.4	256.2	248.5	226.0
75°	178.0	194.4	200.2	205.0	207.0	208.9	207.0	205.0	200.2	194.4	178.0
77.5°	130.2	141.0	144.5	147.6	149.5	151.5	149.5	147.6	144.5	141.0	130.2
80°	97.7	105.4	107.4	109.3	111.2	113.2	111.2	109.3	107.4	105.4	97.7
82.5°	68.7	74.1	76.0	77.6	78.0	78.3	78.0	77.6	76.0	74.1	68.7
85°	32.9	34.8	34.8	34.8	34.8	34.8	34.8	34.8	34.8	34.8	32.9
87.5°	16.2	19.0	21.8	23.5	25.1	24.3	25.1	23.5	21.8	19.0	16.2
90°	46.3	60.3	74.4	82.5	90.5	86.5	90.5	82.5	74.4	60.3	46.3
92.5°	92.9	116.7	134.0	148.4	154.9	154.1	154.9	148.4	134.0	116.7	92.9
95°	187.1	215.2	243.4	263.5	275.6	271.6	275.6	263.5	243.4	215.2	187.1
97.5°	288.4	326.3	357.6	376.5	388.6	396.7	388.6	376.5	357.6	326.3	288.4
100°	356.0	392.2	428.4	450.6	470.7	478.7	470.7	450.6	428.4	392.2	356.0
102.5°	410.7	458.2	497.6	521.4	538.3	546.3	538.3	521.4	497.6	458.2	410.7
105°	500.9	551.1	593.4	623.6	641.7	647.7	641.7	623.6	593.4	551.1	500.9
107.5°	591.0	642.9	681.9	715.3	737.4	750.3	737.4	715.3	681.9	642.9	591.0
110°	661.8	704.0	746.3	776.4	798.6	806.6	798.6	776.4	746.3	704.0	661.8



TEST NUMBER: P1435869

CATALOG NUMBER: SQ2W-FA-K-150U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	721.3	768.4	810.6	840.8	866.1	877.4	866.1	840.8	810.6	768.4	721.3
115°	804.6	866.9	905.2	933.3	951.4	961.5	951.4	933.3	905.2	866.9	804.6
117.5°	873.8	939.0	980.8	1002.5	1011.0	1018.2	1011.0	1002.5	980.8	939.0	873.8
120°	917.2	977.6	1025.9	1054.0	1064.1	1068.1	1064.1	1054.0	1025.9	977.6	917.2
122.5°	957.5	1014.6	1061.3	1095.9	1112.4	1116.4	1112.4	1095.9	1061.3	1014.6	957.5
125°	1013.8	1068.1	1116.4	1150.6	1168.7	1178.7	1168.7	1150.6	1116.4	1068.1	1013.8
127.5°	1062.9	1121.6	1165.9	1196.8	1214.5	1222.6	1214.5	1196.8	1165.9	1121.6	1062.9
130°	1090.2	1150.6	1194.8	1229.0	1245.1	1253.2	1245.1	1229.0	1194.8	1150.6	1090.2
132.5°	1111.1	1174.7	1220.6	1251.5	1269.2	1277.3	1269.2	1251.5	1220.6	1174.7	1111.1
135°	1136.5	1202.9	1251.1	1281.3	1297.4	1305.5	1297.4	1281.3	1251.1	1202.9	1136.5
137.5°	1158.6	1219.0	1269.2	1301.0	1315.5	1320.7	1315.5	1301.0	1269.2	1219.0	1158.6
140°	1174.7	1227.0	1277.3	1307.5	1323.6	1325.6	1323.6	1307.5	1277.3	1227.0	1174.7
142.5°	1195.6	1236.7	1280.5	1310.7	1326.8	1330.4	1326.8	1310.7	1280.5	1236.7	1195.6
145°	1233.0	1257.2	1287.3	1315.5	1329.6	1333.6	1329.6	1315.5	1287.3	1257.2	1233.0
147.5°	1280.1	1287.8	1303.4	1321.9	1335.6	1338.4	1335.6	1321.9	1303.4	1287.8	1280.1
150°	1315.5	1313.5	1319.5	1331.6	1343.7	1341.7	1343.7	1331.6	1319.5	1313.5	1315.5
152.5°	1355.7	1344.1	1343.7	1349.3	1354.9	1354.5	1354.9	1349.3	1343.7	1344.1	1355.7
155°	1424.1	1402.0	1389.9	1385.9	1385.9	1383.9	1385.9	1385.9	1389.9	1402.0	1424.1
157.5°	1499.4	1468.4	1450.3	1440.6	1437.8	1433.4	1437.8	1440.6	1450.3	1468.4	1499.4
160°	1550.9	1516.7	1498.6	1482.5	1476.4	1470.4	1476.4	1482.5	1498.6	1516.7	1550.9
162.5°	1599.1	1566.5	1546.8	1532.3	1526.3	1517.1	1526.3	1532.3	1546.8	1566.5	1599.1
165°	1677.6	1643.4	1621.3	1609.2	1601.1	1593.1	1601.1	1609.2	1621.3	1643.4	1677.6
167.5°	1756.0	1718.6	1704.1	1690.5	1682.8	1668.3	1682.8	1690.5	1704.1	1718.6	1756.0
170°	1804.3	1770.1	1762.1	1750.0	1735.9	1719.8	1735.9	1750.0	1762.1	1770.1	1804.3
172.5°	1846.1	1823.2	1815.2	1803.1	1798.7	1785.8	1798.7	1803.1	1815.2	1823.2	1846.1
175°	1906.9	1888.8	1888.8	1886.8	1880.7	1868.7	1880.7	1886.8	1888.8	1888.8	1906.9
177.5°	1957.6	1947.9	1954.4	1954.4	1952.7	1941.5	1952.7	1954.4	1954.4	1947.9	1957.6
180°	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4



TEST NUMBER: P1435869

CATALOG NUMBER: SQ2W-FA-K-150U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	1122.9	1122.9	1122.9	1122.9
2.5°	1110.2	1116.0	1116.0	1116.0
5°	1069.2	1093.9	1099.7	1105.5
7.5°	988.3	1043.2	1069.1	1095.1
10°	931.4	983.6	1035.9	1088.1
12.5°	882.7	929.9	1003.8	1077.7
15°	842.9	882.6	965.8	1048.9
17.5°	813.6	839.1	926.2	1013.2
20°	806.6	818.3	905.3	992.3
22.5°	793.9	793.5	879.0	964.5
25°	771.8	758.8	834.2	909.7
27.5°	745.1	723.5	783.0	842.6
30°	725.4	700.3	750.5	800.8
32.5°	702.2	675.9	712.2	748.6
35°	670.3	639.3	654.8	670.3
37.5°	639.5	602.0	597.0	591.9
40°	615.1	574.5	557.1	539.7
42.5°	591.9	549.8	530.8	511.8
45°	555.7	515.0	503.4	491.8
47.5°	520.0	478.4	469.9	461.4
50°	493.3	449.7	438.1	426.5
52.5°	463.1	416.1	409.1	402.2
55°	414.9	367.1	372.9	378.7
57.5°	365.6	313.8	318.8	323.8
60°	330.8	276.6	286.3	296.0
62.5°	304.1	251.5	258.0	264.6
65°	268.4	221.0	217.1	213.3
67.5°	235.3	192.7	179.9	167.1
70°	213.3	174.1	156.7	139.3
72.5°	188.9	156.7	139.3	121.9
75°	150.9	126.2	108.8	91.4
77.5°	112.0	94.8	80.5	66.2
80°	84.1	71.6	61.9	52.2
82.5°	59.8	51.1	42.9	34.8
85°	29.0	25.1	21.3	17.4
87.5°	14.2	11.0	7.8	4.7
90°	36.2	22.1	14.1	6.0
92.5°	78.0	54.3	38.2	22.1
95°	156.9	124.7	88.5	62.4
97.5°	249.8	197.9	162.1	119.1
100°	299.7	249.4	215.2	169.0
102.5°	354.4	312.2	265.1	218.8
105°	452.6	400.3	346.0	293.7
107.5°	543.5	486.0	420.8	373.7
110°	601.4	539.1	470.7	428.4



TEST NUMBER: P1435869

CATALOG NUMBER: SQ2W-FA-K-150U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	657.8	593.8	523.8	481.5
115°	734.2	663.8	599.4	563.2
117.5°	807.8	735.4	667.4	638.8
120°	852.9	780.5	714.1	692.0
122.5°	889.9	819.1	757.5	748.3
125°	945.4	873.0	820.7	832.8
127.5°	990.5	924.1	891.1	918.0
130°	1017.8	959.5	939.4	977.6
132.5°	1041.9	996.5	987.6	1040.3
135°	1078.2	1052.0	1060.1	1132.5
137.5°	1121.2	1111.1	1138.1	1229.4
140°	1148.6	1154.6	1192.8	1295.4
142.5°	1185.6	1199.6	1249.1	1358.2
145°	1243.1	1273.3	1337.6	1446.3
147.5°	1308.3	1347.3	1426.9	1538.4
150°	1351.7	1402.0	1486.5	1593.1
152.5°	1401.6	1453.5	1538.0	1646.2
155°	1478.4	1536.8	1625.3	1717.8
157.5°	1556.9	1616.4	1700.9	1781.8
160°	1605.2	1669.5	1746.0	1820.4
162.5°	1659.9	1719.4	1786.2	1852.6
165°	1739.9	1788.2	1842.5	1898.8
167.5°	1807.1	1847.3	1890.0	1933.8
170°	1850.6	1882.7	1919.0	1953.2
172.5°	1887.6	1913.3	1939.9	1969.2
175°	1937.1	1951.1	1967.2	1985.3
177.5°	1975.3	1980.1	1984.9	1993.0
180°	1991.4	1991.4	1991.4	1991.4



TEST NUMBER: P1435869
 CATALOG NUMBER: SQ2W-FA-K-150U-075D-L935-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.55	15.28	15.65	16.37	17.87	15.75	16.48	16.85	17.57	19.07
	3H	15.63	16.28	16.74	17.38	18.90	16.99	17.63	18.09	18.73	20.25
	4H	15.98	16.59	17.09	17.69	19.22	17.37	17.98	18.48	19.08	20.61
	6H	16.13	16.70	17.25	17.80	19.34	17.52	18.09	18.64	19.19	20.73
	8H	16.16	16.70	17.29	17.82	19.35	17.54	18.08	18.67	19.20	20.73
	12H	16.15	16.66	17.28	17.78	19.33	17.52	18.03	18.65	19.15	20.70
4H	2H	15.40	16.02	16.53	17.12	18.64	16.32	16.93	17.44	18.03	19.56
	3H	16.78	17.29	17.91	18.42	19.96	17.77	18.28	18.90	19.41	20.95
	4H	17.23	17.70	18.36	18.82	20.37	18.24	18.71	19.37	19.83	21.38
	6H	17.45	17.85	18.59	18.99	20.54	18.45	18.86	19.59	20.00	21.55
	8H	17.50	17.88	18.64	19.01	20.58	18.50	18.87	19.64	20.01	21.57
	12H	17.50	17.84	18.65	18.98	20.55	18.48	18.82	19.63	19.97	21.54
8H	4H	17.60	17.98	18.74	19.11	20.67	18.42	18.80	19.56	19.93	21.50
	6H	17.95	18.26	19.10	19.43	20.99	18.73	19.04	19.89	20.22	21.78
	8H	18.06	18.33	19.23	19.49	21.07	18.83	19.10	19.99	20.25	21.83
	12H	18.09	18.33	19.26	19.48	21.10	18.83	19.07	20.00	20.22	21.84
12H	4H	17.60	17.94	18.75	19.08	20.65	18.39	18.73	19.54	19.87	21.44
	6H	18.01	18.29	19.18	19.44	21.02	18.75	19.02	19.91	20.17	21.76
	8H	18.15	18.39	19.32	19.54	21.16	18.86	19.09	20.02	20.24	21.86