

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1435875

Luminaire Tested: SQ2W-FA-K-150U-100D-L935-UNV-STD-W-WM-4

Issue Date: 3/24/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1435875  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2502-345-2)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/24/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ2W-FA-K-150U-100D-L935-UNV-STD-W-WM-4  
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE  
DOWNLIGHT - FROSTED CONTINUOUS ASYMMETRIC ROLL LENS  
UPLIGHT - ASYMMETRIC ROLL LENS  
DOWNLIGHT 1000 LUMENS PER FOOT  
UPLIGHT 1500 LUMENS PER FOOT  
Light Source: 3500K CCT, 90 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 9572.1 lumens  
Efficiency: N/A  
Efficacy: 103.3 lumens/watt  
Spacing Criteria (0/90/45): 1.08 / 1.23 / 1.34  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Indirect

Input Watts (W): 92.7  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1435875

CATALOG NUMBER: SQ2W-FA-K-150U-100D-L935-UNV-STD-W-WM-4

### Luminous Intensity Polar Plot

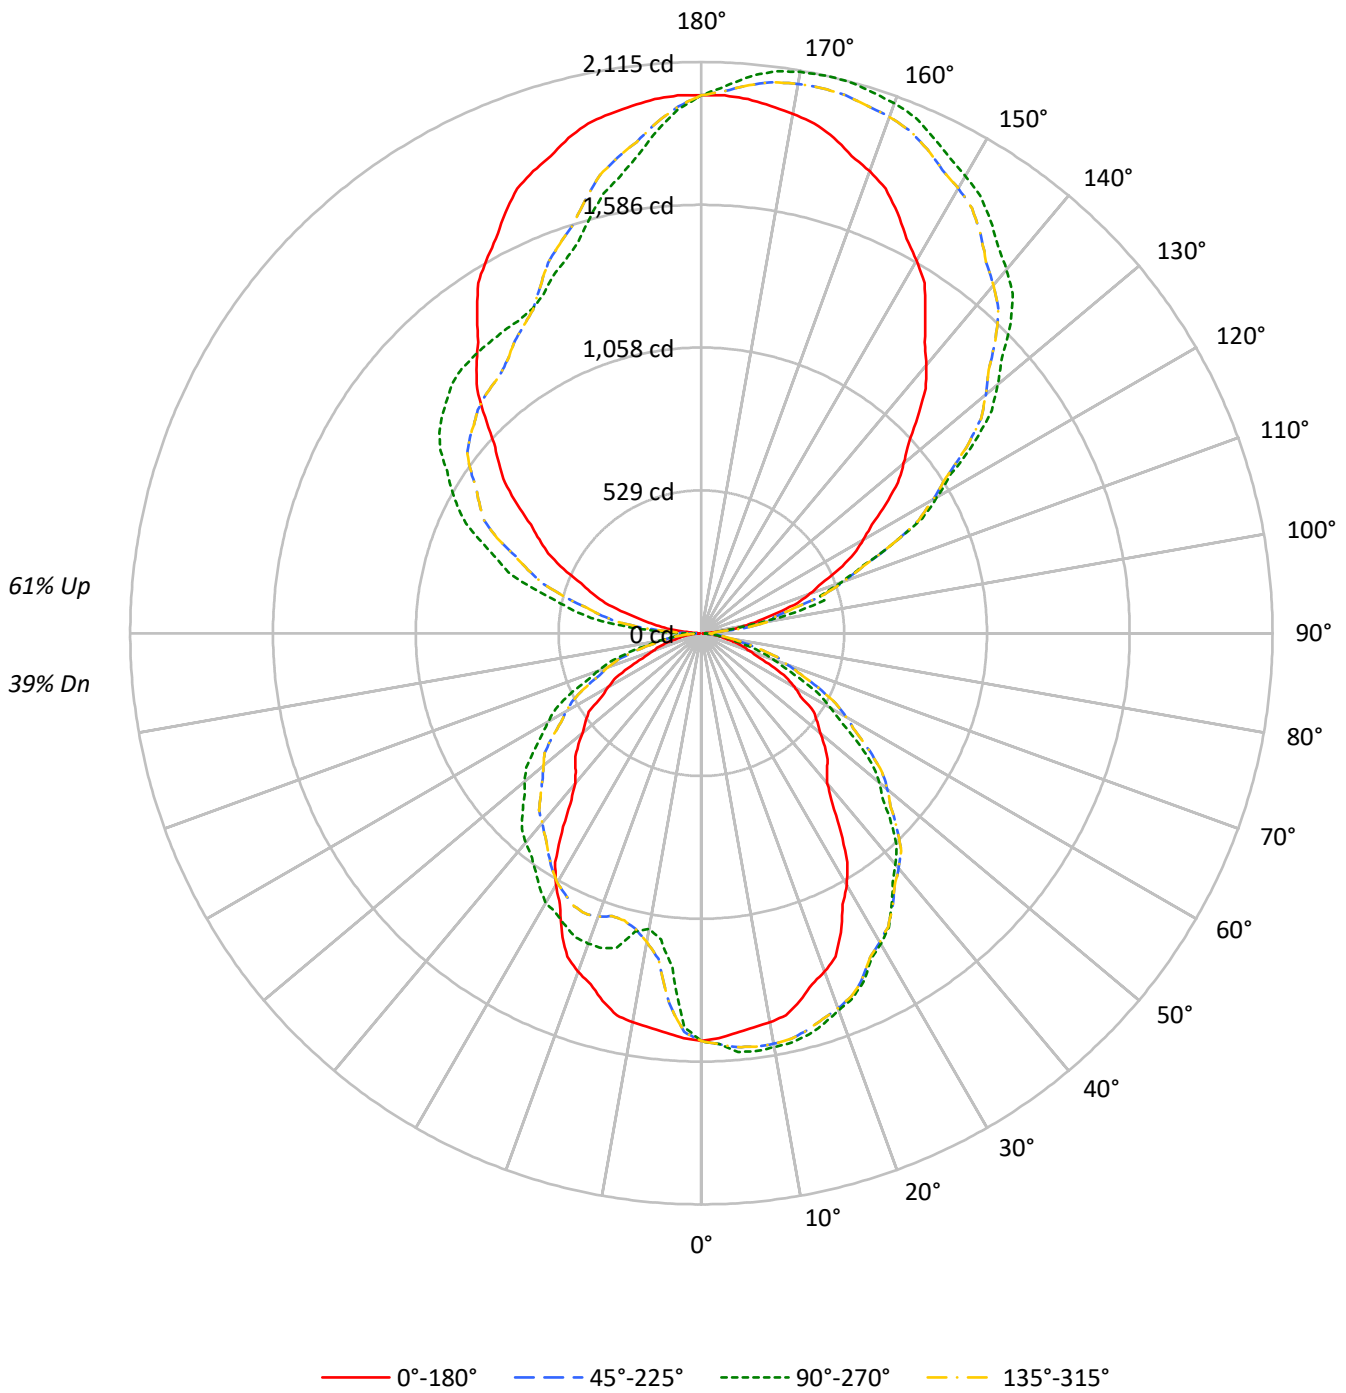



TEST NUMBER: P1435875

CATALOG NUMBER: SQ2W-FA-K-150U-100D-L935-UNV-STD-W-WM-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	105	105	105	105	95	95	95	95	77	77	77	61	61	61	46	46	46	39				
1	95	91	87	84	87	83	80	77	68	66	64	54	52	51	41	40	39	33				
2	87	80	74	69	79	73	68	63	59	56	53	47	45	43	36	34	33	28				
3	79	70	63	57	72	64	58	53	52	48	44	42	39	36	32	30	28	24				
4	72	62	54	48	66	57	50	45	47	42	38	37	34	31	29	26	24	20				
5	66	55	47	41	60	50	43	38	42	36	32	33	30	27	26	23	21	18				
6	61	49	41	36	55	45	38	33	37	32	28	30	26	23	23	21	19	15				
7	56	44	37	31	51	41	34	29	34	29	25	27	23	21	21	19	16	14				
8	52	40	33	27	47	37	30	26	31	26	22	25	21	18	19	17	15	12				
9	49	37	29	24	44	34	27	23	28	23	20	23	19	16	18	15	13	11				
10	45	34	26	22	41	31	25	20	26	21	18	21	17	15	17	14	12	10				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	24377	24377	24377	24377
5°	24090	25228	24090	20107
10°	23985	25520	23985	18229
15°	23573	25725	23573	20150
20°	22924	25539	22924	21013
25°	21787	25332	21787	21267
30°	20073	24766	20073	21492
35°	17763	24222	17763	21108
40°	15293	23557	15293	21338
45°	15100	22715	15100	21379
50°	14405	21607	14405	21461
55°	14331	19932	14331	21250
60°	12849	17763	12849	21164
65°	10953	15648	10953	20569
70°	8842	13260	8842	19062
75°	7667	10954	7667	17523
80°	6527	8164	6527	14142
85°	4335	4335	4335	8670

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 40°  
 Vertical Angle: 45°  
 Luminance: 23427 cd/sqm

TEST NUMBER: P1435875

CATALOG NUMBER: SQ2W-FA-K-150U-100D-L935-UNV-STD-W-WM-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	135.8	1.4
10°-20°	379.6	4.0
20°-30°	576.4	6.0
30°-40°	676.8	7.1
40°-50°	686.8	7.2
50°-60°	601.6	6.3
60°-70°	426.7	4.5
70°-80°	219.7	2.3
80°-90°	54.3	0.6
90°-100°	158.5	1.7
100°-110°	462.2	4.8
110°-120°	754.2	7.9
120°-130°	957.1	10.0
130°-140°	1024.1	10.7
140°-150°	956.3	10.0
150°-160°	786.9	8.2
160°-170°	527.7	5.5
170°-180°	187.4	2.0
0°-30°	1091.9	11.4
0°-40°	1768.6	18.5
0°-60°	3057.0	31.9
0°-90°	3757.7	39.3
90°-120°	1374.9	14.4
90°-150°	4312.4	45.1
90°-180°	5814.0	60.7
0°-180°	9572.1	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1510	1510	1510	1510	1510	
5°	1486	1557	1486	1241	1486	141
15°	1410	1539	1410	1206	1410	396
25°	1223	1422	1223	1194	1223	558
35°	901	1229	901	1071	901	561
45°	661	995	661	936	661	506
55°	509	708	509	755	509	440
65°	287	410	287	538	287	286
75°	123	176	123	281	123	133
85°	23	23	23	47	23	29
90°	6	44	6	86	6	5
95°	62	46	62	272	62	75
105°	294	471	294	648	294	312
115°	563	780	563	962	563	555
125°	833	1237	833	1179	833	745
135°	1132	1619	1132	1306	1132	875
145°	1446	1867	1446	1334	1446	905
155°	1718	2028	1718	1384	1718	790
165°	1899	2114	1899	1593	1899	535
175°	1985	2070	1985	1869	1985	188
180°	1991	1991	1991	1991	1991	



TEST NUMBER: P1435875

CATALOG NUMBER: SQ2W-FA-K-150U-100D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	1509.8	1509.8	1509.8	1509.8	1509.8	1509.8	1509.8	1509.8	1509.8	1509.8	1509.8
2.5°	1500.4	1510.8	1521.2	1523.8	1523.8	1523.8	1523.8	1523.8	1523.8	1523.8	1523.8
5°	1486.4	1504.6	1522.8	1531.2	1536.4	1540.3	1542.9	1546.2	1551.4	1556.6	1551.4
7.5°	1472.3	1496.8	1521.2	1533.2	1541.0	1547.2	1551.9	1556.1	1558.7	1561.3	1558.7
10°	1463.0	1491.6	1520.2	1533.2	1541.0	1546.2	1548.8	1551.4	1554.0	1556.6	1554.0
12.5°	1448.9	1479.6	1510.3	1525.4	1535.3	1541.5	1544.1	1546.7	1549.3	1551.9	1549.3
15°	1410.3	1451.9	1493.5	1509.8	1517.6	1524.1	1529.3	1533.8	1536.4	1539.0	1536.4
17.5°	1362.3	1412.8	1463.2	1483.6	1494.0	1501.6	1506.3	1510.3	1512.4	1514.5	1512.4
20°	1334.2	1388.8	1443.5	1464.9	1475.3	1481.8	1484.4	1486.4	1486.4	1486.4	1486.4
22.5°	1296.8	1357.6	1418.5	1441.5	1451.9	1457.4	1457.9	1458.8	1460.9	1463.0	1460.9
25°	1223.0	1293.3	1363.5	1392.7	1408.3	1414.8	1412.2	1411.6	1416.8	1422.0	1416.8
27.5°	1132.9	1221.3	1309.8	1339.7	1350.1	1356.6	1359.2	1361.1	1361.1	1361.1	1361.1
30°	1076.7	1175.6	1274.4	1306.9	1317.3	1323.8	1326.4	1328.4	1328.4	1328.4	1328.4
32.5°	1006.5	1124.1	1241.6	1277.3	1285.6	1290.0	1290.5	1290.9	1290.9	1290.9	1290.9
35°	901.2	1044.2	1187.3	1226.9	1232.1	1234.7	1234.7	1234.1	1231.5	1228.9	1231.5
37.5°	795.9	958.1	1120.4	1166.9	1174.7	1176.7	1173.1	1169.7	1167.1	1164.5	1167.1
40°	725.6	902.5	1079.3	1129.4	1137.2	1137.2	1129.4	1122.9	1120.3	1117.7	1120.3
42.5°	688.2	863.0	1037.7	1087.3	1095.1	1094.0	1084.2	1076.1	1073.5	1070.9	1073.5
45°	661.3	817.3	973.4	1018.2	1026.0	1024.7	1014.3	1005.2	1000.0	994.8	1000.0
47.5°	620.3	757.6	894.9	939.0	952.0	950.7	935.1	922.1	916.9	911.7	916.9
50°	573.5	708.7	844.0	887.5	900.5	899.2	883.6	870.6	865.4	860.2	865.4
52.5°	540.7	667.6	794.6	834.5	845.4	842.0	824.3	809.8	804.6	799.4	804.6
55°	509.1	615.7	722.4	754.9	762.7	757.5	739.3	723.7	715.9	708.1	715.9
57.5°	435.4	536.8	638.2	669.8	678.2	671.9	651.1	633.3	624.5	615.6	624.5
60°	397.9	489.0	580.0	610.5	620.9	615.7	594.9	576.1	563.1	550.1	563.1
62.5°	355.8	436.4	517.0	548.1	562.7	559.6	538.8	519.9	506.9	493.9	506.9
65°	286.7	357.0	427.2	458.4	476.6	475.3	454.5	435.6	422.6	409.6	422.6
67.5°	224.7	285.1	345.4	376.1	396.9	395.8	373.0	353.2	342.8	332.4	342.8
70°	187.3	239.3	291.3	319.9	340.7	340.7	319.9	301.7	291.3	280.9	291.3
72.5°	163.9	203.4	242.9	270.0	292.9	292.9	270.0	250.7	242.4	234.1	242.4
75°	122.9	146.3	169.7	195.1	221.1	223.7	202.9	186.0	180.8	175.6	180.8
77.5°	88.9	99.9	110.8	130.7	153.6	156.2	138.5	124.7	122.6	120.5	122.6
80°	70.2	72.8	75.4	91.7	112.5	115.1	99.5	87.8	87.8	87.8	87.8
82.5°	46.8	49.4	52.0	63.6	78.2	79.7	68.3	59.2	57.1	55.0	57.1
85°	23.4	23.4	23.4	27.3	32.5	32.5	27.3	23.4	23.4	23.4	23.4
87.5°	5.9	7.5	9.5	12.7	16.0	16.4	14.3	13.1	13.5	13.5	13.5
90°	6.0	14.1	24.1	32.2	38.2	40.2	40.2	42.2	44.3	44.3	44.3
92.5°	22.1	35.0	35.4	35.4	43.0	46.7	49.9	50.3	52.3	52.3	52.3
95°	62.4	68.4	102.6	100.6	68.4	54.3	46.3	46.3	46.3	46.3	46.3
97.5°	119.1	127.9	133.6	179.0	189.1	182.6	148.8	125.1	111.8	105.8	111.8
100°	169.0	173.0	185.1	187.1	237.4	285.6	261.5	231.3	221.3	215.2	221.3
102.5°	218.8	221.3	239.8	248.2	259.9	287.2	370.9	361.7	354.8	353.6	354.8
105°	293.7	295.7	329.9	346.0	354.0	354.0	352.0	392.2	456.6	470.7	456.6
107.5°	373.7	383.0	423.2	466.3	475.5	477.9	467.5	461.4	459.0	460.6	459.0
110°	428.4	442.5	490.8	545.1	559.2	563.2	559.2	553.2	549.1	549.1	549.1



TEST NUMBER: P1435875

CATALOG NUMBER: SQ2W-FA-K-150U-100D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	481.5	502.1	556.8	619.1	642.9	654.9	646.1	641.7	637.6	640.9	637.6
115°	563.2	593.4	665.8	730.2	778.4	784.5	782.5	782.5	780.5	780.5	780.5
117.5°	638.8	687.1	768.4	843.2	899.1	915.2	923.3	920.9	918.4	922.5	918.4
120°	692.0	748.3	840.8	925.3	979.6	1003.7	1011.8	1007.8	1011.8	1007.8	1011.8
122.5°	748.3	817.5	908.4	996.1	1060.1	1087.4	1097.1	1097.9	1098.7	1096.3	1098.7
125°	832.8	917.2	1023.8	1114.4	1180.7	1212.9	1221.0	1223.0	1227.0	1237.1	1227.0
127.5°	918.0	1013.8	1130.9	1218.2	1286.1	1325.2	1337.6	1342.1	1350.5	1354.9	1350.5
130°	977.6	1086.2	1204.9	1287.3	1353.7	1396.0	1418.1	1424.1	1434.2	1432.2	1434.2
132.5°	1040.3	1153.8	1274.1	1359.8	1421.3	1466.8	1485.7	1503.0	1506.6	1509.4	1506.6
135°	1132.5	1255.2	1375.9	1460.3	1518.7	1562.9	1587.1	1603.2	1613.2	1619.2	1613.2
137.5°	1229.4	1359.0	1474.8	1550.0	1608.8	1647.0	1674.4	1691.3	1701.7	1706.5	1701.7
140°	1295.4	1420.1	1532.8	1611.2	1663.5	1701.7	1725.9	1746.0	1758.0	1758.0	1758.0
142.5°	1358.2	1481.3	1590.7	1669.1	1715.0	1750.0	1775.7	1791.0	1804.7	1804.7	1804.7
145°	1446.3	1569.0	1669.5	1748.0	1786.2	1818.4	1846.5	1858.6	1866.7	1866.7	1866.7
147.5°	1538.4	1647.0	1738.7	1814.0	1846.1	1884.0	1906.1	1915.7	1925.8	1921.4	1925.8
150°	1593.1	1693.7	1782.2	1852.6	1884.8	1921.0	1943.1	1951.1	1961.2	1955.2	1961.2
152.5°	1646.2	1741.9	1822.4	1888.0	1915.3	1951.5	1976.9	1984.9	1991.8	1987.3	1991.8
155°	1717.8	1802.3	1876.7	1937.1	1961.2	1995.4	2019.5	2029.6	2037.6	2027.6	2037.6
157.5°	1781.8	1854.6	1919.4	1974.9	2000.6	2030.0	2052.5	2065.0	2073.0	2068.6	2073.0
160°	1820.4	1886.8	1945.1	1997.4	2021.5	2047.7	2071.8	2085.9	2094.0	2087.9	2094.0
162.5°	1852.6	1912.5	1967.6	2015.1	2036.0	2059.0	2087.9	2100.4	2108.4	2100.8	2108.4
165°	1898.8	1947.1	1995.4	2035.6	2053.7	2071.8	2102.0	2116.1	2122.1	2114.1	2122.1
167.5°	1933.8	1970.9	2009.9	2044.5	2057.7	2075.4	2105.6	2117.3	2124.9	2114.9	2124.9
170°	1953.2	1985.3	2019.5	2047.7	2057.7	2073.8	2104.0	2114.1	2120.1	2110.0	2120.1
172.5°	1969.2	1993.4	2021.1	2046.1	2051.3	2064.2	2092.7	2102.8	2107.2	2098.8	2107.2
175°	1985.3	1999.4	2019.5	2035.6	2033.6	2041.7	2065.8	2073.8	2081.9	2069.8	2081.9
177.5°	1993.0	1999.4	2005.9	2015.5	2009.1	2009.1	2026.8	2031.6	2033.2	2026.8	2033.2
180°	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4



TEST NUMBER: P1435875

CATALOG NUMBER: SQ2W-FA-K-150U-100D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	1509.8	1509.8	1509.8	1509.8	1509.8	1509.8	1509.8	1509.8	1509.8	1509.8	1509.8
2.5°	1523.8	1523.8	1523.8	1523.8	1523.8	1521.2	1510.8	1500.4	1500.4	1500.4	1492.6
5°	1546.2	1542.9	1540.3	1536.4	1531.2	1522.8	1504.6	1486.4	1478.6	1470.8	1437.6
7.5°	1556.1	1551.9	1547.2	1541.0	1533.2	1521.2	1496.8	1472.3	1437.5	1402.6	1328.8
10°	1551.4	1548.8	1546.2	1541.0	1533.2	1520.2	1491.6	1463.0	1392.7	1322.5	1252.3
12.5°	1546.7	1544.1	1541.5	1535.3	1525.4	1510.3	1479.6	1448.9	1349.6	1250.2	1186.8
15°	1533.8	1529.3	1524.1	1517.6	1509.8	1493.5	1451.9	1410.3	1298.5	1186.6	1133.3
17.5°	1510.3	1506.3	1501.6	1494.0	1483.6	1463.2	1412.8	1362.3	1245.3	1128.2	1093.9
20°	1486.4	1484.4	1481.8	1475.3	1464.9	1443.5	1388.8	1334.2	1217.2	1100.1	1084.5
22.5°	1458.8	1457.9	1457.4	1451.9	1441.5	1418.5	1357.6	1296.8	1181.8	1066.9	1067.4
25°	1411.6	1412.2	1414.8	1408.3	1392.7	1363.5	1293.3	1223.0	1121.6	1020.2	1037.7
27.5°	1361.1	1359.2	1356.6	1350.1	1339.7	1309.8	1221.3	1132.9	1052.8	972.7	1001.8
30°	1328.4	1326.4	1323.8	1317.3	1306.9	1274.4	1175.6	1076.7	1009.1	941.5	975.3
32.5°	1290.9	1290.5	1290.0	1285.6	1277.3	1241.6	1124.1	1006.5	957.6	908.7	944.1
35°	1234.1	1234.7	1234.7	1232.1	1226.9	1187.3	1044.2	901.2	880.4	859.6	901.2
37.5°	1169.7	1173.1	1176.7	1174.7	1166.9	1120.4	958.1	795.9	802.6	809.4	859.8
40°	1122.9	1129.4	1137.2	1137.2	1129.4	1079.3	902.5	725.6	749.0	772.4	827.1
42.5°	1076.1	1084.2	1094.0	1095.1	1087.3	1037.7	863.0	688.2	713.7	739.2	795.9
45°	1005.2	1014.3	1024.7	1026.0	1018.2	973.4	817.3	661.3	676.9	692.5	747.1
47.5°	922.1	935.1	950.7	952.0	939.0	894.9	757.6	620.3	631.7	643.2	699.1
50°	870.6	883.6	899.2	900.5	887.5	844.0	708.7	573.5	589.1	604.7	663.2
52.5°	809.8	824.3	842.0	845.4	834.5	794.6	667.6	540.7	550.1	559.4	622.6
55°	723.7	739.3	757.5	762.7	754.9	722.4	615.7	509.1	501.3	493.5	557.9
57.5°	633.3	651.1	671.9	678.2	669.8	638.2	536.8	435.4	428.6	421.9	491.6
60°	576.1	594.9	615.7	620.9	610.5	580.0	489.0	397.9	384.9	371.9	444.7
62.5°	519.9	538.8	559.6	562.7	548.1	517.0	436.4	355.8	347.0	338.1	408.8
65°	435.6	454.5	475.3	476.6	458.4	427.2	357.0	286.7	291.9	297.1	360.9
67.5°	353.2	373.0	395.8	396.9	376.1	345.4	285.1	224.7	241.9	259.0	316.4
70°	301.7	319.9	340.7	340.7	319.9	291.3	239.3	187.3	210.7	234.1	286.7
72.5°	250.7	270.0	292.9	292.9	270.0	242.9	203.4	163.9	187.3	210.7	254.0
75°	186.0	202.9	223.7	221.1	195.1	169.7	146.3	122.9	146.3	169.7	202.9
77.5°	124.7	138.5	156.2	153.6	130.7	110.8	99.9	88.9	108.2	127.4	150.6
80°	87.8	99.5	115.1	112.5	91.7	75.4	72.8	70.2	83.2	96.2	113.1
82.5°	59.2	68.3	79.7	78.2	63.6	52.0	49.4	46.8	57.7	68.7	80.4
85°	23.4	27.3	32.5	32.5	27.3	23.4	23.4	23.4	28.6	33.8	39.0
87.5°	13.1	14.3	16.4	16.0	12.7	9.5	7.5	5.9	9.6	13.3	16.6
90°	42.2	40.2	40.2	38.2	32.2	24.1	14.1	6.0	14.1	22.1	36.2
92.5°	50.3	49.9	46.7	43.0	35.4	35.4	35.0	22.1	38.2	54.3	78.0
95°	46.3	46.3	54.3	68.4	100.6	102.6	68.4	62.4	88.5	124.7	156.9
97.5°	125.1	148.8	182.6	189.1	179.0	133.6	127.9	119.1	162.1	197.9	249.8
100°	231.3	261.5	285.6	237.4	187.1	185.1	173.0	169.0	215.2	249.4	299.7
102.5°	361.7	370.9	287.2	259.9	248.2	239.8	221.3	218.8	265.1	312.2	354.4
105°	392.2	352.0	354.0	354.0	346.0	329.9	295.7	293.7	346.0	400.3	452.6
107.5°	461.4	467.5	477.9	475.5	466.3	423.2	383.0	373.7	420.8	486.0	543.5
110°	553.2	559.2	563.2	559.2	545.1	490.8	442.5	428.4	470.7	539.1	601.4



TEST NUMBER: P1435875

CATALOG NUMBER: SQ2W-FA-K-150U-100D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	641.7	646.1	654.9	642.9	619.1	556.8	502.1	481.5	523.8	593.8	657.8
115°	782.5	782.5	784.5	778.4	730.2	665.8	593.4	563.2	599.4	663.8	734.2
117.5°	920.9	923.3	915.2	899.1	843.2	768.4	687.1	638.8	667.4	735.4	807.8
120°	1007.8	1011.8	1003.7	979.6	925.3	840.8	748.3	692.0	714.1	780.5	852.9
122.5°	1097.9	1097.1	1087.4	1060.1	996.1	908.4	817.5	748.3	757.5	819.1	889.9
125°	1223.0	1221.0	1212.9	1180.7	1114.4	1023.8	917.2	832.8	820.7	873.0	945.4
127.5°	1342.1	1337.6	1325.2	1286.1	1218.2	1130.9	1013.8	918.0	891.1	924.1	990.5
130°	1424.1	1418.1	1396.0	1353.7	1287.3	1204.9	1086.2	977.6	939.4	959.5	1017.8
132.5°	1503.0	1485.7	1466.8	1421.3	1359.8	1274.1	1153.8	1040.3	987.6	996.5	1041.9
135°	1603.2	1587.1	1562.9	1518.7	1460.3	1375.9	1255.2	1132.5	1060.1	1052.0	1078.2
137.5°	1691.3	1674.4	1647.0	1608.8	1550.0	1474.8	1359.0	1229.4	1138.1	1111.1	1121.2
140°	1746.0	1725.9	1701.7	1663.5	1611.2	1532.8	1420.1	1295.4	1192.8	1154.6	1148.6
142.5°	1791.0	1775.7	1750.0	1715.0	1669.1	1590.7	1481.3	1358.2	1249.1	1199.6	1185.6
145°	1858.6	1846.5	1818.4	1786.2	1748.0	1669.5	1569.0	1446.3	1337.6	1273.3	1243.1
147.5°	1915.7	1906.1	1884.0	1846.1	1814.0	1738.7	1647.0	1538.4	1426.9	1347.3	1308.3
150°	1951.1	1943.1	1921.0	1884.8	1852.6	1782.2	1693.7	1593.1	1486.5	1402.0	1351.7
152.5°	1984.9	1976.9	1951.5	1915.3	1888.0	1822.4	1741.9	1646.2	1538.0	1453.5	1401.6
155°	2029.6	2019.5	1995.4	1961.2	1937.1	1876.7	1802.3	1717.8	1625.3	1536.8	1478.4
157.5°	2065.0	2052.5	2030.0	2000.6	1974.9	1919.4	1854.6	1781.8	1700.9	1616.4	1556.9
160°	2085.9	2071.8	2047.7	2021.5	1997.4	1945.1	1886.8	1820.4	1746.0	1669.5	1605.2
162.5°	2100.4	2087.9	2059.0	2036.0	2015.1	1967.6	1912.5	1852.6	1786.2	1719.4	1659.9
165°	2116.1	2102.0	2071.8	2053.7	2035.6	1995.4	1947.1	1898.8	1842.5	1788.2	1739.9
167.5°	2117.3	2105.6	2075.4	2057.7	2044.5	2009.9	1970.9	1933.8	1890.0	1847.3	1807.1
170°	2114.1	2104.0	2073.8	2057.7	2047.7	2019.5	1985.3	1953.2	1919.0	1882.7	1850.6
172.5°	2102.8	2092.7	2064.2	2051.3	2046.1	2021.1	1993.4	1969.2	1939.9	1913.3	1887.6
175°	2073.8	2065.8	2041.7	2033.6	2035.6	2019.5	1999.4	1985.3	1967.2	1951.1	1937.1
177.5°	2031.6	2026.8	2009.1	2009.1	2015.5	2005.9	1999.4	1993.0	1984.9	1980.1	1975.3
180°	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4



TEST NUMBER: P1435875

CATALOG NUMBER: SQ2W-FA-K-150U-100D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	1509.8	1509.8	1509.8	1509.8	1509.8	1509.8	1509.8	1509.8	1509.8	1509.8	1509.8
2.5°	1482.2	1473.9	1467.6	1462.4	1460.4	1458.3	1460.4	1462.4	1467.6	1473.9	1482.2
5°	1396.0	1351.8	1305.0	1266.6	1253.6	1240.6	1253.6	1266.6	1305.0	1351.8	1396.0
7.5°	1241.9	1188.6	1168.8	1152.9	1148.8	1144.6	1148.8	1152.9	1168.8	1188.6	1241.9
10°	1182.1	1139.2	1123.6	1111.9	1111.9	1111.9	1111.9	1111.9	1123.6	1139.2	1182.1
12.5°	1135.3	1109.0	1108.0	1109.8	1120.2	1130.6	1120.2	1109.8	1108.0	1109.0	1135.3
15°	1099.5	1103.4	1145.0	1179.5	1192.5	1205.5	1192.5	1179.5	1145.0	1103.4	1099.5
17.5°	1087.1	1109.5	1161.0	1202.2	1212.6	1223.0	1212.6	1202.2	1161.0	1109.5	1087.1
20°	1102.8	1131.4	1170.4	1202.2	1212.6	1223.0	1212.6	1202.2	1170.4	1131.4	1102.8
22.5°	1106.4	1141.2	1171.9	1197.6	1208.0	1218.4	1208.0	1197.6	1171.9	1141.2	1106.4
25°	1094.9	1136.6	1162.6	1183.4	1188.6	1193.8	1188.6	1183.4	1162.6	1136.6	1094.9
27.5°	1067.4	1113.2	1139.2	1159.6	1163.2	1166.9	1163.2	1159.6	1139.2	1113.2	1067.4
30°	1042.9	1089.7	1115.8	1137.2	1145.0	1152.8	1145.0	1137.2	1115.8	1089.7	1042.9
32.5°	1007.6	1055.4	1087.7	1112.2	1113.8	1115.4	1113.8	1112.2	1087.7	1055.4	1007.6
35°	963.6	1013.0	1049.4	1076.1	1073.5	1070.9	1073.5	1076.1	1049.4	1013.0	963.6
37.5°	924.9	973.2	1005.0	1029.5	1032.7	1035.8	1032.7	1029.5	1005.0	973.2	924.9
40°	892.1	941.5	975.3	1002.0	1007.2	1012.4	1007.2	1002.0	975.3	941.5	892.1
42.5°	863.0	913.4	947.2	973.9	979.1	984.3	979.1	973.9	947.2	913.4	863.0
45°	814.7	866.7	903.1	931.1	933.7	936.3	933.7	931.1	903.1	866.7	814.7
47.5°	769.8	822.1	855.9	881.9	884.5	887.1	884.5	881.9	855.9	822.1	769.8
50°	736.0	789.4	823.2	849.2	851.8	854.4	851.8	849.2	823.2	789.4	736.0
52.5°	703.8	759.2	788.8	811.7	814.3	816.9	814.3	811.7	788.8	759.2	703.8
55°	646.3	704.8	733.4	754.9	754.9	754.9	754.9	733.4	704.8	646.3	646.3
57.5°	586.7	646.8	671.8	691.3	694.4	697.5	694.4	691.3	671.8	646.8	586.7
60°	546.2	607.3	628.1	645.0	650.2	655.4	650.2	645.0	628.1	607.3	546.2
62.5°	506.1	565.2	586.0	602.4	605.5	608.6	605.5	602.4	586.0	565.2	506.1
65°	444.1	496.1	516.9	533.2	535.8	538.4	535.8	533.2	516.9	496.1	444.1
67.5°	387.1	429.8	444.4	455.8	457.9	460.0	457.9	455.8	444.4	429.8	387.1
70°	349.2	385.6	396.0	403.8	403.8	403.8	403.8	396.0	385.6	349.2	349.2
72.5°	303.9	334.1	344.5	352.8	354.9	357.0	354.9	352.8	344.5	334.1	303.9
75°	239.3	261.4	269.2	275.7	278.3	280.9	278.3	275.7	269.2	261.4	239.3
77.5°	175.0	189.6	194.3	198.4	201.0	203.6	201.0	198.4	194.3	189.6	175.0
80°	131.3	141.7	144.3	146.9	149.5	152.1	149.5	146.9	144.3	141.7	131.3
82.5°	92.3	99.6	102.2	104.3	104.8	105.3	104.8	104.3	102.2	99.6	92.3
85°	44.2	46.8	46.8	46.8	46.8	46.8	46.8	46.8	46.8	46.8	44.2
87.5°	18.6	21.4	24.2	25.9	27.5	26.7	27.5	25.9	24.2	21.4	18.6
90°	46.3	60.3	74.4	82.5	90.5	86.5	90.5	82.5	74.4	60.3	46.3
92.5°	92.9	116.7	134.0	148.4	154.9	154.1	154.9	148.4	134.0	116.7	92.9
95°	187.1	215.2	243.4	263.5	275.6	271.6	275.6	263.5	243.4	215.2	187.1
97.5°	288.4	326.3	357.6	376.5	388.6	396.7	388.6	376.5	357.6	326.3	288.4
100°	356.0	392.2	428.4	450.6	470.7	478.7	470.7	450.6	428.4	392.2	356.0
102.5°	410.7	458.2	497.6	521.4	538.3	546.3	538.3	521.4	497.6	458.2	410.7
105°	500.9	551.1	593.4	623.6	641.7	647.7	641.7	623.6	593.4	551.1	500.9
107.5°	591.0	642.9	681.9	715.3	737.4	750.3	737.4	715.3	681.9	642.9	591.0
110°	661.8	704.0	746.3	776.4	798.6	806.6	798.6	776.4	746.3	704.0	661.8



TEST NUMBER: P1435875

CATALOG NUMBER: SQ2W-FA-K-150U-100D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	721.3	768.4	810.6	840.8	866.1	877.4	866.1	840.8	810.6	768.4	721.3
115°	804.6	866.9	905.2	933.3	951.4	961.5	951.4	933.3	905.2	866.9	804.6
117.5°	873.8	939.0	980.8	1002.5	1011.0	1018.2	1011.0	1002.5	980.8	939.0	873.8
120°	917.2	977.6	1025.9	1054.0	1064.1	1068.1	1064.1	1054.0	1025.9	977.6	917.2
122.5°	957.5	1014.6	1061.3	1095.9	1112.4	1116.4	1112.4	1095.9	1061.3	1014.6	957.5
125°	1013.8	1068.1	1116.4	1150.6	1168.7	1178.7	1168.7	1150.6	1116.4	1068.1	1013.8
127.5°	1062.9	1121.6	1165.9	1196.8	1214.5	1222.6	1214.5	1196.8	1165.9	1121.6	1062.9
130°	1090.2	1150.6	1194.8	1229.0	1245.1	1253.2	1245.1	1229.0	1194.8	1150.6	1090.2
132.5°	1111.1	1174.7	1220.6	1251.5	1269.2	1277.3	1269.2	1251.5	1220.6	1174.7	1111.1
135°	1136.5	1202.9	1251.1	1281.3	1297.4	1305.5	1297.4	1281.3	1251.1	1202.9	1136.5
137.5°	1158.6	1219.0	1269.2	1301.0	1315.5	1320.7	1315.5	1301.0	1269.2	1219.0	1158.6
140°	1174.7	1227.0	1277.3	1307.5	1323.6	1325.6	1323.6	1307.5	1277.3	1227.0	1174.7
142.5°	1195.6	1236.7	1280.5	1310.7	1326.8	1330.4	1326.8	1310.7	1280.5	1236.7	1195.6
145°	1233.0	1257.2	1287.3	1315.5	1329.6	1333.6	1329.6	1315.5	1287.3	1257.2	1233.0
147.5°	1280.1	1287.8	1303.4	1321.9	1335.6	1338.4	1335.6	1321.9	1303.4	1287.8	1280.1
150°	1315.5	1313.5	1319.5	1331.6	1343.7	1341.7	1343.7	1331.6	1319.5	1313.5	1315.5
152.5°	1355.7	1344.1	1343.7	1349.3	1354.9	1354.5	1354.9	1349.3	1343.7	1344.1	1355.7
155°	1424.1	1402.0	1389.9	1385.9	1385.9	1383.9	1385.9	1385.9	1389.9	1402.0	1424.1
157.5°	1499.4	1468.4	1450.3	1440.6	1437.8	1433.4	1437.8	1440.6	1450.3	1468.4	1499.4
160°	1550.9	1516.7	1498.6	1482.5	1476.4	1470.4	1476.4	1482.5	1498.6	1516.7	1550.9
162.5°	1599.1	1566.5	1546.8	1532.3	1526.3	1517.1	1526.3	1532.3	1546.8	1566.5	1599.1
165°	1677.6	1643.4	1621.3	1609.2	1601.1	1593.1	1601.1	1609.2	1621.3	1643.4	1677.6
167.5°	1756.0	1718.6	1704.1	1690.5	1682.8	1668.3	1682.8	1690.5	1704.1	1718.6	1756.0
170°	1804.3	1770.1	1762.1	1750.0	1735.9	1719.8	1735.9	1750.0	1762.1	1770.1	1804.3
172.5°	1846.1	1823.2	1815.2	1803.1	1798.7	1785.8	1798.7	1803.1	1815.2	1823.2	1846.1
175°	1906.9	1888.8	1888.8	1886.8	1880.7	1868.7	1880.7	1886.8	1888.8	1888.8	1906.9
177.5°	1957.6	1947.9	1954.4	1954.4	1952.7	1941.5	1952.7	1954.4	1954.4	1947.9	1957.6
180°	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4



TEST NUMBER: P1435875

CATALOG NUMBER: SQ2W-FA-K-150U-100D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	330°	340°	350°	360°
0°	1509.8	1509.8	1509.8	1509.8
2.5°	1492.6	1500.4	1500.4	1500.4
5°	1437.6	1470.8	1478.6	1486.4
7.5°	1328.8	1402.6	1437.5	1472.3
10°	1252.3	1322.5	1392.7	1463.0
12.5°	1186.8	1250.2	1349.6	1448.9
15°	1133.3	1186.6	1298.5	1410.3
17.5°	1093.9	1128.2	1245.3	1362.3
20°	1084.5	1100.1	1217.2	1334.2
22.5°	1067.4	1066.9	1181.8	1296.8
25°	1037.7	1020.2	1121.6	1223.0
27.5°	1001.8	972.7	1052.8	1132.9
30°	975.3	941.5	1009.1	1076.7
32.5°	944.1	908.7	957.6	1006.5
35°	901.2	859.6	880.4	901.2
37.5°	859.8	809.4	802.6	795.9
40°	827.1	772.4	749.0	725.6
42.5°	795.9	739.2	713.7	688.2
45°	747.1	692.5	676.9	661.3
47.5°	699.1	643.2	631.7	620.3
50°	663.2	604.7	589.1	573.5
52.5°	622.6	559.4	550.1	540.7
55°	557.9	493.5	501.3	509.1
57.5°	491.6	421.9	428.6	435.4
60°	444.7	371.9	384.9	397.9
62.5°	408.8	338.1	347.0	355.8
65°	360.9	297.1	291.9	286.7
67.5°	316.4	259.0	241.9	224.7
70°	286.7	234.1	210.7	187.3
72.5°	254.0	210.7	187.3	163.9
75°	202.9	169.7	146.3	122.9
77.5°	150.6	127.4	108.2	88.9
80°	113.1	96.2	83.2	70.2
82.5°	80.4	68.7	57.7	46.8
85°	39.0	33.8	28.6	23.4
87.5°	16.6	13.3	9.6	5.9
90°	36.2	22.1	14.1	6.0
92.5°	78.0	54.3	38.2	22.1
95°	156.9	124.7	88.5	62.4
97.5°	249.8	197.9	162.1	119.1
100°	299.7	249.4	215.2	169.0
102.5°	354.4	312.2	265.1	218.8
105°	452.6	400.3	346.0	293.7
107.5°	543.5	486.0	420.8	373.7
110°	601.4	539.1	470.7	428.4



TEST NUMBER: P1435875

CATALOG NUMBER: SQ2W-FA-K-150U-100D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	330°	340°	350°	360°
112.5°	657.8	593.8	523.8	481.5
115°	734.2	663.8	599.4	563.2
117.5°	807.8	735.4	667.4	638.8
120°	852.9	780.5	714.1	692.0
122.5°	889.9	819.1	757.5	748.3
125°	945.4	873.0	820.7	832.8
127.5°	990.5	924.1	891.1	918.0
130°	1017.8	959.5	939.4	977.6
132.5°	1041.9	996.5	987.6	1040.3
135°	1078.2	1052.0	1060.1	1132.5
137.5°	1121.2	1111.1	1138.1	1229.4
140°	1148.6	1154.6	1192.8	1295.4
142.5°	1185.6	1199.6	1249.1	1358.2
145°	1243.1	1273.3	1337.6	1446.3
147.5°	1308.3	1347.3	1426.9	1538.4
150°	1351.7	1402.0	1486.5	1593.1
152.5°	1401.6	1453.5	1538.0	1646.2
155°	1478.4	1536.8	1625.3	1717.8
157.5°	1556.9	1616.4	1700.9	1781.8
160°	1605.2	1669.5	1746.0	1820.4
162.5°	1659.9	1719.4	1786.2	1852.6
165°	1739.9	1788.2	1842.5	1898.8
167.5°	1807.1	1847.3	1890.0	1933.8
170°	1850.6	1882.7	1919.0	1953.2
172.5°	1887.6	1913.3	1939.9	1969.2
175°	1937.1	1951.1	1967.2	1985.3
177.5°	1975.3	1980.1	1984.9	1993.0
180°	1991.4	1991.4	1991.4	1991.4



TEST NUMBER: P1435875  
 CATALOG NUMBER: SQ2W-FA-K-150U-100D-L935-UNV-STD-W-WM-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	16.39	17.16	17.43	18.21	19.63	17.59	18.36	18.63	19.41	20.83
	3H	17.47	18.16	18.52	19.22	20.65	18.82	19.51	19.88	20.57	22.01
	4H	17.82	18.47	18.88	19.53	20.98	19.21	19.86	20.28	20.92	22.37
	6H	17.97	18.58	19.05	19.64	21.10	19.36	19.97	20.44	21.03	22.49
	8H	18.01	18.58	19.09	19.66	21.11	19.39	19.96	20.47	21.04	22.49
	12H	18.00	18.54	19.08	19.62	21.09	19.37	19.91	20.45	20.99	22.46
4H	2H	17.24	17.90	18.32	18.96	20.40	18.16	18.81	19.23	19.87	21.32
	3H	18.62	19.17	19.70	20.26	21.71	19.61	20.16	20.69	21.25	22.70
	4H	19.08	19.58	20.16	20.65	22.13	20.09	20.59	21.17	21.66	23.14
	6H	19.30	19.73	20.39	20.83	22.30	20.30	20.73	21.40	21.83	23.30
	8H	19.36	19.76	20.45	20.85	22.34	20.35	20.75	21.44	21.84	23.33
	12H	19.35	19.72	20.46	20.82	22.31	20.33	20.70	21.45	21.80	23.29
8H	4H	19.45	19.85	20.55	20.95	22.43	20.27	20.68	21.37	21.77	23.26
	6H	19.80	20.13	20.92	21.27	22.75	20.58	20.92	21.70	22.05	23.53
	8H	19.92	20.20	21.04	21.32	22.83	20.68	20.97	21.80	22.09	23.59
	12H	19.95	20.20	21.08	21.32	22.86	20.69	20.95	21.82	22.06	23.60
12H	4H	19.45	19.81	20.56	20.92	22.41	20.24	20.60	21.35	21.71	23.20
	6H	19.87	20.16	20.99	21.27	22.78	20.60	20.89	21.73	22.01	23.51
	8H	20.01	20.26	21.14	21.38	22.92	20.71	20.97	21.84	22.08	23.62