

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1427859

Luminaire Tested: SQ2W-PH1-K-025U-100D-L935-UNV-STD-W-WM-4

Issue Date: 3/10/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1427859  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-10)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/10/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ2W-PH1-K-025U-100D-L935-UNV-STD-W-WM-4  
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE  
DOWNLIGHT - PERCEIVE HEX LENS  
UPLIGHT - ASYMMETRIC ROLL LENS  
DOWNLIGHT 1000 LUMENS PER FOOT  
UPLIGHT 250 LUMENS PER FOOT  
Light Source: 3500K CCT, 90 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5476.6 lumens  
Efficiency: N/A  
Efficacy: 121.4 lumens/watt  
Spacing Criteria (0/90/45): 1.19 / 1.02 / 1.23  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Direct

Input Watts (W): 45.1  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1427859

CATALOG NUMBER: SQ2W-PH1-K-025U-100D-L935-UNV-STD-W-WM-4

### Luminous Intensity Polar Plot

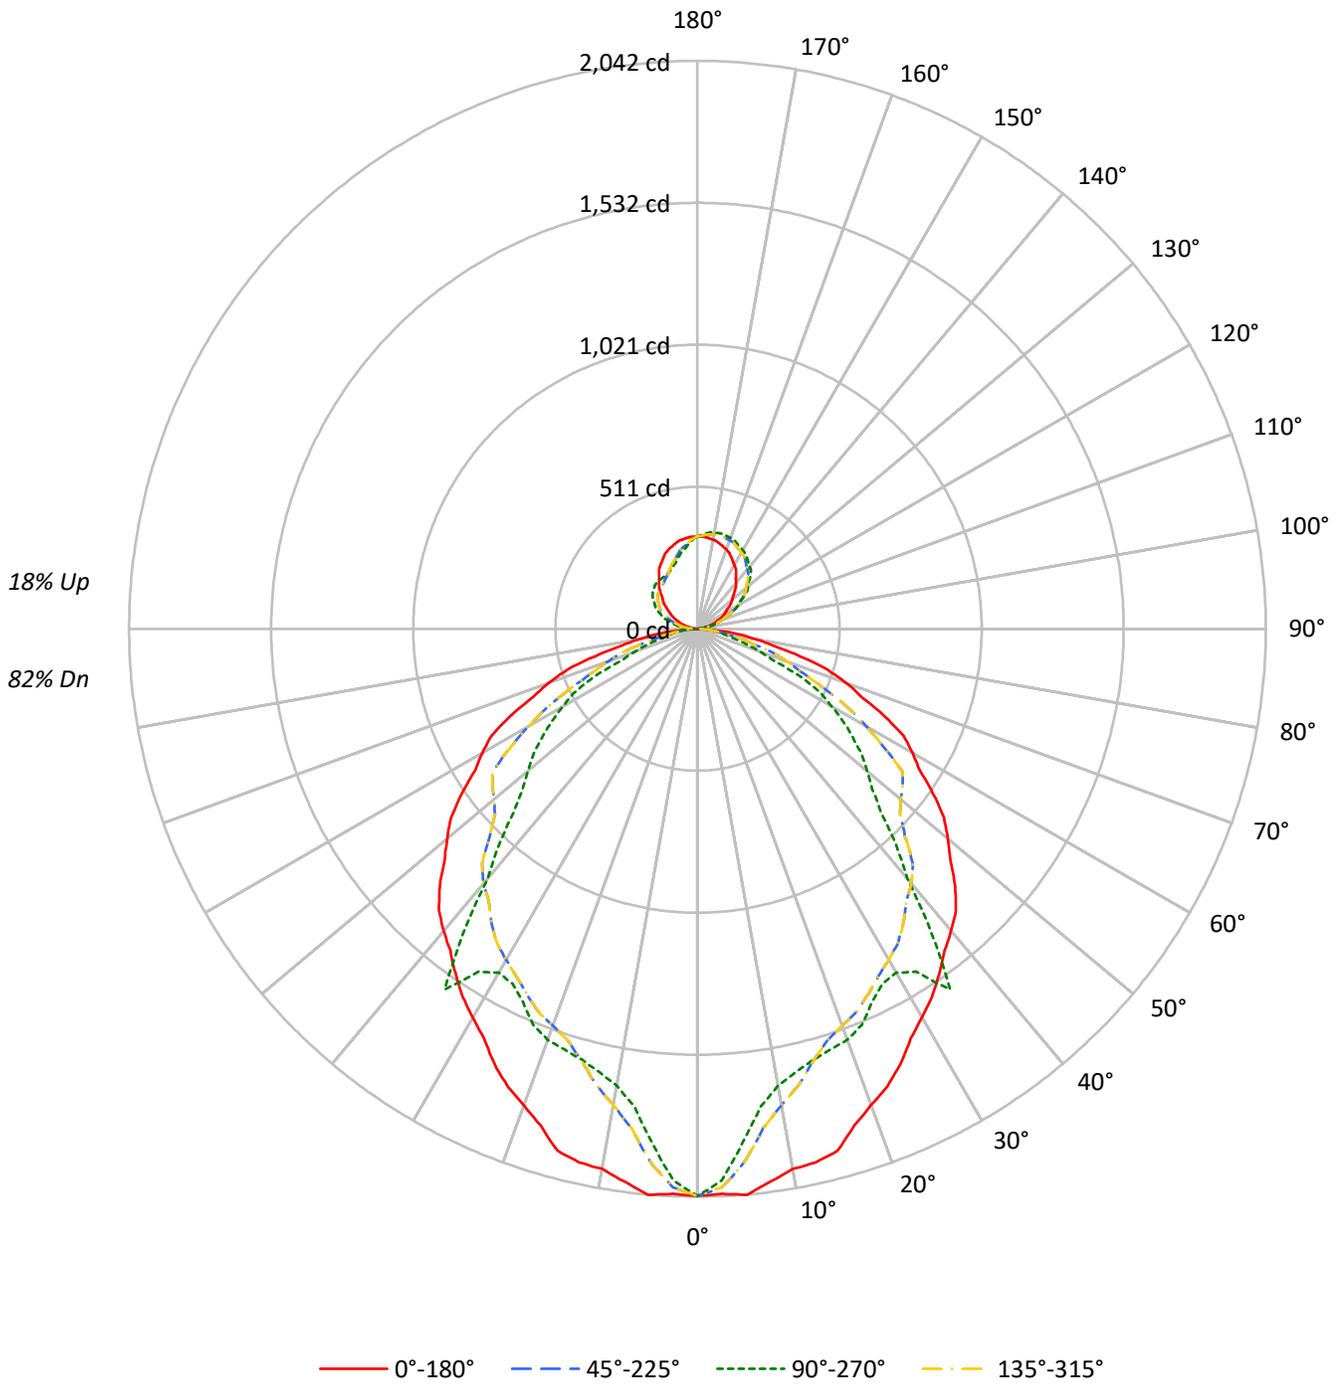



TEST NUMBER: P1427859

CATALOG NUMBER: SQ2W-PH1-K-025U-100D-L935-UNV-STD-W-WM-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	115	115	115	115	110	110	110	110	101	101	101	93	93	93	86	86	86	82
1	105	101	97	94	101	97	94	90	90	87	84	83	81	79	77	75	73	70
2	96	89	82	77	92	85	79	75	79	74	70	73	69	66	68	65	62	59
3	88	78	70	64	84	75	68	63	70	64	59	65	60	56	60	56	53	50
4	81	69	61	55	77	67	59	53	62	56	51	58	53	48	54	49	46	43
5	74	62	54	47	71	60	52	46	56	49	44	52	46	42	49	44	40	38
6	69	56	47	41	66	54	46	40	51	44	39	47	41	37	44	39	35	33
7	64	51	42	36	61	49	41	36	46	39	34	43	37	33	40	35	32	29
8	59	46	38	33	57	45	37	32	42	35	31	39	34	30	37	32	28	26
9	55	42	35	29	53	41	34	29	39	32	28	36	31	27	34	29	26	24
10	52	39	32	26	50	38	31	26	36	29	25	34	28	24	32	27	23	22

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	32913	32913	32913	32913
5°	33102	30084	33102	30084
10°	32338	27346	32338	27346
15°	32484	26811	32484	26811
20°	31326	27027	31326	27027
25°	30752	26398	30752	26398
30°	30085	26613	30085	26613
35°	29857	31195	29857	31195
40°	29882	24731	29882	24731
45°	29893	21301	29893	21301
50°	29473	19974	29473	19974
55°	29100	19164	29100	19164
60°	28810	17976	28810	17976
65°	28305	15633	28305	15633
70°	26738	11169	26738	11169
75°	23836	8471	23836	8471
80°	19479	7931	19479	7931
85°	12208	5391	12208	5391

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 29893 cd/sqm



TEST NUMBER: P1427859

CATALOG NUMBER: SQ2W-PH1-K-025U-100D-L935-UNV-STD-W-WM-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	179.4	3.3
10°-20°	471.8	8.6
20°-30°	691.7	12.6
30°-40°	837.6	15.3
40°-50°	823.6	15.0
50°-60°	716.4	13.1
60°-70°	498.3	9.1
70°-80°	236.3	4.3
80°-90°	53.5	1.0
90°-100°	26.4	0.5
100°-110°	76.9	1.4
110°-120°	125.6	2.3
120°-130°	159.3	2.9
130°-140°	170.5	3.1
140°-150°	159.2	2.9
150°-160°	131.0	2.4
160°-170°	87.9	1.6
170°-180°	31.2	0.6
0°-30°	1342.9	24.5
0°-40°	2180.5	39.8
0°-60°	3720.6	67.9
0°-90°	4508.6	82.3
90°-120°	228.9	4.2
90°-150°	717.9	13.1
90°-180°	968.0	17.7
0°-180°	5476.6	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	2038	2038	2038	2038	2038	
5°	2042	1856	2042	1856	2042	192
15°	1943	1604	1943	1604	1943	542
25°	1726	1482	1726	1482	1726	794
35°	1515	1583	1515	1583	1515	949
45°	1309	933	1309	933	1309	1006
55°	1034	681	1034	681	1034	924
65°	741	409	741	409	741	728
75°	382	136	382	136	382	405
85°	66	29	66	29	66	88
90°	1	7	1	14	1	3
95°	10	8	10	45	10	13
105°	49	78	49	108	49	52
115°	94	130	94	160	94	92
125°	139	206	139	196	139	124
135°	188	270	188	217	188	146
145°	241	311	241	222	241	151
155°	286	338	286	230	286	131
165°	316	352	316	265	316	89
175°	330	345	330	311	330	31
180°	332	332	332	332	332	



TEST NUMBER: P1427859

CATALOG NUMBER: SQ2W-PH1-K-025U-100D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	2038.5	2038.5	2038.5	2038.5	2038.5	2038.5	2038.5	2038.5	2038.5	2038.5	2038.5
2.5°	2033.8	2043.5	2053.1	2039.5	2018.1	2003.3	1995.0	1988.5	1987.1	1985.7	1987.1
5°	2042.4	2041.5	2040.6	2000.3	1946.9	1906.8	1880.1	1859.6	1857.9	1856.2	1857.9
7.5°	2005.1	1978.4	1951.7	1897.5	1834.3	1787.9	1758.4	1736.0	1734.6	1733.2	1734.6
10°	1972.5	1932.0	1891.5	1830.3	1762.2	1714.8	1688.1	1668.0	1668.0	1668.0	1668.0
12.5°	1964.8	1900.8	1836.9	1769.8	1701.7	1657.7	1637.9	1624.1	1628.2	1632.3	1628.2
15°	1943.4	1846.9	1750.3	1682.2	1623.6	1591.7	1586.6	1585.1	1594.5	1604.0	1594.5
17.5°	1872.8	1768.9	1664.9	1605.1	1559.9	1542.8	1553.9	1564.9	1575.9	1587.0	1575.9
20°	1823.2	1720.6	1618.0	1562.6	1523.0	1513.5	1534.2	1552.3	1562.6	1573.0	1562.6
22.5°	1781.3	1677.3	1573.4	1524.4	1493.7	1489.7	1512.5	1530.9	1536.4	1542.0	1536.4
25°	1726.2	1609.0	1491.7	1456.0	1447.3	1452.9	1472.8	1487.0	1484.4	1481.8	1484.4
27.5°	1660.3	1537.9	1415.5	1392.5	1402.7	1413.8	1425.8	1435.3	1436.8	1438.4	1436.8
30°	1613.7	1491.3	1368.9	1350.6	1367.0	1381.2	1393.3	1405.1	1416.3	1427.5	1416.3
32.5°	1568.7	1442.2	1315.6	1302.5	1327.1	1353.8	1382.4	1410.3	1436.0	1461.7	1436.0
35°	1514.8	1382.9	1251.0	1240.7	1270.8	1309.6	1357.0	1413.7	1498.2	1582.7	1498.2
37.5°	1458.2	1316.8	1175.4	1170.7	1211.6	1252.4	1293.3	1330.7	1357.6	1384.5	1357.6
40°	1417.8	1269.6	1121.3	1121.1	1170.2	1221.1	1273.6	1297.6	1235.5	1173.4	1235.5
42.5°	1374.4	1226.1	1077.8	1073.5	1117.1	1173.1	1241.6	1266.7	1161.9	1057.1	1161.9
45°	1309.2	1154.9	1000.6	995.0	1039.0	1070.0	1088.1	1082.9	1007.9	932.9	1007.9
47.5°	1232.4	1085.3	938.3	937.1	984.5	987.9	947.4	909.7	880.4	851.1	880.4
50°	1173.4	1034.7	895.9	901.9	956.2	951.0	886.4	833.2	814.2	795.2	814.2
52.5°	1116.0	984.1	852.2	868.3	933.6	923.3	837.2	769.5	756.8	744.0	756.8
55°	1033.8	907.1	780.4	816.6	907.1	893.3	775.2	686.0	683.4	680.8	683.4
57.5°	946.5	826.7	706.9	732.0	805.4	791.0	688.5	612.9	617.3	621.8	617.3
60°	892.2	775.8	659.5	662.7	705.8	692.0	621.3	567.0	561.8	556.7	561.8
62.5°	834.8	723.9	613.1	597.0	612.5	596.3	548.4	511.1	506.0	500.8	506.0
65°	740.9	640.1	539.2	508.8	501.9	478.6	439.0	409.2	409.2	409.2	409.2
67.5°	637.7	549.8	461.9	427.9	411.8	388.7	358.6	330.8	310.1	289.4	310.1
70°	566.4	488.8	411.2	375.6	354.1	326.5	292.9	264.2	250.4	236.6	250.4
72.5°	490.3	423.8	357.2	320.8	294.4	267.5	240.1	215.6	199.7	183.9	199.7
75°	382.1	328.6	275.2	239.9	210.6	183.4	158.4	139.2	137.5	135.8	137.5
77.5°	276.2	237.2	198.3	169.6	144.5	125.6	113.0	103.6	103.8	104.0	103.8
80°	209.5	180.2	150.9	124.1	98.3	84.9	84.0	83.6	84.5	85.3	84.5
82.5°	147.4	125.7	104.0	86.9	71.4	64.2	65.4	66.4	66.5	66.7	66.5
85°	65.9	55.6	45.3	41.4	39.7	37.1	33.6	30.8	30.0	29.1	30.0
87.5°	14.2	13.7	13.4	11.9	10.1	9.1	9.1	9.2	9.2	9.2	9.2
90°	1.0	2.3	4.0	5.4	6.4	6.7	6.7	7.0	7.4	7.4	7.4
92.5°	3.7	5.8	5.9	5.9	7.2	7.8	8.3	8.4	8.7	8.7	8.7
95°	10.4	11.4	17.1	16.7	11.4	9.0	7.7	7.7	7.7	7.7	7.7
97.5°	19.8	21.3	22.2	29.8	31.5	30.4	24.8	20.8	18.6	17.6	18.6
100°	28.1	28.8	30.8	31.1	39.5	47.6	43.5	38.5	36.8	35.8	36.8
102.5°	36.4	36.8	39.9	41.3	43.3	47.8	61.8	60.2	59.1	58.9	59.1
105°	48.9	49.2	54.9	57.6	58.9	58.9	58.6	65.3	76.0	78.4	76.0
107.5°	62.2	63.8	70.5	77.6	79.2	79.6	77.8	76.8	76.4	76.7	76.4
110°	71.3	73.7	81.7	90.8	93.1	93.8	93.1	92.1	91.4	91.4	91.4



TEST NUMBER: P1427859

CATALOG NUMBER: SQ2W-PH1-K-025U-100D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	80.2	83.6	92.7	103.1	107.0	109.0	107.6	106.8	106.2	106.7	106.2
115°	93.8	98.8	110.8	121.6	129.6	130.6	130.3	130.3	129.9	129.9	129.9
117.5°	106.4	114.4	127.9	140.4	149.7	152.4	153.7	153.3	152.9	153.6	152.9
120°	115.2	124.6	140.0	154.0	163.1	167.1	168.4	167.8	168.4	167.8	168.4
122.5°	124.6	136.1	151.2	165.8	176.5	181.0	182.6	182.8	182.9	182.5	182.9
125°	138.6	152.7	170.5	185.5	196.6	201.9	203.3	203.6	204.3	206.0	204.3
127.5°	152.8	168.8	188.3	202.8	214.1	220.6	222.7	223.4	224.8	225.6	224.8
130°	162.8	180.8	200.6	214.3	225.4	232.4	236.1	237.1	238.8	238.4	238.8
132.5°	173.2	192.1	212.1	226.4	236.6	244.2	247.3	250.2	250.8	251.3	250.8
135°	188.5	209.0	229.1	243.1	252.8	260.2	264.2	266.9	268.6	269.6	268.6
137.5°	204.7	226.2	245.5	258.1	267.8	274.2	278.8	281.6	283.3	284.1	283.3
140°	215.7	236.4	255.2	268.2	276.9	283.3	287.3	290.7	292.7	292.7	292.7
142.5°	226.1	246.6	264.8	277.9	285.5	291.3	295.6	298.2	300.5	300.5	300.5
145°	240.8	261.2	277.9	291.0	297.4	302.7	307.4	309.4	310.8	310.8	310.8
147.5°	256.1	274.2	289.5	302.0	307.4	313.6	317.3	318.9	320.6	319.9	320.6
150°	265.2	282.0	296.7	308.4	313.8	319.8	323.5	324.8	326.5	325.5	326.5
152.5°	274.1	290.0	303.4	314.3	318.9	324.9	329.1	330.5	331.6	330.9	331.6
155°	286.0	300.1	312.4	322.5	326.5	332.2	336.2	337.9	339.2	337.6	339.2
157.5°	296.6	308.8	319.5	328.8	333.1	338.0	341.7	343.8	345.1	344.4	345.1
160°	303.1	314.1	323.8	332.5	336.6	340.9	344.9	347.3	348.6	347.6	348.6
162.5°	308.4	318.4	327.6	335.5	339.0	342.8	347.6	349.7	351.0	349.7	351.0
165°	316.1	324.2	332.2	338.9	341.9	344.9	349.9	352.3	353.3	352.0	353.3
167.5°	322.0	328.1	334.6	340.4	342.6	345.5	350.6	352.5	353.8	352.1	353.8
170°	325.2	330.5	336.2	340.9	342.6	345.3	350.3	352.0	353.0	351.3	353.0
172.5°	327.8	331.9	336.5	340.6	341.5	343.7	348.4	350.1	350.8	349.4	350.8
175°	330.5	332.9	336.2	338.9	338.6	339.9	343.9	345.3	346.6	344.6	346.6
177.5°	331.8	332.9	333.9	335.5	334.5	334.5	337.4	338.2	338.5	337.4	338.5
180°	331.5	331.5	331.5	331.5	331.5	331.5	331.5	331.5	331.5	331.5	331.5



TEST NUMBER: P1427859

CATALOG NUMBER: SQ2W-PH1-K-025U-100D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	2038.5	2038.5	2038.5	2038.5	2038.5	2038.5	2038.5	2038.5	2038.5	2038.5	2038.5
2.5°	1988.5	1995.0	2003.3	2018.1	2039.5	2053.1	2043.5	2033.8	2043.5	2053.1	2039.5
5°	1859.6	1880.1	1906.8	1946.9	2000.3	2040.6	2041.5	2042.4	2041.5	2040.6	2000.3
7.5°	1736.0	1758.4	1787.9	1834.3	1897.5	1951.7	1978.4	2005.1	1978.4	1951.7	1897.5
10°	1668.0	1688.1	1714.8	1762.2	1830.3	1891.5	1932.0	1972.5	1932.0	1891.5	1830.3
12.5°	1624.1	1637.9	1657.7	1701.7	1769.8	1836.9	1900.8	1964.8	1900.8	1836.9	1769.8
15°	1585.1	1586.6	1591.7	1623.6	1682.2	1750.3	1846.9	1943.4	1846.9	1750.3	1682.2
17.5°	1564.9	1553.9	1542.8	1559.9	1605.1	1664.9	1768.9	1872.8	1768.9	1664.9	1605.1
20°	1552.3	1534.2	1513.5	1523.0	1562.6	1618.0	1720.6	1823.2	1720.6	1618.0	1562.6
22.5°	1530.9	1512.5	1489.7	1493.7	1524.4	1573.4	1677.3	1781.3	1677.3	1573.4	1524.4
25°	1487.0	1472.8	1452.9	1447.3	1456.0	1491.7	1609.0	1726.2	1609.0	1491.7	1456.0
27.5°	1435.3	1425.8	1413.8	1402.7	1392.5	1415.5	1537.9	1660.3	1537.9	1415.5	1392.5
30°	1405.1	1393.3	1381.2	1367.0	1350.6	1368.9	1491.3	1613.7	1491.3	1368.9	1350.6
32.5°	1410.3	1382.4	1353.8	1327.1	1302.5	1315.6	1442.2	1568.7	1442.2	1315.6	1302.5
35°	1413.7	1357.0	1309.6	1270.8	1240.7	1251.0	1382.9	1514.8	1382.9	1251.0	1240.7
37.5°	1330.7	1293.3	1252.4	1211.6	1170.7	1175.4	1316.8	1458.2	1316.8	1175.4	1170.7
40°	1297.6	1273.6	1221.1	1170.2	1121.1	1121.3	1269.6	1417.8	1269.6	1121.3	1121.1
42.5°	1266.7	1241.6	1173.1	1117.1	1073.5	1077.8	1226.1	1374.4	1226.1	1077.8	1073.5
45°	1082.9	1088.1	1070.0	1039.0	995.0	1000.6	1154.9	1309.2	1154.9	1000.6	995.0
47.5°	909.7	947.4	987.9	984.5	937.1	938.3	1085.3	1232.4	1085.3	938.3	937.1
50°	833.2	886.4	951.0	956.2	901.9	895.9	1034.7	1173.4	1034.7	895.9	901.9
52.5°	769.5	837.2	923.3	933.6	868.3	852.2	984.1	1116.0	984.1	852.2	868.3
55°	686.0	775.2	893.3	907.1	816.6	780.4	907.1	1033.8	907.1	780.4	816.6
57.5°	612.9	688.5	791.0	805.4	732.0	706.9	826.7	946.5	826.7	706.9	732.0
60°	567.0	621.3	692.0	705.8	662.7	659.5	775.8	892.2	775.8	659.5	662.7
62.5°	511.1	548.4	596.3	612.5	597.0	613.1	723.9	834.8	723.9	613.1	597.0
65°	409.2	439.0	478.6	501.9	508.8	539.2	640.1	740.9	640.1	539.2	508.8
67.5°	330.8	358.6	388.7	411.8	427.9	461.9	549.8	637.7	549.8	461.9	427.9
70°	264.2	292.9	326.5	354.1	375.6	411.2	488.8	566.4	488.8	411.2	375.6
72.5°	215.6	240.1	267.5	294.4	320.8	357.2	423.8	490.3	423.8	357.2	320.8
75°	139.2	158.4	183.4	210.6	239.9	275.2	328.6	382.1	328.6	275.2	239.9
77.5°	103.6	113.0	125.6	144.5	169.6	198.3	237.2	276.2	237.2	198.3	169.6
80°	83.6	84.0	84.9	98.3	124.1	150.9	180.2	209.5	180.2	150.9	124.1
82.5°	66.4	65.4	64.2	71.4	86.9	104.0	125.7	147.4	125.7	104.0	86.9
85°	30.8	33.6	37.1	39.7	41.4	45.3	55.6	65.9	55.6	45.3	41.4
87.5°	9.2	9.1	9.1	10.1	11.9	13.4	13.7	14.2	13.7	13.3	12.1
90°	7.0	6.7	6.7	6.4	5.4	4.0	2.3	1.0	2.3	3.7	6.0
92.5°	8.4	8.3	7.8	7.2	5.9	5.9	5.8	3.7	6.4	9.0	13.0
95°	7.7	7.7	9.0	11.4	16.7	17.1	11.4	10.4	14.7	20.8	26.1
97.5°	20.8	24.8	30.4	31.5	29.8	22.2	21.3	19.8	27.0	33.0	41.6
100°	38.5	43.5	47.6	39.5	31.1	30.8	28.8	28.1	35.8	41.5	49.9
102.5°	60.2	61.8	47.8	43.3	41.3	39.9	36.8	36.4	44.1	52.0	59.0
105°	65.3	58.6	58.9	58.9	57.6	54.9	49.2	48.9	57.6	66.6	75.3
107.5°	76.8	77.8	79.6	79.2	77.6	70.5	63.8	62.2	70.1	80.9	90.5
110°	92.1	93.1	93.8	93.1	90.8	81.7	73.7	71.3	78.4	89.7	100.1



TEST NUMBER: P1427859

CATALOG NUMBER: SQ2W-PH1-K-025U-100D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	106.8	107.6	109.0	107.0	103.1	92.7	83.6	80.2	87.2	98.9	109.5
115°	130.3	130.3	130.6	129.6	121.6	110.8	98.8	93.8	99.8	110.5	122.2
117.5°	153.3	153.7	152.4	149.7	140.4	127.9	114.4	106.4	111.1	122.4	134.5
120°	167.8	168.4	167.1	163.1	154.0	140.0	124.6	115.2	118.9	129.9	142.0
122.5°	182.8	182.6	181.0	176.5	165.8	151.2	136.1	124.6	126.1	136.4	148.2
125°	203.6	203.3	201.9	196.6	185.5	170.5	152.7	138.6	136.6	145.3	157.4
127.5°	223.4	222.7	220.6	214.1	202.8	188.3	168.8	152.8	148.4	153.8	164.9
130°	237.1	236.1	232.4	225.4	214.3	200.6	180.8	162.8	156.4	159.7	169.4
132.5°	250.2	247.3	244.2	236.6	226.4	212.1	192.1	173.2	164.4	165.9	173.5
135°	266.9	264.2	260.2	252.8	243.1	229.1	209.0	188.5	176.5	175.1	179.5
137.5°	281.6	278.8	274.2	267.8	258.1	245.5	226.2	204.7	189.5	185.0	186.7
140°	290.7	287.3	283.3	276.9	268.2	255.2	236.4	215.7	198.6	192.2	191.2
142.5°	298.2	295.6	291.3	285.5	277.9	264.8	246.6	226.1	208.0	199.7	197.4
145°	309.4	307.4	302.7	297.4	291.0	277.9	261.2	240.8	222.7	212.0	207.0
147.5°	318.9	317.3	313.6	307.4	302.0	289.5	274.2	256.1	237.6	224.3	217.8
150°	324.8	323.5	319.8	313.8	308.4	296.7	282.0	265.2	247.5	233.4	225.0
152.5°	330.5	329.1	324.9	318.9	314.3	303.4	290.0	274.1	256.0	242.0	233.3
155°	337.9	336.2	332.2	326.5	322.5	312.4	300.1	286.0	270.6	255.8	246.1
157.5°	343.8	341.7	338.0	333.1	328.8	319.5	308.8	296.6	283.2	269.1	259.2
160°	347.3	344.9	340.9	336.6	332.5	323.8	314.1	303.1	290.7	277.9	267.2
162.5°	349.7	347.6	342.8	339.0	335.5	327.6	318.4	308.4	297.4	286.3	276.3
165°	352.3	349.9	344.9	341.9	338.9	332.2	324.2	316.1	306.7	297.7	289.7
167.5°	352.5	350.6	345.5	342.6	340.4	334.6	328.1	322.0	314.7	307.6	300.9
170°	352.0	350.3	345.3	342.6	340.9	336.2	330.5	325.2	319.5	313.4	308.1
172.5°	350.1	348.4	343.7	341.5	340.6	336.5	331.9	327.8	323.0	318.5	314.3
175°	345.3	343.9	339.9	338.6	338.9	336.2	332.9	330.5	327.5	324.8	322.5
177.5°	338.2	337.4	334.5	334.5	335.5	333.9	332.9	331.8	330.5	329.7	328.9
180°	331.5	331.5	331.5	331.5	331.5	331.5	331.5	331.5	331.5	331.5	331.5



TEST NUMBER: P1427859

CATALOG NUMBER: SQ2W-PH1-K-025U-100D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	2038.5	2038.5	2038.5	2038.5	2038.5	2038.5	2038.5	2038.5	2038.5	2038.5	2038.5
2.5°	2018.1	2003.3	1995.0	1988.5	1987.1	1985.7	1987.1	1988.5	1995.0	2003.3	2018.1
5°	1946.9	1906.8	1880.1	1859.6	1857.9	1856.2	1857.9	1859.6	1880.1	1906.8	1946.9
7.5°	1834.3	1787.9	1758.4	1736.0	1734.6	1733.2	1734.6	1736.0	1758.4	1787.9	1834.3
10°	1762.2	1714.8	1688.1	1668.0	1668.0	1668.0	1668.0	1668.0	1688.1	1714.8	1762.2
12.5°	1701.7	1657.7	1637.9	1624.1	1628.2	1632.3	1628.2	1624.1	1637.9	1657.7	1701.7
15°	1623.6	1591.7	1586.6	1585.1	1594.5	1604.0	1594.5	1585.1	1586.6	1591.7	1623.6
17.5°	1559.9	1542.8	1553.9	1564.9	1575.9	1587.0	1575.9	1564.9	1553.9	1542.8	1559.9
20°	1523.0	1513.5	1534.2	1552.3	1562.6	1573.0	1562.6	1552.3	1534.2	1513.5	1523.0
22.5°	1493.7	1489.7	1512.5	1530.9	1536.4	1542.0	1536.4	1530.9	1512.5	1489.7	1493.7
25°	1447.3	1452.9	1472.8	1487.0	1484.4	1481.8	1484.4	1487.0	1472.8	1452.9	1447.3
27.5°	1402.7	1413.8	1425.8	1435.3	1436.8	1438.4	1436.8	1435.3	1425.8	1413.8	1402.7
30°	1367.0	1381.2	1393.3	1405.1	1416.3	1427.5	1416.3	1405.1	1393.3	1381.2	1367.0
32.5°	1327.1	1353.8	1382.4	1410.3	1436.0	1461.7	1436.0	1410.3	1382.4	1353.8	1327.1
35°	1270.8	1309.6	1357.0	1413.7	1498.2	1582.7	1498.2	1413.7	1357.0	1309.6	1270.8
37.5°	1211.6	1252.4	1293.3	1330.7	1357.6	1384.5	1357.6	1330.7	1293.3	1252.4	1211.6
40°	1170.2	1221.1	1273.6	1297.6	1235.5	1173.4	1235.5	1297.6	1273.6	1221.1	1170.2
42.5°	1117.1	1173.1	1241.6	1266.7	1161.9	1057.1	1161.9	1266.7	1241.6	1173.1	1117.1
45°	1039.0	1070.0	1088.1	1082.9	1007.9	932.9	1007.9	1082.9	1088.1	1070.0	1039.0
47.5°	984.5	987.9	947.4	909.7	880.4	851.1	880.4	909.7	947.4	987.9	984.5
50°	956.2	951.0	886.4	833.2	814.2	795.2	814.2	833.2	886.4	951.0	956.2
52.5°	933.6	923.3	837.2	769.5	756.8	744.0	756.8	769.5	837.2	923.3	933.6
55°	907.1	893.3	775.2	686.0	683.4	680.8	683.4	686.0	775.2	893.3	907.1
57.5°	805.4	791.0	688.5	612.9	617.3	621.8	617.3	612.9	688.5	791.0	805.4
60°	705.8	692.0	621.3	567.0	561.8	556.7	561.8	567.0	621.3	692.0	705.8
62.5°	612.5	596.3	548.4	511.1	506.0	500.8	506.0	511.1	548.4	596.3	612.5
65°	501.9	478.6	439.0	409.2	409.2	409.2	409.2	409.2	439.0	478.6	501.9
67.5°	411.8	388.7	358.6	330.8	310.1	289.4	310.1	330.8	358.6	388.7	411.8
70°	354.1	326.5	292.9	264.2	250.4	236.6	250.4	264.2	292.9	326.5	354.1
72.5°	294.4	267.5	240.1	215.6	199.7	183.9	199.7	215.6	240.1	267.5	294.4
75°	210.6	183.4	158.4	139.2	137.5	135.8	137.5	139.2	158.4	183.4	210.6
77.5°	144.5	125.6	113.0	103.6	103.8	104.0	103.8	103.6	113.0	125.6	144.5
80°	98.3	84.9	84.0	83.6	84.5	85.3	84.5	83.6	84.0	84.9	98.3
82.5°	71.4	64.2	65.4	66.4	66.5	66.7	66.5	66.4	65.4	64.2	71.4
85°	39.7	37.1	33.6	30.8	30.0	29.1	30.0	30.8	33.6	37.1	39.7
87.5°	10.3	9.8	10.2	10.5	10.8	10.6	10.8	10.5	10.2	9.8	10.3
90°	7.7	10.0	12.4	13.7	15.1	14.4	15.1	13.7	12.4	10.0	7.7
92.5°	15.5	19.4	22.3	24.7	25.8	25.7	25.8	24.7	22.3	19.4	15.5
95°	31.1	35.8	40.5	43.9	45.9	45.2	45.9	43.9	40.5	35.8	31.1
97.5°	48.0	54.3	59.5	62.7	64.7	66.0	64.7	62.7	59.5	54.3	48.0
100°	59.3	65.3	71.3	75.0	78.4	79.7	78.4	75.0	71.3	65.3	59.3
102.5°	68.4	76.3	82.8	86.8	89.6	91.0	89.6	86.8	82.8	76.3	68.4
105°	83.4	91.8	98.8	103.8	106.8	107.8	106.8	103.8	98.8	91.8	83.4
107.5°	98.4	107.0	113.5	119.1	122.8	124.9	122.8	119.1	113.5	107.0	98.4
110°	110.2	117.2	124.2	129.3	132.9	134.3	132.9	129.3	124.2	117.2	110.2



TEST NUMBER: P1427859

CATALOG NUMBER: SQ2W-PH1-K-025U-100D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	120.1	127.9	135.0	140.0	144.2	146.1	144.2	140.0	135.0	127.9	120.1
115°	134.0	144.3	150.7	155.4	158.4	160.1	158.4	155.4	150.7	144.3	134.0
117.5°	145.5	156.3	163.3	166.9	168.3	169.5	168.3	166.9	163.3	156.3	145.5
120°	152.7	162.8	170.8	175.5	177.2	177.8	177.2	175.5	170.8	162.8	152.7
122.5°	159.4	168.9	176.7	182.4	185.2	185.9	185.2	182.4	176.7	168.9	159.4
125°	168.8	177.8	185.9	191.6	194.6	196.2	194.6	191.6	185.9	177.8	168.8
127.5°	176.9	186.7	194.1	199.3	202.2	203.5	202.2	199.3	194.1	186.7	176.9
130°	181.5	191.6	198.9	204.6	207.3	208.6	207.3	204.6	198.9	191.6	181.5
132.5°	185.0	195.6	203.2	208.4	211.3	212.6	211.3	208.4	203.2	195.6	185.0
135°	189.2	200.3	208.3	213.3	216.0	217.3	216.0	213.3	208.3	200.3	189.2
137.5°	192.9	202.9	211.3	216.6	219.0	219.9	219.0	216.6	211.3	202.9	192.9
140°	195.6	204.3	212.6	217.7	220.4	220.7	220.4	217.7	212.6	204.3	195.6
142.5°	199.1	205.9	213.2	218.2	220.9	221.5	220.9	218.2	213.2	205.9	199.1
145°	205.3	209.3	214.3	219.0	221.4	222.0	221.4	219.0	214.3	209.3	205.3
147.5°	213.1	214.4	217.0	220.1	222.4	222.8	222.4	220.1	217.0	214.4	213.1
150°	219.0	218.7	219.7	221.7	223.7	223.4	223.7	221.7	219.7	218.7	219.0
152.5°	225.7	223.8	223.7	224.6	225.6	225.5	225.6	224.6	223.7	223.8	225.7
155°	237.1	233.4	231.4	230.7	230.7	230.4	230.7	230.7	231.4	233.4	237.1
157.5°	249.6	244.5	241.4	239.8	239.4	238.6	239.4	239.8	241.4	244.5	249.6
160°	258.2	252.5	249.5	246.8	245.8	244.8	245.8	246.8	249.5	252.5	258.2
162.5°	266.2	260.8	257.5	255.1	254.1	252.6	254.1	255.1	257.5	260.8	266.2
165°	279.3	273.6	269.9	267.9	266.6	265.2	266.6	267.9	269.9	273.6	279.3
167.5°	292.3	286.1	283.7	281.4	280.2	277.7	280.2	281.4	283.7	286.1	292.3
170°	300.4	294.7	293.4	291.3	289.0	286.3	289.0	291.3	293.4	294.7	300.4
172.5°	307.4	303.5	302.2	300.2	299.4	297.3	299.4	300.2	302.2	303.5	307.4
175°	317.5	314.5	314.5	314.1	313.1	311.1	313.1	314.1	314.5	314.5	317.5
177.5°	325.9	324.3	325.4	325.4	325.1	323.2	325.1	325.4	325.4	324.3	325.9
180°	331.5	331.5	331.5	331.5	331.5	331.5	331.5	331.5	331.5	331.5	331.5



TEST NUMBER: P1427859

CATALOG NUMBER: SQ2W-PH1-K-025U-100D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	330°	340°	350°	360°
0°	2038.5	2038.5	2038.5	2038.5
2.5°	2039.5	2053.1	2043.5	2033.8
5°	2000.3	2040.6	2041.5	2042.4
7.5°	1897.5	1951.7	1978.4	2005.1
10°	1830.3	1891.5	1932.0	1972.5
12.5°	1769.8	1836.9	1900.8	1964.8
15°	1682.2	1750.3	1846.9	1943.4
17.5°	1605.1	1664.9	1768.9	1872.8
20°	1562.6	1618.0	1720.6	1823.2
22.5°	1524.4	1573.4	1677.3	1781.3
25°	1456.0	1491.7	1609.0	1726.2
27.5°	1392.5	1415.5	1537.9	1660.3
30°	1350.6	1368.9	1491.3	1613.7
32.5°	1302.5	1315.6	1442.2	1568.7
35°	1240.7	1251.0	1382.9	1514.8
37.5°	1170.7	1175.4	1316.8	1458.2
40°	1121.1	1121.3	1269.6	1417.8
42.5°	1073.5	1077.8	1226.1	1374.4
45°	995.0	1000.6	1154.9	1309.2
47.5°	937.1	938.3	1085.3	1232.4
50°	901.9	895.9	1034.7	1173.4
52.5°	868.3	852.2	984.1	1116.0
55°	816.6	780.4	907.1	1033.8
57.5°	732.0	706.9	826.7	946.5
60°	662.7	659.5	775.8	892.2
62.5°	597.0	613.1	723.9	834.8
65°	508.8	539.2	640.1	740.9
67.5°	427.9	461.9	549.8	637.7
70°	375.6	411.2	488.8	566.4
72.5°	320.8	357.2	423.8	490.3
75°	239.9	275.2	328.6	382.1
77.5°	169.6	198.3	237.2	276.2
80°	124.1	150.9	180.2	209.5
82.5°	86.9	104.0	125.7	147.4
85°	41.4	45.3	55.6	65.9
87.5°	12.1	13.3	13.7	14.2
90°	6.0	3.7	2.3	1.0
92.5°	13.0	9.0	6.4	3.7
95°	26.1	20.8	14.7	10.4
97.5°	41.6	33.0	27.0	19.8
100°	49.9	41.5	35.8	28.1
102.5°	59.0	52.0	44.1	36.4
105°	75.3	66.6	57.6	48.9
107.5°	90.5	80.9	70.1	62.2
110°	100.1	89.7	78.4	71.3



TEST NUMBER: P1427859

CATALOG NUMBER: SQ2W-PH1-K-025U-100D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	330°	340°	350°	360°
112.5°	109.5	98.9	87.2	80.2
115°	122.2	110.5	99.8	93.8
117.5°	134.5	122.4	111.1	106.4
120°	142.0	129.9	118.9	115.2
122.5°	148.2	136.4	126.1	124.6
125°	157.4	145.3	136.6	138.6
127.5°	164.9	153.8	148.4	152.8
130°	169.4	159.7	156.4	162.8
132.5°	173.5	165.9	164.4	173.2
135°	179.5	175.1	176.5	188.5
137.5°	186.7	185.0	189.5	204.7
140°	191.2	192.2	198.6	215.7
142.5°	197.4	199.7	208.0	226.1
145°	207.0	212.0	222.7	240.8
147.5°	217.8	224.3	237.6	256.1
150°	225.0	233.4	247.5	265.2
152.5°	233.3	242.0	256.0	274.1
155°	246.1	255.8	270.6	286.0
157.5°	259.2	269.1	283.2	296.6
160°	267.2	277.9	290.7	303.1
162.5°	276.3	286.3	297.4	308.4
165°	289.7	297.7	306.7	316.1
167.5°	300.9	307.6	314.7	322.0
170°	308.1	313.4	319.5	325.2
172.5°	314.3	318.5	323.0	327.8
175°	322.5	324.8	327.5	330.5
177.5°	328.9	329.7	330.5	331.8
180°	331.5	331.5	331.5	331.5



TEST NUMBER: P1427859  
 CATALOG NUMBER: SQ2W-PH1-K-025U-100D-L935-UNV-STD-W-WM-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	21.61	22.85	22.23	23.48	24.20	20.44	21.67	21.06	22.30	23.02
	3H	23.81	24.92	24.44	25.56	26.32	21.51	22.63	22.15	23.27	24.02
	4H	24.64	25.69	25.30	26.34	27.11	21.78	22.82	22.43	23.48	24.25
	6H	25.13	26.09	25.79	26.76	27.54	21.94	22.90	22.60	23.57	24.35
	8H	25.29	26.21	25.97	26.90	27.68	22.01	22.92	22.68	23.61	24.40
	12H	25.36	26.24	26.05	26.92	27.73	22.03	22.91	22.71	23.59	24.40
4H	2H	22.09	23.13	22.75	23.79	24.56	21.16	22.21	21.82	22.86	23.63
	3H	24.37	25.24	25.04	25.94	26.73	22.43	23.30	23.10	23.99	24.78
	4H	25.26	26.05	25.95	26.75	27.57	22.74	23.52	23.42	24.22	25.04
	6H	25.84	26.53	26.55	27.25	28.08	22.96	23.64	23.66	24.36	25.19
	8H	26.05	26.69	26.77	27.41	28.25	23.05	23.69	23.77	24.41	25.25
	12H	26.16	26.73	26.89	27.47	28.32	23.10	23.67	23.83	24.41	25.26
8H	4H	25.31	25.95	26.03	26.67	27.51	22.99	23.63	23.71	24.35	25.19
	6H	25.96	26.49	26.70	27.25	28.09	23.28	23.80	24.02	24.57	25.41
	8H	26.23	26.69	26.98	27.46	28.32	23.43	23.90	24.18	24.66	25.52
	12H	26.37	26.79	27.13	27.54	28.46	23.51	23.92	24.27	24.68	25.60
12H	4H	25.28	25.86	26.02	26.60	27.45	23.01	23.58	23.74	24.33	25.17
	6H	25.94	26.41	26.69	27.17	28.03	23.32	23.79	24.07	24.55	25.41
	8H	26.23	26.64	26.98	27.40	28.32	23.50	23.91	24.25	24.66	25.58