

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1427901

Luminaire Tested: SQ2W-PH1-K-075U-075D-L935-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1427901
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-10)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-PH1-K-075U-075D-L935-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - PERCEIVE HEX LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 750 LUMENS PER FOOT
UPLIGHT 750 LUMENS PER FOOT
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6244.1 lumens
Efficiency: N/A
Efficacy: 124.1 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.02 / 1.23
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 50.3
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1427901

CATALOG NUMBER: SQ2W-PH1-K-075U-075D-L935-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

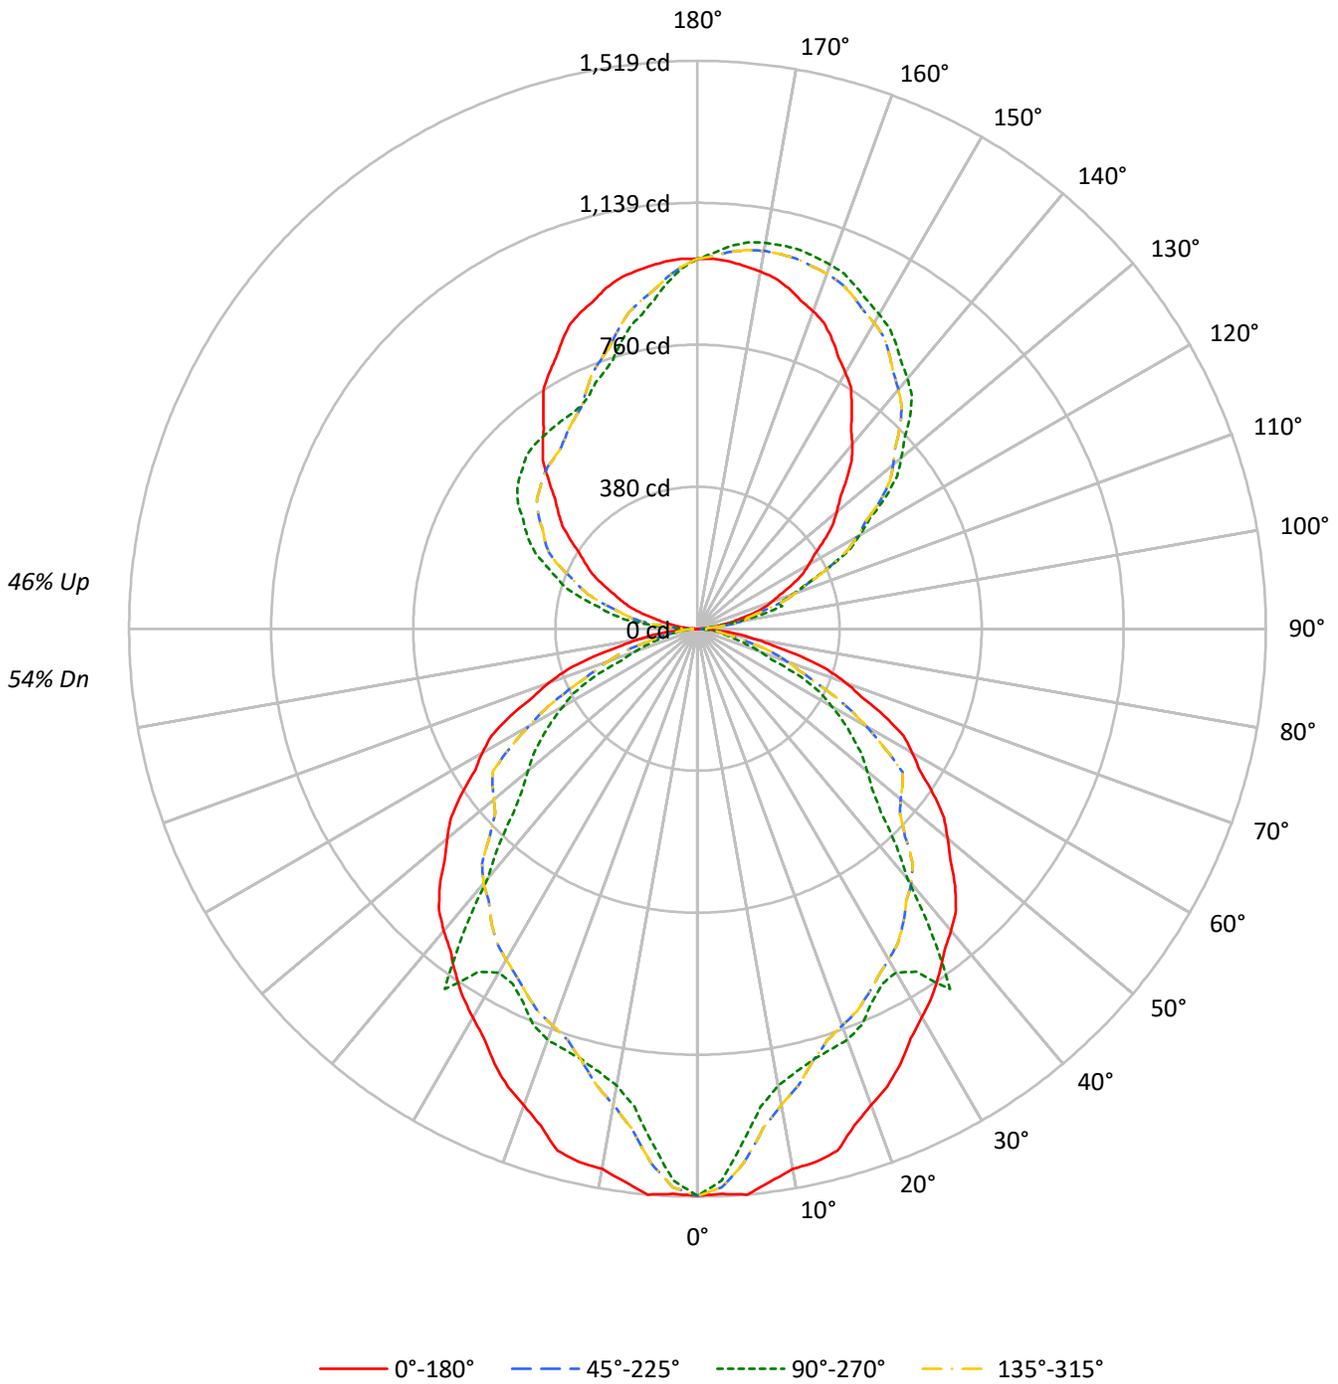



TEST NUMBER: P1427901

CATALOG NUMBER: SQ2W-PH1-K-075U-075D-L935-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	60	60	60	54
1	99	95	91	87	92	88	85	82	75	73	71	64	62	60	53	52	51	46
2	90	83	77	72	83	77	72	67	66	62	59	56	53	51	47	45	43	39
3	82	73	66	60	76	68	61	56	58	54	50	50	46	43	42	39	37	33
4	75	65	57	51	70	60	53	48	52	47	42	44	40	37	37	34	32	28
5	69	58	49	43	64	54	47	41	47	41	37	40	35	32	34	30	28	25
6	64	52	44	38	59	48	41	36	42	36	32	36	32	28	30	27	24	22
7	59	47	39	33	55	44	37	31	38	32	28	33	28	25	28	24	22	19
8	55	42	35	29	51	40	33	28	35	29	25	30	26	22	26	22	19	17
9	51	39	31	26	47	36	30	25	32	26	22	28	23	20	24	20	18	15
10	48	36	28	24	44	33	27	22	29	24	20	26	21	18	22	18	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	24480	24480	24480	24480
5°	24619	22374	24619	22374
10°	24053	20339	24053	20339
15°	24162	19941	24162	19941
20°	23298	20101	23298	20101
25°	22872	19634	22872	19634
30°	22376	19794	22376	19794
35°	22207	23201	22207	23201
40°	22225	18396	22225	18396
45°	22233	15844	22233	15844
50°	21923	14857	21923	14857
55°	21644	14252	21644	14252
60°	21428	13369	21428	13369
65°	21054	11629	21054	11629
70°	19883	8308	19883	8308
75°	17729	6301	17729	6301
80°	14486	5904	14486	5904
85°	9077	4001	9077	4001

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 22233 cd/sqm



TEST NUMBER: P1427901

CATALOG NUMBER: SQ2W-PH1-K-075U-075D-L935-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	133.4	2.1
10°-20°	350.9	5.6
20°-30°	514.5	8.2
30°-40°	623.0	10.0
40°-50°	612.6	9.8
50°-60°	532.9	8.5
60°-70°	370.6	5.9
70°-80°	175.8	2.8
80°-90°	42.9	0.7
90°-100°	78.7	1.3
100°-110°	229.5	3.7
110°-120°	374.6	6.0
120°-130°	475.3	7.6
130°-140°	508.6	8.1
140°-150°	474.9	7.6
150°-160°	390.8	6.3
160°-170°	262.1	4.2
170°-180°	93.1	1.5
0°-30°	998.8	16.0
0°-40°	1621.8	26.0
0°-60°	2767.2	44.3
0°-90°	3356.4	53.8
90°-120°	682.8	10.9
90°-150°	2141.7	34.3
90°-180°	2888.0	46.3
0°-180°	6244.1	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1516	1516	1516	1516	1516	
5°	1519	1380	1519	1380	1519	143
15°	1446	1193	1446	1193	1446	403
25°	1284	1102	1284	1102	1284	590
35°	1127	1177	1127	1177	1127	706
45°	974	694	974	694	974	748
55°	769	506	769	506	769	687
65°	551	304	551	304	551	541
75°	284	101	284	101	284	301
85°	49	22	49	22	49	66
90°	3	22	3	43	3	4
95°	31	23	31	135	31	37
105°	146	234	146	322	146	155
115°	280	388	280	478	280	276
125°	414	614	414	585	414	370
135°	562	804	562	648	562	435
145°	718	927	718	662	718	449
155°	853	1007	853	687	853	392
165°	943	1050	943	791	943	265
175°	986	1028	986	928	986	94
180°	989	989	989	989	989	



TEST NUMBER: P1427901

CATALOG NUMBER: SQ2W-PH1-K-075U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	1516.2	1516.2	1516.2	1516.2	1516.2	1516.2	1516.2	1516.2	1516.2	1516.2	1516.2
2.5°	1512.7	1519.9	1527.1	1516.9	1501.0	1490.0	1483.8	1479.0	1477.9	1476.9	1477.9
5°	1519.0	1518.4	1517.8	1487.8	1448.0	1418.2	1398.3	1383.1	1381.8	1380.5	1381.8
7.5°	1491.3	1471.5	1451.6	1411.3	1364.3	1329.8	1307.8	1291.1	1290.1	1289.1	1290.1
10°	1467.1	1437.0	1406.8	1361.3	1310.7	1275.4	1255.5	1240.6	1240.6	1240.6	1240.6
12.5°	1461.3	1413.8	1366.2	1316.3	1265.7	1233.0	1218.2	1207.9	1211.0	1214.1	1211.0
15°	1445.5	1373.7	1301.8	1251.2	1207.6	1183.9	1180.0	1178.9	1186.0	1193.0	1186.0
17.5°	1393.0	1315.6	1238.3	1193.8	1160.2	1147.5	1155.7	1163.9	1172.1	1180.3	1172.1
20°	1356.0	1279.7	1203.4	1162.2	1132.7	1125.7	1141.1	1154.5	1162.2	1169.9	1162.2
22.5°	1324.9	1247.5	1170.2	1133.8	1110.9	1108.0	1124.9	1138.6	1142.7	1146.9	1142.7
25°	1283.9	1196.7	1109.5	1082.9	1076.5	1080.7	1095.4	1106.0	1104.1	1102.1	1104.1
27.5°	1234.8	1143.8	1052.8	1035.7	1043.2	1051.5	1060.5	1067.5	1068.7	1069.8	1068.7
30°	1200.2	1109.2	1018.1	1004.5	1016.7	1027.3	1036.3	1045.1	1053.4	1061.7	1053.4
32.5°	1166.8	1072.6	978.5	968.7	987.1	1006.9	1028.2	1048.9	1068.0	1087.1	1068.0
35°	1126.7	1028.6	930.5	922.8	945.2	974.1	1009.3	1051.5	1114.3	1177.1	1114.3
37.5°	1084.5	979.4	874.2	870.7	901.1	931.5	961.9	989.7	1009.7	1029.7	1009.7
40°	1054.5	944.2	834.0	833.8	870.4	908.2	947.3	965.1	918.9	872.8	918.9
42.5°	1022.2	911.9	801.7	798.4	830.9	872.5	923.4	942.1	864.2	786.2	864.2
45°	973.7	859.0	744.2	740.0	772.7	795.8	809.3	805.4	749.7	693.9	749.7
47.5°	916.6	807.2	697.9	697.0	732.2	734.8	704.7	676.6	654.8	633.0	654.8
50°	872.8	769.5	666.3	670.8	711.2	707.3	659.3	619.7	605.6	591.5	605.6
52.5°	830.1	732.0	633.9	645.8	694.4	686.7	622.7	572.4	562.9	553.4	562.9
55°	768.9	674.6	580.4	607.3	674.6	664.4	576.6	510.2	508.3	506.3	508.3
57.5°	704.0	614.9	525.7	544.4	599.1	588.3	512.1	455.8	459.2	462.5	459.2
60°	663.6	577.0	490.5	492.9	524.9	514.7	462.1	421.7	417.9	414.0	417.9
62.5°	620.9	538.4	456.0	444.0	455.6	443.5	407.9	380.2	376.3	372.5	376.3
65°	551.1	476.1	401.0	378.4	373.3	356.0	326.5	304.4	304.4	304.4	304.4
67.5°	474.3	408.9	343.5	318.2	306.3	289.1	266.7	246.0	230.6	215.2	230.6
70°	421.2	363.5	305.8	279.4	263.4	242.8	217.8	196.5	186.3	176.0	186.3
72.5°	364.7	315.2	265.7	238.6	219.0	199.0	178.6	160.4	148.6	136.8	148.6
75°	284.2	244.4	204.7	178.4	156.6	136.4	117.8	103.5	102.3	101.0	102.3
77.5°	205.4	176.4	147.5	126.2	107.5	93.4	84.1	77.1	77.2	77.3	77.2
80°	155.8	134.0	112.2	92.3	73.1	63.2	62.5	62.2	62.8	63.5	62.8
82.5°	109.6	93.5	77.3	64.6	53.1	47.8	48.7	49.4	49.5	49.6	49.5
85°	49.0	41.4	33.7	30.8	29.5	27.6	25.0	22.9	22.3	21.6	22.3
87.5°	11.0	11.3	11.8	11.3	10.3	9.8	9.8	10.0	10.2	10.2	10.2
90°	3.0	7.0	12.0	16.0	19.0	20.0	20.0	21.0	22.0	22.0	22.0
92.5°	11.0	17.4	17.6	17.6	21.4	23.2	24.8	25.0	26.0	26.0	26.0
95°	31.0	34.0	50.9	49.9	34.0	27.0	23.0	23.0	23.0	23.0	23.0
97.5°	59.1	63.5	66.3	88.9	93.9	90.7	73.9	62.1	55.5	52.5	55.5
100°	83.9	85.9	91.9	92.9	117.9	141.9	129.9	114.9	109.9	106.9	109.9
102.5°	108.7	109.9	119.1	123.3	129.1	142.7	184.2	179.6	176.2	175.6	176.2
105°	145.8	146.8	163.8	171.8	175.8	175.8	174.8	194.8	226.8	233.8	226.8
107.5°	185.6	190.2	210.2	231.6	236.2	237.4	232.2	229.2	228.0	228.8	228.0
110°	212.8	219.8	243.7	270.7	277.7	279.7	277.7	274.7	272.7	272.7	272.7



TEST NUMBER: P1427901

CATALOG NUMBER: SQ2W-PH1-K-075U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	239.2	249.3	276.5	307.5	319.3	325.3	320.9	318.7	316.7	318.3	316.7
115°	279.7	294.7	330.7	362.6	386.6	389.6	388.6	388.6	387.6	387.6	387.6
117.5°	317.3	341.2	381.6	418.8	446.5	454.5	458.5	457.3	456.1	458.1	456.1
120°	343.6	371.6	417.6	459.5	486.5	498.5	502.5	500.5	502.5	500.5	502.5
122.5°	371.6	406.0	451.1	494.7	526.5	540.0	544.8	545.2	545.6	544.4	545.6
125°	413.6	455.5	508.5	553.4	586.4	602.4	606.4	607.4	609.4	614.4	609.4
127.5°	455.9	503.5	561.6	605.0	638.7	658.1	664.3	666.5	670.7	672.9	670.7
130°	485.5	539.4	598.4	639.3	672.3	693.3	704.3	707.3	712.3	711.3	712.3
132.5°	516.7	573.0	632.7	675.3	705.9	728.4	737.8	746.4	748.2	749.6	748.2
135°	562.4	623.4	683.3	725.3	754.2	776.2	788.2	796.2	801.2	804.2	801.2
137.5°	610.6	674.9	732.4	769.8	799.0	818.0	831.5	839.9	845.1	847.5	845.1
140°	643.3	705.3	761.2	800.2	826.1	845.1	857.1	867.1	873.1	873.1	873.1
142.5°	674.5	735.6	790.0	828.9	851.7	869.1	881.9	889.5	896.3	896.3	896.3
145°	718.3	779.2	829.1	868.1	887.1	903.1	917.1	923.0	927.0	927.0	927.0
147.5°	764.0	818.0	863.5	900.9	916.9	935.6	946.6	951.4	956.4	954.2	956.4
150°	791.2	841.1	885.1	920.1	936.0	954.0	965.0	969.0	974.0	971.0	974.0
152.5°	817.6	865.1	905.1	937.6	951.2	969.2	981.8	985.8	989.2	987.0	989.2
155°	853.1	895.1	932.0	962.0	974.0	991.0	1003.0	1008.0	1012.0	1007.0	1012.0
157.5°	884.9	921.0	953.2	980.8	993.6	1008.2	1019.3	1025.5	1029.5	1027.3	1029.5
160°	904.1	937.0	966.0	992.0	1004.0	1017.0	1028.9	1035.9	1039.9	1036.9	1039.9
162.5°	920.1	949.8	977.2	1000.8	1011.2	1022.5	1036.9	1043.1	1047.1	1043.3	1047.1
165°	943.0	967.0	991.0	1011.0	1019.9	1028.9	1043.9	1050.9	1053.9	1049.9	1053.9
167.5°	960.4	978.8	998.2	1015.4	1021.9	1030.7	1045.7	1051.5	1055.3	1050.3	1055.3
170°	970.0	986.0	1003.0	1017.0	1021.9	1029.9	1044.9	1049.9	1052.9	1047.9	1052.9
172.5°	978.0	990.0	1003.8	1016.2	1018.7	1025.1	1039.3	1044.3	1046.5	1042.3	1046.5
175°	986.0	993.0	1003.0	1011.0	1010.0	1014.0	1025.9	1029.9	1033.9	1027.9	1033.9
177.5°	989.8	993.0	996.2	1001.0	997.8	997.8	1006.6	1009.0	1009.8	1006.6	1009.8
180°	989.0	989.0	989.0	989.0	989.0	989.0	989.0	989.0	989.0	989.0	989.0



TEST NUMBER: P1427901

CATALOG NUMBER: SQ2W-PH1-K-075U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	1516.2	1516.2	1516.2	1516.2	1516.2	1516.2	1516.2	1516.2	1516.2	1516.2	1516.2
2.5°	1479.0	1483.8	1490.0	1501.0	1516.9	1527.1	1519.9	1512.7	1519.9	1527.1	1516.9
5°	1383.1	1398.3	1418.2	1448.0	1487.8	1517.8	1518.4	1519.0	1518.4	1517.8	1487.8
7.5°	1291.1	1307.8	1329.8	1364.3	1411.3	1451.6	1471.5	1491.3	1471.5	1451.6	1411.3
10°	1240.6	1255.5	1275.4	1310.7	1361.3	1406.8	1437.0	1467.1	1437.0	1406.8	1361.3
12.5°	1207.9	1218.2	1233.0	1265.7	1316.3	1366.2	1413.8	1461.3	1413.8	1366.2	1316.3
15°	1178.9	1180.0	1183.9	1207.6	1251.2	1301.8	1373.7	1445.5	1373.7	1301.8	1251.2
17.5°	1163.9	1155.7	1147.5	1160.2	1193.8	1238.3	1315.6	1393.0	1315.6	1238.3	1193.8
20°	1154.5	1141.1	1125.7	1132.7	1162.2	1203.4	1279.7	1356.0	1279.7	1203.4	1162.2
22.5°	1138.6	1124.9	1108.0	1110.9	1133.8	1170.2	1247.5	1324.9	1247.5	1170.2	1133.8
25°	1106.0	1095.4	1080.7	1076.5	1082.9	1109.5	1196.7	1283.9	1196.7	1109.5	1082.9
27.5°	1067.5	1060.5	1051.5	1043.2	1035.7	1052.8	1143.8	1234.8	1143.8	1052.8	1035.7
30°	1045.1	1036.3	1027.3	1016.7	1004.5	1018.1	1109.2	1200.2	1109.2	1018.1	1004.5
32.5°	1048.9	1028.2	1006.9	987.1	968.7	978.5	1072.6	1166.8	1072.6	978.5	968.7
35°	1051.5	1009.3	974.1	945.2	922.8	930.5	1028.6	1126.7	1028.6	930.5	922.8
37.5°	989.7	961.9	931.5	901.1	870.7	874.2	979.4	1084.5	979.4	874.2	870.7
40°	965.1	947.3	908.2	870.4	833.8	834.0	944.2	1054.5	944.2	834.0	833.8
42.5°	942.1	923.4	872.5	830.9	798.4	801.7	911.9	1022.2	911.9	801.7	798.4
45°	805.4	809.3	795.8	772.7	740.0	744.2	859.0	973.7	859.0	744.2	740.0
47.5°	676.6	704.7	734.8	732.2	697.0	697.9	807.2	916.6	807.2	697.9	697.0
50°	619.7	659.3	707.3	711.2	670.8	666.3	769.5	872.8	769.5	666.3	670.8
52.5°	572.4	622.7	686.7	694.4	645.8	633.9	732.0	830.1	732.0	633.9	645.8
55°	510.2	576.6	664.4	674.6	607.3	580.4	674.6	768.9	674.6	580.4	607.3
57.5°	455.8	512.1	588.3	599.1	544.4	525.7	614.9	704.0	614.9	525.7	544.4
60°	421.7	462.1	514.7	524.9	492.9	490.5	577.0	663.6	577.0	490.5	492.9
62.5°	380.2	407.9	443.5	455.6	444.0	456.0	538.4	620.9	538.4	456.0	444.0
65°	304.4	326.5	356.0	373.3	378.4	401.0	476.1	551.1	476.1	401.0	378.4
67.5°	246.0	266.7	289.1	306.3	318.2	343.5	408.9	474.3	408.9	343.5	318.2
70°	196.5	217.8	242.8	263.4	279.4	305.8	363.5	421.2	363.5	305.8	279.4
72.5°	160.4	178.6	199.0	219.0	238.6	265.7	315.2	364.7	315.2	265.7	238.6
75°	103.5	117.8	136.4	156.6	178.4	204.7	244.4	284.2	244.4	204.7	178.4
77.5°	77.1	84.1	93.4	107.5	126.2	147.5	176.4	205.4	176.4	147.5	126.2
80°	62.2	62.5	63.2	73.1	92.3	112.2	134.0	155.8	134.0	112.2	92.3
82.5°	49.4	48.7	47.8	53.1	64.6	77.3	93.5	109.6	93.5	77.3	64.6
85°	22.9	25.0	27.6	29.5	30.8	33.7	41.4	49.0	41.4	33.7	30.8
87.5°	10.0	9.8	9.8	10.3	11.3	11.8	11.3	11.0	11.3	11.6	11.7
90°	21.0	20.0	20.0	19.0	16.0	12.0	7.0	3.0	7.0	11.0	18.0
92.5°	25.0	24.8	23.2	21.4	17.6	17.6	17.4	11.0	19.0	27.0	38.8
95°	23.0	23.0	27.0	34.0	49.9	50.9	34.0	31.0	44.0	61.9	77.9
97.5°	62.1	73.9	90.7	93.9	88.9	66.3	63.5	59.1	80.5	98.3	124.1
100°	114.9	129.9	141.9	117.9	92.9	91.9	85.9	83.9	106.9	123.9	148.8
102.5°	179.6	184.2	142.7	129.1	123.3	119.1	109.9	108.7	131.7	155.0	176.0
105°	194.8	174.8	175.8	175.8	171.8	163.8	146.8	145.8	171.8	198.8	224.8
107.5°	229.2	232.2	237.4	236.2	231.6	210.2	190.2	185.6	209.0	241.4	269.9
110°	274.7	277.7	279.7	277.7	270.7	243.7	219.8	212.8	233.8	267.7	298.7



TEST NUMBER: P1427901

CATALOG NUMBER: SQ2W-PH1-K-075U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	318.7	320.9	325.3	319.3	307.5	276.5	249.3	239.2	260.1	294.9	326.7
115°	388.6	388.6	389.6	386.6	362.6	330.7	294.7	279.7	297.7	329.7	364.6
117.5°	457.3	458.5	454.5	446.5	418.8	381.6	341.2	317.3	331.5	365.2	401.2
120°	500.5	502.5	498.5	486.5	459.5	417.6	371.6	343.6	354.6	387.6	423.6
122.5°	545.2	544.8	540.0	526.5	494.7	451.1	406.0	371.6	376.2	406.8	441.9
125°	607.4	606.4	602.4	586.4	553.4	508.5	455.5	413.6	407.6	433.6	469.5
127.5°	666.5	664.3	658.1	638.7	605.0	561.6	503.5	455.9	442.5	458.9	491.9
130°	707.3	704.3	693.3	672.3	639.3	598.4	539.4	485.5	466.5	476.5	505.5
132.5°	746.4	737.8	728.4	705.9	675.3	632.7	573.0	516.7	490.5	494.9	517.5
135°	796.2	788.2	776.2	754.2	725.3	683.3	623.4	562.4	526.5	522.5	535.4
137.5°	839.9	831.5	818.0	799.0	769.8	732.4	674.9	610.6	565.2	551.8	556.8
140°	867.1	857.1	845.1	826.1	800.2	761.2	705.3	643.3	592.4	573.4	570.4
142.5°	889.5	881.9	869.1	851.7	828.9	790.0	735.6	674.5	620.4	595.8	588.8
145°	923.0	917.1	903.1	887.1	868.1	829.1	779.2	718.3	664.3	632.3	617.4
147.5°	951.4	946.6	935.6	916.9	900.9	863.5	818.0	764.0	708.7	669.1	649.7
150°	969.0	965.0	954.0	936.0	920.1	885.1	841.1	791.2	738.2	696.3	671.3
152.5°	985.8	981.8	969.2	951.2	937.6	905.1	865.1	817.6	763.8	721.9	696.1
155°	1008.0	1003.0	991.0	974.0	962.0	932.0	895.1	853.1	807.2	763.2	734.2
157.5°	1025.5	1019.3	1008.2	993.6	980.8	953.2	921.0	884.9	844.7	802.8	773.2
160°	1035.9	1028.9	1017.0	1004.0	992.0	966.0	937.0	904.1	867.1	829.1	797.2
162.5°	1043.1	1036.9	1022.5	1011.2	1000.8	977.2	949.8	920.1	887.1	853.9	824.3
165°	1050.9	1043.9	1028.9	1019.9	1011.0	991.0	967.0	943.0	915.1	888.1	864.1
167.5°	1051.5	1045.7	1030.7	1021.9	1015.4	998.2	978.8	960.4	938.6	917.5	897.5
170°	1049.9	1044.9	1029.9	1021.9	1017.0	1003.0	986.0	970.0	953.0	935.0	919.1
172.5°	1044.3	1039.3	1025.1	1018.7	1016.2	1003.8	990.0	978.0	963.4	950.2	937.4
175°	1029.9	1025.9	1014.0	1010.0	1011.0	1003.0	993.0	986.0	977.0	969.0	962.0
177.5°	1009.0	1006.6	997.8	997.8	1001.0	996.2	993.0	989.8	985.8	983.4	981.0
180°	989.0	989.0	989.0	989.0	989.0	989.0	989.0	989.0	989.0	989.0	989.0



TEST NUMBER: P1427901

CATALOG NUMBER: SQ2W-PH1-K-075U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	1516.2	1516.2	1516.2	1516.2	1516.2	1516.2	1516.2	1516.2	1516.2	1516.2	1516.2
2.5°	1501.0	1490.0	1483.8	1479.0	1477.9	1476.9	1477.9	1479.0	1483.8	1490.0	1501.0
5°	1448.0	1418.2	1398.3	1383.1	1381.8	1380.5	1381.8	1383.1	1398.3	1418.2	1448.0
7.5°	1364.3	1329.8	1307.8	1291.1	1290.1	1289.1	1290.1	1291.1	1307.8	1329.8	1364.3
10°	1310.7	1275.4	1255.5	1240.6	1240.6	1240.6	1240.6	1240.6	1255.5	1275.4	1310.7
12.5°	1265.7	1233.0	1218.2	1207.9	1211.0	1214.1	1211.0	1207.9	1218.2	1233.0	1265.7
15°	1207.6	1183.9	1180.0	1178.9	1186.0	1193.0	1186.0	1178.9	1180.0	1183.9	1207.6
17.5°	1160.2	1147.5	1155.7	1163.9	1172.1	1180.3	1172.1	1163.9	1155.7	1147.5	1160.2
20°	1132.7	1125.7	1141.1	1154.5	1162.2	1169.9	1162.2	1154.5	1141.1	1125.7	1132.7
22.5°	1110.9	1108.0	1124.9	1138.6	1142.7	1146.9	1142.7	1138.6	1124.9	1108.0	1110.9
25°	1076.5	1080.7	1095.4	1106.0	1104.1	1102.1	1104.1	1106.0	1095.4	1080.7	1076.5
27.5°	1043.2	1051.5	1060.5	1067.5	1068.7	1069.8	1068.7	1067.5	1060.5	1051.5	1043.2
30°	1016.7	1027.3	1036.3	1045.1	1053.4	1061.7	1053.4	1045.1	1036.3	1027.3	1016.7
32.5°	987.1	1006.9	1028.2	1048.9	1068.0	1087.1	1068.0	1048.9	1028.2	1006.9	987.1
35°	945.2	974.1	1009.3	1051.5	1114.3	1177.1	1114.3	1051.5	1009.3	974.1	945.2
37.5°	901.1	931.5	961.9	989.7	1009.7	1029.7	1009.7	989.7	961.9	931.5	901.1
40°	870.4	908.2	947.3	965.1	918.9	872.8	918.9	965.1	947.3	908.2	870.4
42.5°	830.9	872.5	923.4	942.1	864.2	786.2	864.2	942.1	923.4	872.5	830.9
45°	772.7	795.8	809.3	805.4	749.7	693.9	749.7	805.4	809.3	795.8	772.7
47.5°	732.2	734.8	704.7	676.6	654.8	633.0	654.8	704.7	734.8	732.2	732.2
50°	711.2	707.3	659.3	619.7	605.6	591.5	605.6	619.7	659.3	707.3	711.2
52.5°	694.4	686.7	622.7	572.4	562.9	553.4	562.9	622.7	686.7	694.4	694.4
55°	674.6	664.4	576.6	510.2	508.3	506.3	508.3	510.2	576.6	664.4	674.6
57.5°	599.1	588.3	512.1	455.8	459.2	462.5	459.2	512.1	588.3	599.1	599.1
60°	524.9	514.7	462.1	421.7	417.9	414.0	417.9	462.1	514.7	524.9	524.9
62.5°	455.6	443.5	407.9	380.2	376.3	372.5	376.3	407.9	443.5	455.6	455.6
65°	373.3	356.0	326.5	304.4	304.4	304.4	304.4	326.5	356.0	373.3	373.3
67.5°	306.3	289.1	266.7	246.0	230.6	215.2	230.6	266.7	289.1	306.3	306.3
70°	263.4	242.8	217.8	196.5	186.3	176.0	186.3	217.8	242.8	263.4	263.4
72.5°	219.0	199.0	178.6	160.4	148.6	136.8	148.6	178.6	199.0	219.0	219.0
75°	156.6	136.4	117.8	103.5	102.3	101.0	102.3	117.8	136.4	156.6	156.6
77.5°	107.5	93.4	84.1	77.1	77.2	77.3	77.2	84.1	93.4	107.5	107.5
80°	73.1	63.2	62.5	62.2	62.8	63.5	62.8	62.2	62.5	63.2	73.1
82.5°	53.1	47.8	48.7	49.4	49.5	49.6	49.5	47.8	47.8	53.1	53.1
85°	29.5	27.6	25.0	22.9	22.3	21.6	22.3	25.0	27.6	29.5	29.5
87.5°	11.1	11.8	13.2	14.0	14.8	14.4	14.8	11.8	11.8	11.1	11.1
90°	23.0	30.0	37.0	41.0	45.0	43.0	45.0	30.0	30.0	23.0	23.0
92.5°	46.2	57.9	66.5	73.7	76.9	76.5	76.9	57.9	57.9	46.2	46.2
95°	92.9	106.9	120.9	130.9	136.9	134.9	136.9	106.9	106.9	92.9	92.9
97.5°	143.3	162.0	177.6	187.0	193.0	197.0	193.0	162.0	162.0	143.3	143.3
100°	176.8	194.8	212.8	223.8	233.8	237.8	233.8	212.8	194.8	176.8	176.8
102.5°	204.0	227.6	247.1	258.9	267.3	271.3	267.3	247.1	227.6	204.0	204.0
105°	248.7	273.7	294.7	309.7	318.7	321.7	318.7	294.7	273.7	248.7	248.7
107.5°	293.5	319.3	338.7	355.2	366.2	372.6	366.2	319.3	319.3	293.5	293.5
110°	328.7	349.6	370.6	385.6	396.6	400.6	396.6	349.6	349.6	328.7	328.7



TEST NUMBER: P1427901

CATALOG NUMBER: SQ2W-PH1-K-075U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	358.2	381.6	402.6	417.6	430.2	435.8	430.2	417.6	402.6	381.6	358.2
115°	399.6	430.6	449.5	463.5	472.5	477.5	472.5	463.5	449.5	430.6	399.6
117.5°	434.0	466.3	487.1	497.9	502.1	505.7	502.1	497.9	487.1	466.3	434.0
120°	455.5	485.5	509.5	523.5	528.5	530.5	528.5	523.5	509.5	485.5	455.5
122.5°	475.5	503.9	527.1	544.2	552.4	554.4	552.4	544.2	527.1	503.9	475.5
125°	503.5	530.5	554.4	571.4	580.4	585.4	580.4	571.4	554.4	530.5	503.5
127.5°	527.9	557.0	579.0	594.4	603.2	607.2	603.2	594.4	579.0	557.0	527.9
130°	541.4	571.4	593.4	610.4	618.4	622.4	618.4	610.4	593.4	571.4	541.4
132.5°	551.8	583.4	606.2	621.6	630.3	634.3	630.3	621.6	606.2	583.4	551.8
135°	564.4	597.4	621.4	636.3	644.3	648.3	644.3	636.3	621.4	597.4	564.4
137.5°	575.4	605.4	630.3	646.1	653.3	655.9	653.3	646.1	630.3	605.4	575.4
140°	583.4	609.4	634.3	649.3	657.3	658.3	657.3	649.3	634.3	609.4	583.4
142.5°	593.8	614.2	635.9	650.9	658.9	660.7	658.9	650.9	635.9	614.2	593.8
145°	612.4	624.4	639.3	653.3	660.3	662.3	660.3	653.3	639.3	624.4	612.4
147.5°	635.7	639.5	647.3	656.5	663.3	664.7	663.3	656.5	647.3	639.5	635.7
150°	653.3	652.3	655.3	661.3	667.3	666.3	667.3	661.3	655.3	652.3	653.3
152.5°	673.3	667.5	667.3	670.1	672.9	672.7	672.9	670.1	667.3	667.5	673.3
155°	707.3	696.3	690.3	688.3	688.3	687.3	688.3	688.3	690.3	696.3	707.3
157.5°	744.6	729.2	720.3	715.5	714.1	711.9	714.1	715.5	720.3	729.2	744.6
160°	770.2	753.2	744.2	736.2	733.2	730.2	733.2	736.2	744.2	753.2	770.2
162.5°	794.2	778.0	768.2	761.0	758.0	753.4	758.0	761.0	768.2	778.0	794.2
165°	833.1	816.2	805.2	799.2	795.2	791.2	795.2	799.2	805.2	816.2	833.1
167.5°	872.1	853.5	846.3	839.5	835.7	828.5	835.7	839.5	846.3	853.5	872.1
170°	896.1	879.1	875.1	869.1	862.1	854.1	862.1	869.1	875.1	879.1	896.1
172.5°	916.9	905.5	901.5	895.5	893.3	886.9	893.3	895.5	901.5	905.5	916.9
175°	947.0	938.0	938.0	937.0	934.0	928.0	934.0	937.0	938.0	938.0	947.0
177.5°	972.2	967.4	970.6	970.6	969.8	964.2	969.8	970.6	970.6	967.4	972.2
180°	989.0	989.0	989.0	989.0	989.0	989.0	989.0	989.0	989.0	989.0	989.0



TEST NUMBER: P1427901

CATALOG NUMBER: SQ2W-PH1-K-075U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	1516.2	1516.2	1516.2	1516.2
2.5°	1516.9	1527.1	1519.9	1512.7
5°	1487.8	1517.8	1518.4	1519.0
7.5°	1411.3	1451.6	1471.5	1491.3
10°	1361.3	1406.8	1437.0	1467.1
12.5°	1316.3	1366.2	1413.8	1461.3
15°	1251.2	1301.8	1373.7	1445.5
17.5°	1193.8	1238.3	1315.6	1393.0
20°	1162.2	1203.4	1279.7	1356.0
22.5°	1133.8	1170.2	1247.5	1324.9
25°	1082.9	1109.5	1196.7	1283.9
27.5°	1035.7	1052.8	1143.8	1234.8
30°	1004.5	1018.1	1109.2	1200.2
32.5°	968.7	978.5	1072.6	1166.8
35°	922.8	930.5	1028.6	1126.7
37.5°	870.7	874.2	979.4	1084.5
40°	833.8	834.0	944.2	1054.5
42.5°	798.4	801.7	911.9	1022.2
45°	740.0	744.2	859.0	973.7
47.5°	697.0	697.9	807.2	916.6
50°	670.8	666.3	769.5	872.8
52.5°	645.8	633.9	732.0	830.1
55°	607.3	580.4	674.6	768.9
57.5°	544.4	525.7	614.9	704.0
60°	492.9	490.5	577.0	663.6
62.5°	444.0	456.0	538.4	620.9
65°	378.4	401.0	476.1	551.1
67.5°	318.2	343.5	408.9	474.3
70°	279.4	305.8	363.5	421.2
72.5°	238.6	265.7	315.2	364.7
75°	178.4	204.7	244.4	284.2
77.5°	126.2	147.5	176.4	205.4
80°	92.3	112.2	134.0	155.8
82.5°	64.6	77.3	93.5	109.6
85°	30.8	33.7	41.4	49.0
87.5°	11.7	11.6	11.3	11.0
90°	18.0	11.0	7.0	3.0
92.5°	38.8	27.0	19.0	11.0
95°	77.9	61.9	44.0	31.0
97.5°	124.1	98.3	80.5	59.1
100°	148.8	123.9	106.9	83.9
102.5°	176.0	155.0	131.7	108.7
105°	224.8	198.8	171.8	145.8
107.5°	269.9	241.4	209.0	185.6
110°	298.7	267.7	233.8	212.8

TEST NUMBER: P1427901

CATALOG NUMBER: SQ2W-PH1-K-075U-075D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	326.7	294.9	260.1	239.2
115°	364.6	329.7	297.7	279.7
117.5°	401.2	365.2	331.5	317.3
120°	423.6	387.6	354.6	343.6
122.5°	441.9	406.8	376.2	371.6
125°	469.5	433.6	407.6	413.6
127.5°	491.9	458.9	442.5	455.9
130°	505.5	476.5	466.5	485.5
132.5°	517.5	494.9	490.5	516.7
135°	535.4	522.5	526.5	562.4
137.5°	556.8	551.8	565.2	610.6
140°	570.4	573.4	592.4	643.3
142.5°	588.8	595.8	620.4	674.5
145°	617.4	632.3	664.3	718.3
147.5°	649.7	669.1	708.7	764.0
150°	671.3	696.3	738.2	791.2
152.5°	696.1	721.9	763.8	817.6
155°	734.2	763.2	807.2	853.1
157.5°	773.2	802.8	844.7	884.9
160°	797.2	829.1	867.1	904.1
162.5°	824.3	853.9	887.1	920.1
165°	864.1	888.1	915.1	943.0
167.5°	897.5	917.5	938.6	960.4
170°	919.1	935.0	953.0	970.0
172.5°	937.4	950.2	963.4	978.0
175°	962.0	969.0	977.0	986.0
177.5°	981.0	983.4	985.8	989.8
180°	989.0	989.0	989.0	989.0



TEST NUMBER: P1427901
 CATALOG NUMBER: SQ2W-PH1-K-075U-075D-L935-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.33	19.22	19.25	20.16	21.38	17.15	18.04	18.08	18.99	20.20
	3H	20.50	21.30	21.44	22.25	23.49	18.21	19.00	19.15	19.96	21.20
	4H	21.32	22.07	22.27	23.03	24.28	18.45	19.21	19.41	20.16	21.41
	6H	21.79	22.48	22.75	23.44	24.70	18.60	19.29	19.56	20.25	21.51
	8H	21.94	22.60	22.91	23.58	24.84	18.66	19.31	19.63	20.29	21.55
	12H	22.00	22.63	22.97	23.60	24.88	18.67	19.29	19.64	20.27	21.55
4H	2H	18.77	19.52	19.72	20.47	21.72	17.84	18.59	18.80	19.55	20.80
	3H	21.02	21.65	21.99	22.63	23.90	19.08	19.70	20.04	20.69	21.95
	4H	21.89	22.46	22.87	23.45	24.73	19.37	19.94	20.35	20.92	22.21
	6H	22.46	22.95	23.44	23.95	25.24	19.57	20.06	20.56	21.06	22.35
	8H	22.66	23.12	23.65	24.11	25.42	19.66	20.12	20.65	21.11	22.42
	12H	22.74	23.16	23.75	24.17	25.48	19.68	20.10	20.69	21.11	22.42
8H	4H	21.92	22.38	22.91	23.37	24.68	19.60	20.06	20.59	21.05	22.36
	6H	22.55	22.93	23.57	23.97	25.27	19.87	20.25	20.88	21.29	22.59
	8H	22.81	23.15	23.84	24.17	25.49	20.02	20.35	21.04	21.37	22.69
	12H	22.94	23.24	23.97	24.26	25.62	20.08	20.37	21.11	21.39	22.76
12H	4H	21.87	22.29	22.88	23.30	24.61	19.60	20.01	20.61	21.02	22.33
	6H	22.53	22.86	23.55	23.89	25.20	19.90	20.24	20.93	21.26	22.58
	8H	22.80	23.09	23.83	24.11	25.48	20.07	20.36	21.10	21.38	22.74