

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1428153

Luminaire Tested: SQ2W-PP3-K-150U-125D-L935-UNV-STD-W-WM-4

Issue Date: 3/10/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1428153  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-7)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/10/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ2W-PP3-K-150U-125D-L935-UNV-STD-W-WM-4  
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE  
DOWNLIGHT - PERCEIVE PRISM LENS  
UPLIGHT - ASYMMETRIC ROLL LENS  
DOWNLIGHT 1250 LUMENS PER FOOT  
UPLIGHT 1500 LUMENS PER FOOT  
Light Source: 3500K CCT, 90 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 11576.5 lumens  
Efficiency: N/A  
Efficacy: 111.0 lumens/watt  
Spacing Criteria (0/90/45): 1.26 / 1.41 / 1.4  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse

Input Watts (W): 104.3  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1428153

CATALOG NUMBER: SQ2W-PP3-K-150U-125D-L935-UNV-STD-W-WM-4

### Luminous Intensity Polar Plot

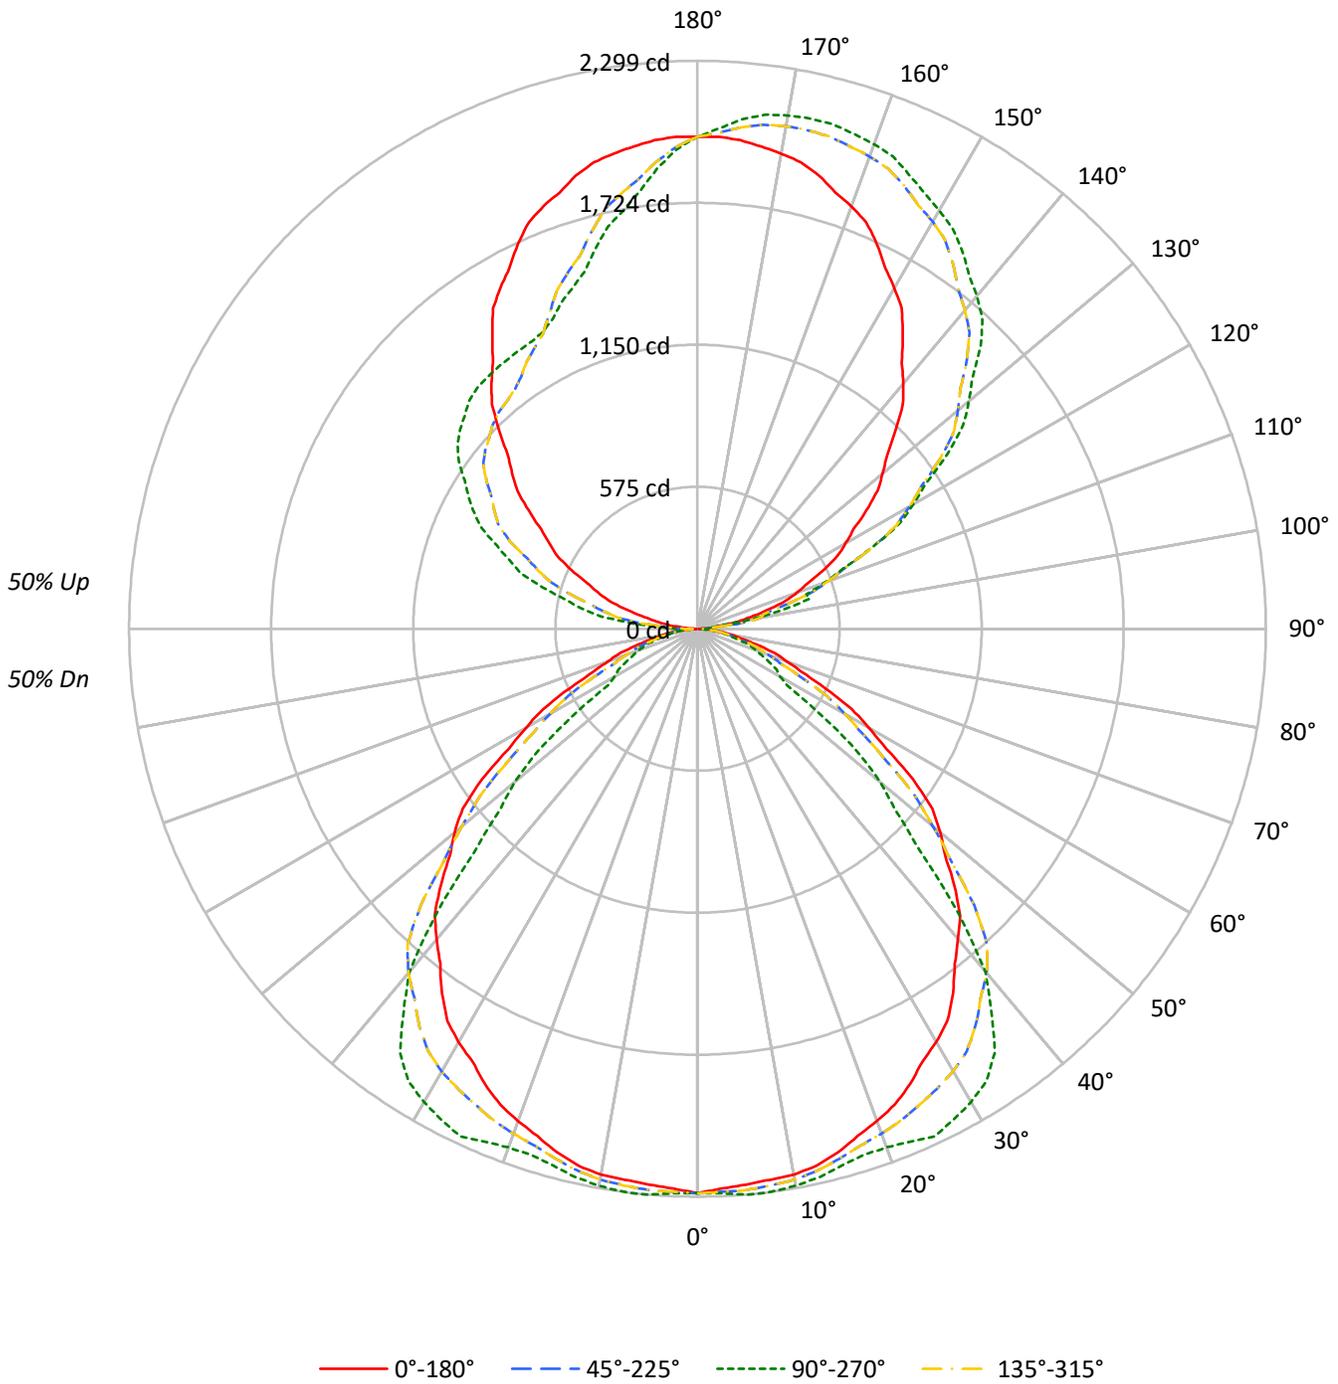



TEST NUMBER: P1428153

CATALOG NUMBER: SQ2W-PP3-K-150U-125D-L935-UNV-STD-W-WM-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20				
RC	80					70					50					30				
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50		
1	98	94	90	87	91	87	84	81	74	71	69	62	60	59	50	49	48	43		
2	90	83	77	72	83	77	72	67	65	61	58	55	52	50	45	43	41	37		
3	82	73	66	60	76	68	62	57	58	53	49	49	45	42	40	38	36	32		
4	75	65	57	51	69	60	54	48	52	47	42	44	40	37	36	33	31	28		
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	33	30	27	24		
6	64	52	44	39	59	49	42	36	42	36	32	36	31	28	30	27	24	21		
7	59	47	39	34	55	44	37	32	38	32	28	32	28	25	27	24	22	19		
8	55	43	35	30	51	40	33	28	35	29	25	30	25	22	25	22	19	17		
9	51	39	32	27	47	37	30	25	32	26	23	27	23	20	23	20	17	15		
10	48	36	29	24	44	34	27	23	29	24	20	25	21	18	21	18	16	14		

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	36886	36886	36886	36886
5°	36598	37262	36598	37262
10°	36783	37535	36783	37535
15°	36695	37622	36695	37622
20°	36432	38382	36432	38382
25°	36226	40398	36226	40398
30°	36019	41243	36019	41243
35°	35510	41318	35510	41318
40°	34561	38176	34561	38176
45°	33528	29060	33528	29060
50°	32211	24204	32211	24204
55°	29979	17404	29979	17404
60°	25814	12477	25814	12477
65°	21776	12271	21776	12271
70°	18127	11745	18127	11745
75°	15365	10998	15365	10998
80°	13026	9884	13026	9884
85°	10281	5372	10281	5372

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 40°  
 Vertical Angle: 45°  
 Luminance: 36677 cd/sqm



TEST NUMBER: P1428153

CATALOG NUMBER: SQ2W-PP3-K-150U-125D-L935-UNV-STD-W-WM-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	217.5	1.9
10°-20°	629.6	5.4
20°-30°	986.4	8.5
30°-40°	1216.8	10.5
40°-50°	1145.5	9.9
50°-60°	811.1	7.0
60°-70°	462.2	4.0
70°-80°	228.8	2.0
80°-90°	64.1	0.6
90°-100°	158.5	1.4
100°-110°	462.2	4.0
110°-120°	754.2	6.5
120°-130°	957.1	8.3
130°-140°	1024.1	8.8
140°-150°	956.3	8.3
150°-160°	786.9	6.8
160°-170°	527.7	4.6
170°-180°	187.4	1.6
0°-30°	1833.5	15.8
0°-40°	3050.3	26.3
0°-60°	5006.9	43.3
0°-90°	5762.0	49.8
90°-120°	1374.9	11.9
90°-150°	4312.4	37.3
90°-180°	5814.0	50.2
0°-180°	11576.5	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	2285	2285	2285	2285	2285	
5°	2258	2299	2258	2299	2258	215
15°	2195	2251	2195	2251	2195	619
25°	2034	2268	2034	2268	2034	937
35°	1802	2096	1802	2096	1802	1124
45°	1468	1273	1468	1273	1468	1130
55°	1065	618	1065	618	1065	940
65°	570	321	570	321	570	572
75°	246	176	246	176	246	267
85°	56	29	56	29	56	65
90°	6	44	6	86	6	7
95°	62	46	62	272	62	75
105°	294	471	294	648	294	312
115°	563	780	563	962	563	555
125°	833	1237	833	1179	833	745
135°	1132	1619	1132	1306	1132	875
145°	1446	1867	1446	1334	1446	905
155°	1718	2028	1718	1384	1718	790
165°	1899	2114	1899	1593	1899	535
175°	1985	2070	1985	1869	1985	188
180°	1991	1991	1991	1991	1991	



TEST NUMBER: P1428153

CATALOG NUMBER: SQ2W-PP3-K-150U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	2284.6	2284.6	2284.6	2284.6	2284.6	2284.6	2284.6	2284.6	2284.6	2284.6	2284.6
2.5°	2267.3	2281.9	2296.4	2293.0	2283.6	2279.7	2281.4	2283.1	2284.9	2286.6	2284.9
5°	2258.1	2276.3	2294.6	2291.9	2282.2	2278.5	2280.6	2284.1	2291.6	2299.1	2291.6
7.5°	2249.4	2268.1	2286.7	2284.3	2274.9	2272.0	2275.6	2280.7	2289.9	2299.1	2289.9
10°	2243.6	2259.7	2275.8	2273.4	2264.8	2263.2	2268.5	2274.4	2282.0	2289.5	2282.0
12.5°	2226.2	2241.4	2256.7	2254.7	2247.0	2246.6	2253.7	2260.7	2267.4	2274.0	2267.4
15°	2195.3	2209.2	2223.2	2223.5	2219.2	2221.9	2231.5	2240.1	2245.5	2250.8	2245.5
17.5°	2153.3	2170.2	2187.2	2191.1	2190.7	2197.3	2211.1	2222.8	2228.3	2233.9	2228.3
20°	2120.4	2140.8	2161.2	2167.9	2170.1	2179.7	2196.9	2212.5	2223.2	2233.9	2223.2
22.5°	2085.6	2109.5	2133.3	2142.2	2146.0	2160.8	2186.6	2210.5	2229.0	2247.5	2229.0
25°	2033.5	2057.1	2080.7	2097.9	2112.9	2139.2	2176.8	2211.9	2239.8	2267.7	2239.8
27.5°	1972.6	1996.0	2019.4	2048.9	2080.5	2117.4	2159.7	2196.9	2219.1	2241.2	2219.1
30°	1932.0	1954.6	1977.1	2010.9	2048.5	2089.3	2133.3	2171.4	2191.8	2212.2	2191.8
32.5°	1881.8	1905.2	1928.6	1964.6	2004.7	2048.5	2095.9	2136.2	2154.9	2173.5	2154.9
35°	1801.6	1824.2	1846.7	1888.6	1936.9	1985.7	2035.1	2074.8	2085.5	2096.3	2085.5
37.5°	1709.4	1734.9	1760.5	1807.4	1861.5	1902.4	1930.1	1951.0	1951.7	1952.3	1951.7
40°	1639.8	1673.1	1706.4	1753.3	1804.9	1833.3	1838.7	1839.2	1825.2	1811.3	1825.2
42.5°	1572.2	1614.9	1657.6	1695.4	1731.4	1738.8	1717.6	1686.1	1624.1	1562.1	1624.1
45°	1468.4	1518.8	1569.2	1592.3	1606.3	1559.1	1450.6	1358.6	1315.7	1272.7	1315.7
47.5°	1357.7	1407.5	1457.4	1451.0	1425.8	1354.4	1236.5	1140.7	1111.1	1081.5	1111.1
50°	1282.4	1329.6	1376.8	1342.8	1281.6	1201.1	1101.3	1019.4	991.5	963.6	991.5
52.5°	1197.4	1239.5	1281.5	1230.1	1147.4	1062.6	975.7	899.8	857.3	814.8	857.3
55°	1065.0	1094.0	1123.0	1066.6	981.9	888.5	786.5	699.8	659.0	618.3	659.0
57.5°	905.6	926.0	946.4	902.1	836.2	743.4	623.6	522.3	476.6	430.8	476.6
60°	799.4	815.5	831.6	791.3	732.3	643.7	525.7	431.5	408.9	386.4	408.9
62.5°	702.8	717.2	731.5	689.6	628.8	549.7	452.3	377.2	369.2	361.3	369.2
65°	570.0	583.9	597.9	553.9	490.5	428.8	368.7	323.3	322.3	321.2	322.3
67.5°	453.5	468.8	484.0	442.6	382.3	336.7	305.7	282.2	281.0	279.7	281.0
70°	384.0	400.1	416.2	377.6	320.7	283.6	266.5	253.0	250.9	248.8	250.9
72.5°	326.0	341.3	356.5	322.8	272.8	242.2	231.0	222.3	221.1	219.8	221.1
75°	246.3	258.1	269.9	245.5	209.0	188.1	182.7	178.4	177.4	176.3	177.4
77.5°	178.7	186.2	193.7	177.7	153.9	140.6	137.8	135.5	134.4	133.3	134.4
80°	140.1	143.3	146.5	135.2	119.1	110.6	109.5	108.4	107.3	106.3	107.3
82.5°	105.3	104.2	103.1	96.6	88.2	83.5	82.4	81.1	79.2	77.3	79.2
85°	55.5	53.4	51.3	49.1	47.0	43.7	39.4	35.4	32.2	29.0	32.2
87.5°	18.6	20.2	22.2	20.6	17.5	15.3	14.5	14.2	14.6	14.6	14.6
90°	6.0	14.1	24.1	32.2	38.2	40.2	40.2	42.2	44.3	44.3	44.3
92.5°	22.1	35.0	35.4	35.4	43.0	46.7	49.9	50.3	52.3	52.3	52.3
95°	62.4	68.4	102.6	100.6	68.4	54.3	46.3	46.3	46.3	46.3	46.3
97.5°	119.1	127.9	133.6	179.0	189.1	182.6	148.8	125.1	111.8	105.8	111.8
100°	169.0	173.0	185.1	187.1	237.4	285.6	261.5	231.3	221.3	215.2	221.3
102.5°	218.8	221.3	239.8	248.2	259.9	287.2	370.9	361.7	354.8	353.6	354.8
105°	293.7	295.7	329.9	346.0	354.0	354.0	352.0	392.2	456.6	470.7	456.6
107.5°	373.7	383.0	423.2	466.3	475.5	477.9	467.5	461.4	459.0	460.6	459.0
110°	428.4	442.5	490.8	545.1	559.2	563.2	559.2	553.2	549.1	549.1	549.1



TEST NUMBER: P1428153

CATALOG NUMBER: SQ2W-PP3-K-150U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	481.5	502.1	556.8	619.1	642.9	654.9	646.1	641.7	637.6	640.9	637.6
115°	563.2	593.4	665.8	730.2	778.4	784.5	782.5	782.5	780.5	780.5	780.5
117.5°	638.8	687.1	768.4	843.2	899.1	915.2	923.3	920.9	918.4	922.5	918.4
120°	692.0	748.3	840.8	925.3	979.6	1003.7	1011.8	1007.8	1011.8	1007.8	1011.8
122.5°	748.3	817.5	908.4	996.1	1060.1	1087.4	1097.1	1097.9	1098.7	1096.3	1098.7
125°	832.8	917.2	1023.8	1114.4	1180.7	1212.9	1221.0	1223.0	1227.0	1237.1	1227.0
127.5°	918.0	1013.8	1130.9	1218.2	1286.1	1325.2	1337.6	1342.1	1350.5	1354.9	1350.5
130°	977.6	1086.2	1204.9	1287.3	1353.7	1396.0	1418.1	1424.1	1434.2	1432.2	1434.2
132.5°	1040.3	1153.8	1274.1	1359.8	1421.3	1466.8	1485.7	1503.0	1506.6	1509.4	1506.6
135°	1132.5	1255.2	1375.9	1460.3	1518.7	1562.9	1587.1	1603.2	1613.2	1619.2	1613.2
137.5°	1229.4	1359.0	1474.8	1550.0	1608.8	1647.0	1674.4	1691.3	1701.7	1706.5	1701.7
140°	1295.4	1420.1	1532.8	1611.2	1663.5	1701.7	1725.9	1746.0	1758.0	1758.0	1758.0
142.5°	1358.2	1481.3	1590.7	1669.1	1715.0	1750.0	1775.7	1791.0	1804.7	1804.7	1804.7
145°	1446.3	1569.0	1669.5	1748.0	1786.2	1818.4	1846.5	1858.6	1866.7	1866.7	1866.7
147.5°	1538.4	1647.0	1738.7	1814.0	1846.1	1884.0	1906.1	1915.7	1925.8	1921.4	1925.8
150°	1593.1	1693.7	1782.2	1852.6	1884.8	1921.0	1943.1	1951.1	1961.2	1955.2	1961.2
152.5°	1646.2	1741.9	1822.4	1888.0	1915.3	1951.5	1976.9	1984.9	1991.8	1987.3	1991.8
155°	1717.8	1802.3	1876.7	1937.1	1961.2	1995.4	2019.5	2029.6	2037.6	2027.6	2037.6
157.5°	1781.8	1854.6	1919.4	1974.9	2000.6	2030.0	2052.5	2065.0	2073.0	2068.6	2073.0
160°	1820.4	1886.8	1945.1	1997.4	2021.5	2047.7	2071.8	2085.9	2094.0	2087.9	2094.0
162.5°	1852.6	1912.5	1967.6	2015.1	2036.0	2059.0	2087.9	2100.4	2108.4	2100.8	2108.4
165°	1898.8	1947.1	1995.4	2035.6	2053.7	2071.8	2102.0	2116.1	2122.1	2114.1	2122.1
167.5°	1933.8	1970.9	2009.9	2044.5	2057.7	2075.4	2105.6	2117.3	2124.9	2114.9	2124.9
170°	1953.2	1985.3	2019.5	2047.7	2057.7	2073.8	2104.0	2114.1	2120.1	2110.0	2120.1
172.5°	1969.2	1993.4	2021.1	2046.1	2051.3	2064.2	2092.7	2102.8	2107.2	2098.8	2107.2
175°	1985.3	1999.4	2019.5	2035.6	2033.6	2041.7	2065.8	2073.8	2081.9	2069.8	2081.9
177.5°	1993.0	1999.4	2005.9	2015.5	2009.1	2009.1	2026.8	2031.6	2033.2	2026.8	2033.2
180°	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4

TEST NUMBER: P1428153

CATALOG NUMBER: SQ2W-PP3-K-150U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	2284.6	2284.6	2284.6	2284.6	2284.6	2284.6	2284.6	2284.6	2284.6	2284.6	2284.6
2.5°	2283.1	2281.4	2279.7	2283.6	2293.0	2296.4	2281.9	2267.3	2281.9	2296.4	2293.0
5°	2284.1	2280.6	2278.5	2282.2	2291.9	2294.6	2276.3	2258.1	2276.3	2294.6	2291.9
7.5°	2280.7	2275.6	2272.0	2274.9	2284.3	2286.7	2268.1	2249.4	2268.1	2286.7	2284.3
10°	2274.4	2268.5	2263.2	2264.8	2273.4	2275.8	2259.7	2243.6	2259.7	2275.8	2273.4
12.5°	2260.7	2253.7	2246.6	2247.0	2254.7	2256.7	2241.4	2226.2	2241.4	2256.7	2254.7
15°	2240.1	2231.5	2221.9	2219.2	2223.5	2223.2	2209.2	2195.3	2209.2	2223.2	2223.5
17.5°	2222.8	2211.1	2197.3	2190.7	2191.1	2187.2	2170.2	2153.3	2170.2	2187.2	2191.1
20°	2212.5	2196.9	2179.7	2170.1	2167.9	2161.2	2140.8	2120.4	2140.8	2161.2	2167.9
22.5°	2210.5	2186.6	2160.8	2146.0	2142.2	2133.3	2109.5	2085.6	2109.5	2133.3	2142.2
25°	2211.9	2176.8	2139.2	2112.9	2097.9	2080.7	2057.1	2033.5	2057.1	2080.7	2097.9
27.5°	2196.9	2159.7	2117.4	2080.5	2048.9	2019.4	1996.0	1972.6	1996.0	2019.4	2048.9
30°	2171.4	2133.3	2089.3	2048.5	2010.9	1977.1	1954.6	1932.0	1954.6	1977.1	2010.9
32.5°	2136.2	2095.9	2048.5	2004.7	1964.6	1928.6	1905.2	1881.8	1905.2	1928.6	1964.6
35°	2074.8	2035.1	1985.7	1936.9	1888.6	1846.7	1824.2	1801.6	1824.2	1846.7	1888.6
37.5°	1951.0	1930.1	1902.4	1861.5	1807.4	1760.5	1734.9	1709.4	1734.9	1760.5	1807.4
40°	1839.2	1838.7	1833.3	1804.9	1753.3	1706.4	1673.1	1639.8	1673.1	1706.4	1753.3
42.5°	1686.1	1717.6	1738.8	1731.4	1695.4	1657.6	1614.9	1572.2	1614.9	1657.6	1695.4
45°	1358.6	1450.6	1559.1	1606.3	1592.3	1569.2	1518.8	1468.4	1518.8	1569.2	1592.3
47.5°	1140.7	1236.5	1354.4	1425.8	1451.0	1457.4	1407.5	1357.7	1407.5	1457.4	1451.0
50°	1019.4	1101.3	1201.1	1281.6	1342.8	1376.8	1329.6	1282.4	1329.6	1376.8	1342.8
52.5°	899.8	975.7	1062.6	1147.4	1230.1	1281.5	1239.5	1197.4	1239.5	1281.5	1230.1
55°	699.8	786.5	888.5	981.9	1066.6	1123.0	1094.0	1065.0	1094.0	1123.0	1066.6
57.5°	522.3	623.6	743.4	836.2	902.1	946.4	926.0	905.6	926.0	946.4	902.1
60°	431.5	525.7	643.7	732.3	791.3	831.6	815.5	799.4	815.5	831.6	791.3
62.5°	377.2	452.3	549.7	628.8	689.6	731.5	717.2	702.8	717.2	731.5	689.6
65°	323.3	368.7	428.8	490.5	553.9	597.9	583.9	570.0	583.9	597.9	553.9
67.5°	282.2	305.7	336.7	382.3	442.6	484.0	468.8	453.5	468.8	484.0	442.6
70°	253.0	266.5	283.6	320.7	377.6	416.2	400.1	384.0	400.1	416.2	377.6
72.5°	222.3	231.0	242.2	272.8	322.8	356.5	341.3	326.0	341.3	356.5	322.8
75°	178.4	182.7	188.1	209.0	245.5	269.9	258.1	246.3	258.1	269.9	245.5
77.5°	135.5	137.8	140.6	153.9	177.7	193.7	186.2	178.7	186.2	193.7	177.7
80°	108.4	109.5	110.6	119.1	135.2	146.5	143.3	140.1	143.3	146.5	135.2
82.5°	81.1	82.4	83.5	88.2	96.6	103.1	104.2	105.3	104.2	103.1	96.6
85°	35.4	39.4	43.7	47.0	49.1	51.3	53.4	55.5	53.4	51.3	49.1
87.5°	14.2	14.5	15.3	17.5	20.6	22.2	20.2	18.6	20.2	21.8	21.4
90°	42.2	40.2	40.2	38.2	32.2	24.1	14.1	6.0	14.1	22.1	36.2
92.5°	50.3	49.9	46.7	43.0	35.4	35.4	35.0	22.1	38.2	54.3	78.0
95°	46.3	46.3	54.3	68.4	100.6	102.6	68.4	62.4	88.5	124.7	156.9
97.5°	125.1	148.8	182.6	189.1	179.0	133.6	127.9	119.1	162.1	197.9	249.8
100°	231.3	261.5	285.6	237.4	187.1	185.1	173.0	169.0	215.2	249.4	299.7
102.5°	361.7	370.9	287.2	259.9	248.2	239.8	221.3	218.8	265.1	312.2	354.4
105°	392.2	352.0	354.0	354.0	346.0	329.9	295.7	293.7	346.0	400.3	452.6
107.5°	461.4	467.5	477.9	475.5	466.3	423.2	383.0	373.7	420.8	486.0	543.5
110°	553.2	559.2	563.2	559.2	545.1	490.8	442.5	428.4	470.7	539.1	601.4



TEST NUMBER: P1428153

CATALOG NUMBER: SQ2W-PP3-K-150U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	641.7	646.1	654.9	642.9	619.1	556.8	502.1	481.5	523.8	593.8	657.8
115°	782.5	782.5	784.5	778.4	730.2	665.8	593.4	563.2	599.4	663.8	734.2
117.5°	920.9	923.3	915.2	899.1	843.2	768.4	687.1	638.8	667.4	735.4	807.8
120°	1007.8	1011.8	1003.7	979.6	925.3	840.8	748.3	692.0	714.1	780.5	852.9
122.5°	1097.9	1097.1	1087.4	1060.1	996.1	908.4	817.5	748.3	757.5	819.1	889.9
125°	1223.0	1221.0	1212.9	1180.7	1114.4	1023.8	917.2	832.8	820.7	873.0	945.4
127.5°	1342.1	1337.6	1325.2	1286.1	1218.2	1130.9	1013.8	918.0	891.1	924.1	990.5
130°	1424.1	1418.1	1396.0	1353.7	1287.3	1204.9	1086.2	977.6	939.4	959.5	1017.8
132.5°	1503.0	1485.7	1466.8	1421.3	1359.8	1274.1	1153.8	1040.3	987.6	996.5	1041.9
135°	1603.2	1587.1	1562.9	1518.7	1460.3	1375.9	1255.2	1132.5	1060.1	1052.0	1078.2
137.5°	1691.3	1674.4	1647.0	1608.8	1550.0	1474.8	1359.0	1229.4	1138.1	1111.1	1121.2
140°	1746.0	1725.9	1701.7	1663.5	1611.2	1532.8	1420.1	1295.4	1192.8	1154.6	1148.6
142.5°	1791.0	1775.7	1750.0	1715.0	1669.1	1590.7	1481.3	1358.2	1249.1	1199.6	1185.6
145°	1858.6	1846.5	1818.4	1786.2	1748.0	1669.5	1569.0	1446.3	1337.6	1273.3	1243.1
147.5°	1915.7	1906.1	1884.0	1846.1	1814.0	1738.7	1647.0	1538.4	1426.9	1347.3	1308.3
150°	1951.1	1943.1	1921.0	1884.8	1852.6	1782.2	1693.7	1593.1	1486.5	1402.0	1351.7
152.5°	1984.9	1976.9	1951.5	1915.3	1888.0	1822.4	1741.9	1646.2	1538.0	1453.5	1401.6
155°	2029.6	2019.5	1995.4	1961.2	1937.1	1876.7	1802.3	1717.8	1625.3	1536.8	1478.4
157.5°	2065.0	2052.5	2030.0	2000.6	1974.9	1919.4	1854.6	1781.8	1700.9	1616.4	1556.9
160°	2085.9	2071.8	2047.7	2021.5	1997.4	1945.1	1886.8	1820.4	1746.0	1669.5	1605.2
162.5°	2100.4	2087.9	2059.0	2036.0	2015.1	1967.6	1912.5	1852.6	1786.2	1719.4	1659.9
165°	2116.1	2102.0	2071.8	2053.7	2035.6	1995.4	1947.1	1898.8	1842.5	1788.2	1739.9
167.5°	2117.3	2105.6	2075.4	2057.7	2044.5	2009.9	1970.9	1933.8	1890.0	1847.3	1807.1
170°	2114.1	2104.0	2073.8	2057.7	2047.7	2019.5	1985.3	1953.2	1919.0	1882.7	1850.6
172.5°	2102.8	2092.7	2064.2	2051.3	2046.1	2021.1	1993.4	1969.2	1939.9	1913.3	1887.6
175°	2073.8	2065.8	2041.7	2033.6	2035.6	2019.5	1999.4	1985.3	1967.2	1951.1	1937.1
177.5°	2031.6	2026.8	2009.1	2009.1	2015.5	2005.9	1999.4	1993.0	1984.9	1980.1	1975.3
180°	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4



TEST NUMBER: P1428153

CATALOG NUMBER: SQ2W-PP3-K-150U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	2284.6	2284.6	2284.6	2284.6	2284.6	2284.6	2284.6	2284.6	2284.6	2284.6	2284.6
2.5°	2283.6	2279.7	2281.4	2283.1	2284.9	2286.6	2284.9	2283.1	2281.4	2279.7	2283.6
5°	2282.2	2278.5	2280.6	2284.1	2291.6	2299.1	2291.6	2284.1	2280.6	2278.5	2282.2
7.5°	2274.9	2272.0	2275.6	2280.7	2289.9	2299.1	2289.9	2280.7	2275.6	2272.0	2274.9
10°	2264.8	2263.2	2268.5	2274.4	2282.0	2289.5	2282.0	2274.4	2268.5	2263.2	2264.8
12.5°	2247.0	2246.6	2253.7	2260.7	2267.4	2274.0	2267.4	2260.7	2253.7	2246.6	2247.0
15°	2219.2	2221.9	2231.5	2240.1	2245.5	2250.8	2245.5	2240.1	2231.5	2221.9	2219.2
17.5°	2190.7	2197.3	2211.1	2222.8	2228.3	2233.9	2228.3	2222.8	2211.1	2197.3	2190.7
20°	2170.1	2179.7	2196.9	2212.5	2223.2	2233.9	2223.2	2212.5	2196.9	2179.7	2170.1
22.5°	2146.0	2160.8	2186.6	2210.5	2229.0	2247.5	2229.0	2210.5	2186.6	2160.8	2146.0
25°	2112.9	2139.2	2176.8	2211.9	2239.8	2267.7	2239.8	2211.9	2176.8	2139.2	2112.9
27.5°	2080.5	2117.4	2159.7	2196.9	2219.1	2241.2	2219.1	2196.9	2159.7	2117.4	2080.5
30°	2048.5	2089.3	2133.3	2171.4	2191.8	2212.2	2191.8	2171.4	2133.3	2089.3	2048.5
32.5°	2004.7	2048.5	2095.9	2136.2	2154.9	2173.5	2154.9	2136.2	2095.9	2048.5	2004.7
35°	1936.9	1985.7	2035.1	2074.8	2085.5	2096.3	2085.5	2074.8	2035.1	1985.7	1936.9
37.5°	1861.5	1902.4	1930.1	1951.0	1951.7	1952.3	1951.7	1951.0	1930.1	1902.4	1861.5
40°	1804.9	1833.3	1838.7	1839.2	1825.2	1811.3	1825.2	1839.2	1838.7	1833.3	1804.9
42.5°	1731.4	1738.8	1717.6	1686.1	1624.1	1562.1	1624.1	1686.1	1717.6	1738.8	1731.4
45°	1606.3	1559.1	1450.6	1358.6	1315.7	1272.7	1315.7	1358.6	1450.6	1559.1	1606.3
47.5°	1425.8	1354.4	1236.5	1140.7	1111.1	1081.5	1111.1	1140.7	1236.5	1354.4	1425.8
50°	1281.6	1201.1	1101.3	1019.4	991.5	963.6	991.5	1019.4	1101.3	1201.1	1281.6
52.5°	1147.4	1062.6	975.7	899.8	857.3	814.8	857.3	899.8	975.7	1062.6	1147.4
55°	981.9	888.5	786.5	699.8	659.0	618.3	659.0	699.8	786.5	888.5	981.9
57.5°	836.2	743.4	623.6	522.3	476.6	430.8	476.6	522.3	623.6	743.4	836.2
60°	732.3	643.7	525.7	431.5	408.9	386.4	408.9	431.5	525.7	643.7	732.3
62.5°	628.8	549.7	452.3	377.2	369.2	361.3	369.2	377.2	452.3	549.7	628.8
65°	490.5	428.8	368.7	323.3	322.3	321.2	322.3	323.3	368.7	428.8	490.5
67.5°	382.3	336.7	305.7	282.2	281.0	279.7	281.0	282.2	305.7	336.7	382.3
70°	320.7	283.6	266.5	253.0	250.9	248.8	250.9	253.0	266.5	283.6	320.7
72.5°	272.8	242.2	231.0	222.3	221.1	219.8	221.1	222.3	231.0	242.2	272.8
75°	209.0	188.1	182.7	178.4	177.4	176.3	177.4	178.4	182.7	188.1	209.0
77.5°	153.9	140.6	137.8	135.5	134.4	133.3	134.4	135.5	137.8	140.6	153.9
80°	119.1	110.6	109.5	108.4	107.3	106.3	107.3	108.4	109.5	110.6	119.1
82.5°	88.2	83.5	82.4	81.1	79.2	77.3	79.2	81.1	82.4	83.5	88.2
85°	47.0	43.7	39.4	35.4	32.2	29.0	32.2	35.4	39.4	43.7	47.0
87.5°	19.1	19.4	21.3	22.3	23.9	23.1	23.9	22.3	21.3	19.4	19.1
90°	46.3	60.3	74.4	82.5	90.5	86.5	90.5	82.5	74.4	60.3	46.3
92.5°	92.9	116.7	134.0	148.4	154.9	154.1	154.9	148.4	134.0	116.7	92.9
95°	187.1	215.2	243.4	263.5	275.6	271.6	275.6	263.5	243.4	215.2	187.1
97.5°	288.4	326.3	357.6	376.5	388.6	396.7	388.6	376.5	357.6	326.3	288.4
100°	356.0	392.2	428.4	450.6	470.7	478.7	470.7	450.6	428.4	392.2	356.0
102.5°	410.7	458.2	497.6	521.4	538.3	546.3	538.3	521.4	497.6	458.2	410.7
105°	500.9	551.1	593.4	623.6	641.7	647.7	641.7	623.6	593.4	551.1	500.9
107.5°	591.0	642.9	681.9	715.3	737.4	750.3	737.4	715.3	681.9	642.9	591.0
110°	661.8	704.0	746.3	776.4	798.6	806.6	798.6	776.4	746.3	704.0	661.8



TEST NUMBER: P1428153

CATALOG NUMBER: SQ2W-PP3-K-150U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	721.3	768.4	810.6	840.8	866.1	877.4	866.1	840.8	810.6	768.4	721.3
115°	804.6	866.9	905.2	933.3	951.4	961.5	951.4	933.3	905.2	866.9	804.6
117.5°	873.8	939.0	980.8	1002.5	1011.0	1018.2	1011.0	1002.5	980.8	939.0	873.8
120°	917.2	977.6	1025.9	1054.0	1064.1	1068.1	1064.1	1054.0	1025.9	977.6	917.2
122.5°	957.5	1014.6	1061.3	1095.9	1112.4	1116.4	1112.4	1095.9	1061.3	1014.6	957.5
125°	1013.8	1068.1	1116.4	1150.6	1168.7	1178.7	1168.7	1150.6	1116.4	1068.1	1013.8
127.5°	1062.9	1121.6	1165.9	1196.8	1214.5	1222.6	1214.5	1196.8	1165.9	1121.6	1062.9
130°	1090.2	1150.6	1194.8	1229.0	1245.1	1253.2	1245.1	1229.0	1194.8	1150.6	1090.2
132.5°	1111.1	1174.7	1220.6	1251.5	1269.2	1277.3	1269.2	1251.5	1220.6	1174.7	1111.1
135°	1136.5	1202.9	1251.1	1281.3	1297.4	1305.5	1297.4	1281.3	1251.1	1202.9	1136.5
137.5°	1158.6	1219.0	1269.2	1301.0	1315.5	1320.7	1315.5	1301.0	1269.2	1219.0	1158.6
140°	1174.7	1227.0	1277.3	1307.5	1323.6	1325.6	1323.6	1307.5	1277.3	1227.0	1174.7
142.5°	1195.6	1236.7	1280.5	1310.7	1326.8	1330.4	1326.8	1310.7	1280.5	1236.7	1195.6
145°	1233.0	1257.2	1287.3	1315.5	1329.6	1333.6	1329.6	1315.5	1287.3	1257.2	1233.0
147.5°	1280.1	1287.8	1303.4	1321.9	1335.6	1338.4	1335.6	1321.9	1303.4	1287.8	1280.1
150°	1315.5	1313.5	1319.5	1331.6	1343.7	1341.7	1343.7	1331.6	1319.5	1313.5	1315.5
152.5°	1355.7	1344.1	1343.7	1349.3	1354.9	1354.5	1354.9	1349.3	1343.7	1344.1	1355.7
155°	1424.1	1402.0	1389.9	1385.9	1385.9	1383.9	1385.9	1385.9	1389.9	1402.0	1424.1
157.5°	1499.4	1468.4	1450.3	1440.6	1437.8	1433.4	1437.8	1440.6	1450.3	1468.4	1499.4
160°	1550.9	1516.7	1498.6	1482.5	1476.4	1470.4	1476.4	1482.5	1498.6	1516.7	1550.9
162.5°	1599.1	1566.5	1546.8	1532.3	1526.3	1517.1	1526.3	1532.3	1546.8	1566.5	1599.1
165°	1677.6	1643.4	1621.3	1609.2	1601.1	1593.1	1601.1	1609.2	1621.3	1643.4	1677.6
167.5°	1756.0	1718.6	1704.1	1690.5	1682.8	1668.3	1682.8	1690.5	1704.1	1718.6	1756.0
170°	1804.3	1770.1	1762.1	1750.0	1735.9	1719.8	1735.9	1750.0	1762.1	1770.1	1804.3
172.5°	1846.1	1823.2	1815.2	1803.1	1798.7	1785.8	1798.7	1803.1	1815.2	1823.2	1846.1
175°	1906.9	1888.8	1888.8	1886.8	1880.7	1868.7	1880.7	1886.8	1888.8	1888.8	1906.9
177.5°	1957.6	1947.9	1954.4	1954.4	1952.7	1941.5	1952.7	1954.4	1954.4	1947.9	1957.6
180°	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4	1991.4



TEST NUMBER: P1428153

CATALOG NUMBER: SQ2W-PP3-K-150U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	330°	340°	350°	360°
0°	2284.6	2284.6	2284.6	2284.6
2.5°	2293.0	2296.4	2281.9	2267.3
5°	2291.9	2294.6	2276.3	2258.1
7.5°	2284.3	2286.7	2268.1	2249.4
10°	2273.4	2275.8	2259.7	2243.6
12.5°	2254.7	2256.7	2241.4	2226.2
15°	2223.5	2223.2	2209.2	2195.3
17.5°	2191.1	2187.2	2170.2	2153.3
20°	2167.9	2161.2	2140.8	2120.4
22.5°	2142.2	2133.3	2109.5	2085.6
25°	2097.9	2080.7	2057.1	2033.5
27.5°	2048.9	2019.4	1996.0	1972.6
30°	2010.9	1977.1	1954.6	1932.0
32.5°	1964.6	1928.6	1905.2	1881.8
35°	1888.6	1846.7	1824.2	1801.6
37.5°	1807.4	1760.5	1734.9	1709.4
40°	1753.3	1706.4	1673.1	1639.8
42.5°	1695.4	1657.6	1614.9	1572.2
45°	1592.3	1569.2	1518.8	1468.4
47.5°	1451.0	1457.4	1407.5	1357.7
50°	1342.8	1376.8	1329.6	1282.4
52.5°	1230.1	1281.5	1239.5	1197.4
55°	1066.6	1123.0	1094.0	1065.0
57.5°	902.1	946.4	926.0	905.6
60°	791.3	831.6	815.5	799.4
62.5°	689.6	731.5	717.2	702.8
65°	553.9	597.9	583.9	570.0
67.5°	442.6	484.0	468.8	453.5
70°	377.6	416.2	400.1	384.0
72.5°	322.8	356.5	341.3	326.0
75°	245.5	269.9	258.1	246.3
77.5°	177.7	193.7	186.2	178.7
80°	135.2	146.5	143.3	140.1
82.5°	96.6	103.1	104.2	105.3
85°	49.1	51.3	53.4	55.5
87.5°	21.4	21.8	20.2	18.6
90°	36.2	22.1	14.1	6.0
92.5°	78.0	54.3	38.2	22.1
95°	156.9	124.7	88.5	62.4
97.5°	249.8	197.9	162.1	119.1
100°	299.7	249.4	215.2	169.0
102.5°	354.4	312.2	265.1	218.8
105°	452.6	400.3	346.0	293.7
107.5°	543.5	486.0	420.8	373.7
110°	601.4	539.1	470.7	428.4



TEST NUMBER: P1428153

CATALOG NUMBER: SQ2W-PP3-K-150U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	330°	340°	350°	360°
112.5°	657.8	593.8	523.8	481.5
115°	734.2	663.8	599.4	563.2
117.5°	807.8	735.4	667.4	638.8
120°	852.9	780.5	714.1	692.0
122.5°	889.9	819.1	757.5	748.3
125°	945.4	873.0	820.7	832.8
127.5°	990.5	924.1	891.1	918.0
130°	1017.8	959.5	939.4	977.6
132.5°	1041.9	996.5	987.6	1040.3
135°	1078.2	1052.0	1060.1	1132.5
137.5°	1121.2	1111.1	1138.1	1229.4
140°	1148.6	1154.6	1192.8	1295.4
142.5°	1185.6	1199.6	1249.1	1358.2
145°	1243.1	1273.3	1337.6	1446.3
147.5°	1308.3	1347.3	1426.9	1538.4
150°	1351.7	1402.0	1486.5	1593.1
152.5°	1401.6	1453.5	1538.0	1646.2
155°	1478.4	1536.8	1625.3	1717.8
157.5°	1556.9	1616.4	1700.9	1781.8
160°	1605.2	1669.5	1746.0	1820.4
162.5°	1659.9	1719.4	1786.2	1852.6
165°	1739.9	1788.2	1842.5	1898.8
167.5°	1807.1	1847.3	1890.0	1933.8
170°	1850.6	1882.7	1919.0	1953.2
172.5°	1887.6	1913.3	1939.9	1969.2
175°	1937.1	1951.1	1967.2	1985.3
177.5°	1975.3	1980.1	1984.9	1993.0
180°	1991.4	1991.4	1991.4	1991.4



TEST NUMBER: P1428153  
 CATALOG NUMBER: SQ2W-PP3-K-150U-125D-L935-UNV-STD-W-WM-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	19.97	20.79	20.93	21.77	23.05	15.74	16.57	16.70	17.54	18.82
	3H	21.02	21.76	22.00	22.75	24.05	17.05	17.78	18.02	18.77	20.07
	4H	21.39	22.09	22.38	23.08	24.39	17.60	18.30	18.59	19.29	20.60
	6H	21.58	22.23	22.58	23.22	24.54	17.96	18.61	18.96	19.60	20.92
	8H	21.64	22.26	22.65	23.27	24.58	18.09	18.70	19.10	19.71	21.03
	12H	21.66	22.25	22.68	23.25	24.59	18.12	18.71	19.14	19.71	21.05
4H	2H	20.08	20.78	21.08	21.77	23.08	16.64	17.34	17.64	18.33	19.64
	3H	21.37	21.95	22.38	22.97	24.29	18.06	18.64	19.07	19.66	20.98
	4H	21.88	22.41	22.89	23.42	24.76	18.68	19.21	19.70	20.22	21.57
	6H	22.19	22.65	23.22	23.68	25.02	19.13	19.58	20.15	20.62	21.96
	8H	22.30	22.73	23.33	23.75	25.11	19.30	19.72	20.32	20.75	22.10
	12H	22.34	22.73	23.39	23.77	25.13	19.34	19.73	20.39	20.77	22.13
8H	4H	21.90	22.32	22.92	23.35	24.70	18.99	19.41	20.02	20.44	21.80
	6H	22.31	22.66	23.36	23.73	25.08	19.55	19.90	20.60	20.97	22.32
	8H	22.49	22.80	23.54	23.85	25.22	19.80	20.10	20.85	21.16	22.53
	12H	22.58	22.86	23.64	23.90	25.32	19.89	20.17	20.95	21.22	22.63
12H	4H	21.85	22.24	22.90	23.28	24.64	19.00	19.38	20.04	20.42	21.79
	6H	22.30	22.61	23.36	23.66	25.04	19.61	19.92	20.67	20.98	22.35
	8H	22.49	22.77	23.55	23.81	25.23	19.89	20.16	20.95	21.21	22.62