

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1428441

Luminaire Tested: SQ2W-PW1-K-100U-125D-L935-UNV-STD-W-WM-4

Issue Date: 3/10/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1428441  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-8)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/10/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: CORELITE  
Catalog Number: SQ2W-PW1-K-100U-125D-L935-UNV-STD-W-WM-4  
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE  
DOWNLIGHT - PERCEIVE WAVES LENS  
UPLIGHT - ASYMMETRIC ROLL LENS  
DOWNLIGHT 1250 LUMENS PER FOOT  
UPLIGHT 1000 LUMENS PER FOOT  
Light Source: 3500K CCT, 90 CRI LEDS  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 9498.6 lumens  
Efficiency: N/A  
Efficacy: 115.4 lumens/watt  
Spacing Criteria (0/90/45): 1.27 / 1.11 / 1.23  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse

Input Watts (W): 82.3  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1428441

CATALOG NUMBER: SQ2W-PW1-K-100U-125D-L935-UNV-STD-W-WM-4

### Luminous Intensity Polar Plot

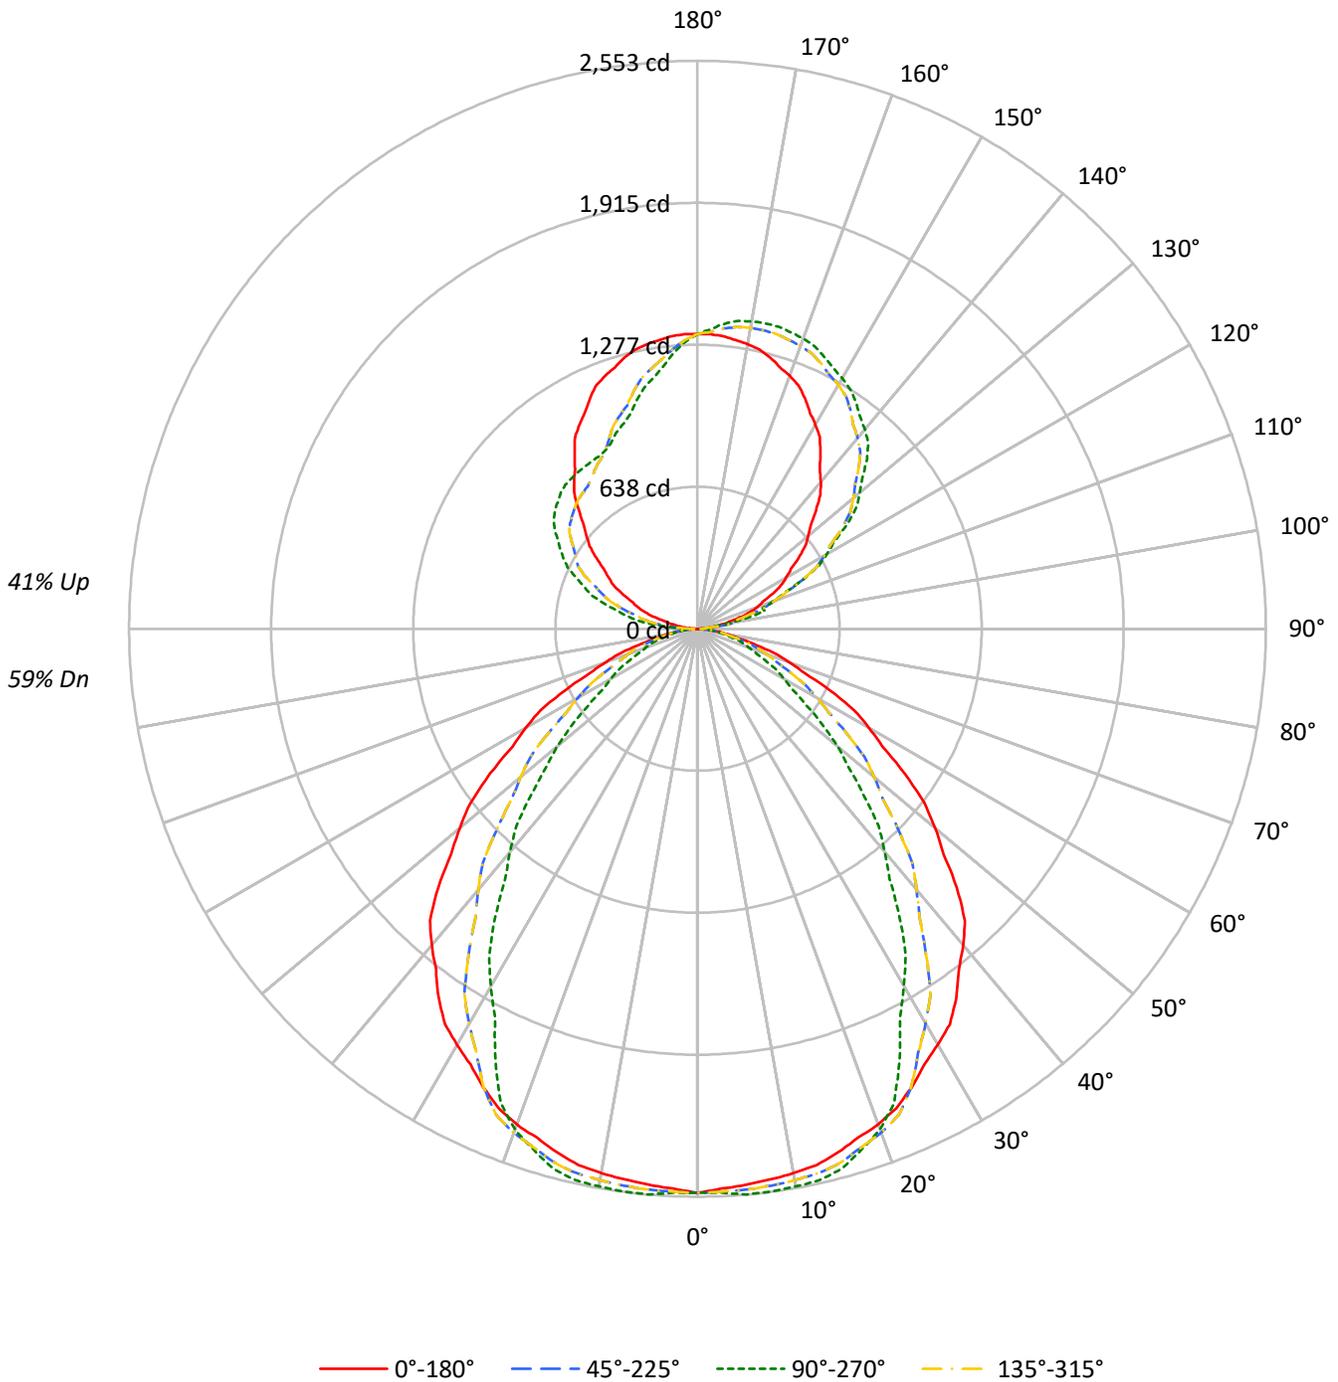



TEST NUMBER: P1428441

CATALOG NUMBER: SQ2W-PW1-K-100U-125D-L935-UNV-STD-W-WM-4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	65	65	65	59				
1	101	96	93	89	94	90	87	84	79	76	74	68	66	65	58	57	56	51				
2	92	85	79	74	86	80	75	70	70	66	62	61	58	55	52	50	48	44				
3	84	75	68	63	79	71	64	59	62	57	53	54	51	47	47	44	42	38				
4	78	67	59	54	72	63	56	51	56	50	46	49	45	41	42	39	37	33				
5	72	60	52	46	67	57	50	44	50	45	40	44	40	36	38	35	32	29				
6	66	54	46	41	62	51	44	39	45	40	35	40	35	32	35	31	29	26				
7	61	49	41	36	57	47	39	34	41	36	31	37	32	29	32	28	26	23				
8	57	45	37	32	53	43	36	31	38	32	28	34	29	26	30	26	23	21				
9	53	41	34	29	50	39	32	28	35	29	25	31	27	23	27	24	21	19				
10	50	38	31	26	47	36	29	25	32	27	23	29	24	21	26	22	19	17				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	40942	40942	40942	40942
5°	40669	41372	40669	41372
10°	40742	41733	40742	41733
15°	40731	41983	40731	41983
20°	40748	41162	40748	41162
25°	40528	38248	40528	38248
30°	40253	34580	40253	34580
35°	39937	31227	39937	31227
40°	39143	27589	39143	27589
45°	37609	24098	37609	24098
50°	35002	20624	35002	20624
55°	32019	16723	32019	16723
60°	28697	14428	28697	14428
65°	25096	12825	25096	12825
70°	20521	11627	20521	11627
75°	15970	10698	15970	10698
80°	11901	9428	11901	9428
85°	8058	5372	8058	5372

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 37609 cd/sqm



TEST NUMBER: P1428441

CATALOG NUMBER: SQ2W-PW1-K-100U-125D-L935-UNV-STD-W-WM-4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	241.5	2.5
10°-20°	699.6	7.4
20°-30°	1029.6	10.8
30°-40°	1125.7	11.9
40°-50°	1009.9	10.6
50°-60°	753.3	7.9
60°-70°	476.1	5.0
70°-80°	235.9	2.5
80°-90°	60.7	0.6
90°-100°	105.4	1.1
100°-110°	307.3	3.2
110°-120°	501.5	5.3
120°-130°	636.4	6.7
130°-140°	681.0	7.2
140°-150°	635.9	6.7
150°-160°	523.2	5.5
160°-170°	350.9	3.7
170°-180°	124.6	1.3
0°-30°	1970.7	20.7
0°-40°	3096.4	32.6
0°-60°	4859.6	51.2
0°-90°	5632.3	59.3
90°-120°	914.2	9.6
90°-150°	2867.5	30.2
90°-180°	3866.0	40.7
0°-180°	9498.6	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	2536	2536	2536	2536	2536	
5°	2509	2553	2509	2553	2509	239
15°	2437	2512	2437	2512	2437	688
25°	2275	2147	2275	2147	2275	1048
35°	2026	1584	2026	1584	2026	1264
45°	1647	1055	1647	1055	1647	1263
55°	1138	594	1138	594	1138	1016
65°	657	336	657	336	657	651
75°	256	172	256	172	256	282
85°	44	29	44	29	44	55
90°	4	29	4	58	4	5
95°	42	31	42	181	42	50
105°	195	313	195	431	195	208
115°	374	519	374	639	374	369
125°	554	823	554	784	554	495
135°	753	1077	753	868	753	582
145°	962	1241	962	887	962	602
155°	1142	1348	1142	920	1142	525
165°	1263	1406	1263	1059	1263	355
175°	1320	1376	1320	1243	1320	125
180°	1324	1324	1324	1324	1324	



TEST NUMBER: P1428441

CATALOG NUMBER: SQ2W-PW1-K-100U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (FULL):**

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	2535.8	2535.8	2535.8	2535.8	2535.8	2535.8	2535.8	2535.8	2535.8	2535.8	2535.8
2.5°	2518.4	2533.0	2547.6	2544.2	2534.7	2530.4	2531.3	2532.6	2535.2	2537.7	2535.2
5°	2509.3	2527.5	2545.7	2543.1	2533.4	2529.1	2530.2	2533.4	2543.1	2552.7	2543.1
7.5°	2496.7	2515.2	2533.6	2532.8	2525.5	2523.6	2527.3	2532.4	2541.8	2551.3	2541.8
10°	2485.1	2504.4	2523.7	2523.7	2517.3	2516.8	2522.1	2528.3	2536.9	2545.5	2536.9
12.5°	2469.6	2489.8	2510.0	2511.5	2506.8	2507.5	2513.8	2520.6	2529.2	2537.7	2529.2
15°	2436.8	2458.3	2479.7	2484.3	2483.2	2486.4	2494.0	2500.9	2506.3	2511.7	2506.3
17.5°	2398.6	2420.1	2441.6	2445.8	2444.3	2444.5	2446.5	2448.6	2451.1	2453.7	2451.1
20°	2371.6	2393.1	2414.5	2417.5	2414.3	2408.9	2401.4	2395.7	2395.7	2395.7	2395.7
22.5°	2333.0	2356.1	2379.3	2379.5	2372.0	2358.0	2337.6	2320.6	2313.7	2306.9	2313.7
25°	2275.0	2297.5	2320.1	2309.6	2288.1	2256.5	2214.6	2179.2	2163.1	2147.0	2163.1
27.5°	2207.4	2225.6	2243.9	2216.5	2174.0	2123.1	2063.6	2013.4	1991.1	1968.8	1991.1
30°	2159.1	2173.0	2187.0	2143.8	2081.5	2017.7	1952.2	1897.7	1876.2	1854.8	1876.2
32.5°	2108.8	2114.2	2119.6	2062.6	1984.9	1912.0	1844.0	1787.1	1764.0	1740.8	1764.0
35°	2026.2	2016.6	2006.9	1931.2	1833.6	1750.4	1681.7	1625.1	1604.7	1584.3	1604.7
37.5°	1928.7	1899.9	1871.1	1785.9	1681.7	1593.7	1521.8	1462.2	1439.7	1417.2	1439.7
40°	1857.2	1816.4	1775.6	1684.1	1575.7	1485.5	1413.6	1354.0	1331.5	1309.0	1331.5
42.5°	1778.0	1726.9	1675.8	1581.7	1473.3	1383.1	1311.2	1251.4	1228.0	1204.6	1228.0
45°	1647.1	1587.0	1526.9	1428.9	1318.4	1228.2	1158.4	1100.5	1077.9	1055.4	1077.9
47.5°	1499.8	1440.1	1380.4	1282.7	1172.4	1083.4	1015.8	960.2	940.9	921.6	940.9
50°	1393.5	1335.5	1277.6	1184.2	1079.0	992.6	925.0	868.3	844.7	821.1	844.7
52.5°	1285.3	1233.3	1181.4	1091.4	988.8	902.9	833.5	773.5	741.3	709.1	741.3
55°	1137.5	1088.1	1038.7	954.0	857.3	770.4	693.1	630.6	612.4	594.1	612.4
57.5°	985.3	942.6	899.9	823.7	736.3	657.5	587.3	530.9	515.9	500.9	515.9
60°	888.7	851.2	813.6	740.6	655.8	583.9	524.9	476.8	461.8	446.8	461.8
62.5°	796.0	762.7	729.5	659.5	577.3	512.6	465.6	427.3	414.8	402.3	414.8
65°	656.9	632.2	607.5	549.8	481.1	427.5	388.8	357.2	346.4	335.7	346.4
67.5°	521.7	507.9	494.2	451.0	397.9	354.5	320.6	293.3	286.3	279.2	286.3
70°	434.7	430.4	426.1	390.4	344.3	307.2	279.3	257.1	251.7	246.3	251.7
72.5°	359.4	361.1	362.8	333.1	293.0	262.0	240.1	222.7	219.1	215.4	219.1
75°	256.0	264.6	273.2	253.6	224.6	202.6	187.6	175.8	173.6	171.5	173.6
77.5°	174.4	187.2	200.1	187.4	166.2	149.9	138.8	130.0	128.3	126.5	128.3
80°	128.0	140.9	153.8	144.9	128.8	116.5	107.9	101.4	101.4	101.4	101.4
82.5°	89.4	99.7	110.0	103.7	91.9	83.8	79.5	76.3	76.3	76.3	76.3
85°	43.5	48.8	54.2	52.3	48.0	42.7	36.2	31.1	30.1	29.0	30.1
87.5°	12.4	16.0	20.0	18.4	15.0	12.6	11.8	11.4	11.7	11.7	11.7
90°	4.0	9.4	16.1	21.4	25.4	26.8	26.8	28.1	29.4	29.4	29.4
92.5°	14.7	23.3	23.5	23.5	28.6	31.0	33.2	33.4	34.8	34.8	34.8
95°	41.5	45.5	68.2	66.9	45.5	36.1	30.8	30.8	30.8	30.8	30.8
97.5°	79.2	85.1	88.8	119.0	125.7	121.4	99.0	83.2	74.4	70.4	74.4
100°	112.4	115.0	123.1	124.4	157.8	189.9	173.9	153.8	147.1	143.1	147.1
102.5°	145.5	147.1	159.4	165.1	172.8	191.0	246.6	240.5	235.9	235.1	235.9
105°	195.3	196.6	219.4	230.1	235.4	235.4	234.1	260.8	303.6	313.0	303.6
107.5°	248.5	254.7	281.4	310.0	316.2	317.8	310.8	306.8	305.2	306.3	305.2
110°	284.9	294.3	326.4	362.5	371.8	374.5	371.8	367.8	365.1	365.1	365.1



TEST NUMBER: P1428441

CATALOG NUMBER: SQ2W-PW1-K-100U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	320.2	333.9	370.2	411.7	427.5	435.5	429.6	426.7	424.0	426.1	424.0
115°	374.5	394.6	442.7	485.5	517.6	521.6	520.3	520.3	519.0	519.0	519.0
117.5°	424.8	456.9	510.9	560.7	597.9	608.6	613.9	612.3	610.7	613.4	610.7
120°	460.1	497.6	559.1	615.3	651.4	667.4	672.8	670.1	672.8	670.1	672.8
122.5°	497.6	543.6	604.0	662.4	704.9	723.1	729.5	730.0	730.6	729.0	730.6
125°	553.7	609.9	680.8	741.0	785.1	806.5	811.9	813.2	815.9	822.6	815.9
127.5°	610.5	674.1	752.0	810.0	855.2	881.2	889.5	892.4	898.0	901.0	898.0
130°	650.0	722.3	801.2	856.0	900.2	928.3	943.0	947.0	953.7	952.3	953.7
132.5°	691.8	767.2	847.2	904.2	945.1	975.3	987.9	999.4	1001.8	1003.7	1001.8
135°	753.0	834.6	914.9	971.1	1009.8	1039.3	1055.3	1066.0	1072.7	1076.7	1072.7
137.5°	817.5	903.6	980.7	1030.7	1069.8	1095.2	1113.4	1124.6	1131.6	1134.8	1131.6
140°	861.4	944.3	1019.2	1071.4	1106.1	1131.6	1147.6	1161.0	1169.0	1169.0	1169.0
142.5°	903.1	985.0	1057.7	1109.9	1140.4	1163.7	1180.8	1190.9	1200.0	1200.0	1200.0
145°	961.7	1043.3	1110.2	1162.3	1187.7	1209.1	1227.9	1235.9	1241.2	1241.2	1241.2
147.5°	1023.0	1095.2	1156.2	1206.2	1227.6	1252.7	1267.5	1273.9	1280.6	1277.6	1280.6
150°	1059.3	1126.2	1185.1	1231.9	1253.3	1277.4	1292.1	1297.4	1304.1	1300.1	1304.1
152.5°	1094.6	1158.3	1211.8	1255.4	1273.6	1297.7	1314.5	1319.9	1324.4	1321.5	1324.4
155°	1142.3	1198.4	1247.9	1288.1	1304.1	1326.8	1342.9	1349.6	1354.9	1348.2	1354.9
157.5°	1184.8	1233.2	1276.3	1313.2	1330.3	1349.9	1364.8	1373.1	1378.5	1375.5	1378.5
160°	1210.5	1254.6	1293.4	1328.2	1344.2	1361.6	1377.7	1387.0	1392.4	1388.4	1392.4
162.5°	1231.9	1271.7	1308.4	1340.0	1353.9	1369.1	1388.4	1396.7	1402.0	1396.9	1402.0
165°	1262.6	1294.7	1326.8	1353.6	1365.6	1377.7	1397.7	1407.1	1411.1	1405.8	1411.1
167.5°	1285.9	1310.5	1336.5	1359.5	1368.3	1380.1	1400.1	1407.9	1413.0	1406.3	1413.0
170°	1298.8	1320.2	1342.9	1361.6	1368.3	1379.0	1399.1	1405.8	1409.8	1403.1	1409.8
172.5°	1309.5	1325.5	1344.0	1360.6	1364.0	1372.6	1391.6	1398.3	1401.2	1395.6	1401.2
175°	1320.2	1329.5	1342.9	1353.6	1352.3	1357.6	1373.7	1379.0	1384.4	1376.3	1384.4
177.5°	1325.2	1329.5	1333.8	1340.2	1335.9	1335.9	1347.7	1350.9	1352.0	1347.7	1352.0
180°	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2



TEST NUMBER: P1428441

CATALOG NUMBER: SQ2W-PW1-K-100U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	2535.8	2535.8	2535.8	2535.8	2535.8	2535.8	2535.8	2535.8	2535.8	2535.8	2535.8
2.5°	2532.6	2531.3	2530.4	2534.7	2544.2	2547.6	2533.0	2518.4	2533.0	2547.6	2544.2
5°	2533.4	2530.2	2529.1	2533.4	2543.1	2545.7	2527.5	2509.3	2527.5	2545.7	2543.1
7.5°	2532.4	2527.3	2523.6	2525.5	2532.8	2533.6	2515.2	2496.7	2515.2	2533.6	2532.8
10°	2528.3	2522.1	2516.8	2517.3	2523.7	2523.7	2504.4	2485.1	2504.4	2523.7	2523.7
12.5°	2520.6	2513.8	2507.5	2506.8	2511.5	2510.0	2489.8	2469.6	2489.8	2510.0	2511.5
15°	2500.9	2494.0	2486.4	2483.2	2484.3	2479.7	2458.3	2436.8	2458.3	2479.7	2484.3
17.5°	2448.6	2446.5	2444.5	2444.3	2445.8	2441.6	2420.1	2398.6	2420.1	2441.6	2445.8
20°	2395.7	2401.4	2408.9	2414.3	2417.5	2414.5	2393.1	2371.6	2393.1	2414.5	2417.5
22.5°	2320.6	2337.6	2358.0	2372.0	2379.5	2379.3	2356.1	2333.0	2356.1	2379.3	2379.5
25°	2179.2	2214.6	2256.5	2288.1	2309.6	2320.1	2297.5	2275.0	2297.5	2320.1	2309.6
27.5°	2013.4	2063.6	2123.1	2174.0	2216.5	2243.9	2225.6	2207.4	2225.6	2243.9	2216.5
30°	1897.7	1952.2	2017.7	2081.5	2143.8	2187.0	2173.0	2159.1	2173.0	2187.0	2143.8
32.5°	1787.1	1844.0	1912.0	1984.9	2062.6	2119.6	2114.2	2108.8	2114.2	2119.6	2062.6
35°	1625.1	1681.7	1750.4	1833.6	1931.2	2006.9	2016.6	2026.2	2016.6	2006.9	1931.2
37.5°	1462.2	1521.8	1593.7	1681.7	1785.9	1871.1	1899.9	1928.7	1899.9	1871.1	1785.9
40°	1354.0	1413.6	1485.5	1575.7	1684.1	1775.6	1816.4	1857.2	1816.4	1775.6	1684.1
42.5°	1251.4	1311.2	1383.1	1473.3	1581.7	1675.8	1726.9	1778.0	1726.9	1675.8	1581.7
45°	1100.5	1158.4	1228.2	1318.4	1428.9	1526.9	1587.0	1647.1	1587.0	1526.9	1428.9
47.5°	960.2	1015.8	1083.4	1172.4	1282.7	1380.4	1440.1	1499.8	1440.1	1380.4	1282.7
50°	868.3	925.0	992.6	1079.0	1184.2	1277.6	1335.5	1393.5	1335.5	1277.6	1184.2
52.5°	773.5	833.5	902.9	988.8	1091.4	1181.4	1233.3	1285.3	1233.3	1181.4	1091.4
55°	630.6	693.1	770.4	857.3	954.0	1038.7	1088.1	1137.5	1088.1	1038.7	954.0
57.5°	530.9	587.3	657.5	736.3	823.7	899.9	942.6	985.3	942.6	899.9	823.7
60°	476.8	524.9	583.9	655.8	740.6	813.6	851.2	888.7	851.2	813.6	740.6
62.5°	427.3	465.6	512.6	577.3	659.5	729.5	762.7	796.0	762.7	729.5	659.5
65°	357.2	388.8	427.5	481.1	549.8	607.5	632.2	656.9	632.2	607.5	549.8
67.5°	293.3	320.6	354.5	397.9	451.0	494.2	507.9	521.7	507.9	494.2	451.0
70°	257.1	279.3	307.2	344.3	390.4	426.1	430.4	434.7	430.4	426.1	390.4
72.5°	222.7	240.1	262.0	293.0	333.1	362.8	361.1	359.4	361.1	362.8	333.1
75°	175.8	187.6	202.6	224.6	253.6	273.2	264.6	256.0	264.6	273.2	253.6
77.5°	130.0	138.8	149.9	166.2	187.4	200.1	187.2	174.4	187.2	200.1	187.4
80°	101.4	107.9	116.5	128.8	144.9	153.8	140.9	128.0	140.9	153.8	144.9
82.5°	76.3	79.5	83.8	91.9	103.7	110.0	99.7	89.4	99.7	110.0	103.7
85°	31.1	36.2	42.7	48.0	52.3	54.2	48.8	43.5	48.8	54.2	52.3
87.5°	11.4	11.8	12.6	15.0	18.4	20.0	16.0	12.4	16.0	19.7	19.0
90°	28.1	26.8	26.8	25.4	21.4	16.1	9.4	4.0	9.4	14.7	24.1
92.5°	33.4	33.2	31.0	28.6	23.5	23.5	23.3	14.7	25.4	36.1	51.9
95°	30.8	30.8	36.1	45.5	66.9	68.2	45.5	41.5	58.9	82.9	104.3
97.5°	83.2	99.0	121.4	125.7	119.0	88.8	85.1	79.2	107.8	131.6	166.1
100°	153.8	173.9	189.9	157.8	124.4	123.1	115.0	112.4	143.1	165.9	199.3
102.5°	240.5	246.6	191.0	172.8	165.1	159.4	147.1	145.5	176.3	207.6	235.7
105°	260.8	234.1	235.4	235.4	230.1	219.4	196.6	195.3	230.1	266.2	300.9
107.5°	306.8	310.8	317.8	316.2	310.0	281.4	254.7	248.5	279.8	323.2	361.4
110°	367.8	371.8	374.5	371.8	362.5	326.4	294.3	284.9	313.0	358.5	399.9



TEST NUMBER: P1428441

CATALOG NUMBER: SQ2W-PW1-K-100U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	426.7	429.6	435.5	427.5	411.7	370.2	333.9	320.2	348.3	394.8	437.4
115°	520.3	520.3	521.6	517.6	485.5	442.7	394.6	374.5	398.6	441.4	488.2
117.5°	612.3	613.9	608.6	597.9	560.7	510.9	456.9	424.8	443.8	489.0	537.2
120°	670.1	672.8	667.4	651.4	615.3	559.1	497.6	460.1	474.8	519.0	567.1
122.5°	730.0	729.5	723.1	704.9	662.4	604.0	543.6	497.6	503.7	544.6	591.7
125°	813.2	811.9	806.5	785.1	741.0	680.8	609.9	553.7	545.7	580.5	628.6
127.5°	892.4	889.5	881.2	855.2	810.0	752.0	674.1	610.5	592.5	614.5	658.6
130°	947.0	943.0	928.3	900.2	856.0	801.2	722.3	650.0	624.6	638.0	676.8
132.5°	999.4	987.9	975.3	945.1	904.2	847.2	767.2	691.8	656.7	662.6	692.8
135°	1066.0	1055.3	1039.3	1009.8	971.1	914.9	834.6	753.0	704.9	699.5	716.9
137.5°	1124.6	1113.4	1095.2	1069.8	1030.7	980.7	903.6	817.5	756.8	738.9	745.5
140°	1161.0	1147.6	1131.6	1106.1	1071.4	1019.2	944.3	861.4	793.2	767.8	763.7
142.5°	1190.9	1180.8	1163.7	1140.4	1109.9	1057.7	985.0	903.1	830.6	797.7	788.3
145°	1235.9	1227.9	1209.1	1187.7	1162.3	1110.2	1043.3	961.7	889.5	846.7	826.6
147.5°	1273.9	1267.5	1252.7	1227.6	1206.2	1156.2	1095.2	1023.0	948.9	895.9	869.9
150°	1297.4	1292.1	1277.4	1253.3	1231.9	1185.1	1126.2	1059.3	988.4	932.3	898.8
152.5°	1319.9	1314.5	1297.7	1273.6	1255.4	1211.8	1158.3	1094.6	1022.7	966.5	932.0
155°	1349.6	1342.9	1326.8	1304.1	1288.1	1247.9	1198.4	1142.3	1080.7	1021.9	983.1
157.5°	1373.1	1364.8	1349.9	1330.3	1313.2	1276.3	1233.2	1184.8	1131.0	1074.9	1035.3
160°	1387.0	1377.7	1361.6	1344.2	1328.2	1293.4	1254.6	1210.5	1161.0	1110.2	1067.4
162.5°	1396.7	1388.4	1369.1	1353.9	1340.0	1308.4	1271.7	1231.9	1187.7	1143.3	1103.7
165°	1407.1	1397.7	1377.7	1365.6	1353.6	1326.8	1294.7	1262.6	1225.2	1189.1	1157.0
167.5°	1407.9	1400.1	1380.1	1368.3	1359.5	1336.5	1310.5	1285.9	1256.8	1228.4	1201.7
170°	1405.8	1399.1	1379.0	1368.3	1361.6	1342.9	1320.2	1298.8	1276.0	1251.9	1230.5
172.5°	1398.3	1391.6	1372.6	1364.0	1360.6	1344.0	1325.5	1309.5	1289.9	1272.3	1255.2
175°	1379.0	1373.7	1357.6	1352.3	1353.6	1342.9	1329.5	1320.2	1308.1	1297.4	1288.1
177.5°	1350.9	1347.7	1335.9	1335.9	1340.2	1333.8	1329.5	1325.2	1319.9	1316.7	1313.5
180°	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2



TEST NUMBER: P1428441

CATALOG NUMBER: SQ2W-PW1-K-100U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	2535.8	2535.8	2535.8	2535.8	2535.8	2535.8	2535.8	2535.8	2535.8	2535.8	2535.8
2.5°	2534.7	2530.4	2531.3	2532.6	2535.2	2537.7	2535.2	2532.6	2531.3	2530.4	2534.7
5°	2533.4	2529.1	2530.2	2533.4	2543.1	2552.7	2543.1	2533.4	2530.2	2529.1	2533.4
7.5°	2525.5	2523.6	2527.3	2532.4	2541.8	2551.3	2541.8	2532.4	2527.3	2523.6	2525.5
10°	2517.3	2516.8	2522.1	2528.3	2536.9	2545.5	2536.9	2528.3	2522.1	2516.8	2517.3
12.5°	2506.8	2507.5	2513.8	2520.6	2529.2	2537.7	2529.2	2520.6	2513.8	2507.5	2506.8
15°	2483.2	2486.4	2494.0	2500.9	2506.3	2511.7	2506.3	2500.9	2494.0	2486.4	2483.2
17.5°	2444.3	2444.5	2446.5	2448.6	2451.1	2453.7	2451.1	2448.6	2446.5	2444.5	2444.3
20°	2414.3	2408.9	2401.4	2395.7	2395.7	2395.7	2395.7	2395.7	2401.4	2408.9	2414.3
22.5°	2372.0	2358.0	2337.6	2320.6	2313.7	2306.9	2313.7	2320.6	2337.6	2358.0	2372.0
25°	2288.1	2256.5	2214.6	2179.2	2163.1	2147.0	2163.1	2179.2	2214.6	2256.5	2288.1
27.5°	2174.0	2123.1	2063.6	2013.4	1991.1	1968.8	1991.1	2013.4	2063.6	2123.1	2174.0
30°	2081.5	2017.7	1952.2	1897.7	1876.2	1854.8	1876.2	1897.7	1952.2	2017.7	2081.5
32.5°	1984.9	1912.0	1844.0	1787.1	1764.0	1740.8	1764.0	1787.1	1844.0	1912.0	1984.9
35°	1833.6	1750.4	1681.7	1625.1	1604.7	1584.3	1604.7	1625.1	1681.7	1750.4	1833.6
37.5°	1681.7	1593.7	1521.8	1462.2	1439.7	1417.2	1439.7	1462.2	1521.8	1593.7	1681.7
40°	1575.7	1485.5	1413.6	1354.0	1331.5	1309.0	1331.5	1354.0	1413.6	1485.5	1575.7
42.5°	1473.3	1383.1	1311.2	1251.4	1228.0	1204.6	1228.0	1251.4	1311.2	1383.1	1473.3
45°	1318.4	1228.2	1158.4	1100.5	1077.9	1055.4	1077.9	1100.5	1158.4	1228.2	1318.4
47.5°	1172.4	1083.4	1015.8	960.2	940.9	921.6	940.9	960.2	1015.8	1083.4	1172.4
50°	1079.0	992.6	925.0	868.3	844.7	821.1	844.7	868.3	925.0	992.6	1079.0
52.5°	988.8	902.9	833.5	773.5	741.3	709.1	741.3	773.5	833.5	902.9	988.8
55°	857.3	770.4	693.1	630.6	612.4	594.1	612.4	630.6	693.1	770.4	857.3
57.5°	736.3	657.5	587.3	530.9	515.9	500.9	515.9	530.9	587.3	657.5	736.3
60°	655.8	583.9	524.9	476.8	461.8	446.8	461.8	476.8	524.9	583.9	655.8
62.5°	577.3	512.6	465.6	427.3	414.8	402.3	414.8	427.3	465.6	512.6	577.3
65°	481.1	427.5	388.8	357.2	346.4	335.7	346.4	357.2	388.8	427.5	481.1
67.5°	397.9	354.5	320.6	293.3	286.3	279.2	286.3	293.3	320.6	354.5	397.9
70°	344.3	307.2	279.3	257.1	251.7	246.3	251.7	257.1	279.3	307.2	344.3
72.5°	293.0	262.0	240.1	222.7	219.1	215.4	219.1	222.7	240.1	262.0	293.0
75°	224.6	202.6	187.6	175.8	173.6	171.5	173.6	175.8	187.6	202.6	224.6
77.5°	166.2	149.9	138.8	130.0	128.3	126.5	128.3	130.0	138.8	149.9	166.2
80°	128.8	116.5	107.9	101.4	101.4	101.4	101.4	101.4	107.9	116.5	128.8
82.5°	91.9	83.8	79.5	76.3	76.3	76.3	76.3	76.3	79.5	83.8	91.9
85°	48.0	42.7	36.2	31.1	30.1	29.0	30.1	31.1	36.2	42.7	48.0
87.5°	16.0	15.3	16.3	16.8	17.8	17.3	17.8	16.8	16.3	15.3	16.0
90°	30.8	40.1	49.5	54.8	60.2	57.5	60.2	54.8	49.5	40.1	30.8
92.5°	61.8	77.6	89.1	98.7	103.0	102.5	103.0	98.7	89.1	77.6	61.8
95°	124.4	143.1	161.8	175.2	183.2	180.6	183.2	175.2	161.8	143.1	124.4
97.5°	191.8	216.9	237.8	250.4	258.4	263.8	258.4	250.4	237.8	216.9	191.8
100°	236.7	260.8	284.9	299.6	313.0	318.3	313.0	299.6	284.9	260.8	236.7
102.5°	273.1	304.7	330.9	346.7	357.9	363.3	357.9	346.7	330.9	304.7	273.1
105°	333.0	366.5	394.6	414.6	426.7	430.7	426.7	414.6	394.6	366.5	333.0
107.5°	393.0	427.5	453.4	475.6	490.3	498.9	490.3	475.6	453.4	427.5	393.0
110°	440.1	468.1	496.2	516.3	531.0	536.4	531.0	516.3	496.2	468.1	440.1



TEST NUMBER: P1428441

CATALOG NUMBER: SQ2W-PW1-K-100U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	479.6	510.9	539.0	559.1	575.9	583.4	575.9	559.1	539.0	510.9	479.6
115°	535.0	576.5	601.9	620.6	632.7	639.3	632.7	620.6	601.9	576.5	535.0
117.5°	581.0	624.4	652.2	666.6	672.3	677.1	672.3	666.6	652.2	624.4	581.0
120°	609.9	650.0	682.1	700.9	707.6	710.2	707.6	700.9	682.1	650.0	609.9
122.5°	636.7	674.7	705.7	728.7	739.7	742.3	739.7	728.7	705.7	674.7	636.7
125°	674.1	710.2	742.3	765.1	777.1	783.8	777.1	765.1	742.3	710.2	674.1
127.5°	706.8	745.8	775.2	795.8	807.6	813.0	807.6	795.8	775.2	745.8	706.8
130°	724.9	765.1	794.5	817.2	827.9	833.3	827.9	817.2	794.5	765.1	724.9
132.5°	738.9	781.1	811.6	832.2	844.0	849.3	844.0	832.2	811.6	781.1	738.9
135°	755.7	799.9	832.0	852.0	862.7	868.1	862.7	852.0	832.0	799.9	755.7
137.5°	770.4	810.6	844.0	865.1	874.8	878.2	874.8	865.1	844.0	810.6	770.4
140°	781.1	815.9	849.3	869.4	880.1	881.4	880.1	869.4	849.3	815.9	781.1
142.5°	795.0	822.3	851.5	871.5	882.2	884.7	882.2	871.5	851.5	822.3	795.0
145°	819.9	836.0	856.0	874.8	884.1	886.8	884.1	874.8	856.0	836.0	819.9
147.5°	851.2	856.3	866.7	879.0	888.1	890.0	888.1	879.0	866.7	856.3	851.2
150°	874.8	873.4	877.4	885.5	893.5	892.1	893.5	885.5	877.4	873.4	874.8
152.5°	901.5	893.7	893.5	897.2	901.0	900.7	901.0	897.2	893.5	893.7	901.5
155°	947.0	932.3	924.2	921.6	921.6	920.2	921.6	921.6	924.2	932.3	947.0
157.5°	997.0	976.4	964.4	957.9	956.1	953.1	956.1	957.9	964.4	976.4	997.0
160°	1031.2	1008.5	996.5	985.8	981.8	977.7	981.8	985.8	996.5	1008.5	1031.2
162.5°	1063.3	1041.7	1028.6	1018.9	1014.9	1008.8	1014.9	1018.9	1028.6	1041.7	1063.3
165°	1115.5	1092.8	1078.1	1070.0	1064.7	1059.3	1064.7	1070.0	1078.1	1092.8	1115.5
167.5°	1167.7	1142.8	1133.2	1124.1	1119.0	1109.4	1119.0	1124.1	1133.2	1142.8	1167.7
170°	1199.8	1177.0	1171.7	1163.7	1154.3	1143.6	1154.3	1163.7	1171.7	1177.0	1199.8
172.5°	1227.6	1212.4	1207.0	1199.0	1196.0	1187.5	1196.0	1199.0	1207.0	1212.4	1227.6
175°	1268.0	1256.0	1256.0	1254.6	1250.6	1242.6	1250.6	1254.6	1256.0	1256.0	1268.0
177.5°	1301.7	1295.3	1299.6	1299.6	1298.5	1291.0	1298.5	1299.6	1299.6	1295.3	1301.7
180°	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2	1324.2



TEST NUMBER: P1428441

CATALOG NUMBER: SQ2W-PW1-K-100U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	330°	340°	350°	360°
0°	2535.8	2535.8	2535.8	2535.8
2.5°	2544.2	2547.6	2533.0	2518.4
5°	2543.1	2545.7	2527.5	2509.3
7.5°	2532.8	2533.6	2515.2	2496.7
10°	2523.7	2523.7	2504.4	2485.1
12.5°	2511.5	2510.0	2489.8	2469.6
15°	2484.3	2479.7	2458.3	2436.8
17.5°	2445.8	2441.6	2420.1	2398.6
20°	2417.5	2414.5	2393.1	2371.6
22.5°	2379.5	2379.3	2356.1	2333.0
25°	2309.6	2320.1	2297.5	2275.0
27.5°	2216.5	2243.9	2225.6	2207.4
30°	2143.8	2187.0	2173.0	2159.1
32.5°	2062.6	2119.6	2114.2	2108.8
35°	1931.2	2006.9	2016.6	2026.2
37.5°	1785.9	1871.1	1899.9	1928.7
40°	1684.1	1775.6	1816.4	1857.2
42.5°	1581.7	1675.8	1726.9	1778.0
45°	1428.9	1526.9	1587.0	1647.1
47.5°	1282.7	1380.4	1440.1	1499.8
50°	1184.2	1277.6	1335.5	1393.5
52.5°	1091.4	1181.4	1233.3	1285.3
55°	954.0	1038.7	1088.1	1137.5
57.5°	823.7	899.9	942.6	985.3
60°	740.6	813.6	851.2	888.7
62.5°	659.5	729.5	762.7	796.0
65°	549.8	607.5	632.2	656.9
67.5°	451.0	494.2	507.9	521.7
70°	390.4	426.1	430.4	434.7
72.5°	333.1	362.8	361.1	359.4
75°	253.6	273.2	264.6	256.0
77.5°	187.4	200.1	187.2	174.4
80°	144.9	153.8	140.9	128.0
82.5°	103.7	110.0	99.7	89.4
85°	52.3	54.2	48.8	43.5
87.5°	19.0	19.7	16.0	12.4
90°	24.1	14.7	9.4	4.0
92.5°	51.9	36.1	25.4	14.7
95°	104.3	82.9	58.9	41.5
97.5°	166.1	131.6	107.8	79.2
100°	199.3	165.9	143.1	112.4
102.5°	235.7	207.6	176.3	145.5
105°	300.9	266.2	230.1	195.3
107.5°	361.4	323.2	279.8	248.5
110°	399.9	358.5	313.0	284.9



TEST NUMBER: P1428441

CATALOG NUMBER: SQ2W-PW1-K-100U-125D-L935-UNV-STD-W-WM-4

**CANDELA DISTRIBUTION (continued):**

	330°	340°	350°	360°
112.5°	437.4	394.8	348.3	320.2
115°	488.2	441.4	398.6	374.5
117.5°	537.2	489.0	443.8	424.8
120°	567.1	519.0	474.8	460.1
122.5°	591.7	544.6	503.7	497.6
125°	628.6	580.5	545.7	553.7
127.5°	658.6	614.5	592.5	610.5
130°	676.8	638.0	624.6	650.0
132.5°	692.8	662.6	656.7	691.8
135°	716.9	699.5	704.9	753.0
137.5°	745.5	738.9	756.8	817.5
140°	763.7	767.8	793.2	861.4
142.5°	788.3	797.7	830.6	903.1
145°	826.6	846.7	889.5	961.7
147.5°	869.9	895.9	948.9	1023.0
150°	898.8	932.3	988.4	1059.3
152.5°	932.0	966.5	1022.7	1094.6
155°	983.1	1021.9	1080.7	1142.3
157.5°	1035.3	1074.9	1131.0	1184.8
160°	1067.4	1110.2	1161.0	1210.5
162.5°	1103.7	1143.3	1187.7	1231.9
165°	1157.0	1189.1	1225.2	1262.6
167.5°	1201.7	1228.4	1256.8	1285.9
170°	1230.5	1251.9	1276.0	1298.8
172.5°	1255.2	1272.3	1289.9	1309.5
175°	1288.1	1297.4	1308.1	1320.2
177.5°	1313.5	1316.7	1319.9	1325.2
180°	1324.2	1324.2	1324.2	1324.2



TEST NUMBER: P1428441

CATALOG NUMBER: SQ2W-PW1-K-100U-125D-L935-UNV-STD-W-WM-4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	20.64	21.54	21.52	22.44	23.58	16.89	17.79	17.77	18.69	19.82
	3H	21.95	22.75	22.84	23.66	24.82	18.16	18.97	19.06	19.88	21.04
	4H	22.36	23.12	23.27	24.03	25.20	18.67	19.43	19.58	20.34	21.51
	6H	22.54	23.24	23.46	24.16	25.34	18.98	19.68	19.90	20.60	21.78
	8H	22.58	23.25	23.51	24.18	25.37	19.10	19.76	20.02	20.70	21.88
	12H	22.58	23.22	23.52	24.15	25.35	19.13	19.76	20.06	20.69	21.90
4H	2H	20.78	21.54	21.69	22.45	23.62	17.70	18.47	18.62	19.38	20.55
	3H	22.32	22.95	23.25	23.90	25.08	19.15	19.79	20.08	20.73	21.91
	4H	22.87	23.44	23.80	24.38	25.59	19.73	20.31	20.67	21.25	22.46
	6H	23.18	23.68	24.13	24.64	25.85	20.12	20.62	21.07	21.58	22.79
	8H	23.27	23.74	24.23	24.69	25.92	20.27	20.73	21.22	21.69	22.91
	12H	23.30	23.71	24.27	24.69	25.92	20.32	20.73	21.29	21.71	22.94
8H	4H	22.91	23.37	23.86	24.33	25.55	20.08	20.54	21.03	21.50	22.72
	6H	23.33	23.72	24.31	24.71	25.94	20.58	20.96	21.55	21.95	23.18
	8H	23.50	23.84	24.49	24.83	26.07	20.79	21.13	21.78	22.12	23.36
	12H	23.58	23.88	24.57	24.86	26.15	20.88	21.18	21.87	22.16	23.45
12H	4H	22.87	23.29	23.84	24.26	25.49	20.10	20.52	21.07	21.49	22.72
	6H	23.33	23.66	24.31	24.65	25.89	20.65	20.99	21.64	21.97	23.22
	8H	23.52	23.82	24.51	24.80	26.09	20.90	21.19	21.88	22.17	23.46