

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1428600

Luminaire Tested: SQ2W-WBN-K-050U-050D-L935-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1428600
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G3-2308-130-2)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-WBN-K-050U-050D-L935-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - WHITE DISCREET BAFFLE, NARROW 35-DEGREE OPTIC
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 500 LUMENS PER FOOT
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4104.1 lumens
Efficiency: N/A
Efficacy: 124.4 lumens/watt
Spacing Criteria (0/90/45): 0.59 / 0.58 / 0.63
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 33
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1428600

CATALOG NUMBER: SQ2W-WBN-K-050U-050D-L935-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

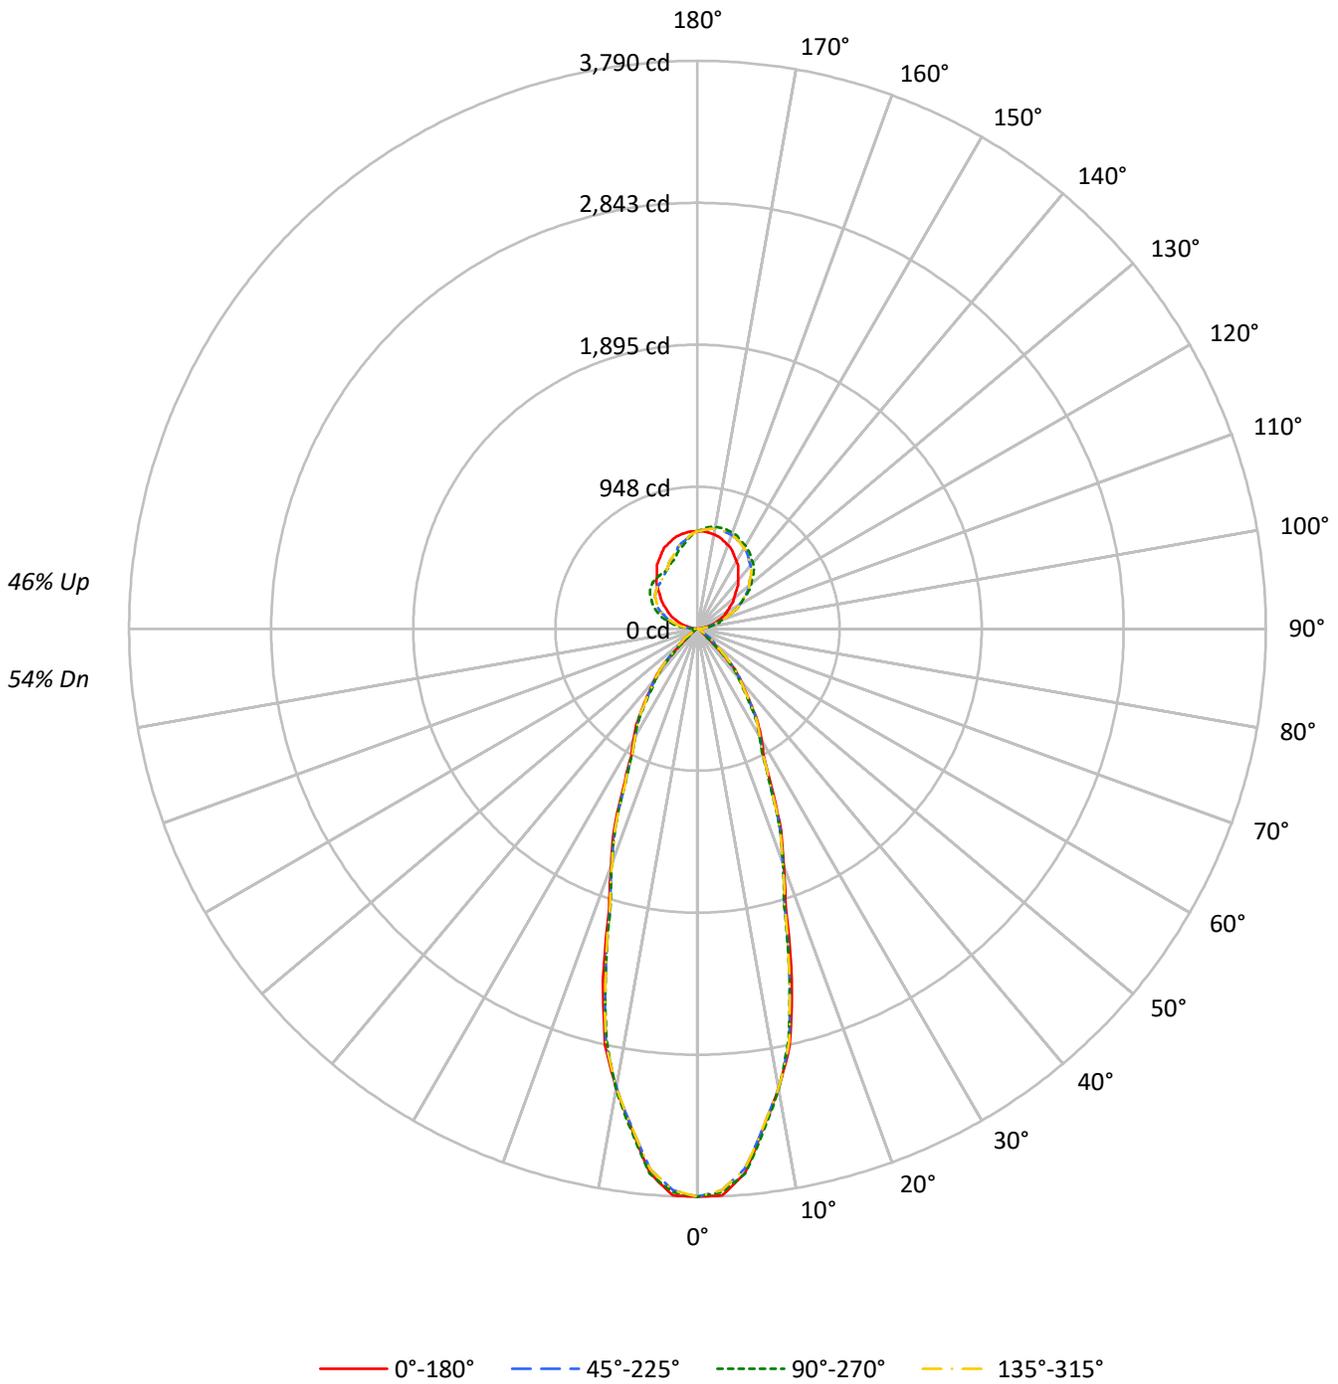



TEST NUMBER: P1428600

CATALOG NUMBER: SQ2W-WBN-K-050U-050D-L935-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	60	60	60	54				
1	101	98	95	92	94	91	88	86	78	77	75	67	66	65	56	56	55	50				
2	94	88	84	80	88	83	79	75	72	69	67	62	60	58	53	52	51	46				
3	88	81	75	70	82	76	71	67	66	63	60	58	55	53	50	48	47	43				
4	82	74	68	63	77	70	64	60	62	57	54	54	51	49	47	45	43	40				
5	77	68	61	56	72	64	58	54	57	53	49	51	47	45	44	42	40	38				
6	73	63	56	51	68	59	54	49	53	49	45	47	44	42	42	40	38	35				
7	68	58	52	47	64	55	49	45	50	45	42	45	41	39	40	37	35	33				
8	64	54	48	43	61	52	46	42	47	42	39	42	39	36	38	35	33	31				
9	61	51	44	40	57	48	43	39	44	39	36	40	36	34	36	33	31	30				
10	58	48	41	37	54	45	40	36	41	37	34	38	34	32	34	32	30	28				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	61192	61192	61192	61192
5°	59082	59147	59082	59147
10°	51068	51189	51068	51189
15°	40638	39513	40638	39513
20°	28869	28695	28869	28695
25°	20768	20218	20768	20218
30°	15869	15405	15869	15405
35°	12457	11927	12457	11927
40°	9438	8856	9438	8856
45°	5281	4713	5281	4713
50°	1859	1638	1859	1638
55°	1134	1078	1134	1078
60°	869	804	869	804
65°	795	745	795	745
70°	760	699	760	699
75°	711	674	711	674
80°	623	623	623	623
85°	630	500	630	500

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 40°
 Vertical Angle: 45°
 Luminance: 6261 cd/sqm



TEST NUMBER: P1428600

CATALOG NUMBER: SQ2W-WBN-K-050U-050D-L935-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	329.0	8.0
10°-20°	653.9	15.9
20°-30°	541.5	13.2
30°-40°	389.5	9.5
40°-50°	198.4	4.8
50°-60°	51.6	1.3
60°-70°	21.4	0.5
70°-80°	11.9	0.3
80°-90°	6.2	0.2
90°-100°	51.8	1.3
100°-110°	151.1	3.7
110°-120°	246.5	6.0
120°-130°	312.9	7.6
130°-140°	334.8	8.2
140°-150°	312.6	7.6
150°-160°	257.2	6.3
160°-170°	172.5	4.2
170°-180°	61.3	1.5
0°-30°	1524.3	37.1
0°-40°	1913.9	46.6
0°-60°	2163.9	52.7
0°-90°	2203.4	53.7
90°-120°	449.4	11.0
90°-150°	1409.7	34.3
90°-180°	1901.0	46.3
0°-180°	4104.1	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	3790	3790	3790	3790	3790	
5°	3645	3649	3645	3649	3645	329
15°	2431	2364	2431	2364	2431	660
25°	1166	1135	1166	1135	1166	548
35°	632	605	632	605	632	397
45°	231	206	231	206	231	185
55°	40	38	40	38	40	40
65°	21	20	21	20	21	21
75°	11	11	11	11	11	12
85°	3	3	3	3	3	4
90°	2	14	2	28	2	2
95°	20	15	20	89	20	25
105°	96	154	96	212	96	102
115°	184	255	184	314	184	181
125°	272	404	272	385	272	244
135°	370	529	370	427	370	286
145°	473	610	473	436	473	296
155°	562	663	562	452	562	258
165°	621	691	621	521	621	175
175°	649	677	649	611	649	62
180°	651	651	651	651	651	



TEST NUMBER: P1428600

CATALOG NUMBER: SQ2W-WBN-K-050U-050D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	3790.0	3790.0	3790.0	3790.0	3790.0	3790.0	3790.0	3790.0	3790.0	3790.0	3790.0
2.5°	3784.0	3781.2	3778.3	3765.6	3749.6	3748.2	3761.6	3770.8	3767.5	3764.1	3767.5
5°	3645.4	3643.0	3640.6	3629.7	3616.0	3620.8	3644.1	3660.2	3654.8	3649.4	3654.8
7.5°	3359.1	3361.2	3363.2	3357.6	3349.5	3355.7	3376.3	3390.4	3384.6	3378.9	3384.6
10°	3114.9	3120.3	3125.7	3118.1	3106.1	3115.2	3145.4	3163.0	3142.6	3122.3	3142.6
12.5°	2845.5	2842.0	2838.5	2831.6	2823.4	2821.8	2826.6	2827.5	2816.2	2805.0	2816.2
15°	2431.2	2418.6	2406.1	2386.8	2365.3	2358.3	2365.7	2370.5	2367.2	2363.9	2367.2
17.5°	1958.2	1963.1	1967.9	1954.9	1935.9	1926.0	1925.3	1923.8	1920.1	1916.4	1920.1
20°	1680.2	1681.7	1683.2	1675.0	1663.7	1661.0	1666.9	1671.3	1670.7	1670.1	1670.7
22.5°	1456.4	1456.7	1457.0	1446.2	1431.8	1429.0	1437.8	1443.1	1437.7	1432.3	1437.7
25°	1165.8	1164.9	1164.0	1156.9	1147.6	1140.7	1136.2	1133.1	1134.0	1134.9	1134.0
27.5°	956.1	952.4	948.7	942.5	935.6	933.6	936.6	938.3	936.1	933.9	936.1
30°	851.2	848.2	845.2	839.1	831.9	829.2	831.0	831.7	829.0	826.3	829.0
32.5°	757.0	757.2	757.3	751.8	744.4	740.2	739.4	738.3	736.3	734.3	736.3
35°	632.0	633.8	635.6	631.1	624.5	619.0	614.5	610.5	607.8	605.1	607.8
37.5°	520.4	522.1	523.7	520.0	514.4	508.4	501.8	496.3	494.0	491.7	494.0
40°	447.8	449.0	450.2	447.6	443.7	437.8	430.1	423.8	422.0	420.2	422.0
42.5°	368.7	373.7	378.7	377.1	373.2	367.6	360.3	353.9	349.9	346.0	349.9
45°	231.3	247.1	263.0	270.1	274.2	272.3	264.2	252.4	229.4	206.4	229.4
47.5°	117.0	138.9	160.9	176.6	190.3	185.9	163.5	141.1	118.5	95.9	118.5
50°	74.0	89.2	104.4	123.7	144.3	139.8	110.3	85.5	75.4	65.2	75.4
52.5°	56.7	64.6	72.4	90.7	112.5	110.4	84.4	63.5	57.9	52.3	57.9
55°	40.3	43.3	46.3	56.5	69.0	68.3	54.2	43.1	40.7	38.3	40.7
57.5°	31.2	32.9	34.5	38.3	42.8	42.4	37.1	32.7	31.2	29.7	31.2
60°	26.9	28.1	29.3	31.2	33.2	32.9	30.3	27.9	26.4	24.9	26.4
62.5°	24.2	24.9	25.6	26.5	27.4	27.0	25.2	23.8	23.3	22.7	23.3
65°	20.8	21.1	21.4	21.5	21.5	21.2	20.6	20.1	19.8	19.5	19.8
67.5°	17.7	18.0	18.3	18.4	18.3	18.1	17.8	17.5	17.2	16.9	17.2
70°	16.1	16.4	16.7	16.6	16.3	16.0	15.7	15.4	15.1	14.8	15.1
72.5°	14.0	14.3	14.6	14.4	14.1	14.0	13.9	13.8	13.5	13.2	13.5
75°	11.4	11.4	11.4	11.4	11.4	11.3	11.0	10.8	10.8	10.8	10.8
77.5°	8.9	8.9	9.0	8.8	8.5	8.3	8.3	8.3	8.0	7.8	8.0
80°	6.7	7.0	7.3	7.2	6.9	6.7	6.7	6.7	6.7	6.7	6.7
82.5°	5.6	5.7	5.8	5.6	5.3	5.1	5.1	5.1	5.1	5.1	5.1
85°	3.4	3.4	3.4	3.1	2.8	2.8	3.1	3.3	3.0	2.7	3.0
87.5°	1.5	2.0	2.7	3.2	3.6	3.7	3.7	3.8	4.0	4.0	4.0
90°	2.0	4.6	7.9	10.5	12.5	13.2	13.2	13.8	14.5	14.5	14.5
92.5°	7.2	11.4	11.6	11.6	14.1	15.3	16.3	16.4	17.1	17.1	17.1
95°	20.4	22.4	33.5	32.9	22.4	17.8	15.1	15.1	15.1	15.1	15.1
97.5°	38.9	41.8	43.7	58.5	61.8	59.7	48.7	40.9	36.6	34.6	36.6
100°	55.2	56.5	60.5	61.1	77.6	93.4	85.5	75.6	72.3	70.4	72.3
102.5°	71.5	72.3	78.4	81.1	85.0	93.9	121.2	118.2	116.0	115.6	116.0
105°	96.0	96.7	107.8	113.1	115.7	115.7	115.1	128.2	149.3	153.9	149.3
107.5°	122.2	125.2	138.3	152.4	155.4	156.2	152.8	150.8	150.0	150.6	150.0
110°	140.1	144.7	160.4	178.2	182.8	184.1	182.8	180.8	179.5	179.5	179.5



TEST NUMBER: P1428600

CATALOG NUMBER: SQ2W-WBN-K-050U-050D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	157.4	164.1	182.0	202.4	210.1	214.1	211.2	209.8	208.4	209.5	208.4
115°	184.1	194.0	217.6	238.7	254.5	256.4	255.8	255.8	255.1	255.1	255.1
117.5°	208.8	224.6	251.2	275.6	293.9	299.2	301.8	301.0	300.2	301.5	300.2
120°	226.2	244.6	274.8	302.5	320.2	328.1	330.7	329.4	330.7	329.4	330.7
122.5°	244.6	267.2	296.9	325.6	346.5	355.5	358.6	358.9	359.1	358.4	359.1
125°	272.2	299.8	334.7	364.3	386.0	396.5	399.1	399.8	401.1	404.4	401.1
127.5°	300.1	331.4	369.7	398.2	420.4	433.2	437.3	438.7	441.5	442.9	441.5
130°	319.6	355.1	393.9	420.8	442.5	456.3	463.6	465.5	468.8	468.2	468.8
132.5°	340.1	377.2	416.5	444.5	464.6	479.5	485.6	491.3	492.5	493.4	492.5
135°	370.2	410.3	449.7	477.4	496.4	510.9	518.8	524.0	527.3	529.3	527.3
137.5°	401.9	444.2	482.1	506.7	525.9	538.4	547.3	552.8	556.3	557.8	556.3
140°	423.4	464.2	501.0	526.7	543.8	556.3	564.2	570.7	574.7	574.7	574.7
142.5°	444.0	484.2	520.0	545.6	560.6	572.0	580.5	585.5	589.9	589.9	589.9
145°	472.8	512.9	545.7	571.4	583.9	594.4	603.6	607.6	610.2	610.2	610.2
147.5°	502.9	538.4	568.4	593.0	603.5	615.8	623.1	626.2	629.5	628.1	629.5
150°	520.8	553.6	582.6	605.6	616.1	627.9	635.2	637.8	641.1	639.1	641.1
152.5°	538.1	569.4	595.7	617.2	626.1	637.9	646.2	648.8	651.1	649.6	651.1
155°	561.5	589.1	613.5	633.2	641.1	652.3	660.2	663.4	666.1	662.8	666.1
157.5°	582.4	606.2	627.4	645.6	654.0	663.6	670.9	675.0	677.6	676.2	677.6
160°	595.1	616.8	635.8	652.9	660.8	669.4	677.3	681.9	684.5	682.5	684.5
162.5°	605.6	625.2	643.2	658.7	665.5	673.0	682.5	686.6	689.2	686.7	689.2
165°	620.7	636.5	652.3	665.4	671.3	677.3	687.1	691.7	693.7	691.1	693.7
167.5°	632.1	644.2	657.0	668.3	672.6	678.4	688.3	692.1	694.6	691.3	694.6
170°	638.5	649.0	660.2	669.4	672.6	677.9	687.8	691.1	693.0	689.7	693.0
172.5°	643.7	651.6	660.7	668.8	670.5	674.8	684.1	687.4	688.8	686.1	688.8
175°	649.0	653.6	660.2	665.4	664.8	667.4	675.3	677.9	680.5	676.6	680.5
177.5°	651.5	653.6	655.7	658.8	656.7	656.7	662.5	664.1	664.6	662.5	664.6
180°	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9



TEST NUMBER: P1428600

CATALOG NUMBER: SQ2W-WBN-K-050U-050D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	3790.0	3790.0	3790.0	3790.0	3790.0	3790.0	3790.0	3790.0	3790.0	3790.0	3790.0
2.5°	3770.8	3761.6	3748.2	3749.6	3765.6	3778.3	3781.2	3784.0	3781.2	3778.3	3765.6
5°	3660.2	3644.1	3620.8	3616.0	3629.7	3640.6	3643.0	3645.4	3643.0	3640.6	3629.7
7.5°	3390.4	3376.3	3355.7	3349.5	3357.6	3363.2	3361.2	3359.1	3361.2	3363.2	3357.6
10°	3163.0	3145.4	3115.2	3106.1	3118.1	3125.7	3120.3	3114.9	3120.3	3125.7	3118.1
12.5°	2827.5	2826.6	2821.8	2823.4	2831.6	2838.5	2842.0	2845.5	2842.0	2838.5	2831.6
15°	2370.5	2365.7	2358.3	2365.3	2386.8	2406.1	2418.6	2431.2	2418.6	2406.1	2386.8
17.5°	1923.8	1925.3	1926.0	1935.9	1954.9	1967.9	1963.1	1958.2	1963.1	1967.9	1954.9
20°	1671.3	1666.9	1661.0	1663.7	1675.0	1683.2	1681.7	1680.2	1681.7	1683.2	1675.0
22.5°	1443.1	1437.8	1429.0	1431.8	1446.2	1457.0	1456.7	1456.4	1456.7	1457.0	1446.2
25°	1133.1	1136.2	1140.7	1147.6	1156.9	1164.0	1164.9	1165.8	1164.9	1164.0	1156.9
27.5°	938.3	936.6	933.6	935.6	942.5	948.7	952.4	956.1	952.4	948.7	942.5
30°	831.7	831.0	829.2	831.9	839.1	845.2	848.2	851.2	848.2	845.2	839.1
32.5°	738.3	739.4	740.2	744.4	751.8	757.3	757.2	757.0	757.2	757.3	751.8
35°	610.5	614.5	619.0	624.5	631.1	635.6	633.8	632.0	633.8	635.6	631.1
37.5°	496.3	501.8	508.4	514.4	520.0	523.7	522.1	520.4	522.1	523.7	520.0
40°	423.8	430.1	437.8	443.7	447.6	450.2	449.0	447.8	449.0	450.2	447.6
42.5°	353.9	360.3	367.6	373.2	377.1	378.7	373.7	368.7	373.7	378.7	377.1
45°	252.4	264.2	272.3	274.2	270.1	263.0	247.1	231.3	247.1	263.0	270.1
47.5°	141.1	163.5	185.9	190.3	176.6	160.9	138.9	117.0	138.9	160.9	176.6
50°	85.5	110.3	139.8	144.3	123.7	104.4	89.2	74.0	89.2	104.4	123.7
52.5°	63.5	84.4	110.4	112.5	90.7	72.4	64.6	56.7	64.6	72.4	90.7
55°	43.1	54.2	68.3	69.0	56.5	46.3	43.3	40.3	43.3	46.3	56.5
57.5°	32.7	37.1	42.4	42.8	38.3	34.5	32.9	31.2	32.9	34.5	38.3
60°	27.9	30.3	32.9	33.2	31.2	29.3	28.1	26.9	28.1	29.3	31.2
62.5°	23.8	25.2	27.0	27.4	26.5	25.6	24.9	24.2	24.9	25.6	26.5
65°	20.1	20.6	21.2	21.5	21.5	21.4	21.1	20.8	21.1	21.4	21.5
67.5°	17.5	17.8	18.1	18.3	18.4	18.3	18.0	17.7	18.0	18.3	18.4
70°	15.4	15.7	16.0	16.3	16.6	16.7	16.4	16.1	16.4	16.7	16.6
72.5°	13.8	13.9	14.0	14.1	14.4	14.6	14.3	14.0	14.3	14.6	14.4
75°	10.8	11.0	11.3	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4
77.5°	8.3	8.3	8.3	8.5	8.8	9.0	8.9	8.9	8.9	9.0	8.8
80°	6.7	6.7	6.7	6.9	7.2	7.3	7.0	6.7	7.0	7.3	7.2
82.5°	5.1	5.1	5.1	5.3	5.6	5.8	5.7	5.6	5.7	5.8	5.6
85°	3.3	3.1	2.8	2.8	3.1	3.4	3.4	3.4	3.4	3.4	3.1
87.5°	3.8	3.7	3.7	3.6	3.2	2.7	2.0	1.5	2.0	2.5	3.4
90°	13.8	13.2	13.2	12.5	10.5	7.9	4.6	2.0	4.6	7.2	11.8
92.5°	16.4	16.3	15.3	14.1	11.6	11.6	11.4	7.2	12.5	17.8	25.5
95°	15.1	15.1	17.8	22.4	32.9	33.5	22.4	20.4	28.9	40.8	51.3
97.5°	40.9	48.7	59.7	61.8	58.5	43.7	41.8	38.9	53.0	64.7	81.7
100°	75.6	85.5	93.4	77.6	61.1	60.5	56.5	55.2	70.4	81.5	98.0
102.5°	118.2	121.2	93.9	85.0	81.1	78.4	72.3	71.5	86.7	102.0	115.9
105°	128.2	115.1	115.7	115.7	113.1	107.8	96.7	96.0	113.1	130.8	147.9
107.5°	150.8	152.8	156.2	155.4	152.4	138.3	125.2	122.2	137.6	158.9	177.7
110°	180.8	182.8	184.1	182.8	178.2	160.4	144.7	140.1	153.9	176.2	196.6



TEST NUMBER: P1428600

CATALOG NUMBER: SQ2W-WBN-K-050U-050D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	209.8	211.2	214.1	210.1	202.4	182.0	164.1	157.4	171.2	194.1	215.0
115°	255.8	255.8	256.4	254.5	238.7	217.6	194.0	184.1	195.9	217.0	240.0
117.5°	301.0	301.8	299.2	293.9	275.6	251.2	224.6	208.8	218.2	240.4	264.1
120°	329.4	330.7	328.1	320.2	302.5	274.8	244.6	226.2	233.4	255.1	278.8
122.5°	358.9	358.6	355.5	346.5	325.6	296.9	267.2	244.6	247.6	267.7	290.9
125°	399.8	399.1	396.5	386.0	364.3	334.7	299.8	272.2	268.3	285.4	309.0
127.5°	438.7	437.3	433.2	420.4	398.2	369.7	331.4	300.1	291.3	302.1	323.8
130°	465.5	463.6	456.3	442.5	420.8	393.9	355.1	319.6	307.1	313.6	332.7
132.5°	491.3	485.6	479.5	464.6	444.5	416.5	377.2	340.1	322.8	325.7	340.6
135°	524.0	518.8	510.9	496.4	477.4	449.7	410.3	370.2	346.5	343.9	352.4
137.5°	552.8	547.3	538.4	525.9	506.7	482.1	444.2	401.9	372.0	363.2	366.5
140°	570.7	564.2	556.3	543.8	526.7	501.0	464.2	423.4	389.9	377.4	375.4
142.5°	585.5	580.5	572.0	560.6	545.6	520.0	484.2	444.0	408.3	392.1	387.5
145°	607.6	603.6	594.4	583.9	571.4	545.7	512.9	472.8	437.3	416.2	406.4
147.5°	626.2	623.1	615.8	603.5	593.0	568.4	538.4	502.9	466.4	440.4	427.7
150°	637.8	635.2	627.9	616.1	605.6	582.6	553.6	520.8	485.9	458.3	441.9
152.5°	648.8	646.2	637.9	626.1	617.2	595.7	569.4	538.1	502.7	475.1	458.2
155°	663.4	660.2	652.3	641.1	633.2	613.5	589.1	561.5	531.3	502.3	483.3
157.5°	675.0	670.9	663.6	654.0	645.6	627.4	606.2	582.4	556.0	528.4	508.9
160°	681.9	677.3	669.4	660.8	652.9	635.8	616.8	595.1	570.7	545.7	524.7
162.5°	686.6	682.5	673.0	665.5	658.7	643.2	625.2	605.6	583.9	562.1	542.6
165°	691.7	687.1	677.3	671.3	665.4	652.3	636.5	620.7	602.3	584.5	568.8
167.5°	692.1	688.3	678.4	672.6	668.3	657.0	644.2	632.1	617.8	603.9	590.7
170°	691.1	687.8	677.9	672.6	669.4	660.2	649.0	638.5	627.3	615.4	604.9
172.5°	687.4	684.1	674.8	670.5	668.8	660.7	651.6	643.7	634.1	625.4	617.0
175°	677.9	675.3	667.4	664.8	665.4	660.2	653.6	649.0	643.1	637.8	633.2
177.5°	664.1	662.5	656.7	656.7	658.8	655.7	653.6	651.5	648.8	647.3	645.7
180°	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9



TEST NUMBER: P1428600

CATALOG NUMBER: SQ2W-WBN-K-050U-050D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	3790.0	3790.0	3790.0	3790.0	3790.0	3790.0	3790.0	3790.0	3790.0	3790.0	3790.0
2.5°	3749.6	3748.2	3761.6	3770.8	3767.5	3764.1	3767.5	3770.8	3761.6	3748.2	3749.6
5°	3616.0	3620.8	3644.1	3660.2	3654.8	3649.4	3654.8	3660.2	3644.1	3620.8	3616.0
7.5°	3349.5	3355.7	3376.3	3390.4	3384.6	3378.9	3384.6	3390.4	3376.3	3355.7	3349.5
10°	3106.1	3115.2	3145.4	3163.0	3142.6	3122.3	3142.6	3163.0	3145.4	3115.2	3106.1
12.5°	2823.4	2821.8	2826.6	2827.5	2816.2	2805.0	2816.2	2827.5	2826.6	2821.8	2823.4
15°	2365.3	2358.3	2365.7	2370.5	2367.2	2363.9	2367.2	2370.5	2365.7	2358.3	2365.3
17.5°	1935.9	1926.0	1925.3	1923.8	1920.1	1916.4	1920.1	1923.8	1925.3	1926.0	1935.9
20°	1663.7	1661.0	1666.9	1671.3	1670.7	1670.1	1670.7	1671.3	1666.9	1661.0	1663.7
22.5°	1431.8	1429.0	1437.8	1443.1	1437.7	1432.3	1437.7	1443.1	1437.8	1429.0	1431.8
25°	1147.6	1140.7	1136.2	1133.1	1134.0	1134.9	1134.0	1133.1	1136.2	1140.7	1147.6
27.5°	935.6	933.6	936.6	938.3	936.1	933.9	936.1	938.3	936.6	933.6	935.6
30°	831.9	829.2	831.0	831.7	829.0	826.3	829.0	831.7	831.0	829.2	831.9
32.5°	744.4	740.2	739.4	738.3	736.3	734.3	736.3	738.3	739.4	740.2	744.4
35°	624.5	619.0	614.5	610.5	607.8	605.1	607.8	610.5	614.5	619.0	624.5
37.5°	514.4	508.4	501.8	496.3	494.0	491.7	494.0	496.3	501.8	508.4	514.4
40°	443.7	437.8	430.1	423.8	422.0	420.2	422.0	423.8	430.1	437.8	443.7
42.5°	373.2	367.6	360.3	353.9	349.9	346.0	349.9	353.9	360.3	367.6	373.2
45°	274.2	272.3	264.2	252.4	229.4	206.4	229.4	252.4	264.2	272.3	274.2
47.5°	190.3	185.9	163.5	141.1	118.5	95.9	118.5	141.1	163.5	185.9	190.3
50°	144.3	139.8	110.3	85.5	75.4	65.2	75.4	85.5	110.3	139.8	144.3
52.5°	112.5	110.4	84.4	63.5	57.9	52.3	57.9	63.5	84.4	110.4	112.5
55°	69.0	68.3	54.2	43.1	40.7	38.3	40.7	43.1	54.2	68.3	69.0
57.5°	42.8	42.4	37.1	32.7	31.2	29.7	31.2	32.7	37.1	42.4	42.8
60°	33.2	32.9	30.3	27.9	26.4	24.9	26.4	27.9	30.3	32.9	33.2
62.5°	27.4	27.0	25.2	23.8	23.3	22.7	23.3	23.8	25.2	27.0	27.4
65°	21.5	21.2	20.6	20.1	19.8	19.5	19.8	20.1	20.6	21.2	21.5
67.5°	18.3	18.1	17.8	17.5	17.2	16.9	17.2	17.5	17.8	18.1	18.3
70°	16.3	16.0	15.7	15.4	15.1	14.8	15.1	15.4	15.7	16.0	16.3
72.5°	14.1	14.0	13.9	13.8	13.5	13.2	13.5	13.8	13.9	14.0	14.1
75°	11.4	11.3	11.0	10.8	10.8	10.8	10.8	10.8	11.0	11.3	11.4
77.5°	8.5	8.3	8.3	8.3	8.0	7.8	8.0	8.3	8.3	8.3	8.5
80°	6.9	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.9
82.5°	5.3	5.1	5.1	5.1	5.1	5.1	5.1	5.1	5.1	5.1	5.3
85°	2.8	2.8	3.1	3.3	3.0	2.7	3.0	3.3	3.1	2.8	2.8
87.5°	4.1	5.0	5.9	6.5	7.0	6.7	7.0	6.5	5.9	5.0	4.1
90°	15.1	19.7	24.3	27.0	29.6	28.3	29.6	27.0	24.3	19.7	15.1
92.5°	30.4	38.1	43.8	48.5	50.6	50.4	50.6	48.5	43.8	38.1	30.4
95°	61.1	70.4	79.6	86.1	90.1	88.8	90.1	86.1	79.6	70.4	61.1
97.5°	94.3	106.7	116.9	123.1	127.0	129.7	127.0	123.1	116.9	106.7	94.3
100°	116.4	128.2	140.1	147.3	153.9	156.5	153.9	147.3	140.1	128.2	116.4
102.5°	134.3	149.8	162.7	170.4	176.0	178.6	176.0	170.4	162.7	149.8	134.3
105°	163.7	180.2	194.0	203.8	209.8	211.7	209.8	203.8	194.0	180.2	163.7
107.5°	193.2	210.1	222.9	233.8	241.0	245.3	241.0	233.8	222.9	210.1	193.2
110°	216.3	230.1	243.9	253.8	261.0	263.7	261.0	253.8	243.9	230.1	216.3



TEST NUMBER: P1428600

CATALOG NUMBER: SQ2W-WBN-K-050U-050D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	235.8	251.2	265.0	274.8	283.1	286.8	283.1	274.8	265.0	251.2	235.8
115°	263.0	283.4	295.9	305.1	311.0	314.3	311.0	305.1	295.9	283.4	263.0
117.5°	285.6	306.9	320.6	327.7	330.5	332.8	330.5	327.7	320.6	306.9	285.6
120°	299.8	319.6	335.3	344.5	347.8	349.1	347.8	344.5	335.3	319.6	299.8
122.5°	313.0	331.7	346.9	358.2	363.6	364.9	363.6	358.2	346.9	331.7	313.0
125°	331.4	349.1	364.9	376.1	382.0	385.3	382.0	376.1	364.9	349.1	331.4
127.5°	347.4	366.6	381.1	391.2	397.0	399.6	397.0	391.2	381.1	366.6	347.4
130°	356.4	376.1	390.6	401.7	407.0	409.6	407.0	401.7	390.6	376.1	356.4
132.5°	363.2	384.0	399.0	409.1	414.9	417.5	414.9	409.1	399.0	384.0	363.2
135°	371.5	393.2	409.0	418.8	424.1	426.7	424.1	418.8	409.0	393.2	371.5
137.5°	378.7	398.5	414.9	425.3	430.0	431.7	430.0	425.3	414.9	398.5	378.7
140°	384.0	401.1	417.5	427.4	432.7	433.3	432.7	427.4	401.1	384.0	384.0
142.5°	390.8	404.2	418.6	428.4	433.7	434.9	433.7	428.4	418.6	404.2	390.8
145°	403.1	411.0	420.8	430.0	434.6	435.9	434.6	430.0	420.8	411.0	403.1
147.5°	418.4	420.9	426.1	432.1	436.6	437.5	436.6	432.1	426.1	420.9	418.4
150°	430.0	429.4	431.3	435.3	439.2	438.6	439.2	435.3	431.3	429.4	430.0
152.5°	443.2	439.4	439.2	441.1	442.9	442.8	442.9	441.1	439.2	439.4	443.2
155°	465.5	458.3	454.3	453.0	453.0	452.4	453.0	453.0	454.3	458.3	465.5
157.5°	490.1	480.0	474.1	470.9	470.0	468.6	470.0	470.9	474.1	480.0	490.1
160°	507.0	495.8	489.9	484.6	482.6	480.7	482.6	484.6	489.9	495.8	507.0
162.5°	522.7	512.1	505.6	500.9	498.9	495.9	498.9	500.9	505.6	512.1	522.7
165°	548.4	537.2	530.0	526.0	523.4	520.8	523.4	526.0	530.0	537.2	548.4
167.5°	574.0	561.8	557.1	552.6	550.1	545.4	550.1	552.6	557.1	561.8	574.0
170°	589.8	578.6	576.0	572.0	567.4	562.2	567.4	572.0	576.0	578.6	589.8
172.5°	603.5	596.0	593.4	589.4	588.0	583.8	588.0	589.4	593.4	596.0	603.5
175°	623.3	617.4	617.4	616.8	614.8	610.8	614.8	616.8	617.4	617.4	623.3
177.5°	639.9	636.7	638.9	638.9	638.3	634.6	638.3	638.9	638.9	636.7	639.9
180°	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9	650.9



TEST NUMBER: P1428600

CATALOG NUMBER: SQ2W-WBN-K-050U-050D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	3790.0	3790.0	3790.0	3790.0
2.5°	3765.6	3778.3	3781.2	3784.0
5°	3629.7	3640.6	3643.0	3645.4
7.5°	3357.6	3363.2	3361.2	3359.1
10°	3118.1	3125.7	3120.3	3114.9
12.5°	2831.6	2838.5	2842.0	2845.5
15°	2386.8	2406.1	2418.6	2431.2
17.5°	1954.9	1967.9	1963.1	1958.2
20°	1675.0	1683.2	1681.7	1680.2
22.5°	1446.2	1457.0	1456.7	1456.4
25°	1156.9	1164.0	1164.9	1165.8
27.5°	942.5	948.7	952.4	956.1
30°	839.1	845.2	848.2	851.2
32.5°	751.8	757.3	757.2	757.0
35°	631.1	635.6	633.8	632.0
37.5°	520.0	523.7	522.1	520.4
40°	447.6	450.2	449.0	447.8
42.5°	377.1	378.7	373.7	368.7
45°	270.1	263.0	247.1	231.3
47.5°	176.6	160.9	138.9	117.0
50°	123.7	104.4	89.2	74.0
52.5°	90.7	72.4	64.6	56.7
55°	56.5	46.3	43.3	40.3
57.5°	38.3	34.5	32.9	31.2
60°	31.2	29.3	28.1	26.9
62.5°	26.5	25.6	24.9	24.2
65°	21.5	21.4	21.1	20.8
67.5°	18.4	18.3	18.0	17.7
70°	16.6	16.7	16.4	16.1
72.5°	14.4	14.6	14.3	14.0
75°	11.4	11.4	11.4	11.4
77.5°	8.8	9.0	8.9	8.9
80°	7.2	7.3	7.0	6.7
82.5°	5.6	5.8	5.7	5.6
85°	3.1	3.4	3.4	3.4
87.5°	3.4	2.5	2.0	1.5
90°	11.8	7.2	4.6	2.0
92.5°	25.5	17.8	12.5	7.2
95°	51.3	40.8	28.9	20.4
97.5°	81.7	64.7	53.0	38.9
100°	98.0	81.5	70.4	55.2
102.5°	115.9	102.0	86.7	71.5
105°	147.9	130.8	113.1	96.0
107.5°	177.7	158.9	137.6	122.2
110°	196.6	176.2	153.9	140.1

TEST NUMBER: P1428600

CATALOG NUMBER: SQ2W-WBN-K-050U-050D-L935-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	215.0	194.1	171.2	157.4
115°	240.0	217.0	195.9	184.1
117.5°	264.1	240.4	218.2	208.8
120°	278.8	255.1	233.4	226.2
122.5°	290.9	267.7	247.6	244.6
125°	309.0	285.4	268.3	272.2
127.5°	323.8	302.1	291.3	300.1
130°	332.7	313.6	307.1	319.6
132.5°	340.6	325.7	322.8	340.1
135°	352.4	343.9	346.5	370.2
137.5°	366.5	363.2	372.0	401.9
140°	375.4	377.4	389.9	423.4
142.5°	387.5	392.1	408.3	444.0
145°	406.4	416.2	437.3	472.8
147.5°	427.7	440.4	466.4	502.9
150°	441.9	458.3	485.9	520.8
152.5°	458.2	475.1	502.7	538.1
155°	483.3	502.3	531.3	561.5
157.5°	508.9	528.4	556.0	582.4
160°	524.7	545.7	570.7	595.1
162.5°	542.6	562.1	583.9	605.6
165°	568.8	584.5	602.3	620.7
167.5°	590.7	603.9	617.8	632.1
170°	604.9	615.4	627.3	638.5
172.5°	617.0	625.4	634.1	643.7
175°	633.2	637.8	643.1	649.0
177.5°	645.7	647.3	648.8	651.5
180°	650.9	650.9	650.9	650.9



TEST NUMBER: P1428600
 CATALOG NUMBER: SQ2W-WBN-K-050U-050D-L935-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.81	1.51	1.78	2.46	3.69	0.44	1.14	1.41	2.09	3.32
	3H	2.03	2.65	3.01	3.61	4.87	1.64	2.26	2.62	3.22	4.48
	4H	2.55	3.13	3.54	4.10	5.36	2.16	2.75	3.15	3.71	4.98
	6H	2.90	3.43	3.90	4.40	5.68	2.49	3.02	3.49	3.99	5.27
	8H	3.04	3.55	4.05	4.53	5.81	2.63	3.13	3.63	4.12	5.39
	12H	3.14	3.62	4.14	4.60	5.89	2.70	3.18	3.70	4.16	5.45
4H	2H	1.13	1.71	2.12	2.68	3.94	0.82	1.40	1.82	2.37	3.64
	3H	2.62	3.10	3.62	4.10	5.37	2.28	2.77	3.28	3.76	5.04
	4H	3.26	3.70	4.27	4.69	5.99	2.92	3.36	3.93	4.35	5.65
	6H	3.75	4.13	4.77	5.14	6.44	3.38	3.75	4.39	4.76	6.06
	8H	3.96	4.31	4.98	5.31	6.63	3.57	3.92	4.59	4.92	6.23
	12H	4.10	4.41	5.13	5.43	6.75	3.68	3.99	4.71	5.01	6.33
8H	4H	3.43	3.78	4.44	4.78	6.09	3.12	3.47	4.14	4.47	5.78
	6H	4.06	4.35	5.10	5.39	6.70	3.71	4.00	4.75	5.04	6.35
	8H	4.38	4.63	5.43	5.66	6.99	4.00	4.25	5.05	5.28	6.61
	12H	4.61	4.83	5.66	5.85	7.23	4.20	4.42	5.25	5.44	6.82
12H	4H	3.40	3.72	4.44	4.74	6.05	3.11	3.42	4.14	4.44	5.76
	6H	4.09	4.34	5.14	5.38	6.71	3.76	4.01	4.81	5.04	6.37
	8H	4.44	4.66	5.49	5.69	7.06	4.08	4.30	5.13	5.32	6.70