

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1427725

Luminaire Tested: SQ2W-F-K-075U-050D-L840-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1427725
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-20)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-F-K-075U-050D-L840-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - FROSTED CONTINUOUS ROLL LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 750 LUMENS PER FOOT
Light Source: 4000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5771.3 lumens
Efficiency: N/A
Efficacy: 139.4 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.25 / 1.36
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 41.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1427725

CATALOG NUMBER: SQ2W-F-K-075U-050D-L840-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

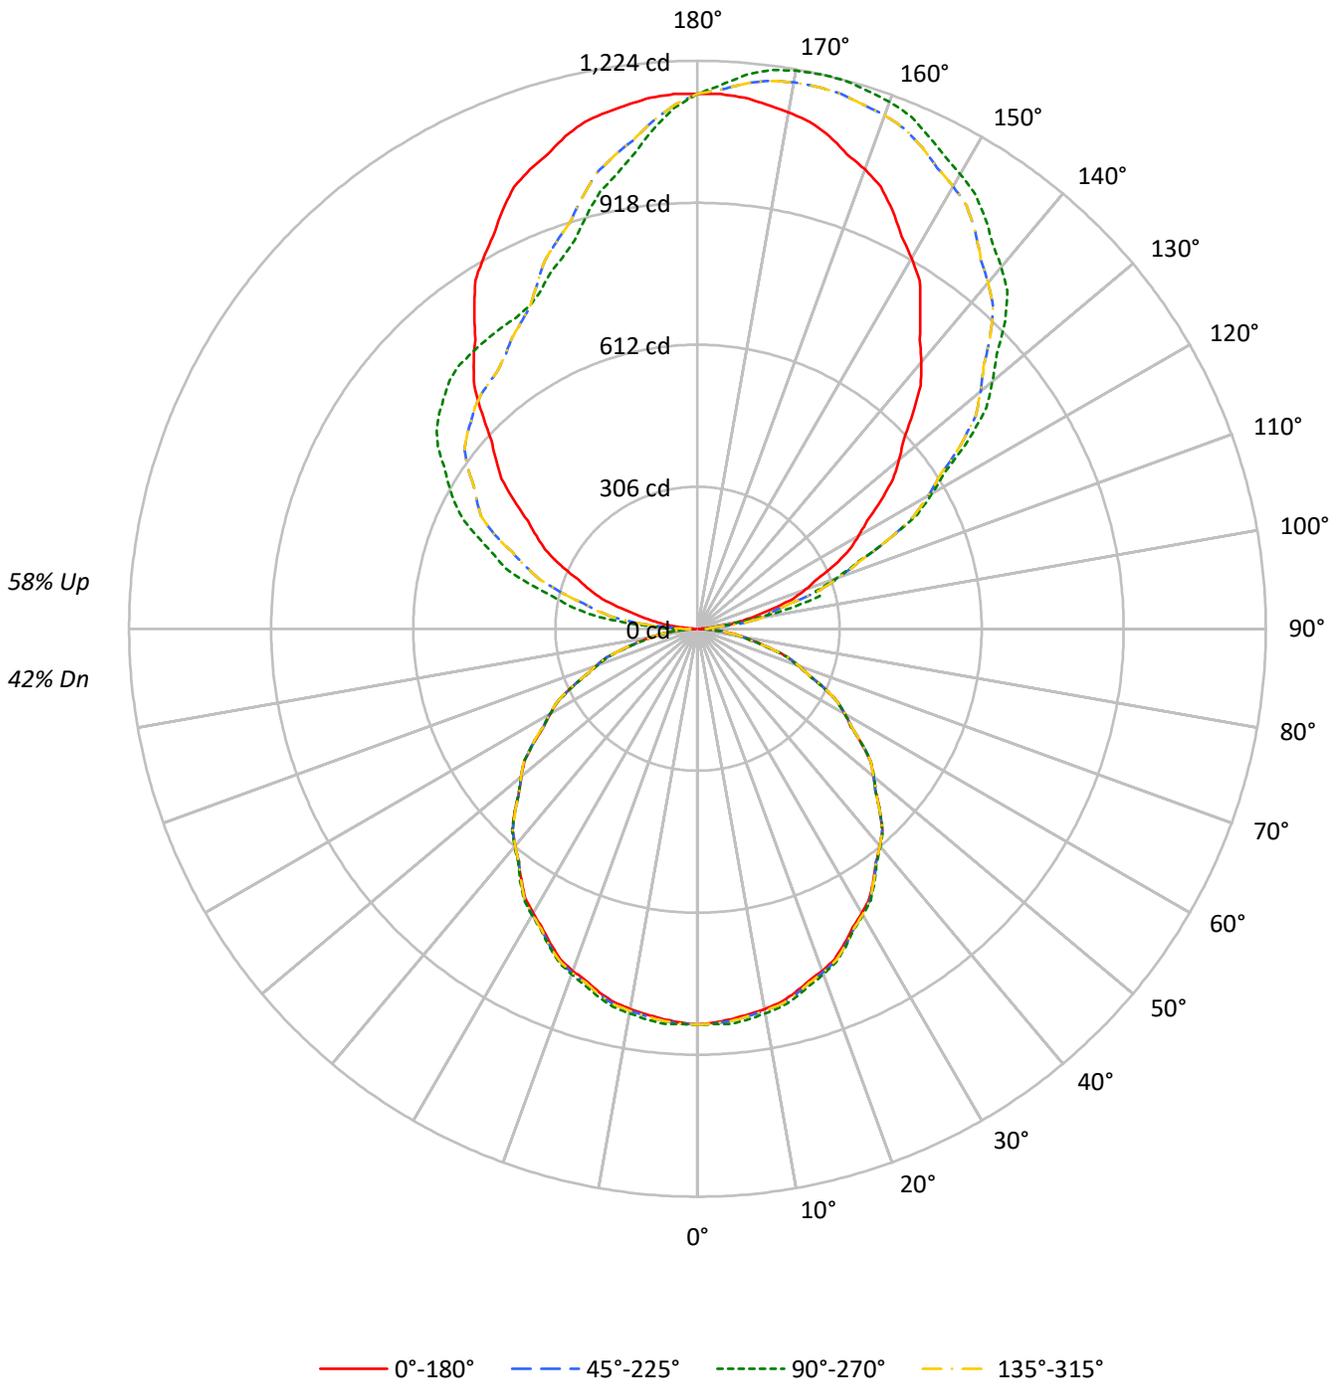



TEST NUMBER: P1427725

CATALOG NUMBER: SQ2W-F-K-075U-050D-L840-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	48	48	48	42
1	96	91	88	84	87	84	80	77	69	66	64	55	54	52	43	42	41	35
2	87	80	74	68	79	73	68	63	60	56	53	48	46	43	37	36	34	29
3	79	70	63	57	72	64	58	53	53	48	44	42	39	36	33	31	29	24
4	72	62	54	48	66	57	50	44	47	42	38	38	34	31	29	27	25	21
5	66	55	47	41	60	50	43	38	42	36	32	34	30	27	26	24	21	18
6	61	49	41	35	55	45	38	33	38	32	28	30	26	23	24	21	19	16
7	56	44	36	31	51	41	34	29	34	29	25	28	24	21	22	19	17	14
8	52	40	32	27	48	37	30	25	31	26	22	25	21	18	20	17	15	12
9	49	36	29	24	44	34	27	22	28	23	19	23	19	16	18	15	13	11
10	45	33	26	21	41	31	24	20	26	21	17	21	17	15	17	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	13775	13775	13775	13775
5°	13692	13847	13692	13847
10°	13644	13801	13644	13801
15°	13569	13740	13569	13740
20°	13483	13617	13483	13617
25°	13338	13455	13338	13455
30°	13196	13285	13196	13285
35°	13026	13111	13026	13111
40°	12880	12918	12880	12918
45°	12691	12691	12691	12691
50°	12436	12466	12436	12466
55°	12143	12160	12143	12160
60°	11815	11815	11815	11815
65°	11431	11385	11431	11385
70°	10891	10777	10891	10777
75°	10156	9931	10156	9931
80°	9047	8601	9047	8601
85°	7243	6113	7243	6113

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 20°
 Vertical Angle: 45°
 Luminance: 12775 cd/sqm



TEST NUMBER: P1427725

CATALOG NUMBER: SQ2W-F-K-075U-050D-L840-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	80.7	1.4
10°-20°	230.7	4.0
20°-30°	347.2	6.0
30°-40°	415.2	7.2
40°-50°	428.8	7.4
50°-60°	386.7	6.7
60°-70°	296.2	5.1
70°-80°	171.2	3.0
80°-90°	49.2	0.9
90°-100°	91.7	1.6
100°-110°	267.5	4.6
110°-120°	436.5	7.6
120°-130°	553.9	9.6
130°-140°	592.7	10.3
140°-150°	553.5	9.6
150°-160°	455.4	7.9
160°-170°	305.4	5.3
170°-180°	108.5	1.9
0°-30°	658.6	11.4
0°-40°	1073.9	18.6
0°-60°	1889.3	32.7
0°-90°	2406.0	41.7
90°-120°	795.8	13.8
90°-150°	2495.9	43.2
90°-180°	3365.0	58.3
0°-180°	5771.3	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	853	853	853	853	853	
5°	845	854	845	854	845	80
15°	812	822	812	822	812	229
25°	749	755	749	755	749	345
35°	661	665	661	665	661	414
45°	556	556	556	556	556	428
55°	431	432	431	432	431	385
65°	299	298	299	298	299	296
75°	163	159	163	159	163	172
85°	39	33	39	33	39	46
90°	4	26	4	50	4	4
95°	36	27	36	157	36	44
105°	170	272	170	375	170	181
115°	326	452	326	556	326	321
125°	482	716	482	682	482	431
135°	655	937	655	756	655	506
145°	837	1080	837	772	837	524
155°	994	1174	994	801	994	457
165°	1099	1224	1099	922	1099	309
175°	1149	1198	1149	1082	1149	109
180°	1153	1153	1153	1153	1153	



TEST NUMBER: P1427725

CATALOG NUMBER: SQ2W-F-K-075U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	853.2	853.2	853.2	853.2	853.2	853.2	853.2	853.2	853.2	853.2	853.2
2.5°	848.9	853.0	857.0	855.3	851.7	850.3	851.1	851.9	852.3	852.7	852.3
5°	844.8	850.2	855.5	853.6	849.4	847.5	848.0	849.1	851.8	854.4	851.8
7.5°	838.0	843.3	848.6	846.9	842.9	841.2	841.8	843.0	845.8	848.5	845.8
10°	832.2	837.5	842.9	841.0	836.7	835.1	836.2	837.5	839.7	841.8	839.7
12.5°	825.0	830.3	835.7	834.1	830.3	828.7	829.3	830.4	832.7	835.1	832.7
15°	811.8	817.1	822.4	821.0	817.2	815.8	816.6	817.7	819.8	822.0	819.8
17.5°	795.8	800.8	805.8	804.5	801.0	799.7	800.6	801.8	803.6	805.5	803.6
20°	784.7	789.5	794.3	792.9	789.5	787.9	788.1	788.8	790.7	792.5	790.7
22.5°	771.3	776.1	780.9	779.6	776.4	774.5	773.9	774.0	776.3	778.6	776.3
25°	748.7	753.5	758.3	757.3	754.3	752.5	751.7	751.5	753.4	755.3	753.4
27.5°	725.1	729.1	733.1	732.3	729.8	728.3	727.8	727.7	729.1	730.4	729.1
30°	707.8	711.8	715.8	714.8	712.2	710.6	710.0	710.0	711.3	712.6	711.3
32.5°	689.5	693.3	697.1	695.8	692.7	691.1	691.0	691.3	692.8	694.4	692.8
35°	660.9	664.2	667.4	666.0	663.0	661.7	662.0	662.5	663.8	665.2	663.8
37.5°	632.2	634.7	637.1	635.7	633.0	631.6	631.5	631.8	632.9	634.0	632.9
40°	611.1	613.7	616.4	614.9	611.9	610.3	610.1	610.2	611.5	612.9	611.5
42.5°	589.4	591.5	593.5	592.1	589.6	588.4	588.6	588.9	589.6	590.3	589.6
45°	555.8	557.7	559.5	558.2	555.8	554.6	554.6	554.7	555.3	555.8	555.3
47.5°	520.6	522.0	523.5	522.4	520.6	519.5	519.1	519.1	520.0	520.8	520.0
50°	495.1	497.0	498.8	497.9	496.0	494.8	494.3	494.2	495.2	496.3	495.2
52.5°	470.1	472.2	474.3	473.4	471.5	470.2	469.5	469.1	470.0	470.8	470.0
55°	431.4	433.8	436.2	435.6	434.0	432.7	431.6	431.0	431.5	432.0	431.5
57.5°	391.9	394.2	396.6	396.1	394.7	393.4	392.1	391.3	392.1	392.8	392.1
60°	365.9	368.1	370.2	369.5	367.9	366.6	365.5	364.9	365.4	365.9	365.4
62.5°	339.5	341.6	343.8	342.9	341.1	339.7	338.6	337.9	338.5	339.0	338.5
65°	299.2	301.1	303.0	302.2	300.6	299.3	298.2	297.5	297.8	298.0	297.8
67.5°	258.6	260.2	261.8	261.1	259.5	258.0	256.4	255.4	255.8	256.2	255.8
70°	230.7	232.3	233.9	233.3	232.0	230.7	229.3	228.3	228.3	228.3	228.3
72.5°	203.8	205.2	206.6	205.8	204.2	202.9	201.8	200.9	200.9	200.9	200.9
75°	162.8	163.6	164.4	164.0	163.2	162.2	160.8	159.8	159.5	159.2	159.5
77.5°	123.3	123.3	123.3	122.5	121.5	120.5	119.5	118.7	118.3	118.0	118.3
80°	97.3	97.3	97.3	96.7	95.9	95.1	94.3	93.6	93.1	92.5	93.1
82.5°	73.3	72.9	72.5	71.7	70.9	69.9	68.7	67.9	68.4	69.0	68.4
85°	39.1	38.5	38.0	37.3	36.5	35.5	34.4	33.6	33.3	33.0	33.3
87.5°	12.7	13.2	14.0	14.3	14.4	13.8	13.0	12.5	12.5	12.3	12.5
90°	3.5	8.1	14.0	18.6	22.1	23.3	23.3	24.4	25.6	25.6	25.6
92.5°	12.8	20.3	20.5	20.5	24.9	27.0	28.9	29.1	30.3	30.3	30.3
95°	36.1	39.6	59.4	58.2	39.6	31.4	26.8	26.8	26.8	26.8	26.8
97.5°	68.9	74.0	77.3	103.6	109.4	105.7	86.2	72.4	64.7	61.2	64.7
100°	97.8	100.1	107.1	108.3	137.4	165.3	151.3	133.9	128.1	124.6	128.1
102.5°	126.7	128.1	138.8	143.7	150.4	166.2	214.7	209.3	205.4	204.7	205.4
105°	170.0	171.1	190.9	200.2	204.9	204.9	203.7	227.0	264.3	272.4	264.3
107.5°	216.3	221.7	244.9	269.9	275.2	276.6	270.6	267.1	265.7	266.6	265.7
110°	248.0	256.1	284.1	315.5	323.6	326.0	323.6	320.2	317.8	317.8	317.8



TEST NUMBER: P1427725

CATALOG NUMBER: SQ2W-F-K-075U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	278.7	290.6	322.3	358.3	372.1	379.1	373.9	371.4	369.1	370.9	369.1
115°	326.0	343.4	385.4	422.6	450.5	454.0	452.9	452.9	451.7	451.7	451.7
117.5°	369.7	397.7	444.7	488.0	520.4	529.7	534.4	533.0	531.6	533.9	531.6
120°	400.5	433.1	486.6	535.5	567.0	580.9	585.6	583.3	585.6	583.3	585.6
122.5°	433.1	473.1	525.8	576.5	613.5	629.4	635.0	635.4	635.9	634.5	635.9
125°	482.0	530.9	592.6	645.0	683.4	702.0	706.7	707.8	710.2	716.0	710.2
127.5°	531.3	586.8	654.5	705.0	744.4	767.0	774.2	776.8	781.6	784.2	781.6
130°	565.8	628.7	697.4	745.1	783.5	808.0	820.8	824.3	830.1	828.9	830.1
132.5°	602.1	667.8	737.4	787.0	822.6	848.9	859.9	869.9	872.0	873.6	872.0
135°	655.4	726.5	796.3	845.2	879.0	904.6	918.6	927.9	933.7	937.2	933.7
137.5°	711.6	786.5	853.6	897.1	931.1	953.2	969.1	978.9	984.9	987.7	984.9
140°	749.7	821.9	887.1	932.5	962.8	984.9	998.9	1010.5	1017.5	1017.5	1017.5
142.5°	786.1	857.3	920.6	966.1	992.6	1012.9	1027.8	1036.6	1044.5	1044.5	1044.5
145°	837.1	908.1	966.3	1011.7	1033.8	1052.4	1068.7	1075.7	1080.4	1080.4	1080.4
147.5°	890.4	953.2	1006.3	1049.9	1068.5	1090.4	1103.2	1108.8	1114.6	1112.0	1114.6
150°	922.0	980.3	1031.5	1072.2	1090.9	1111.8	1124.6	1129.3	1135.1	1131.6	1135.1
152.5°	952.8	1008.2	1054.8	1092.7	1108.6	1129.5	1144.2	1148.8	1152.8	1150.2	1152.8
155°	994.2	1043.1	1086.2	1121.1	1135.1	1154.9	1168.9	1174.7	1179.3	1173.5	1179.3
157.5°	1031.2	1073.4	1110.9	1143.0	1157.9	1174.9	1187.9	1195.2	1199.8	1197.3	1199.8
160°	1053.6	1092.0	1125.8	1156.1	1170.0	1185.2	1199.1	1207.3	1211.9	1208.4	1211.9
162.5°	1072.2	1106.9	1138.8	1166.3	1178.4	1191.7	1208.4	1215.7	1220.3	1215.9	1220.3
165°	1099.0	1126.9	1154.9	1178.2	1188.6	1199.1	1216.6	1224.7	1228.2	1223.6	1228.2
167.5°	1119.3	1140.7	1163.3	1183.3	1191.0	1201.2	1218.7	1225.4	1229.9	1224.0	1229.9
170°	1130.4	1149.1	1168.9	1185.2	1191.0	1200.3	1217.8	1223.6	1227.1	1221.2	1227.1
172.5°	1139.8	1153.7	1169.8	1184.2	1187.3	1194.7	1211.2	1217.1	1219.6	1214.7	1219.6
175°	1149.1	1157.2	1168.9	1178.2	1177.0	1181.7	1195.6	1200.3	1204.9	1198.0	1204.9
177.5°	1153.5	1157.2	1160.9	1166.5	1162.8	1162.8	1173.0	1175.8	1176.8	1173.0	1176.8
180°	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6



TEST NUMBER: P1427725

CATALOG NUMBER: SQ2W-F-K-075U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	853.2	853.2	853.2	853.2	853.2	853.2	853.2	853.2	853.2	853.2	853.2
2.5°	851.9	851.1	850.3	851.7	855.3	857.0	853.0	848.9	853.0	857.0	855.3
5°	849.1	848.0	847.5	849.4	853.6	855.5	850.2	844.8	850.2	855.5	853.6
7.5°	843.0	841.8	841.2	842.9	846.9	848.6	843.3	838.0	843.3	848.6	846.9
10°	837.5	836.2	835.1	836.7	841.0	842.9	837.5	832.2	837.5	842.9	841.0
12.5°	830.4	829.3	828.7	830.3	834.1	835.7	830.3	825.0	830.3	835.7	834.1
15°	817.7	816.6	815.8	817.2	821.0	822.4	817.1	811.8	817.1	822.4	821.0
17.5°	801.8	800.6	799.7	801.0	804.5	805.8	800.8	795.8	800.8	805.8	804.5
20°	788.8	788.1	787.9	789.5	792.9	794.3	789.5	784.7	789.5	794.3	792.9
22.5°	774.0	773.9	774.5	776.4	779.6	780.9	776.1	771.3	776.1	780.9	779.6
25°	751.5	751.7	752.5	754.3	757.3	758.3	753.5	748.7	753.5	758.3	757.3
27.5°	727.7	727.8	728.3	729.8	732.3	733.1	729.1	725.1	729.1	733.1	732.3
30°	710.0	710.0	710.6	712.2	714.8	715.8	711.8	707.8	711.8	715.8	714.8
32.5°	691.3	691.0	691.1	692.7	695.8	697.1	693.3	689.5	693.3	697.1	695.8
35°	662.5	662.0	661.7	663.0	666.0	667.4	664.2	660.9	664.2	667.4	666.0
37.5°	631.8	631.5	631.6	633.0	635.7	637.1	634.7	632.2	634.7	637.1	635.7
40°	610.2	610.1	610.3	611.9	614.9	616.4	613.7	611.1	613.7	616.4	614.9
42.5°	588.9	588.6	588.4	589.6	592.1	593.5	591.5	589.4	591.5	593.5	592.1
45°	554.7	554.6	554.6	555.8	558.2	559.5	557.7	555.8	557.7	559.5	558.2
47.5°	519.1	519.1	519.5	520.6	522.4	523.5	522.0	520.6	522.0	523.5	522.4
50°	494.2	494.3	494.8	496.0	497.9	498.8	497.0	495.1	497.0	498.8	497.9
52.5°	469.1	469.5	470.2	471.5	473.4	474.3	472.2	470.1	472.2	474.3	473.4
55°	431.0	431.6	432.7	434.0	435.6	436.2	433.8	431.4	433.8	436.2	435.6
57.5°	391.3	392.1	393.4	394.7	396.1	396.6	394.2	391.9	394.2	396.6	396.1
60°	364.9	365.5	366.6	367.9	369.5	370.2	368.1	365.9	368.1	370.2	369.5
62.5°	337.9	338.6	339.7	341.1	342.9	343.8	341.6	339.5	341.6	343.8	342.9
65°	297.5	298.2	299.3	300.6	302.2	303.0	301.1	299.2	301.1	303.0	302.2
67.5°	255.4	256.4	258.0	259.5	261.1	261.8	260.2	258.6	260.2	261.8	261.1
70°	228.3	229.3	230.7	232.0	233.3	233.9	232.3	230.7	232.3	233.9	233.3
72.5°	200.9	201.8	202.9	204.2	205.8	206.6	205.2	203.8	205.2	206.6	205.8
75°	159.8	160.8	162.2	163.2	164.0	164.4	163.6	162.8	163.6	164.4	164.0
77.5°	118.7	119.5	120.5	121.5	122.5	123.3	123.3	123.3	123.3	123.3	122.5
80°	93.6	94.3	95.1	95.9	96.7	97.3	97.3	97.3	97.3	97.3	96.7
82.5°	67.9	68.7	69.9	70.9	71.7	72.5	72.9	73.3	72.9	72.5	71.7
85°	33.6	34.4	35.5	36.5	37.3	38.0	38.5	39.1	38.5	38.0	37.3
87.5°	12.5	13.0	13.8	14.4	14.3	14.0	13.2	12.7	13.2	13.7	14.8
90°	24.4	23.3	23.3	22.1	18.6	14.0	8.1	3.5	8.1	12.8	21.0
92.5°	29.1	28.9	27.0	24.9	20.5	20.5	20.3	12.8	22.1	31.4	45.2
95°	26.8	26.8	31.4	39.6	58.2	59.4	39.6	36.1	51.2	72.2	90.8
97.5°	72.4	86.2	105.7	109.4	103.6	77.3	74.0	68.9	93.8	114.6	144.6
100°	133.9	151.3	165.3	137.4	108.3	107.1	100.1	97.8	124.6	144.4	173.5
102.5°	209.3	214.7	166.2	150.4	143.7	138.8	128.1	126.7	153.4	180.7	205.1
105°	227.0	203.7	204.9	204.9	200.2	190.9	171.1	170.0	200.2	231.7	261.9
107.5°	267.1	270.6	276.6	275.2	269.9	244.9	221.7	216.3	243.6	281.3	314.6
110°	320.2	323.6	326.0	323.6	315.5	284.1	256.1	248.0	272.4	312.0	348.1



TEST NUMBER: P1427725

CATALOG NUMBER: SQ2W-F-K-075U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	371.4	373.9	379.1	372.1	358.3	322.3	290.6	278.7	303.2	343.7	380.7
115°	452.9	452.9	454.0	450.5	422.6	385.4	343.4	326.0	346.9	384.2	424.9
117.5°	533.0	534.4	529.7	520.4	488.0	444.7	397.7	369.7	386.3	425.6	467.5
120°	583.3	585.6	580.9	567.0	535.5	486.6	433.1	400.5	413.3	451.7	493.6
122.5°	635.4	635.0	629.4	613.5	576.5	525.8	473.1	433.1	438.4	474.1	515.0
125°	707.8	706.7	702.0	683.4	645.0	592.6	530.9	482.0	475.0	505.3	547.2
127.5°	776.8	774.2	767.0	744.4	705.0	654.5	586.8	531.3	515.7	534.8	573.3
130°	824.3	820.8	808.0	783.5	745.1	697.4	628.7	565.8	543.7	555.3	589.1
132.5°	869.9	859.9	848.9	822.6	787.0	737.4	667.8	602.1	571.6	576.7	603.1
135°	927.9	918.6	904.6	879.0	845.2	796.3	726.5	655.4	613.5	608.9	624.0
137.5°	978.9	969.1	953.2	931.1	897.1	853.6	786.5	711.6	658.7	643.1	648.9
140°	1010.5	998.9	984.9	962.8	932.5	887.1	821.9	749.7	690.4	668.3	664.8
142.5°	1036.6	1027.8	1012.9	992.6	966.1	920.6	857.3	786.1	723.0	694.3	686.2
145°	1075.7	1068.7	1052.4	1033.8	1011.7	966.3	908.1	837.1	774.2	736.9	719.5
147.5°	1108.8	1103.2	1090.4	1068.5	1049.9	1006.3	953.2	890.4	825.9	779.8	757.2
150°	1129.3	1124.6	1111.8	1090.9	1072.2	1031.5	980.3	922.0	860.3	811.4	782.3
152.5°	1148.8	1144.2	1129.5	1108.6	1092.7	1054.8	1008.2	952.8	890.1	841.3	811.2
155°	1174.7	1168.9	1154.9	1135.1	1121.1	1086.2	1043.1	994.2	940.7	889.4	855.7
157.5°	1195.2	1187.9	1174.9	1157.9	1143.0	1110.9	1073.4	1031.2	984.4	935.6	901.1
160°	1207.3	1199.1	1185.2	1170.0	1156.1	1125.8	1092.0	1053.6	1010.5	966.3	929.0
162.5°	1215.7	1208.4	1191.7	1178.4	1166.3	1138.8	1106.9	1072.2	1033.8	995.2	960.7
165°	1224.7	1216.6	1199.1	1188.6	1178.2	1154.9	1126.9	1099.0	1066.4	1035.0	1007.0
167.5°	1225.4	1218.7	1201.2	1191.0	1183.3	1163.3	1140.7	1119.3	1093.9	1069.2	1045.9
170°	1223.6	1217.8	1200.3	1191.0	1185.2	1168.9	1149.1	1130.4	1110.6	1089.7	1071.1
172.5°	1217.1	1211.2	1194.7	1187.3	1184.2	1169.8	1153.7	1139.8	1122.8	1107.4	1092.5
175°	1200.3	1195.6	1181.7	1177.0	1178.2	1168.9	1157.2	1149.1	1138.6	1129.3	1121.1
177.5°	1175.8	1173.0	1162.8	1162.8	1166.5	1160.9	1157.2	1153.5	1148.8	1146.0	1143.2
180°	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6



TEST NUMBER: P1427725

CATALOG NUMBER: SQ2W-F-K-075U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	853.2	853.2	853.2	853.2	853.2	853.2	853.2	853.2	853.2	853.2	853.2
2.5°	851.7	850.3	851.1	851.9	852.3	852.7	852.3	851.9	851.1	850.3	851.7
5°	849.4	847.5	848.0	849.1	851.8	854.4	851.8	849.1	848.0	847.5	849.4
7.5°	842.9	841.2	841.8	843.0	845.8	848.5	845.8	843.0	841.8	841.2	842.9
10°	836.7	835.1	836.2	837.5	839.7	841.8	839.7	837.5	836.2	835.1	836.7
12.5°	830.3	828.7	829.3	830.4	832.7	835.1	832.7	830.4	829.3	828.7	830.3
15°	817.2	815.8	816.6	817.7	819.8	822.0	819.8	817.7	816.6	815.8	817.2
17.5°	801.0	799.7	800.6	801.8	803.6	805.5	803.6	801.8	800.6	799.7	801.0
20°	789.5	787.9	788.1	788.8	790.7	792.5	790.7	788.8	788.1	787.9	789.5
22.5°	776.4	774.5	773.9	774.0	776.3	778.6	776.3	774.0	773.9	774.5	776.4
25°	754.3	752.5	751.7	751.5	753.4	755.3	753.4	751.5	751.7	752.5	754.3
27.5°	729.8	728.3	727.8	727.7	729.1	730.4	729.1	727.7	727.8	728.3	729.8
30°	712.2	710.6	710.0	710.0	711.3	712.6	711.3	710.0	710.0	710.6	712.2
32.5°	692.7	691.1	691.0	691.3	692.8	694.4	692.8	691.3	691.0	691.1	692.7
35°	663.0	661.7	662.0	662.5	663.8	665.2	663.8	662.5	662.0	661.7	663.0
37.5°	633.0	631.6	631.5	631.8	632.9	634.0	632.9	631.8	631.5	631.6	633.0
40°	611.9	610.3	610.1	610.2	611.5	612.9	611.5	610.2	610.1	610.3	611.9
42.5°	589.6	588.4	588.6	588.9	589.6	590.3	589.6	588.9	588.6	588.4	589.6
45°	555.8	554.6	554.6	554.7	555.3	555.8	555.3	554.7	554.6	554.6	555.8
47.5°	520.6	519.5	519.1	519.1	520.0	520.8	520.0	519.1	519.1	519.5	520.6
50°	496.0	494.8	494.3	494.2	495.2	496.3	495.2	494.2	494.3	494.8	496.0
52.5°	471.5	470.2	469.5	469.1	470.0	470.8	470.0	469.1	469.5	470.2	471.5
55°	434.0	432.7	431.6	431.0	431.5	432.0	431.5	431.0	431.6	432.7	434.0
57.5°	394.7	393.4	392.1	391.3	392.1	392.8	392.1	391.3	392.1	393.4	394.7
60°	367.9	366.6	365.5	364.9	365.4	365.9	365.4	364.9	365.5	366.6	367.9
62.5°	341.1	339.7	338.6	337.9	338.5	339.0	338.5	337.9	338.6	339.7	341.1
65°	300.6	299.3	298.2	297.5	297.8	298.0	297.8	297.5	298.2	299.3	300.6
67.5°	259.5	258.0	256.4	255.4	255.8	256.2	255.8	255.4	256.4	258.0	259.5
70°	232.0	230.7	229.3	228.3	228.3	228.3	228.3	228.3	229.3	230.7	232.0
72.5°	204.2	202.9	201.8	200.9	200.9	200.9	200.9	200.9	201.8	202.9	204.2
75°	163.2	162.2	160.8	159.8	159.5	159.2	159.5	159.8	160.8	162.2	163.2
77.5°	121.5	120.5	119.5	118.7	118.3	118.0	118.3	118.7	119.5	120.5	121.5
80°	95.9	95.1	94.3	93.6	93.1	92.5	93.1	93.6	94.3	95.1	95.9
82.5°	70.9	69.9	68.7	67.9	68.4	69.0	68.4	67.9	68.7	69.9	70.9
85°	36.5	35.5	34.4	33.6	33.3	33.0	33.3	33.6	34.4	35.5	36.5
87.5°	15.3	16.2	16.9	17.2	17.9	17.2	17.9	17.2	16.9	16.2	15.3
90°	26.8	34.9	43.1	47.7	52.4	50.1	52.4	47.7	43.1	34.9	26.8
92.5°	53.8	67.5	77.5	85.9	89.6	89.2	89.6	85.9	77.5	67.5	53.8
95°	108.3	124.6	140.9	152.5	159.5	157.2	159.5	152.5	140.9	124.6	108.3
97.5°	166.9	188.8	207.0	217.9	224.9	229.6	224.9	217.9	207.0	188.8	166.9
100°	206.1	227.0	248.0	260.8	272.4	277.1	272.4	260.8	248.0	227.0	206.1
102.5°	237.7	265.2	288.0	301.8	311.5	316.2	311.5	301.8	288.0	265.2	237.7
105°	289.9	319.0	343.4	360.9	371.4	374.9	371.4	360.9	343.4	319.0	289.9
107.5°	342.0	372.1	394.7	414.0	426.8	434.2	426.8	414.0	394.7	372.1	342.0
110°	383.0	407.5	431.9	449.4	462.2	466.8	462.2	449.4	431.9	407.5	383.0



TEST NUMBER: P1427725

CATALOG NUMBER: SQ2W-F-K-075U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	417.5	444.7	469.2	486.6	501.3	507.8	501.3	486.6	469.2	444.7	417.5
115°	465.7	501.8	523.9	540.2	550.7	556.5	550.7	540.2	523.9	501.8	465.7
117.5°	505.7	543.4	567.7	580.2	585.1	589.3	585.1	580.2	567.7	543.4	505.7
120°	530.9	565.8	593.7	610.0	615.9	618.2	615.9	610.0	593.7	565.8	530.9
122.5°	554.2	587.2	614.2	634.3	643.8	646.1	643.8	634.3	614.2	587.2	554.2
125°	586.8	618.2	646.1	665.9	676.4	682.2	676.4	665.9	646.1	618.2	586.8
127.5°	615.2	649.2	674.8	692.7	702.9	707.6	702.9	692.7	674.8	649.2	615.2
130°	631.0	665.9	691.5	711.3	720.6	725.3	720.6	711.3	691.5	665.9	631.0
132.5°	643.1	679.9	706.4	724.4	734.6	739.3	734.6	724.4	706.4	679.9	643.1
135°	657.8	696.2	724.1	741.6	750.9	755.6	750.9	741.6	724.1	696.2	657.8
137.5°	670.6	705.5	734.6	753.0	761.4	764.4	761.4	753.0	734.6	705.5	670.6
140°	679.9	710.2	739.3	756.7	766.0	767.2	766.0	756.7	739.3	710.2	679.9
142.5°	692.0	715.7	741.1	758.6	767.9	770.0	767.9	758.6	741.1	715.7	692.0
145°	713.7	727.6	745.1	761.4	769.5	771.9	769.5	761.4	745.1	727.6	713.7
147.5°	740.9	745.3	754.4	765.1	773.0	774.7	773.0	765.1	754.4	745.3	740.9
150°	761.4	760.2	763.7	770.7	777.7	776.5	777.7	770.7	763.7	760.2	761.4
152.5°	784.7	777.9	777.7	780.9	784.2	784.0	784.2	780.9	777.7	777.9	784.7
155°	824.3	811.4	804.5	802.1	802.1	801.0	802.1	802.1	804.5	811.4	824.3
157.5°	867.8	849.9	839.4	833.8	832.2	829.6	832.2	833.8	839.4	849.9	867.8
160°	897.6	877.8	867.3	858.0	854.5	851.0	854.5	858.0	867.3	877.8	897.6
162.5°	925.5	906.7	895.3	886.9	883.4	878.0	883.4	886.9	895.3	906.7	925.5
165°	970.9	951.2	938.3	931.4	926.7	922.0	926.7	931.4	938.3	951.2	970.9
167.5°	1016.3	994.7	986.3	978.4	974.0	965.6	974.0	978.4	986.3	994.7	1016.3
170°	1044.3	1024.5	1019.8	1012.9	1004.7	995.4	1004.7	1012.9	1019.8	1024.5	1044.3
172.5°	1068.5	1055.2	1050.6	1043.6	1041.0	1033.6	1041.0	1043.6	1050.6	1055.2	1068.5
175°	1103.7	1093.2	1093.2	1092.0	1088.5	1081.5	1088.5	1092.0	1093.2	1093.2	1103.7
177.5°	1133.0	1127.4	1131.1	1131.1	1130.2	1123.7	1130.2	1131.1	1131.1	1127.4	1133.0
180°	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6	1152.6



TEST NUMBER: P1427725

CATALOG NUMBER: SQ2W-F-K-075U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	853.2	853.2	853.2	853.2
2.5°	855.3	857.0	853.0	848.9
5°	853.6	855.5	850.2	844.8
7.5°	846.9	848.6	843.3	838.0
10°	841.0	842.9	837.5	832.2
12.5°	834.1	835.7	830.3	825.0
15°	821.0	822.4	817.1	811.8
17.5°	804.5	805.8	800.8	795.8
20°	792.9	794.3	789.5	784.7
22.5°	779.6	780.9	776.1	771.3
25°	757.3	758.3	753.5	748.7
27.5°	732.3	733.1	729.1	725.1
30°	714.8	715.8	711.8	707.8
32.5°	695.8	697.1	693.3	689.5
35°	666.0	667.4	664.2	660.9
37.5°	635.7	637.1	634.7	632.2
40°	614.9	616.4	613.7	611.1
42.5°	592.1	593.5	591.5	589.4
45°	558.2	559.5	557.7	555.8
47.5°	522.4	523.5	522.0	520.6
50°	497.9	498.8	497.0	495.1
52.5°	473.4	474.3	472.2	470.1
55°	435.6	436.2	433.8	431.4
57.5°	396.1	396.6	394.2	391.9
60°	369.5	370.2	368.1	365.9
62.5°	342.9	343.8	341.6	339.5
65°	302.2	303.0	301.1	299.2
67.5°	261.1	261.8	260.2	258.6
70°	233.3	233.9	232.3	230.7
72.5°	205.8	206.6	205.2	203.8
75°	164.0	164.4	163.6	162.8
77.5°	122.5	123.3	123.3	123.3
80°	96.7	97.3	97.3	97.3
82.5°	71.7	72.5	72.9	73.3
85°	37.3	38.0	38.5	39.1
87.5°	14.8	13.7	13.2	12.7
90°	21.0	12.8	8.1	3.5
92.5°	45.2	31.4	22.1	12.8
95°	90.8	72.2	51.2	36.1
97.5°	144.6	114.6	93.8	68.9
100°	173.5	144.4	124.6	97.8
102.5°	205.1	180.7	153.4	126.7
105°	261.9	231.7	200.2	170.0
107.5°	314.6	281.3	243.6	216.3
110°	348.1	312.0	272.4	248.0

TEST NUMBER: P1427725

CATALOG NUMBER: SQ2W-F-K-075U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	380.7	343.7	303.2	278.7
115°	424.9	384.2	346.9	326.0
117.5°	467.5	425.6	386.3	369.7
120°	493.6	451.7	413.3	400.5
122.5°	515.0	474.1	438.4	433.1
125°	547.2	505.3	475.0	482.0
127.5°	573.3	534.8	515.7	531.3
130°	589.1	555.3	543.7	565.8
132.5°	603.1	576.7	571.6	602.1
135°	624.0	608.9	613.5	655.4
137.5°	648.9	643.1	658.7	711.6
140°	664.8	668.3	690.4	749.7
142.5°	686.2	694.3	723.0	786.1
145°	719.5	736.9	774.2	837.1
147.5°	757.2	779.8	825.9	890.4
150°	782.3	811.4	860.3	922.0
152.5°	811.2	841.3	890.1	952.8
155°	855.7	889.4	940.7	994.2
157.5°	901.1	935.6	984.4	1031.2
160°	929.0	966.3	1010.5	1053.6
162.5°	960.7	995.2	1033.8	1072.2
165°	1007.0	1035.0	1066.4	1099.0
167.5°	1045.9	1069.2	1093.9	1119.3
170°	1071.1	1089.7	1110.6	1130.4
172.5°	1092.5	1107.4	1122.8	1139.8
175°	1121.1	1129.3	1138.6	1149.1
177.5°	1143.2	1146.0	1148.8	1153.5
180°	1152.6	1152.6	1152.6	1152.6



TEST NUMBER: P1427725
 CATALOG NUMBER: SQ2W-F-K-075U-050D-L840-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	16.16	16.96	17.18	17.99	19.37	16.07	16.87	17.09	17.90	19.29
	3H	17.94	18.66	18.97	19.70	21.10	17.84	18.56	18.87	19.60	21.00
	4H	18.63	19.31	19.68	20.36	21.77	18.52	19.20	19.56	20.24	21.66
	6H	19.07	19.70	20.12	20.74	22.17	18.93	19.55	19.98	20.60	22.03
	8H	19.23	19.82	20.29	20.89	22.31	19.07	19.67	20.13	20.73	22.15
	12H	19.31	19.88	20.37	20.93	22.38	19.13	19.70	20.20	20.76	22.20
4H	2H	16.73	17.41	17.78	18.45	19.86	16.66	17.34	17.71	18.39	19.80
	3H	18.74	19.31	19.80	20.38	21.81	18.65	19.22	19.71	20.29	21.72
	4H	19.56	20.08	20.62	21.14	22.59	19.44	19.97	20.51	21.03	22.48
	6H	20.10	20.55	21.18	21.64	23.08	19.96	20.41	21.04	21.50	22.94
	8H	20.32	20.74	21.39	21.81	23.27	20.16	20.58	21.23	21.66	23.11
	12H	20.43	20.81	21.52	21.90	23.36	20.24	20.62	21.34	21.71	23.18
8H	4H	19.79	20.21	20.87	21.29	22.75	19.70	20.12	20.77	21.20	22.65
	6H	20.48	20.83	21.58	21.95	23.40	20.35	20.70	21.45	21.82	23.27
	8H	20.79	21.09	21.89	22.19	23.67	20.63	20.93	21.74	22.04	23.51
	12H	20.97	21.23	22.07	22.33	23.84	20.77	21.04	21.88	22.14	23.65
12H	4H	19.79	20.17	20.88	21.26	22.72	19.69	20.07	20.79	21.16	22.63
	6H	20.53	20.83	21.64	21.94	23.41	20.41	20.71	21.51	21.81	23.29
	8H	20.86	21.13	21.97	22.23	23.74	20.71	20.98	21.82	22.08	23.59