

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1435861

Luminaire Tested: SQ2W-FA-K-150U-050D-L840-UNV-STD-W-WM-4

Issue Date: 3/24/2026

Test Information

Test Method: LM-79-2019
Report Number: P1435861
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2502-345-2)
Test Lab: INNOVATION CENTER
Issue Date: 3/24/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-FA-K-150U-050D-L840-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - FROSTED CONTINUOUS ASYMMETRIC ROLL LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 1500 LUMENS PER FOOT
Light Source: 4000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9038.6 lumens
Efficiency: N/A
Efficacy: 124.0 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.23 / 1.34
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 72.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1435861

CATALOG NUMBER: SQ2W-FA-K-150U-050D-L840-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

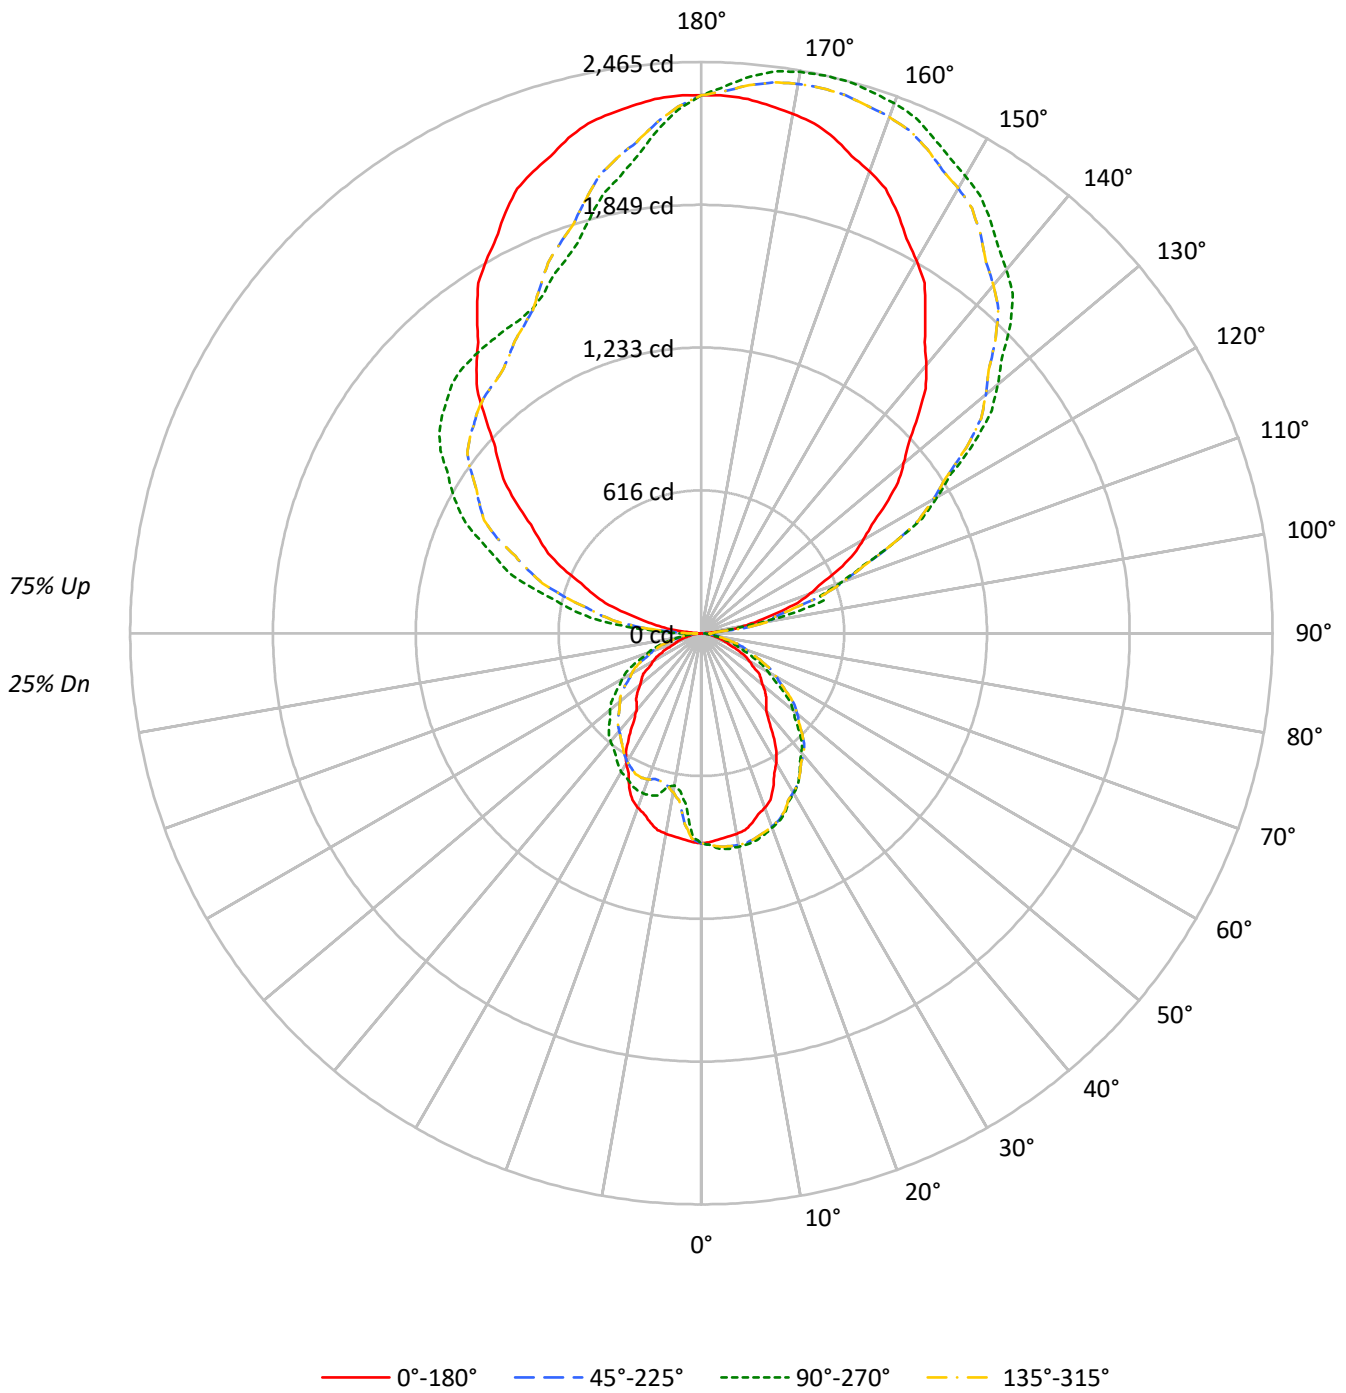



TEST NUMBER: P1435861

CATALOG NUMBER: SQ2W-FA-K-150U-050D-L840-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	69	69	69	51	51	51	33	33	33	25
1	92	88	84	81	82	79	75	73	61	59	57	44	43	42	29	29	28	21
2	84	77	71	66	75	69	64	60	53	50	47	39	37	35	26	25	24	18
3	77	68	61	55	68	60	54	50	47	43	39	34	32	30	23	21	20	15
4	70	60	52	46	62	53	47	42	42	37	34	31	28	25	20	19	17	13
5	64	53	45	39	57	47	41	36	37	32	29	27	24	22	18	16	15	11
6	59	47	40	34	52	42	36	31	33	28	25	25	21	19	17	15	13	10
7	54	43	35	30	48	38	32	27	30	25	22	22	19	17	15	13	12	9
8	50	38	31	26	45	35	28	24	27	23	19	20	17	15	14	12	10	8
9	47	35	28	23	41	31	25	21	25	20	17	19	15	13	13	11	9	7
10	43	32	25	20	39	29	23	19	23	18	15	17	14	12	12	10	8	6

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	14647	14647	14647	14647
5°	14475	15159	14475	12081
10°	14411	15334	14411	10953
15°	14164	15456	14164	12107
20°	13775	15345	13775	12627
25°	13092	15221	13092	12778
30°	12062	14881	12062	12914
35°	10673	14554	10673	12683
40°	9189	14155	9189	12821
45°	9072	13647	9072	12846
50°	8656	12984	8656	12896
55°	8611	11977	8611	12768
60°	7721	10672	7721	12716
65°	6582	9402	6582	12359
70°	5311	7968	5311	11452
75°	4604	6581	4604	10530
80°	3924	4900	3924	8498
85°	2612	2612	2612	5206

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 40°
 Vertical Angle: 45°
 Luminance: 14077 cd/sqm



TEST NUMBER: P1435861

CATALOG NUMBER: SQ2W-FA-K-150U-050D-L840-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	81.6	0.9
10°-20°	228.1	2.5
20°-30°	346.4	3.8
30°-40°	406.7	4.5
40°-50°	412.7	4.6
50°-60°	361.5	4.0
60°-70°	256.4	2.8
70°-80°	132.0	1.5
80°-90°	37.3	0.4
90°-100°	184.7	2.0
100°-110°	538.6	6.0
110°-120°	879.0	9.7
120°-130°	1115.4	12.3
130°-140°	1193.5	13.2
140°-150°	1114.5	12.3
150°-160°	917.1	10.1
160°-170°	615.0	6.8
170°-180°	218.4	2.4
0°-30°	656.1	7.3
0°-40°	1062.7	11.8
0°-60°	1836.8	20.3
0°-90°	2262.5	25.0
90°-120°	1602.3	17.7
90°-150°	5025.7	55.6
90°-180°	6776.0	75.0
0°-180°	9038.6	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	907	907	907	907	907	
5°	893	935	893	745	893	85
15°	847	925	847	724	847	238
25°	735	854	735	717	735	335
35°	542	738	542	644	542	337
45°	397	598	397	563	397	304
55°	306	426	306	454	306	265
65°	172	246	172	324	172	172
75°	74	106	74	169	74	80
85°	14	14	14	28	14	18
90°	7	52	7	101	7	6
95°	73	54	73	316	73	88
105°	342	548	342	755	342	364
115°	656	910	656	1120	656	647
125°	970	1442	970	1374	970	868
135°	1320	1887	1320	1521	1320	1020
145°	1686	2175	1686	1554	1686	1055
155°	2002	2363	2002	1613	2002	920
165°	2213	2464	2213	1857	2213	623
175°	2314	2412	2314	2178	2314	220
180°	2321	2321	2321	2321	2321	



TEST NUMBER: P1435861

CATALOG NUMBER: SQ2W-FA-K-150U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	907.2	907.2	907.2	907.2	907.2	907.2	907.2	907.2	907.2	907.2	907.2
2.5°	901.5	907.8	914.0	915.6	915.6	915.6	915.6	915.6	915.6	915.6	915.6
5°	893.1	904.0	915.0	920.1	923.2	925.5	927.1	929.0	932.2	935.3	932.2
7.5°	884.7	899.4	914.0	921.2	925.9	929.7	932.5	935.0	936.5	938.1	936.5
10°	879.0	896.2	913.4	921.2	925.9	929.0	930.6	932.2	933.7	935.3	933.7
12.5°	870.6	889.0	907.5	916.5	922.5	926.2	927.8	929.4	930.9	932.5	930.9
15°	847.4	872.4	897.4	907.2	911.9	915.8	918.9	921.6	923.2	924.7	923.2
17.5°	818.6	848.9	879.2	891.5	897.7	902.2	905.1	907.5	908.7	910.0	908.7
20°	801.7	834.5	867.3	880.2	886.5	890.4	891.9	893.1	893.1	893.1	893.1
22.5°	779.2	815.7	852.3	866.1	872.4	875.7	876.0	876.5	877.8	879.0	877.8
25°	734.9	777.1	819.3	836.8	846.2	850.1	848.6	848.2	851.3	854.4	851.3
27.5°	680.7	733.9	787.0	805.0	811.2	815.1	816.7	817.9	817.9	817.9	817.9
30°	647.0	706.4	765.7	785.3	791.5	795.4	797.0	798.2	798.2	798.2	798.2
32.5°	604.8	675.4	746.1	767.5	772.5	775.1	775.4	775.7	775.7	775.7	775.7
35°	541.5	627.4	713.4	737.2	740.3	741.9	741.9	741.5	740.0	738.4	740.0
37.5°	478.2	575.7	673.2	701.1	705.8	707.1	704.9	702.8	701.3	699.7	701.3
40°	436.0	542.3	648.5	678.6	683.3	683.3	678.6	674.7	673.1	671.6	673.1
42.5°	413.5	518.5	623.5	653.3	658.0	657.4	651.4	646.6	645.0	643.5	645.0
45°	397.3	491.1	584.9	611.8	616.5	615.7	609.5	604.0	600.9	597.7	600.9
47.5°	372.7	455.2	537.7	564.2	572.0	571.3	561.9	554.1	550.9	547.8	550.9
50°	344.6	425.8	507.1	533.3	541.1	540.3	530.9	523.1	520.0	516.9	520.0
52.5°	324.9	401.2	477.4	501.4	508.0	505.9	495.3	486.6	483.4	480.3	483.4
55°	305.9	370.0	434.1	453.6	458.3	455.1	444.2	434.8	430.1	425.5	430.1
57.5°	261.6	322.5	383.5	402.5	407.5	403.7	391.2	380.5	375.2	369.9	375.2
60°	239.1	293.8	348.5	366.9	373.1	370.0	357.5	346.1	338.3	330.5	338.3
62.5°	213.8	262.2	310.7	329.3	338.1	336.2	323.7	312.4	304.6	296.8	304.6
65°	172.3	214.5	256.7	275.4	286.4	285.6	273.1	261.8	253.9	246.1	253.9
67.5°	135.0	171.3	207.5	226.0	238.5	237.8	224.1	212.2	206.0	199.7	206.0
70°	112.5	143.8	175.0	192.2	204.7	204.7	192.2	181.3	175.0	168.8	175.0
72.5°	98.5	122.2	146.0	162.2	176.0	176.0	162.2	150.6	145.6	140.6	145.6
75°	73.8	87.9	102.0	117.2	132.8	134.4	121.9	111.7	108.6	105.5	108.6
77.5°	53.4	60.0	66.6	78.5	92.3	93.8	83.2	74.9	73.7	72.4	73.7
80°	42.2	43.8	45.3	55.1	67.6	69.2	59.8	52.7	52.7	52.7	52.7
82.5°	28.1	29.7	31.3	38.2	47.0	47.9	41.0	35.6	34.3	33.1	34.3
85°	14.1	14.1	14.1	16.4	19.5	19.5	16.4	14.1	14.1	14.1	14.1
87.5°	4.2	6.1	8.4	11.3	13.9	14.4	13.1	12.7	13.1	13.1	13.1
90°	7.0	16.4	28.1	37.5	44.5	46.9	46.9	49.2	51.6	51.6	51.6
92.5°	25.8	40.8	41.3	41.3	50.2	54.4	58.1	58.6	60.9	60.9	60.9
95°	72.7	79.7	119.6	117.2	79.7	63.3	53.9	53.9	53.9	53.9	53.9
97.5°	138.8	149.1	155.7	208.6	220.4	212.9	173.5	145.8	130.3	123.3	130.3
100°	196.9	201.6	215.7	218.0	276.6	332.9	304.7	269.6	257.9	250.8	257.9
102.5°	255.0	257.9	279.4	289.3	302.9	334.7	432.3	421.5	413.5	412.1	413.5
105°	342.3	344.6	384.4	403.2	412.6	412.6	410.2	457.1	532.1	548.5	532.1
107.5°	435.5	446.3	493.2	543.4	554.2	557.0	544.8	537.8	534.9	536.8	534.9
110°	499.3	515.7	572.0	635.3	651.7	656.4	651.7	644.7	640.0	640.0	640.0



TEST NUMBER: P1435861

CATALOG NUMBER: SQ2W-FA-K-150U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	561.2	585.1	648.9	721.5	749.2	763.3	753.0	747.8	743.1	746.9	743.1
115°	656.4	691.5	775.9	850.9	907.2	914.2	911.9	911.9	909.5	909.5	909.5
117.5°	744.5	800.8	895.5	982.7	1047.9	1066.6	1076.0	1073.2	1070.4	1075.0	1070.4
120°	806.4	872.0	979.9	1078.3	1141.6	1169.7	1179.1	1174.4	1179.1	1174.4	1179.1
122.5°	872.0	952.7	1058.6	1160.8	1235.4	1267.3	1278.5	1279.5	1280.4	1277.6	1280.4
125°	970.5	1068.9	1193.2	1298.7	1376.0	1413.5	1422.9	1425.3	1430.0	1441.7	1430.0
127.5°	1069.9	1181.5	1317.9	1419.6	1498.9	1544.3	1558.9	1564.0	1573.9	1579.0	1573.9
130°	1139.3	1265.9	1404.2	1500.3	1577.6	1626.9	1652.7	1659.7	1671.4	1669.1	1671.4
132.5°	1212.4	1344.6	1484.8	1584.7	1656.4	1709.4	1731.4	1751.6	1755.8	1759.1	1755.8
135°	1319.8	1462.8	1603.4	1701.9	1769.9	1821.4	1849.6	1868.3	1880.0	1887.1	1880.0
137.5°	1432.8	1583.7	1718.8	1806.4	1874.9	1919.4	1951.3	1971.0	1983.2	1988.8	1983.2
140°	1509.7	1655.0	1786.3	1877.7	1938.6	1983.2	2011.3	2034.8	2048.8	2048.8	2048.8
142.5°	1582.8	1726.3	1853.8	1945.2	1998.7	2039.4	2069.4	2087.3	2103.2	2103.2	2103.2
145°	1685.5	1828.5	1945.7	2037.1	2081.6	2119.1	2152.0	2166.0	2175.4	2175.4	2175.4
147.5°	1792.8	1919.4	2026.3	2114.0	2151.5	2195.6	2221.3	2232.6	2244.3	2239.2	2244.3
150°	1856.6	1973.8	2076.9	2159.0	2196.5	2238.7	2264.5	2273.9	2285.6	2278.5	2285.6
152.5°	1918.5	2030.1	2123.8	2200.3	2232.1	2274.3	2303.9	2313.2	2321.2	2316.1	2321.2
155°	2001.9	2100.4	2187.1	2257.5	2285.6	2325.4	2353.6	2365.3	2374.7	2362.9	2374.7
157.5°	2076.5	2161.3	2236.8	2301.5	2331.5	2365.8	2392.0	2406.5	2415.9	2410.8	2415.9
160°	2121.5	2198.8	2266.8	2327.8	2355.9	2386.4	2414.5	2430.9	2440.3	2433.3	2440.3
162.5°	2159.0	2228.9	2293.1	2348.4	2372.8	2399.5	2433.3	2447.8	2457.2	2448.3	2457.2
165°	2212.9	2269.2	2325.4	2372.3	2393.4	2414.5	2449.7	2466.1	2473.1	2463.7	2473.1
167.5°	2253.7	2296.8	2342.3	2382.6	2398.1	2418.7	2453.9	2467.5	2476.4	2464.7	2476.4
170°	2276.2	2313.7	2353.6	2386.4	2398.1	2416.9	2452.0	2463.7	2470.8	2459.1	2470.8
172.5°	2295.0	2323.1	2355.4	2384.5	2390.6	2405.6	2438.9	2450.6	2455.8	2445.9	2455.8
175°	2313.7	2330.1	2353.6	2372.3	2370.0	2379.3	2407.5	2416.9	2426.2	2412.2	2426.2
177.5°	2322.6	2330.1	2337.6	2348.9	2341.4	2341.4	2362.0	2367.6	2369.5	2362.0	2369.5
180°	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7



TEST NUMBER: P1435861

CATALOG NUMBER: SQ2W-FA-K-150U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	907.2	907.2	907.2	907.2	907.2	907.2	907.2	907.2	907.2	907.2	907.2
2.5°	915.6	915.6	915.6	915.6	915.6	914.0	907.8	901.5	901.5	901.5	896.9
5°	929.0	927.1	925.5	923.2	920.1	915.0	904.0	893.1	888.4	883.7	863.8
7.5°	935.0	932.5	929.7	925.9	921.2	914.0	899.4	884.7	863.7	842.8	798.4
10°	932.2	930.6	929.0	925.9	921.2	913.4	896.2	879.0	836.8	794.7	752.5
12.5°	929.4	927.8	926.2	922.5	916.5	907.5	889.0	870.6	810.9	751.2	713.1
15°	921.6	918.9	915.8	911.9	907.2	897.4	872.4	847.4	780.2	713.0	681.0
17.5°	907.5	905.1	902.2	897.7	891.5	879.2	848.9	818.6	748.2	677.9	657.3
20°	893.1	891.9	890.4	886.5	880.2	867.3	834.5	801.7	731.4	661.0	651.7
22.5°	876.5	876.0	875.7	872.4	866.1	852.3	815.7	779.2	710.1	641.0	641.3
25°	848.2	848.6	850.1	846.2	836.8	819.3	777.1	734.9	673.9	613.0	623.5
27.5°	817.9	816.7	815.1	811.2	805.0	787.0	733.9	680.7	632.6	584.5	602.0
30°	798.2	797.0	795.4	791.5	785.3	765.7	706.4	647.0	606.3	565.7	586.0
32.5°	775.7	775.4	775.1	772.5	767.5	746.1	675.4	604.8	575.4	546.0	567.3
35°	741.5	741.9	741.9	740.3	737.2	713.4	627.4	541.5	529.0	516.5	541.5
37.5°	702.8	704.9	707.1	705.8	701.1	673.2	575.7	478.2	482.3	486.3	516.6
40°	674.7	678.6	683.3	683.3	678.6	648.5	542.3	436.0	450.1	464.1	497.0
42.5°	646.6	651.4	657.4	658.0	653.3	623.5	518.5	413.5	428.8	444.1	478.2
45°	604.0	609.5	615.7	616.5	611.8	584.9	491.1	397.3	406.7	416.1	448.9
47.5°	554.1	561.9	571.3	572.0	564.2	537.7	455.2	372.7	379.6	386.5	420.1
50°	523.1	530.9	540.3	541.1	533.3	507.1	425.8	344.6	354.0	363.3	398.5
52.5°	486.6	495.3	505.9	508.0	501.4	477.4	401.2	324.9	330.5	336.1	374.1
55°	434.8	444.2	455.1	458.3	453.6	434.1	370.0	305.9	301.2	296.5	335.2
57.5°	380.5	391.2	403.7	407.5	402.5	383.5	322.5	261.6	257.5	253.5	295.4
60°	346.1	357.5	370.0	373.1	366.9	348.5	293.8	239.1	231.3	223.5	267.2
62.5°	312.4	323.7	336.2	338.1	329.3	310.7	262.2	213.8	208.5	203.2	245.7
65°	261.8	273.1	285.6	286.4	275.4	256.7	214.5	172.3	175.4	178.5	216.8
67.5°	212.2	224.1	237.8	238.5	226.0	207.5	171.3	135.0	145.3	155.6	190.1
70°	181.3	192.2	204.7	204.7	192.2	175.0	143.8	112.5	126.6	140.6	172.3
72.5°	150.6	162.2	176.0	176.0	162.2	146.0	122.2	98.5	112.5	126.6	152.6
75°	111.7	121.9	134.4	132.8	117.2	102.0	87.9	73.8	87.9	102.0	121.9
77.5°	74.9	83.2	93.8	92.3	78.5	66.6	60.0	53.4	65.0	76.6	90.5
80°	52.7	59.8	69.2	67.6	55.1	45.3	43.8	42.2	50.0	57.8	68.0
82.5°	35.6	41.0	47.9	47.0	38.2	31.3	29.7	28.1	34.7	41.3	48.3
85°	14.1	16.4	19.5	19.5	16.4	14.1	14.1	14.1	17.2	20.3	23.4
87.5°	12.7	13.1	14.4	13.9	11.3	8.4	6.1	4.2	7.3	10.5	14.1
90°	49.2	46.9	46.9	44.5	37.5	28.1	16.4	7.0	16.4	25.8	42.2
92.5°	58.6	58.1	54.4	50.2	41.3	41.3	40.8	25.8	44.5	63.3	91.0
95°	53.9	53.9	63.3	79.7	117.2	119.6	79.7	72.7	103.1	145.3	182.8
97.5°	145.8	173.5	212.9	220.4	208.6	155.7	149.1	138.8	188.9	230.7	291.1
100°	269.6	304.7	332.9	276.6	218.0	215.7	201.6	196.9	250.8	290.7	349.3
102.5°	421.5	432.3	334.7	302.9	289.3	279.4	257.9	255.0	309.0	363.8	413.0
105°	457.1	410.2	412.6	412.6	403.2	384.4	344.6	342.3	403.2	466.5	527.4
107.5°	537.8	544.8	557.0	554.2	543.4	493.2	446.3	435.5	490.4	566.4	633.4
110°	644.7	651.7	656.4	651.7	635.3	572.0	515.7	499.3	548.5	628.2	700.9

TEST NUMBER: P1435861

CATALOG NUMBER: SQ2W-FA-K-150U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	747.8	753.0	763.3	749.2	721.5	648.9	585.1	561.2	610.4	692.0	766.5
115°	911.9	911.9	914.2	907.2	850.9	775.9	691.5	656.4	698.6	773.6	855.6
117.5°	1073.2	1076.0	1066.6	1047.9	982.7	895.5	800.8	744.5	777.8	857.0	941.4
120°	1174.4	1179.1	1169.7	1141.6	1078.3	979.9	872.0	806.4	832.2	909.5	993.9
122.5°	1279.5	1278.5	1267.3	1235.4	1160.8	1058.6	952.7	872.0	882.8	954.6	1037.1
125°	1425.3	1422.9	1413.5	1376.0	1298.7	1193.2	1068.9	970.5	956.4	1017.4	1101.8
127.5°	1564.0	1558.9	1544.3	1498.9	1419.6	1317.9	1181.5	1069.9	1038.5	1076.9	1154.3
130°	1659.7	1652.7	1626.9	1577.6	1500.3	1404.2	1265.9	1139.3	1094.7	1118.2	1186.2
132.5°	1751.6	1731.4	1709.4	1656.4	1584.7	1484.8	1344.6	1212.4	1151.0	1161.3	1214.3
135°	1868.3	1849.6	1821.4	1769.9	1701.9	1603.4	1462.8	1319.8	1235.4	1226.0	1256.5
137.5°	1971.0	1951.3	1919.4	1874.9	1806.4	1718.8	1583.7	1432.8	1326.3	1294.9	1306.6
140°	2034.8	2011.3	1983.2	1938.6	1877.7	1786.3	1655.0	1509.7	1390.1	1345.6	1338.5
142.5°	2087.3	2069.4	2039.4	1998.7	1945.2	1853.8	1726.3	1582.8	1455.7	1398.1	1381.7
145°	2166.0	2152.0	2119.1	2081.6	2037.1	1945.7	1828.5	1685.5	1558.9	1483.9	1448.7
147.5°	2232.6	2221.3	2195.6	2151.5	2114.0	2026.3	1919.4	1792.8	1663.0	1570.1	1524.7
150°	2273.9	2264.5	2238.7	2196.5	2159.0	2076.9	1973.8	1856.6	1732.4	1633.9	1575.3
152.5°	2313.2	2303.9	2274.3	2232.1	2200.3	2123.8	2030.1	1918.5	1792.4	1693.9	1633.4
155°	2365.3	2353.6	2325.4	2285.6	2257.5	2187.1	2100.4	2001.9	1894.1	1791.0	1723.0
157.5°	2406.5	2392.0	2365.8	2331.5	2301.5	2236.8	2161.3	2076.5	1982.2	1883.8	1814.4
160°	2430.9	2414.5	2386.4	2355.9	2327.8	2266.8	2198.8	2121.5	2034.8	1945.7	1870.7
162.5°	2447.8	2433.3	2399.5	2372.8	2348.4	2293.1	2228.9	2159.0	2081.6	2003.8	1934.4
165°	2466.1	2449.7	2414.5	2393.4	2372.3	2325.4	2269.2	2212.9	2147.3	2084.0	2027.7
167.5°	2467.5	2453.9	2418.7	2398.1	2382.6	2342.3	2296.8	2253.7	2202.6	2152.9	2106.0
170°	2463.7	2452.0	2416.9	2398.1	2386.4	2353.6	2313.7	2276.2	2236.4	2194.2	2156.7
172.5°	2450.6	2438.9	2405.6	2390.6	2384.5	2355.4	2323.1	2295.0	2260.7	2229.8	2199.8
175°	2416.9	2407.5	2379.3	2370.0	2372.3	2353.6	2330.1	2313.7	2292.6	2273.9	2257.5
177.5°	2367.6	2362.0	2341.4	2341.4	2348.9	2337.6	2330.1	2322.6	2313.2	2307.6	2302.0
180°	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7



TEST NUMBER: P1435861

CATALOG NUMBER: SQ2W-FA-K-150U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	907.2	907.2	907.2	907.2	907.2	907.2	907.2	907.2	907.2	907.2	907.2
2.5°	890.6	885.6	881.9	878.7	877.5	876.2	877.5	878.7	881.9	885.6	890.6
5°	838.8	812.2	784.1	761.1	753.2	745.4	753.2	761.1	784.1	812.2	838.8
7.5°	746.2	714.2	702.3	692.8	690.3	687.8	690.3	692.8	702.3	714.2	746.2
10°	710.3	684.5	675.1	668.1	668.1	668.1	668.1	668.1	675.1	684.5	710.3
12.5°	682.1	666.4	665.7	666.8	673.1	679.3	673.1	666.8	665.7	666.4	682.1
15°	660.6	663.0	688.0	708.7	716.5	724.3	716.5	708.7	688.0	663.0	660.6
17.5°	653.2	666.7	697.6	722.4	728.6	734.9	728.6	722.4	697.6	666.7	653.2
20°	662.6	679.8	703.2	722.4	728.6	734.9	728.6	722.4	703.2	679.8	662.6
22.5°	664.8	685.7	704.2	719.6	725.8	732.1	725.8	719.6	704.2	685.7	664.8
25°	657.9	682.9	698.5	711.0	714.2	717.3	714.2	711.0	698.5	682.9	657.9
27.5°	641.3	668.9	684.5	696.7	698.9	701.1	698.9	696.7	684.5	668.9	641.3
30°	626.7	654.8	670.4	683.3	688.0	692.7	688.0	683.3	670.4	654.8	626.7
32.5°	605.4	634.2	653.5	668.3	669.2	670.2	669.2	668.3	653.5	634.2	605.4
35°	579.0	608.7	630.6	646.6	645.0	643.5	645.0	646.6	630.6	608.7	579.0
37.5°	555.7	584.8	603.8	618.6	620.5	622.4	620.5	618.6	603.8	584.8	555.7
40°	536.0	565.7	586.0	602.0	605.2	608.3	605.2	602.0	586.0	565.7	536.0
42.5°	518.5	548.8	569.1	585.2	588.3	591.4	588.3	585.2	569.1	548.8	518.5
45°	489.5	520.8	542.7	559.5	561.0	562.6	561.0	559.5	542.7	520.8	489.5
47.5°	462.6	494.0	514.3	529.9	531.5	533.0	531.5	529.9	514.3	494.0	462.6
50°	442.3	474.3	494.6	510.2	511.8	513.4	511.8	510.2	494.6	474.3	442.3
52.5°	422.9	456.2	474.0	487.7	489.3	490.9	489.3	487.7	474.0	456.2	422.9
55°	388.3	423.5	440.7	453.6	453.6	453.6	453.6	440.7	423.5	388.3	
57.5°	352.6	388.7	403.7	415.4	417.3	419.1	417.3	415.4	403.7	388.7	352.6
60°	328.2	364.9	377.4	387.6	390.7	393.8	390.7	387.6	377.4	364.9	328.2
62.5°	304.1	339.6	352.1	361.9	363.8	365.7	363.8	361.9	352.1	339.6	304.1
65°	266.8	298.1	310.6	320.4	321.9	323.5	321.9	320.4	310.6	298.1	266.8
67.5°	232.6	258.2	267.0	273.9	275.1	276.4	275.1	273.9	267.0	258.2	232.6
70°	209.8	231.7	237.9	242.6	242.6	242.6	242.6	237.9	231.7	209.8	
72.5°	182.6	200.7	207.0	212.0	213.2	214.5	213.2	212.0	207.0	200.7	182.6
75°	143.8	157.1	161.7	165.7	167.2	168.8	167.2	165.7	161.7	157.1	143.8
77.5°	105.2	113.9	116.7	119.2	120.8	122.4	120.8	119.2	116.7	113.9	105.2
80°	78.9	85.2	86.7	88.3	89.9	91.4	89.9	88.3	86.7	85.2	78.9
82.5°	55.5	59.9	61.4	62.7	63.0	63.3	63.0	62.7	61.4	59.9	55.5
85°	26.6	28.1	28.1	28.1	28.1	28.1	28.1	28.1	28.1	28.1	26.6
87.5°	16.4	19.7	23.0	24.8	26.7	25.8	26.7	24.8	23.0	19.7	16.4
90°	53.9	70.3	86.7	96.1	105.5	100.8	105.5	96.1	86.7	70.3	53.9
92.5°	108.3	136.0	156.1	173.0	180.5	179.6	180.5	173.0	156.1	136.0	108.3
95°	218.0	250.8	283.6	307.1	321.2	316.5	321.2	307.1	283.6	250.8	218.0
97.5°	336.2	380.2	416.8	438.8	452.9	462.3	452.9	438.8	416.8	380.2	336.2
100°	414.9	457.1	499.3	525.1	548.5	557.9	548.5	525.1	499.3	457.1	414.9
102.5°	478.7	534.0	580.0	607.6	627.3	636.7	627.3	607.6	580.0	534.0	478.7
105°	583.7	642.3	691.5	726.7	747.8	754.8	747.8	726.7	691.5	642.3	583.7
107.5°	688.7	749.2	794.7	833.6	859.4	874.4	859.4	833.6	794.7	749.2	688.7
110°	771.2	820.5	869.7	904.9	930.6	940.0	930.6	904.9	869.7	820.5	771.2



TEST NUMBER: P1435861

CATALOG NUMBER: SQ2W-FA-K-150U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	840.6	895.5	944.7	979.9	1009.4	1022.5	1009.4	979.9	944.7	895.5	840.6
115°	937.7	1010.3	1054.9	1087.7	1108.8	1120.5	1108.8	1087.7	1054.9	1010.3	937.7
117.5°	1018.3	1094.3	1143.0	1168.3	1178.2	1186.6	1178.2	1168.3	1143.0	1094.3	1018.3
120°	1068.9	1139.3	1195.5	1228.4	1240.1	1244.8	1240.1	1228.4	1195.5	1139.3	1068.9
122.5°	1115.8	1182.4	1236.8	1277.1	1296.3	1301.0	1296.3	1277.1	1236.8	1182.4	1115.8
125°	1181.5	1244.8	1301.0	1340.9	1362.0	1373.7	1362.0	1340.9	1301.0	1244.8	1181.5
127.5°	1238.7	1307.1	1358.7	1394.8	1415.4	1424.8	1415.4	1394.8	1358.7	1307.1	1238.7
130°	1270.5	1340.9	1392.4	1432.3	1451.1	1460.4	1451.1	1432.3	1392.4	1340.9	1270.5
132.5°	1294.9	1369.0	1422.5	1458.6	1479.2	1488.6	1479.2	1458.6	1422.5	1369.0	1294.9
135°	1324.5	1401.8	1458.1	1493.2	1512.0	1521.4	1512.0	1493.2	1458.1	1401.8	1324.5
137.5°	1350.3	1420.6	1479.2	1516.2	1533.1	1539.2	1533.1	1516.2	1479.2	1420.6	1350.3
140°	1369.0	1430.0	1488.6	1523.7	1542.5	1544.8	1542.5	1523.7	1488.6	1430.0	1369.0
142.5°	1393.4	1441.2	1492.3	1527.5	1546.2	1550.4	1546.2	1527.5	1492.3	1441.2	1393.4
145°	1437.0	1465.1	1500.3	1533.1	1549.5	1554.2	1549.5	1533.1	1500.3	1465.1	1437.0
147.5°	1491.8	1500.7	1519.0	1540.6	1556.5	1559.8	1556.5	1540.6	1519.0	1500.7	1491.8
150°	1533.1	1530.8	1537.8	1551.9	1565.9	1563.6	1565.9	1551.9	1537.8	1530.8	1533.1
152.5°	1580.0	1566.4	1565.9	1572.5	1579.0	1578.6	1579.0	1572.5	1565.9	1566.4	1580.0
155°	1659.7	1633.9	1619.8	1615.1	1615.1	1612.8	1615.1	1615.1	1619.8	1633.9	1659.7
157.5°	1747.4	1711.3	1690.2	1678.9	1675.6	1670.5	1675.6	1678.9	1690.2	1711.3	1747.4
160°	1807.4	1767.5	1746.4	1727.7	1720.6	1713.6	1720.6	1727.7	1746.4	1767.5	1807.4
162.5°	1863.6	1825.7	1802.7	1785.8	1778.8	1768.0	1778.8	1785.8	1802.7	1825.7	1863.6
165°	1955.1	1915.2	1889.4	1875.3	1866.0	1856.6	1866.0	1875.3	1889.4	1915.2	1955.1
167.5°	2046.5	2002.9	1986.0	1970.1	1961.1	1944.3	1961.1	1970.1	1986.0	2002.9	2046.5
170°	2102.7	2062.9	2053.5	2039.4	2023.0	2004.3	2023.0	2039.4	2053.5	2062.9	2102.7
172.5°	2151.5	2124.8	2115.4	2101.3	2096.2	2081.2	2096.2	2101.3	2115.4	2124.8	2151.5
175°	2222.3	2201.2	2201.2	2198.8	2191.8	2177.7	2191.8	2198.8	2201.2	2201.2	2222.3
177.5°	2281.4	2270.1	2277.6	2277.6	2275.7	2262.6	2275.7	2277.6	2277.6	2270.1	2281.4
180°	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7



TEST NUMBER: P1435861

CATALOG NUMBER: SQ2W-FA-K-150U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	907.2	907.2	907.2	907.2
2.5°	896.9	901.5	901.5	901.5
5°	863.8	883.7	888.4	893.1
7.5°	798.4	842.8	863.7	884.7
10°	752.5	794.7	836.8	879.0
12.5°	713.1	751.2	810.9	870.6
15°	681.0	713.0	780.2	847.4
17.5°	657.3	677.9	748.2	818.6
20°	651.7	661.0	731.4	801.7
22.5°	641.3	641.0	710.1	779.2
25°	623.5	613.0	673.9	734.9
27.5°	602.0	584.5	632.6	680.7
30°	586.0	565.7	606.3	647.0
32.5°	567.3	546.0	575.4	604.8
35°	541.5	516.5	529.0	541.5
37.5°	516.6	486.3	482.3	478.2
40°	497.0	464.1	450.1	436.0
42.5°	478.2	444.1	428.8	413.5
45°	448.9	416.1	406.7	397.3
47.5°	420.1	386.5	379.6	372.7
50°	398.5	363.3	354.0	344.6
52.5°	374.1	336.1	330.5	324.9
55°	335.2	296.5	301.2	305.9
57.5°	295.4	253.5	257.5	261.6
60°	267.2	223.5	231.3	239.1
62.5°	245.7	203.2	208.5	213.8
65°	216.8	178.5	175.4	172.3
67.5°	190.1	155.6	145.3	135.0
70°	172.3	140.6	126.6	112.5
72.5°	152.6	126.6	112.5	98.5
75°	121.9	102.0	87.9	73.8
77.5°	90.5	76.6	65.0	53.4
80°	68.0	57.8	50.0	42.2
82.5°	48.3	41.3	34.7	28.1
85°	23.4	20.3	17.2	14.1
87.5°	14.1	10.5	7.3	4.2
90°	42.2	25.8	16.4	7.0
92.5°	91.0	63.3	44.5	25.8
95°	182.8	145.3	103.1	72.7
97.5°	291.1	230.7	188.9	138.8
100°	349.3	290.7	250.8	196.9
102.5°	413.0	363.8	309.0	255.0
105°	527.4	466.5	403.2	342.3
107.5°	633.4	566.4	490.4	435.5
110°	700.9	628.2	548.5	499.3



TEST NUMBER: P1435861

CATALOG NUMBER: SQ2W-FA-K-150U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	766.5	692.0	610.4	561.2
115°	855.6	773.6	698.6	656.4
117.5°	941.4	857.0	777.8	744.5
120°	993.9	909.5	832.2	806.4
122.5°	1037.1	954.6	882.8	872.0
125°	1101.8	1017.4	956.4	970.5
127.5°	1154.3	1076.9	1038.5	1069.9
130°	1186.2	1118.2	1094.7	1139.3
132.5°	1214.3	1161.3	1151.0	1212.4
135°	1256.5	1226.0	1235.4	1319.8
137.5°	1306.6	1294.9	1326.3	1432.8
140°	1338.5	1345.6	1390.1	1509.7
142.5°	1381.7	1398.1	1455.7	1582.8
145°	1448.7	1483.9	1558.9	1685.5
147.5°	1524.7	1570.1	1663.0	1792.8
150°	1575.3	1633.9	1732.4	1856.6
152.5°	1633.4	1693.9	1792.4	1918.5
155°	1723.0	1791.0	1894.1	2001.9
157.5°	1814.4	1883.8	1982.2	2076.5
160°	1870.7	1945.7	2034.8	2121.5
162.5°	1934.4	2003.8	2081.6	2159.0
165°	2027.7	2084.0	2147.3	2212.9
167.5°	2106.0	2152.9	2202.6	2253.7
170°	2156.7	2194.2	2236.4	2276.2
172.5°	2199.8	2229.8	2260.7	2295.0
175°	2257.5	2273.9	2292.6	2313.7
177.5°	2302.0	2307.6	2313.2	2322.6
180°	2320.7	2320.7	2320.7	2320.7



TEST NUMBER: P1435861
 CATALOG NUMBER: SQ2W-FA-K-150U-050D-L840-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.75	13.43	13.90	14.56	16.15	13.95	14.62	15.10	15.76	17.35
	3H	13.83	14.43	14.98	15.57	17.17	15.18	15.78	16.33	16.92	18.53
	4H	14.17	14.74	15.33	15.88	17.49	15.56	16.13	16.72	17.28	18.88
	6H	14.32	14.85	15.49	15.99	17.61	15.71	16.24	16.88	17.38	19.00
	8H	14.35	14.85	15.52	16.01	17.62	15.73	16.23	16.90	17.39	19.00
	12H	14.34	14.81	15.51	15.97	17.60	15.71	16.18	16.88	17.34	18.97
4H	2H	13.60	14.17	14.77	15.31	16.92	14.51	15.08	15.68	16.23	17.83
	3H	14.97	15.44	16.14	16.61	18.23	15.96	16.43	17.13	17.60	19.22
	4H	15.41	15.85	16.59	17.01	18.65	16.42	16.86	17.60	18.02	19.66
	6H	15.63	16.01	16.81	17.19	18.82	16.63	17.01	17.82	18.19	19.82
	8H	15.68	16.04	16.86	17.21	18.85	16.68	17.03	17.86	18.20	19.85
	12H	15.68	16.00	16.87	17.18	18.83	16.66	16.98	17.85	18.16	19.81
8H	4H	15.78	16.13	16.96	17.30	18.95	16.60	16.95	17.78	18.12	19.77
	6H	16.12	16.41	17.32	17.63	19.27	16.91	17.20	18.11	18.41	20.05
	8H	16.24	16.49	17.44	17.68	19.34	17.00	17.25	18.21	18.45	20.11
	12H	16.27	16.49	17.48	17.68	19.37	17.01	17.23	18.22	18.42	20.11
12H	4H	15.78	16.09	16.97	17.28	18.93	16.56	16.88	17.76	18.06	19.71
	6H	16.19	16.44	17.40	17.63	19.30	16.93	17.18	18.13	18.37	20.03
	8H	16.33	16.55	17.54	17.74	19.43	17.03	17.25	18.24	18.44	20.13