

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1435873

Luminaire Tested: SQ2W-FA-K-150U-100D-L840-UNV-STD-W-WM-4

Issue Date: 3/24/2026

Test Information

Test Method: LM-79-2019
Report Number: P1435873
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2502-345-2)
Test Lab: INNOVATION CENTER
Issue Date: 3/24/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-FA-K-150U-100D-L840-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - FROSTED CONTINUOUS ASYMMETRIC ROLL LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 1000 LUMENS PER FOOT
UPLIGHT 1500 LUMENS PER FOOT
Light Source: 4000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11155.3 lumens
Efficiency: N/A
Efficacy: 120.3 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.23 / 1.34
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 92.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1435873

CATALOG NUMBER: SQ2W-FA-K-150U-100D-L840-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

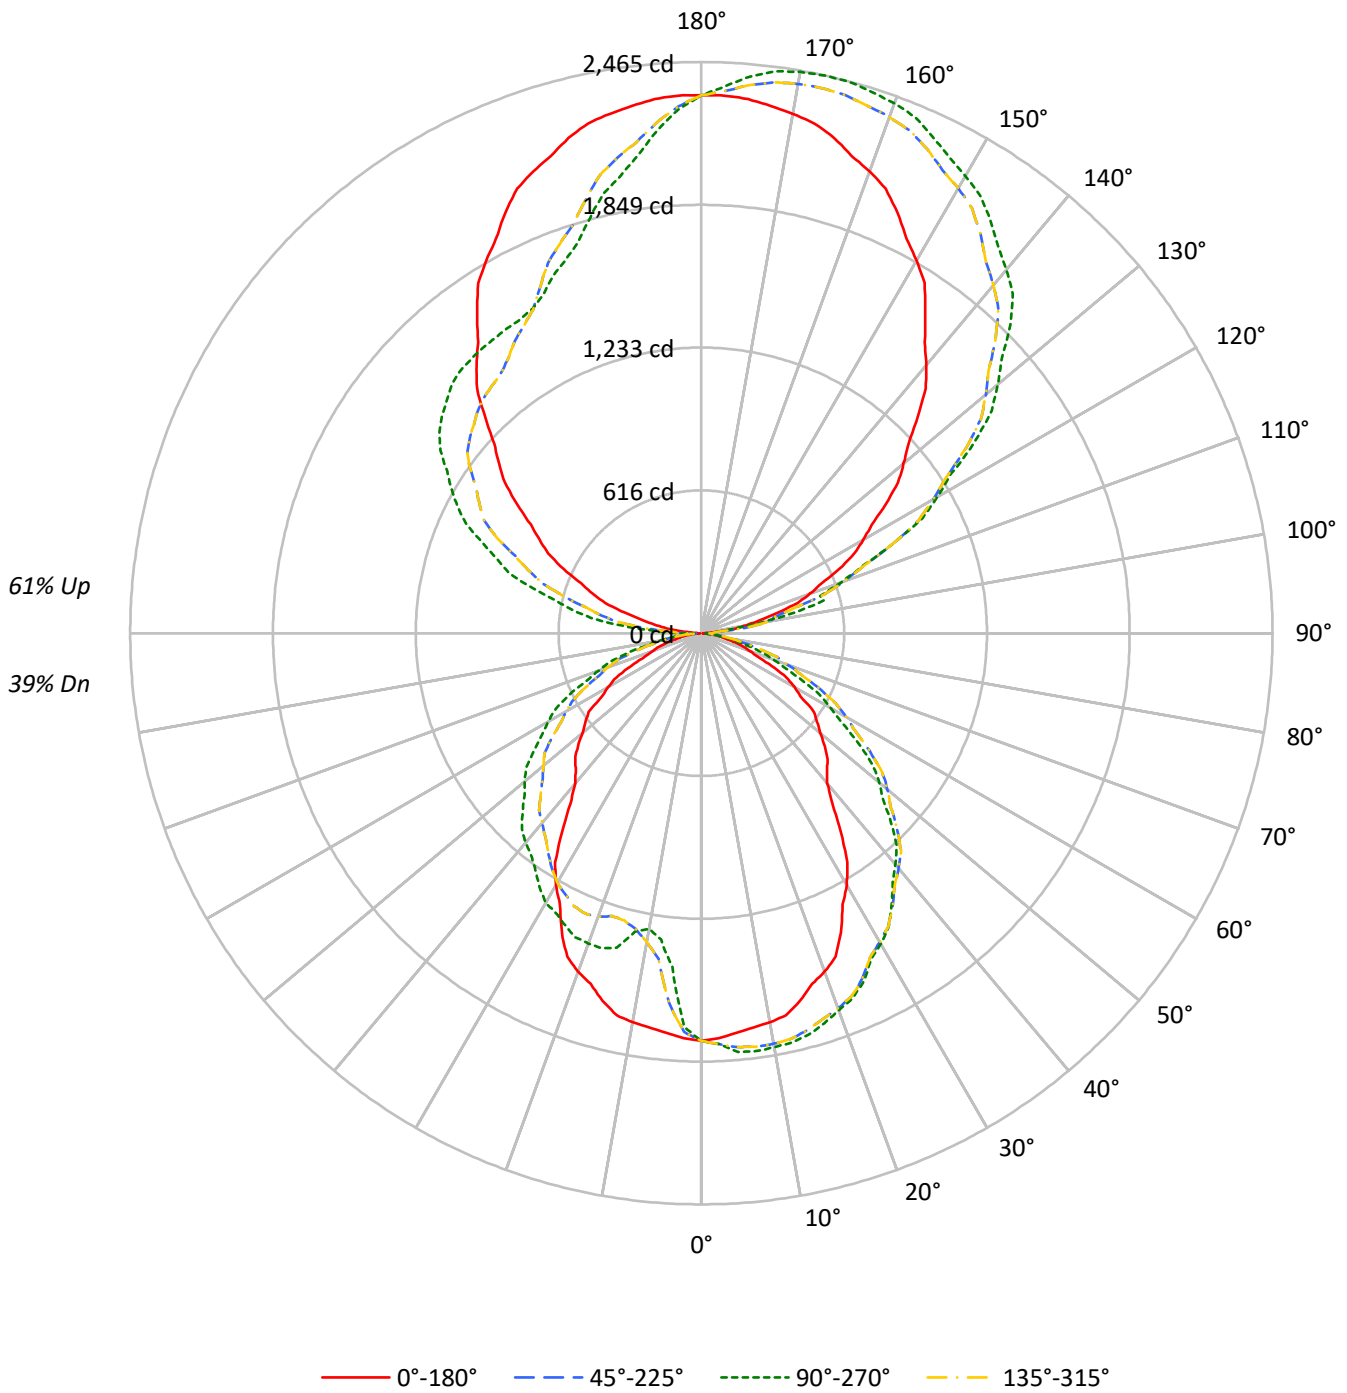



TEST NUMBER: P1435873

CATALOG NUMBER: SQ2W-FA-K-150U-100D-L840-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	105	105	105	105	95	95	95	95	77	77	77	61	61	61	46	46	46	39				
1	95	91	87	84	87	83	80	77	68	66	64	54	52	51	41	40	39	33				
2	87	80	74	69	79	73	68	63	59	56	53	47	45	43	36	34	33	28				
3	79	70	63	57	72	64	58	53	52	48	44	42	39	36	32	30	28	24				
4	72	62	54	48	66	57	50	45	47	42	38	37	34	31	29	26	24	20				
5	66	55	47	41	60	50	43	38	42	36	32	33	30	27	26	23	21	18				
6	61	49	41	36	55	45	38	33	37	32	28	30	26	23	23	21	19	15				
7	56	44	37	31	51	41	34	29	34	29	25	27	23	21	21	19	16	14				
8	52	40	33	27	47	37	30	26	31	26	22	25	21	18	19	17	15	12				
9	49	37	29	24	44	34	27	23	28	23	20	23	19	16	18	15	13	11				
10	45	34	26	22	41	31	25	20	26	21	18	21	17	15	17	14	12	10				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	28408	28408	28408	28408
5°	28074	29402	28074	23432
10°	27951	29741	27951	21244
15°	27473	29980	27473	23483
20°	26716	29762	26716	24489
25°	25391	29522	25391	24784
30°	23394	28862	23394	25047
35°	20700	28229	20700	24598
40°	17824	27454	17824	24866
45°	17595	26473	17595	24916
50°	16786	25181	16786	25010
55°	16701	23228	16701	24763
60°	14973	20702	14973	24664
65°	12768	18238	12768	23969
70°	10300	15451	10300	22215
75°	8933	12763	8933	20418
80°	7606	9512	7606	16485
85°	5057	5057	5057	10115

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 40°
 Vertical Angle: 45°
 Luminance: 27302 cd/sqm



TEST NUMBER: P1435873

CATALOG NUMBER: SQ2W-FA-K-150U-100D-L840-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	158.3	1.4
10°-20°	442.4	4.0
20°-30°	671.8	6.0
30°-40°	788.7	7.1
40°-50°	800.4	7.2
50°-60°	701.1	6.3
60°-70°	497.3	4.5
70°-80°	256.0	2.3
80°-90°	63.3	0.6
90°-100°	184.7	1.7
100°-110°	538.6	4.8
110°-120°	879.0	7.9
120°-130°	1115.4	10.0
130°-140°	1193.5	10.7
140°-150°	1114.5	10.0
150°-160°	917.1	8.2
160°-170°	615.0	5.5
170°-180°	218.4	2.0
0°-30°	1272.5	11.4
0°-40°	2061.2	18.5
0°-60°	3562.6	31.9
0°-90°	4379.2	39.3
90°-120°	1602.3	14.4
90°-150°	5025.7	45.1
90°-180°	6776.0	60.7
0°-180°	11155.3	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1760	1760	1760	1760	1760	
5°	1732	1814	1732	1446	1732	164
15°	1644	1794	1644	1405	1644	462
25°	1425	1657	1425	1391	1425	651
35°	1050	1432	1050	1248	1050	654
45°	771	1159	771	1091	771	589
55°	593	825	593	880	593	513
65°	334	477	334	627	334	334
75°	143	205	143	327	143	155
85°	27	27	27	55	27	34
90°	7	52	7	101	7	6
95°	73	54	73	316	73	88
105°	342	548	342	755	342	364
115°	656	910	656	1120	656	647
125°	970	1442	970	1374	970	868
135°	1320	1887	1320	1521	1320	1020
145°	1686	2175	1686	1554	1686	1055
155°	2002	2363	2002	1613	2002	920
165°	2213	2464	2213	1857	2213	623
175°	2314	2412	2314	2178	2314	220
180°	2321	2321	2321	2321	2321	



TEST NUMBER: P1435873

CATALOG NUMBER: SQ2W-FA-K-150U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	1759.5	1759.5	1759.5	1759.5	1759.5	1759.5	1759.5	1759.5	1759.5	1759.5	1759.5
2.5°	1748.6	1760.7	1772.8	1775.9	1775.9	1775.9	1775.9	1775.9	1775.9	1775.9	1775.9
5°	1732.2	1753.4	1774.7	1784.5	1790.6	1795.1	1798.1	1801.9	1808.0	1814.1	1808.0
7.5°	1715.9	1744.3	1772.8	1786.8	1795.9	1803.1	1808.6	1813.5	1816.5	1819.5	1816.5
10°	1704.9	1738.3	1771.6	1786.8	1795.9	1801.9	1805.0	1808.0	1811.0	1814.1	1811.0
12.5°	1688.6	1724.3	1760.1	1777.7	1789.2	1796.5	1799.5	1802.5	1805.6	1808.6	1805.6
15°	1643.6	1692.1	1740.6	1759.5	1768.6	1776.2	1782.2	1787.5	1790.6	1793.6	1790.6
17.5°	1587.6	1646.4	1705.2	1729.0	1741.2	1750.0	1755.4	1760.1	1762.5	1765.0	1762.5
20°	1554.9	1618.6	1682.2	1707.2	1719.3	1726.9	1729.9	1732.2	1732.2	1732.2	1732.2
22.5°	1511.3	1582.2	1653.1	1679.9	1692.1	1698.4	1699.0	1700.1	1702.5	1704.9	1702.5
25°	1425.3	1507.2	1589.0	1623.1	1641.3	1648.9	1645.8	1645.1	1651.1	1657.2	1651.1
27.5°	1320.3	1423.4	1526.4	1561.3	1573.4	1581.0	1584.0	1586.3	1586.3	1586.3	1586.3
30°	1254.8	1370.0	1485.2	1523.1	1535.2	1542.8	1545.8	1548.1	1548.1	1548.1	1548.1
32.5°	1173.0	1310.0	1447.0	1488.5	1498.2	1503.4	1504.0	1504.4	1504.4	1504.4	1504.4
35°	1050.2	1216.9	1383.7	1429.9	1435.9	1439.0	1439.0	1438.2	1435.2	1432.2	1435.2
37.5°	927.5	1116.6	1305.8	1359.9	1369.0	1371.4	1367.1	1363.2	1360.2	1357.1	1360.2
40°	845.7	1051.8	1257.9	1316.2	1325.3	1325.3	1316.2	1308.6	1305.6	1302.6	1305.6
42.5°	802.0	1005.7	1209.4	1267.1	1276.2	1275.0	1263.5	1254.1	1251.0	1248.0	1251.0
45°	770.6	952.5	1134.4	1186.6	1195.7	1194.2	1182.1	1171.5	1165.4	1159.4	1165.4
47.5°	722.9	882.9	1043.0	1094.3	1109.5	1108.0	1089.8	1074.6	1068.6	1062.5	1068.6
50°	668.3	825.9	983.6	1034.3	1049.5	1048.0	1029.8	1014.6	1008.6	1002.5	1008.6
52.5°	630.1	778.1	926.0	972.5	985.2	981.3	960.7	943.7	937.6	931.6	937.6
55°	593.3	717.6	841.9	879.7	888.8	882.8	861.6	843.4	834.3	825.2	834.3
57.5°	507.4	625.6	743.8	780.6	790.3	783.1	758.8	738.0	727.7	717.4	727.7
60°	463.7	569.8	675.9	711.5	723.7	717.6	693.3	671.4	656.2	641.1	656.2
62.5°	414.6	508.6	602.6	638.8	655.8	652.1	627.9	605.9	590.7	575.6	590.7
65°	334.2	416.0	497.8	534.2	555.4	553.9	529.7	507.7	492.5	477.4	492.5
67.5°	261.9	332.2	402.5	438.3	462.5	461.3	434.6	411.6	399.5	387.4	399.5
70°	218.2	278.9	339.5	372.8	397.1	397.1	372.8	351.6	339.5	327.3	339.5
72.5°	191.0	237.0	283.1	314.6	341.3	341.3	314.6	292.2	282.5	272.8	282.5
75°	143.2	170.5	197.8	227.3	257.6	260.7	236.4	216.7	210.7	204.6	210.7
77.5°	103.7	116.4	129.1	152.3	179.0	182.0	161.4	145.3	142.9	140.5	142.9
80°	81.8	84.9	87.9	106.8	131.1	134.1	115.9	102.3	102.3	102.3	102.3
82.5°	54.6	57.6	60.6	74.1	91.1	92.9	79.6	69.0	66.5	64.1	66.5
85°	27.3	27.3	27.3	31.8	37.9	37.9	31.8	27.3	27.3	27.3	27.3
87.5°	6.9	8.7	11.1	14.8	18.6	19.1	16.7	15.3	15.8	15.8	15.8
90°	7.0	16.4	28.1	37.5	44.5	46.9	46.9	49.2	51.6	51.6	51.6
92.5°	25.8	40.8	41.3	41.3	50.2	54.4	58.1	58.6	60.9	60.9	60.9
95°	72.7	79.7	119.6	117.2	79.7	63.3	53.9	53.9	53.9	53.9	53.9
97.5°	138.8	149.1	155.7	208.6	220.4	212.9	173.5	145.8	130.3	123.3	130.3
100°	196.9	201.6	215.7	218.0	276.6	332.9	304.7	269.6	257.9	250.8	257.9
102.5°	255.0	257.9	279.4	289.3	302.9	334.7	432.3	421.5	413.5	412.1	413.5
105°	342.3	344.6	384.4	403.2	412.6	412.6	410.2	457.1	532.1	548.5	532.1
107.5°	435.5	446.3	493.2	543.4	554.2	557.0	544.8	537.8	534.9	536.8	534.9
110°	499.3	515.7	572.0	635.3	651.7	656.4	651.7	644.7	640.0	640.0	640.0



TEST NUMBER: P1435873

CATALOG NUMBER: SQ2W-FA-K-150U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	561.2	585.1	648.9	721.5	749.2	763.3	753.0	747.8	743.1	746.9	743.1
115°	656.4	691.5	775.9	850.9	907.2	914.2	911.9	911.9	909.5	909.5	909.5
117.5°	744.5	800.8	895.5	982.7	1047.9	1066.6	1076.0	1073.2	1070.4	1075.0	1070.4
120°	806.4	872.0	979.9	1078.3	1141.6	1169.7	1179.1	1174.4	1179.1	1174.4	1179.1
122.5°	872.0	952.7	1058.6	1160.8	1235.4	1267.3	1278.5	1279.5	1280.4	1277.6	1280.4
125°	970.5	1068.9	1193.2	1298.7	1376.0	1413.5	1422.9	1425.3	1430.0	1441.7	1430.0
127.5°	1069.9	1181.5	1317.9	1419.6	1498.9	1544.3	1558.9	1564.0	1573.9	1579.0	1573.9
130°	1139.3	1265.9	1404.2	1500.3	1577.6	1626.9	1652.7	1659.7	1671.4	1669.1	1671.4
132.5°	1212.4	1344.6	1484.8	1584.7	1656.4	1709.4	1731.4	1751.6	1755.8	1759.1	1755.8
135°	1319.8	1462.8	1603.4	1701.9	1769.9	1821.4	1849.6	1868.3	1880.0	1887.1	1880.0
137.5°	1432.8	1583.7	1718.8	1806.4	1874.9	1919.4	1951.3	1971.0	1983.2	1988.8	1983.2
140°	1509.7	1655.0	1786.3	1877.7	1938.6	1983.2	2011.3	2034.8	2048.8	2048.8	2048.8
142.5°	1582.8	1726.3	1853.8	1945.2	1998.7	2039.4	2069.4	2087.3	2103.2	2103.2	2103.2
145°	1685.5	1828.5	1945.7	2037.1	2081.6	2119.1	2152.0	2166.0	2175.4	2175.4	2175.4
147.5°	1792.8	1919.4	2026.3	2114.0	2151.5	2195.6	2221.3	2232.6	2244.3	2239.2	2244.3
150°	1856.6	1973.8	2076.9	2159.0	2196.5	2238.7	2264.5	2273.9	2285.6	2278.5	2285.6
152.5°	1918.5	2030.1	2123.8	2200.3	2232.1	2274.3	2303.9	2313.2	2321.2	2316.1	2321.2
155°	2001.9	2100.4	2187.1	2257.5	2285.6	2325.4	2353.6	2365.3	2374.7	2362.9	2374.7
157.5°	2076.5	2161.3	2236.8	2301.5	2331.5	2365.8	2392.0	2406.5	2415.9	2410.8	2415.9
160°	2121.5	2198.8	2266.8	2327.8	2355.9	2386.4	2414.5	2430.9	2440.3	2433.3	2440.3
162.5°	2159.0	2228.9	2293.1	2348.4	2372.8	2399.5	2433.3	2447.8	2457.2	2448.3	2457.2
165°	2212.9	2269.2	2325.4	2372.3	2393.4	2414.5	2449.7	2466.1	2473.1	2463.7	2473.1
167.5°	2253.7	2296.8	2342.3	2382.6	2398.1	2418.7	2453.9	2467.5	2476.4	2464.7	2476.4
170°	2276.2	2313.7	2353.6	2386.4	2398.1	2416.9	2452.0	2463.7	2470.8	2459.1	2470.8
172.5°	2295.0	2323.1	2355.4	2384.5	2390.6	2405.6	2438.9	2450.6	2455.8	2445.9	2455.8
175°	2313.7	2330.1	2353.6	2372.3	2370.0	2379.3	2407.5	2416.9	2426.2	2412.2	2426.2
177.5°	2322.6	2330.1	2337.6	2348.9	2341.4	2341.4	2362.0	2367.6	2369.5	2362.0	2369.5
180°	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7



TEST NUMBER: P1435873

CATALOG NUMBER: SQ2W-FA-K-150U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	1759.5	1759.5	1759.5	1759.5	1759.5	1759.5	1759.5	1759.5	1759.5	1759.5	1759.5
2.5°	1775.9	1775.9	1775.9	1775.9	1775.9	1772.8	1760.7	1748.6	1748.6	1748.6	1739.5
5°	1801.9	1798.1	1795.1	1790.6	1784.5	1774.7	1753.4	1732.2	1723.1	1714.0	1675.4
7.5°	1813.5	1808.6	1803.1	1795.9	1786.8	1772.8	1744.3	1715.9	1675.2	1634.6	1548.5
10°	1808.0	1805.0	1801.9	1795.9	1786.8	1771.6	1738.3	1704.9	1623.1	1541.3	1459.4
12.5°	1802.5	1799.5	1796.5	1789.2	1777.7	1760.1	1724.3	1688.6	1572.8	1457.0	1383.0
15°	1787.5	1782.2	1776.2	1768.6	1759.5	1740.6	1692.1	1643.6	1513.2	1382.9	1320.8
17.5°	1760.1	1755.4	1750.0	1741.2	1729.0	1705.2	1646.4	1587.6	1451.2	1314.9	1274.8
20°	1732.2	1729.9	1726.9	1719.3	1707.2	1682.2	1618.6	1554.9	1418.5	1282.1	1263.9
22.5°	1700.1	1699.0	1698.4	1692.1	1679.9	1653.1	1582.2	1511.3	1377.3	1243.3	1243.9
25°	1645.1	1645.8	1648.9	1641.3	1623.1	1589.0	1507.2	1425.3	1307.1	1188.9	1209.4
27.5°	1586.3	1584.0	1581.0	1573.4	1561.3	1526.4	1423.4	1320.3	1227.0	1133.6	1167.5
30°	1548.1	1545.8	1542.8	1535.2	1523.1	1485.2	1370.0	1254.8	1176.0	1097.2	1136.6
32.5°	1504.4	1504.0	1503.4	1498.2	1488.5	1447.0	1310.0	1173.0	1116.0	1059.0	1100.3
35°	1438.2	1439.0	1439.0	1435.9	1429.9	1383.7	1216.9	1050.2	1026.0	1001.7	1050.2
37.5°	1363.2	1367.1	1371.4	1369.0	1359.9	1305.8	1116.6	927.5	935.4	943.2	1002.1
40°	1308.6	1316.2	1325.3	1325.3	1316.2	1257.9	1051.8	845.7	872.9	900.2	963.9
42.5°	1254.1	1263.5	1275.0	1276.2	1267.1	1209.4	1005.7	802.0	831.7	861.4	927.5
45°	1171.5	1182.1	1194.2	1195.7	1186.6	1134.4	952.5	770.6	788.8	807.0	870.7
47.5°	1074.6	1089.8	1108.0	1109.5	1094.3	1043.0	882.9	722.9	736.2	749.6	814.7
50°	1014.6	1029.8	1048.0	1049.5	1034.3	983.6	825.9	668.3	686.5	704.7	772.9
52.5°	943.7	960.7	981.3	985.2	972.5	926.0	778.1	630.1	641.1	652.0	725.6
55°	843.4	861.6	882.8	888.8	879.7	841.9	717.6	593.3	584.2	575.1	650.2
57.5°	738.0	758.8	783.1	790.3	780.6	743.8	625.6	507.4	499.5	491.6	572.9
60°	671.4	693.3	717.6	723.7	711.5	675.9	569.8	463.7	448.6	433.4	518.3
62.5°	605.9	627.9	652.1	655.8	638.8	602.6	508.6	414.6	404.3	394.0	476.5
65°	507.7	529.7	553.9	555.4	534.2	497.8	416.0	334.2	340.2	346.3	420.6
67.5°	411.6	434.6	461.3	462.5	438.3	402.5	332.2	261.9	281.9	301.9	368.7
70°	351.6	372.8	397.1	397.1	372.8	339.5	278.9	218.2	245.5	272.8	334.2
72.5°	292.2	314.6	341.3	341.3	314.6	283.1	237.0	191.0	218.2	245.5	296.0
75°	216.7	236.4	260.7	257.6	227.3	197.8	170.5	143.2	170.5	197.8	236.4
77.5°	145.3	161.4	182.0	179.0	152.3	129.1	116.4	103.7	126.1	148.5	175.5
80°	102.3	115.9	134.1	131.1	106.8	87.9	84.9	81.8	97.0	112.1	131.8
82.5°	69.0	79.6	92.9	91.1	74.1	60.6	57.6	54.6	67.3	80.0	93.7
85°	27.3	31.8	37.9	37.9	31.8	27.3	27.3	27.3	33.3	39.4	45.5
87.5°	15.3	16.7	19.1	18.6	14.8	11.1	8.7	6.9	11.2	15.5	19.4
90°	49.2	46.9	46.9	44.5	37.5	28.1	16.4	7.0	16.4	25.8	42.2
92.5°	58.6	58.1	54.4	50.2	41.3	41.3	40.8	25.8	44.5	63.3	91.0
95°	53.9	53.9	63.3	79.7	117.2	119.6	79.7	72.7	103.1	145.3	182.8
97.5°	145.8	173.5	212.9	220.4	208.6	155.7	149.1	138.8	188.9	230.7	291.1
100°	269.6	304.7	332.9	276.6	218.0	215.7	201.6	196.9	250.8	290.7	349.3
102.5°	421.5	432.3	334.7	302.9	289.3	279.4	257.9	255.0	309.0	363.8	413.0
105°	457.1	410.2	412.6	412.6	403.2	384.4	344.6	342.3	403.2	466.5	527.4
107.5°	537.8	544.8	557.0	554.2	543.4	493.2	446.3	435.5	490.4	566.4	633.4
110°	644.7	651.7	656.4	651.7	635.3	572.0	515.7	499.3	548.5	628.2	700.9



TEST NUMBER: P1435873

CATALOG NUMBER: SQ2W-FA-K-150U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	747.8	753.0	763.3	749.2	721.5	648.9	585.1	561.2	610.4	692.0	766.5
115°	911.9	911.9	914.2	907.2	850.9	775.9	691.5	656.4	698.6	773.6	855.6
117.5°	1073.2	1076.0	1066.6	1047.9	982.7	895.5	800.8	744.5	777.8	857.0	941.4
120°	1174.4	1179.1	1169.7	1141.6	1078.3	979.9	872.0	806.4	832.2	909.5	993.9
122.5°	1279.5	1278.5	1267.3	1235.4	1160.8	1058.6	952.7	872.0	882.8	954.6	1037.1
125°	1425.3	1422.9	1413.5	1376.0	1298.7	1193.2	1068.9	970.5	956.4	1017.4	1101.8
127.5°	1564.0	1558.9	1544.3	1498.9	1419.6	1317.9	1181.5	1069.9	1038.5	1076.9	1154.3
130°	1659.7	1652.7	1626.9	1577.6	1500.3	1404.2	1265.9	1139.3	1094.7	1118.2	1186.2
132.5°	1751.6	1731.4	1709.4	1656.4	1584.7	1484.8	1344.6	1212.4	1151.0	1161.3	1214.3
135°	1868.3	1849.6	1821.4	1769.9	1701.9	1603.4	1462.8	1319.8	1235.4	1226.0	1256.5
137.5°	1971.0	1951.3	1919.4	1874.9	1806.4	1718.8	1583.7	1432.8	1326.3	1294.9	1306.6
140°	2034.8	2011.3	1983.2	1938.6	1877.7	1786.3	1655.0	1509.7	1390.1	1345.6	1338.5
142.5°	2087.3	2069.4	2039.4	1998.7	1945.2	1853.8	1726.3	1582.8	1455.7	1398.1	1381.7
145°	2166.0	2152.0	2119.1	2081.6	2037.1	1945.7	1828.5	1685.5	1558.9	1483.9	1448.7
147.5°	2232.6	2221.3	2195.6	2151.5	2114.0	2026.3	1919.4	1792.8	1663.0	1570.1	1524.7
150°	2273.9	2264.5	2238.7	2196.5	2159.0	2076.9	1973.8	1856.6	1732.4	1633.9	1575.3
152.5°	2313.2	2303.9	2274.3	2232.1	2200.3	2123.8	2030.1	1918.5	1792.4	1693.9	1633.4
155°	2365.3	2353.6	2325.4	2285.6	2257.5	2187.1	2100.4	2001.9	1894.1	1791.0	1723.0
157.5°	2406.5	2392.0	2365.8	2331.5	2301.5	2236.8	2161.3	2076.5	1982.2	1883.8	1814.4
160°	2430.9	2414.5	2386.4	2355.9	2327.8	2266.8	2198.8	2121.5	2034.8	1945.7	1870.7
162.5°	2447.8	2433.3	2399.5	2372.8	2348.4	2293.1	2228.9	2159.0	2081.6	2003.8	1934.4
165°	2466.1	2449.7	2414.5	2393.4	2372.3	2325.4	2269.2	2212.9	2147.3	2084.0	2027.7
167.5°	2467.5	2453.9	2418.7	2398.1	2382.6	2342.3	2296.8	2253.7	2202.6	2152.9	2106.0
170°	2463.7	2452.0	2416.9	2398.1	2386.4	2353.6	2313.7	2276.2	2236.4	2194.2	2156.7
172.5°	2450.6	2438.9	2405.6	2390.6	2384.5	2355.4	2323.1	2295.0	2260.7	2229.8	2199.8
175°	2416.9	2407.5	2379.3	2370.0	2372.3	2353.6	2330.1	2313.7	2292.6	2273.9	2257.5
177.5°	2367.6	2362.0	2341.4	2341.4	2348.9	2337.6	2330.1	2322.6	2313.2	2307.6	2302.0
180°	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7



TEST NUMBER: P1435873

CATALOG NUMBER: SQ2W-FA-K-150U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	1759.5	1759.5	1759.5	1759.5	1759.5	1759.5	1759.5	1759.5	1759.5	1759.5	1759.5
2.5°	1727.4	1717.7	1710.4	1704.3	1701.9	1699.5	1701.9	1704.3	1710.4	1717.7	1727.4
5°	1626.9	1575.4	1520.8	1476.1	1460.9	1445.8	1460.9	1476.1	1520.8	1575.4	1626.9
7.5°	1447.3	1385.2	1362.1	1343.6	1338.8	1333.9	1338.8	1343.6	1362.1	1385.2	1447.3
10°	1377.6	1327.6	1309.4	1295.8	1295.8	1295.8	1295.8	1295.8	1309.4	1327.6	1377.6
12.5°	1323.0	1292.4	1291.2	1293.3	1305.5	1317.6	1305.5	1293.3	1291.2	1292.4	1323.0
15°	1281.4	1285.9	1334.4	1374.6	1389.7	1404.9	1389.7	1374.6	1334.4	1285.9	1281.4
17.5°	1267.0	1293.0	1353.0	1401.1	1413.2	1425.3	1413.2	1401.1	1353.0	1293.0	1267.0
20°	1285.1	1318.5	1364.0	1401.1	1413.2	1425.3	1413.2	1401.1	1364.0	1318.5	1285.1
22.5°	1289.4	1330.0	1365.8	1395.6	1407.8	1419.9	1407.8	1395.6	1365.8	1330.0	1289.4
25°	1276.1	1324.5	1354.9	1379.1	1385.2	1391.2	1385.2	1379.1	1354.9	1324.5	1276.1
27.5°	1243.9	1297.3	1327.6	1351.4	1355.6	1359.9	1355.6	1351.4	1327.6	1297.3	1243.9
30°	1215.4	1270.0	1300.3	1325.3	1334.4	1343.5	1334.4	1325.3	1300.3	1270.0	1215.4
32.5°	1174.2	1230.0	1267.6	1296.2	1298.0	1299.8	1298.0	1296.2	1267.6	1230.0	1174.2
35°	1123.0	1180.6	1223.0	1254.1	1251.0	1248.0	1251.0	1254.1	1223.0	1180.6	1123.0
37.5°	1077.8	1134.2	1171.2	1199.8	1203.5	1207.1	1203.5	1199.8	1171.2	1134.2	1077.8
40°	1039.6	1097.2	1136.6	1167.7	1173.8	1179.8	1173.8	1167.7	1136.6	1097.2	1039.6
42.5°	1005.7	1064.5	1103.9	1135.0	1141.0	1147.1	1141.0	1135.0	1103.9	1064.5	1005.7
45°	949.5	1010.1	1052.5	1085.1	1088.1	1091.2	1088.1	1085.1	1052.5	1010.1	949.5
47.5°	897.2	958.1	997.5	1027.8	1030.8	1033.9	1030.8	1027.8	997.5	958.1	897.2
50°	857.8	919.9	959.3	989.6	992.7	995.7	992.7	989.6	959.3	919.9	857.8
52.5°	820.2	884.8	919.3	946.0	949.0	952.0	949.0	946.0	919.3	884.8	820.2
55°	753.2	821.4	854.7	879.7	879.7	879.7	879.7	854.7	821.4	753.2	753.2
57.5°	683.8	753.8	782.9	805.6	809.3	812.9	809.3	805.6	782.9	753.8	683.8
60°	636.5	707.7	732.0	751.7	757.8	763.8	757.8	751.7	732.0	707.7	636.5
62.5°	589.8	658.6	682.9	702.0	705.6	709.3	705.6	702.0	682.9	658.6	589.8
65°	517.5	578.2	602.4	621.4	624.4	627.4	624.4	621.4	602.4	578.2	517.5
67.5°	451.2	500.9	517.8	531.2	533.6	536.0	533.6	531.2	517.8	500.9	451.2
70°	406.9	449.3	461.5	470.6	470.6	470.6	470.6	461.5	449.3	406.9	406.9
72.5°	354.2	389.3	401.5	411.2	413.6	416.0	413.6	411.2	401.5	389.3	354.2
75°	278.9	304.6	313.7	321.3	324.3	327.3	324.3	321.3	313.7	304.6	278.9
77.5°	204.0	221.0	226.4	231.3	234.3	237.3	234.3	231.3	226.4	221.0	204.0
80°	153.1	165.2	168.2	171.3	174.3	177.3	174.3	171.3	168.2	165.2	153.1
82.5°	107.6	116.1	119.1	121.5	122.1	122.8	122.1	121.5	119.1	116.1	107.6
85°	51.5	54.6	54.6	54.6	54.6	54.6	54.6	54.6	54.6	54.6	51.5
87.5°	21.7	25.0	28.3	30.1	32.0	31.1	32.0	30.1	28.3	25.0	21.7
90°	53.9	70.3	86.7	96.1	105.5	100.8	105.5	96.1	86.7	70.3	53.9
92.5°	108.3	136.0	156.1	173.0	180.5	179.6	180.5	173.0	156.1	136.0	108.3
95°	218.0	250.8	283.6	307.1	321.2	316.5	321.2	307.1	283.6	250.8	218.0
97.5°	336.2	380.2	416.8	438.8	452.9	462.3	452.9	438.8	416.8	380.2	336.2
100°	414.9	457.1	499.3	525.1	548.5	557.9	548.5	525.1	499.3	457.1	414.9
102.5°	478.7	534.0	580.0	607.6	627.3	636.7	627.3	607.6	580.0	534.0	478.7
105°	583.7	642.3	691.5	726.7	747.8	754.8	747.8	726.7	691.5	642.3	583.7
107.5°	688.7	749.2	794.7	833.6	859.4	874.4	859.4	833.6	794.7	749.2	688.7
110°	771.2	820.5	869.7	904.9	930.6	940.0	930.6	904.9	869.7	820.5	771.2



TEST NUMBER: P1435873

CATALOG NUMBER: SQ2W-FA-K-150U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	840.6	895.5	944.7	979.9	1009.4	1022.5	1009.4	979.9	944.7	895.5	840.6
115°	937.7	1010.3	1054.9	1087.7	1108.8	1120.5	1108.8	1087.7	1054.9	1010.3	937.7
117.5°	1018.3	1094.3	1143.0	1168.3	1178.2	1186.6	1178.2	1168.3	1143.0	1094.3	1018.3
120°	1068.9	1139.3	1195.5	1228.4	1240.1	1244.8	1240.1	1228.4	1195.5	1139.3	1068.9
122.5°	1115.8	1182.4	1236.8	1277.1	1296.3	1301.0	1296.3	1277.1	1236.8	1182.4	1115.8
125°	1181.5	1244.8	1301.0	1340.9	1362.0	1373.7	1362.0	1340.9	1301.0	1244.8	1181.5
127.5°	1238.7	1307.1	1358.7	1394.8	1415.4	1424.8	1415.4	1394.8	1358.7	1307.1	1238.7
130°	1270.5	1340.9	1392.4	1432.3	1451.1	1460.4	1451.1	1432.3	1392.4	1340.9	1270.5
132.5°	1294.9	1369.0	1422.5	1458.6	1479.2	1488.6	1479.2	1458.6	1422.5	1369.0	1294.9
135°	1324.5	1401.8	1458.1	1493.2	1512.0	1521.4	1512.0	1493.2	1458.1	1401.8	1324.5
137.5°	1350.3	1420.6	1479.2	1516.2	1533.1	1539.2	1533.1	1516.2	1479.2	1420.6	1350.3
140°	1369.0	1430.0	1488.6	1523.7	1542.5	1544.8	1542.5	1523.7	1488.6	1430.0	1369.0
142.5°	1393.4	1441.2	1492.3	1527.5	1546.2	1550.4	1546.2	1527.5	1492.3	1441.2	1393.4
145°	1437.0	1465.1	1500.3	1533.1	1549.5	1554.2	1549.5	1533.1	1500.3	1465.1	1437.0
147.5°	1491.8	1500.7	1519.0	1540.6	1556.5	1559.8	1556.5	1540.6	1519.0	1500.7	1491.8
150°	1533.1	1530.8	1537.8	1551.9	1565.9	1563.6	1565.9	1551.9	1537.8	1530.8	1533.1
152.5°	1580.0	1566.4	1565.9	1572.5	1579.0	1578.6	1579.0	1572.5	1565.9	1566.4	1580.0
155°	1659.7	1633.9	1619.8	1615.1	1615.1	1612.8	1615.1	1615.1	1619.8	1633.9	1659.7
157.5°	1747.4	1711.3	1690.2	1678.9	1675.6	1670.5	1675.6	1678.9	1690.2	1711.3	1747.4
160°	1807.4	1767.5	1746.4	1727.7	1720.6	1713.6	1720.6	1727.7	1746.4	1767.5	1807.4
162.5°	1863.6	1825.7	1802.7	1785.8	1778.8	1768.0	1778.8	1785.8	1802.7	1825.7	1863.6
165°	1955.1	1915.2	1889.4	1875.3	1866.0	1856.6	1866.0	1875.3	1889.4	1915.2	1955.1
167.5°	2046.5	2002.9	1986.0	1970.1	1961.1	1944.3	1961.1	1970.1	1986.0	2002.9	2046.5
170°	2102.7	2062.9	2053.5	2039.4	2023.0	2004.3	2023.0	2039.4	2053.5	2062.9	2102.7
172.5°	2151.5	2124.8	2115.4	2101.3	2096.2	2081.2	2096.2	2101.3	2115.4	2124.8	2151.5
175°	2222.3	2201.2	2201.2	2198.8	2191.8	2177.7	2191.8	2198.8	2201.2	2201.2	2222.3
177.5°	2281.4	2270.1	2277.6	2277.6	2275.7	2262.6	2275.7	2277.6	2277.6	2270.1	2281.4
180°	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7



TEST NUMBER: P1435873

CATALOG NUMBER: SQ2W-FA-K-150U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	1759.5	1759.5	1759.5	1759.5
2.5°	1739.5	1748.6	1748.6	1748.6
5°	1675.4	1714.0	1723.1	1732.2
7.5°	1548.5	1634.6	1675.2	1715.9
10°	1459.4	1541.3	1623.1	1704.9
12.5°	1383.0	1457.0	1572.8	1688.6
15°	1320.8	1382.9	1513.2	1643.6
17.5°	1274.8	1314.9	1451.2	1587.6
20°	1263.9	1282.1	1418.5	1554.9
22.5°	1243.9	1243.3	1377.3	1511.3
25°	1209.4	1188.9	1307.1	1425.3
27.5°	1167.5	1133.6	1227.0	1320.3
30°	1136.6	1097.2	1176.0	1254.8
32.5°	1100.3	1059.0	1116.0	1173.0
35°	1050.2	1001.7	1026.0	1050.2
37.5°	1002.1	943.2	935.4	927.5
40°	963.9	900.2	872.9	845.7
42.5°	927.5	861.4	831.7	802.0
45°	870.7	807.0	788.8	770.6
47.5°	814.7	749.6	736.2	722.9
50°	772.9	704.7	686.5	668.3
52.5°	725.6	652.0	641.1	630.1
55°	650.2	575.1	584.2	593.3
57.5°	572.9	491.6	499.5	507.4
60°	518.3	433.4	448.6	463.7
62.5°	476.5	394.0	404.3	414.6
65°	420.6	346.3	340.2	334.2
67.5°	368.7	301.9	281.9	261.9
70°	334.2	272.8	245.5	218.2
72.5°	296.0	245.5	218.2	191.0
75°	236.4	197.8	170.5	143.2
77.5°	175.5	148.5	126.1	103.7
80°	131.8	112.1	97.0	81.8
82.5°	93.7	80.0	67.3	54.6
85°	45.5	39.4	33.3	27.3
87.5°	19.4	15.5	11.2	6.9
90°	42.2	25.8	16.4	7.0
92.5°	91.0	63.3	44.5	25.8
95°	182.8	145.3	103.1	72.7
97.5°	291.1	230.7	188.9	138.8
100°	349.3	290.7	250.8	196.9
102.5°	413.0	363.8	309.0	255.0
105°	527.4	466.5	403.2	342.3
107.5°	633.4	566.4	490.4	435.5
110°	700.9	628.2	548.5	499.3



TEST NUMBER: P1435873

CATALOG NUMBER: SQ2W-FA-K-150U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	766.5	692.0	610.4	561.2
115°	855.6	773.6	698.6	656.4
117.5°	941.4	857.0	777.8	744.5
120°	993.9	909.5	832.2	806.4
122.5°	1037.1	954.6	882.8	872.0
125°	1101.8	1017.4	956.4	970.5
127.5°	1154.3	1076.9	1038.5	1069.9
130°	1186.2	1118.2	1094.7	1139.3
132.5°	1214.3	1161.3	1151.0	1212.4
135°	1256.5	1226.0	1235.4	1319.8
137.5°	1306.6	1294.9	1326.3	1432.8
140°	1338.5	1345.6	1390.1	1509.7
142.5°	1381.7	1398.1	1455.7	1582.8
145°	1448.7	1483.9	1558.9	1685.5
147.5°	1524.7	1570.1	1663.0	1792.8
150°	1575.3	1633.9	1732.4	1856.6
152.5°	1633.4	1693.9	1792.4	1918.5
155°	1723.0	1791.0	1894.1	2001.9
157.5°	1814.4	1883.8	1982.2	2076.5
160°	1870.7	1945.7	2034.8	2121.5
162.5°	1934.4	2003.8	2081.6	2159.0
165°	2027.7	2084.0	2147.3	2212.9
167.5°	2106.0	2152.9	2202.6	2253.7
170°	2156.7	2194.2	2236.4	2276.2
172.5°	2199.8	2229.8	2260.7	2295.0
175°	2257.5	2273.9	2292.6	2313.7
177.5°	2302.0	2307.6	2313.2	2322.6
180°	2320.7	2320.7	2320.7	2320.7



TEST NUMBER: P1435873
 CATALOG NUMBER: SQ2W-FA-K-150U-100D-L840-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	16.92	17.69	17.96	18.74	20.16	18.12	18.89	19.16	19.94	21.36
	3H	18.00	18.69	19.06	19.75	21.19	19.36	20.05	20.41	21.10	22.54
	4H	18.35	19.00	19.42	20.06	21.51	19.74	20.40	20.81	21.46	22.90
	6H	18.51	19.11	19.58	20.17	21.63	19.90	20.50	20.97	21.56	23.02
	8H	18.54	19.11	19.62	20.19	21.64	19.92	20.49	21.00	21.57	23.02
	12H	18.53	19.08	19.62	20.15	21.62	19.90	20.44	20.98	21.52	22.99
4H	2H	17.78	18.43	18.85	19.49	20.93	18.69	19.34	19.76	20.41	21.85
	3H	19.16	19.70	20.24	20.79	22.25	20.15	20.69	21.23	21.78	23.23
	4H	19.61	20.11	20.69	21.19	22.66	20.62	21.12	21.70	22.20	23.67
	6H	19.83	20.26	20.93	21.36	22.83	20.83	21.26	21.93	22.37	23.84
	8H	19.89	20.29	20.98	21.38	22.87	20.88	21.28	21.98	22.37	23.86
	12H	19.88	20.25	21.00	21.35	22.85	20.87	21.23	21.98	22.33	23.83
8H	4H	19.98	20.38	21.08	21.48	22.96	20.81	21.21	21.90	22.30	23.79
	6H	20.33	20.66	21.45	21.80	23.28	21.12	21.45	22.23	22.58	24.07
	8H	20.45	20.74	21.57	21.85	23.36	21.21	21.50	22.33	22.62	24.12
	12H	20.48	20.73	21.61	21.85	23.39	21.22	21.48	22.35	22.59	24.13
12H	4H	19.98	20.34	21.09	21.45	22.94	20.77	21.13	21.88	22.24	23.73
	6H	20.40	20.69	21.52	21.81	23.31	21.13	21.42	22.26	22.54	24.04
	8H	20.54	20.80	21.67	21.91	23.45	21.24	21.50	22.37	22.61	24.15