

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1436047

Luminaire Tested: SQ2W-FB-K-150U-125D-L840-UNV-STD-W-WM-4

Issue Date: 3/24/2026

Test Information

Test Method: LM-79-2019
Report Number: P1436047
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-12)
Test Lab: INNOVATION CENTER
Issue Date: 3/24/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-FB-K-150U-125D-L840-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - FROSTED CONTINUOUS BATWING ROLL LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 1250 LUMENS PER FOOT
UPLIGHT 1500 LUMENS PER FOOT
Light Source: 4000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12567.6 lumens
Efficiency: N/A
Efficacy: 120.5 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 2.98 / 2.52
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 104.3
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1436047

CATALOG NUMBER: SQ2W-FB-K-150U-125D-L840-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

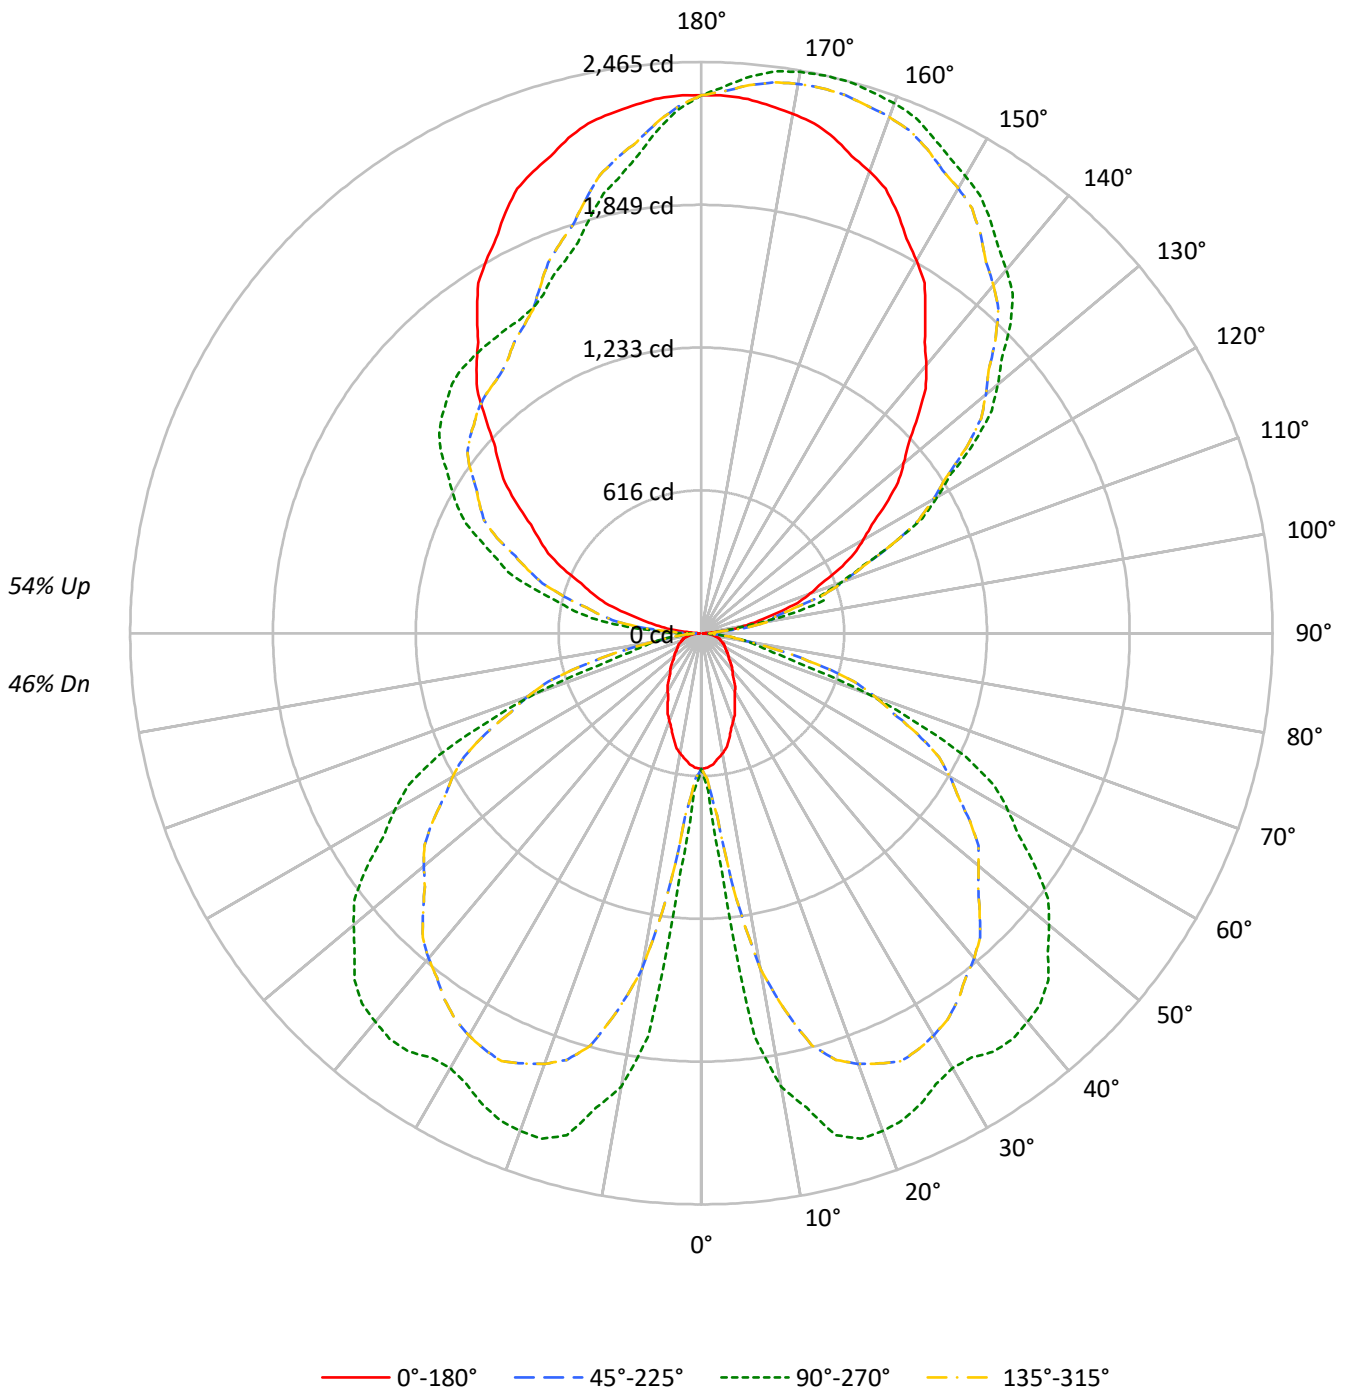



TEST NUMBER: P1436047

CATALOG NUMBER: SQ2W-FB-K-150U-125D-L840-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	53	53	53	46
1	97	92	88	85	89	85	82	78	71	68	66	58	56	55	46	45	44	38
2	88	80	74	69	80	74	68	64	62	58	54	50	48	45	40	38	36	32
3	80	70	63	57	73	65	58	53	54	49	45	44	41	38	35	33	31	26
4	73	62	54	47	66	57	50	44	48	42	38	39	35	32	31	28	26	22
5	66	55	46	40	61	50	43	38	42	37	32	35	30	27	28	25	22	19
6	61	49	40	35	56	45	38	32	38	32	28	31	27	23	25	22	19	16
7	56	44	36	30	51	40	33	28	34	28	24	28	24	20	22	19	17	14
8	52	39	32	26	47	36	29	25	31	25	21	25	21	18	20	17	15	12
9	48	36	28	23	44	33	26	22	28	23	19	23	19	16	19	16	13	11
10	45	33	25	20	41	30	24	19	26	20	17	21	17	14	17	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	9452	9452	9452	9452
5°	9214	16740	9214	16740
10°	8628	32576	8628	32576
15°	7809	37495	7809	37495
20°	6916	39267	6916	39267
25°	6118	39910	6118	39910
30°	5405	40404	5405	40404
35°	4827	43437	4827	43437
40°	4390	46151	4390	46151
45°	4048	48327	4048	48327
50°	3818	49204	3818	49204
55°	3724	49596	3724	49596
60°	3817	49350	3817	49350
65°	3977	47957	3977	47957
70°	4116	36273	4116	36273
75°	4566	20018	4566	20018
80°	4714	18577	4714	18577
85°	4687	7818	4687	7818

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 52.5°
 Luminance: 50042 cd/sqm



TEST NUMBER: P1436047

CATALOG NUMBER: SQ2W-FB-K-150U-125D-L840-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	98.1	0.8
10°-20°	447.5	3.6
20°-30°	787.5	6.3
30°-40°	1019.4	8.1
40°-50°	1124.3	8.9
50°-60°	1049.3	8.3
60°-70°	810.7	6.5
70°-80°	373.7	3.0
80°-90°	81.0	0.6
90°-100°	184.7	1.5
100°-110°	538.6	4.3
110°-120°	879.0	7.0
120°-130°	1115.4	8.9
130°-140°	1193.5	9.5
140°-150°	1114.5	8.9
150°-160°	917.1	7.3
160°-170°	615.0	4.9
170°-180°	218.4	1.7
0°-30°	1333.1	10.6
0°-40°	2352.5	18.7
0°-60°	4526.1	36.0
0°-90°	5791.5	46.1
90°-120°	1602.3	12.7
90°-150°	5025.7	40.0
90°-180°	6776.0	53.9
0°-180°	12567.6	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	585	585	585	585	585	
5°	568	1033	568	1033	568	53
15°	467	2243	467	2243	467	130
25°	343	2240	343	2240	343	158
35°	245	2204	245	2204	245	154
45°	177	2116	177	2116	177	137
55°	132	1762	132	1762	132	119
65°	104	1255	104	1255	104	102
75°	73	321	73	321	73	75
85°	25	42	25	42	25	27
90°	7	52	7	101	7	7
95°	73	54	73	316	73	88
105°	342	548	342	755	342	364
115°	656	910	656	1120	656	647
125°	970	1442	970	1374	970	868
135°	1320	1887	1320	1521	1320	1020
145°	1686	2175	1686	1554	1686	1055
155°	2002	2363	2002	1613	2002	920
165°	2213	2464	2213	1857	2213	623
175°	2314	2412	2314	2178	2314	220
180°	2321	2321	2321	2321	2321	



TEST NUMBER: P1436047

CATALOG NUMBER: SQ2W-FB-K-150U-125D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	585.4	585.4	585.4	585.4	585.4	585.4	585.4	585.4	585.4	585.4	585.4
2.5°	580.9	591.9	602.9	614.7	626.7	639.7	653.7	665.7	671.7	677.7	671.7
5°	568.5	606.1	643.6	698.0	758.0	826.2	902.5	967.9	1000.4	1032.9	1000.4
7.5°	546.6	622.9	699.2	860.9	1051.0	1248.4	1453.0	1622.8	1687.8	1752.9	1687.8
10°	526.3	632.6	739.0	1013.2	1343.5	1597.4	1775.0	1917.0	1952.0	1987.0	1952.0
12.5°	503.8	648.1	792.5	1131.1	1534.3	1798.3	1922.9	2025.3	2061.3	2097.4	2061.3
15°	467.2	673.6	880.0	1262.8	1704.3	1975.8	2077.1	2163.1	2203.1	2243.2	2203.1
17.5°	429.5	704.2	978.9	1369.4	1798.4	2063.1	2163.4	2244.1	2265.9	2287.6	2265.9
20°	402.5	725.2	1047.9	1439.2	1853.2	2103.4	2189.7	2257.9	2271.6	2285.4	2271.6
22.5°	377.7	738.5	1099.2	1490.9	1893.0	2126.6	2191.9	2244.6	2259.4	2274.1	2259.4
25°	343.4	749.9	1156.4	1547.0	1932.3	2145.6	2186.9	2220.3	2230.3	2240.3	2230.3
27.5°	310.2	739.7	1169.3	1554.9	1925.9	2125.0	2152.0	2174.7	2184.4	2194.2	2184.4
30°	289.9	726.5	1163.0	1545.2	1909.2	2101.2	2121.2	2139.7	2153.4	2167.2	2153.4
32.5°	271.9	710.4	1149.0	1526.4	1883.4	2071.4	2090.4	2112.1	2141.9	2171.7	2141.9
35°	244.9	676.4	1108.0	1481.4	1835.4	2027.4	2057.4	2093.7	2148.7	2203.8	2148.7
37.5°	221.8	632.8	1043.9	1413.4	1769.2	1978.5	2041.3	2101.6	2154.7	2207.7	2154.7
40°	208.3	602.3	996.3	1363.2	1720.9	1941.7	2025.5	2099.6	2144.7	2189.7	2144.7
42.5°	194.8	567.8	940.8	1304.6	1665.4	1894.7	1992.5	2077.1	2122.1	2167.2	2122.1
45°	177.3	512.6	847.8	1208.4	1577.4	1819.4	1934.5	2031.4	2074.0	2116.5	2074.0
47.5°	161.0	452.2	743.4	1105.5	1491.3	1745.2	1867.3	1966.7	1997.7	2028.7	1997.7
50°	152.0	412.2	672.4	1035.7	1433.5	1692.5	1812.5	1908.9	1933.9	1958.9	1933.9
52.5°	143.0	373.1	603.3	967.4	1376.2	1637.2	1750.2	1840.8	1863.8	1886.8	1863.8
55°	132.3	319.9	507.5	867.8	1285.6	1543.9	1642.7	1721.9	1741.9	1761.9	1741.9
57.5°	122.7	274.1	425.4	774.4	1189.2	1438.7	1523.0	1590.3	1606.6	1622.8	1606.6
60°	118.2	249.6	380.9	715.8	1118.6	1358.2	1434.5	1495.8	1512.0	1528.3	1512.0
62.5°	111.5	225.8	340.1	657.3	1042.1	1269.6	1339.9	1396.4	1411.7	1427.0	1411.7
65°	104.1	196.7	289.3	575.1	925.3	1129.9	1188.7	1235.3	1245.3	1255.3	1245.3
67.5°	94.0	172.6	251.1	499.9	805.3	976.3	1012.8	1035.6	1016.8	998.0	1016.8
70°	87.2	159.8	232.4	454.1	725.5	867.5	880.0	875.9	822.1	768.4	822.1
72.5°	82.7	147.3	211.8	403.8	638.2	741.7	714.1	668.0	566.2	464.4	566.2
75°	73.2	125.7	178.3	322.7	497.9	525.4	405.3	315.9	318.4	320.9	318.4
77.5°	59.7	98.9	138.2	227.0	332.4	353.3	289.7	242.6	244.9	247.1	244.9
80°	50.7	81.9	113.2	148.2	184.5	201.4	198.9	197.3	198.6	199.8	198.6
82.5°	41.7	64.9	88.2	109.2	129.5	140.9	143.4	144.8	143.0	141.3	143.0
85°	25.3	39.1	52.9	61.0	67.2	65.4	55.4	47.2	44.7	42.2	44.7
87.5°	10.4	17.3	24.6	24.8	22.2	20.6	20.6	21.1	21.6	21.6	21.6
90°	7.0	16.4	28.1	37.5	44.5	46.9	46.9	49.2	51.6	51.6	51.6
92.5°	25.8	40.8	41.3	41.3	50.2	54.4	58.1	58.6	60.9	60.9	60.9
95°	72.7	79.7	119.6	117.2	79.7	63.3	53.9	53.9	53.9	53.9	53.9
97.5°	138.8	149.1	155.7	208.6	220.4	212.9	173.5	145.8	130.3	123.3	130.3
100°	196.9	201.6	215.7	218.0	276.6	332.9	304.7	269.6	257.9	250.8	257.9
102.5°	255.0	257.9	279.4	289.3	302.9	334.7	432.3	421.5	413.5	412.1	413.5
105°	342.3	344.6	384.4	403.2	412.6	412.6	410.2	457.1	532.1	548.5	532.1
107.5°	435.5	446.3	493.2	543.4	554.2	557.0	544.8	537.8	534.9	536.8	534.9
110°	499.3	515.7	572.0	635.3	651.7	656.4	651.7	644.7	640.0	640.0	640.0



TEST NUMBER: P1436047

CATALOG NUMBER: SQ2W-FB-K-150U-125D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	561.2	585.1	648.9	721.5	749.2	763.3	753.0	747.8	743.1	746.9	743.1
115°	656.4	691.5	775.9	850.9	907.2	914.2	911.9	911.9	909.5	909.5	909.5
117.5°	744.5	800.8	895.5	982.7	1047.9	1066.6	1076.0	1073.2	1070.4	1075.0	1070.4
120°	806.4	872.0	979.9	1078.3	1141.6	1169.7	1179.1	1174.4	1179.1	1174.4	1179.1
122.5°	872.0	952.7	1058.6	1160.8	1235.4	1267.3	1278.5	1279.5	1280.4	1277.6	1280.4
125°	970.5	1068.9	1193.2	1298.7	1376.0	1413.5	1422.9	1425.3	1430.0	1441.7	1430.0
127.5°	1069.9	1181.5	1317.9	1419.6	1498.9	1544.3	1558.9	1564.0	1573.9	1579.0	1573.9
130°	1139.3	1265.9	1404.2	1500.3	1577.6	1626.9	1652.7	1659.7	1671.4	1669.1	1671.4
132.5°	1212.4	1344.6	1484.8	1584.7	1656.4	1709.4	1731.4	1751.6	1755.8	1759.1	1755.8
135°	1319.8	1462.8	1603.4	1701.9	1769.9	1821.4	1849.6	1868.3	1880.0	1887.1	1880.0
137.5°	1432.8	1583.7	1718.8	1806.4	1874.9	1919.4	1951.3	1971.0	1983.2	1988.8	1983.2
140°	1509.7	1655.0	1786.3	1877.7	1938.6	1983.2	2011.3	2034.8	2048.8	2048.8	2048.8
142.5°	1582.8	1726.3	1853.8	1945.2	1998.7	2039.4	2069.4	2087.3	2103.2	2103.2	2103.2
145°	1685.5	1828.5	1945.7	2037.1	2081.6	2119.1	2152.0	2166.0	2175.4	2175.4	2175.4
147.5°	1792.8	1919.4	2026.3	2114.0	2151.5	2195.6	2221.3	2232.6	2244.3	2239.2	2244.3
150°	1856.6	1973.8	2076.9	2159.0	2196.5	2238.7	2264.5	2273.9	2285.6	2278.5	2285.6
152.5°	1918.5	2030.1	2123.8	2200.3	2232.1	2274.3	2303.9	2313.2	2321.2	2316.1	2321.2
155°	2001.9	2100.4	2187.1	2257.5	2285.6	2325.4	2353.6	2365.3	2374.7	2362.9	2374.7
157.5°	2076.5	2161.3	2236.8	2301.5	2331.5	2365.8	2392.0	2406.5	2415.9	2410.8	2415.9
160°	2121.5	2198.8	2266.8	2327.8	2355.9	2386.4	2414.5	2430.9	2440.3	2433.3	2440.3
162.5°	2159.0	2228.9	2293.1	2348.4	2372.8	2399.5	2433.3	2447.8	2457.2	2448.3	2457.2
165°	2212.9	2269.2	2325.4	2372.3	2393.4	2414.5	2449.7	2466.1	2473.1	2463.7	2473.1
167.5°	2253.7	2296.8	2342.3	2382.6	2398.1	2418.7	2453.9	2467.5	2476.4	2464.7	2476.4
170°	2276.2	2313.7	2353.6	2386.4	2398.1	2416.9	2452.0	2463.7	2470.8	2459.1	2470.8
172.5°	2295.0	2323.1	2355.4	2384.5	2390.6	2405.6	2438.9	2450.6	2455.8	2445.9	2455.8
175°	2313.7	2330.1	2353.6	2372.3	2370.0	2379.3	2407.5	2416.9	2426.2	2412.2	2426.2
177.5°	2322.6	2330.1	2337.6	2348.9	2341.4	2341.4	2362.0	2367.6	2369.5	2362.0	2369.5
180°	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7



TEST NUMBER: P1436047

CATALOG NUMBER: SQ2W-FB-K-150U-125D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	585.4	585.4	585.4	585.4	585.4	585.4	585.4	585.4	585.4	585.4	585.4
2.5°	665.7	653.7	639.7	626.7	614.7	602.9	591.9	580.9	591.9	602.9	614.7
5°	967.9	902.5	826.2	758.0	698.0	643.6	606.1	568.5	606.1	643.6	698.0
7.5°	1622.8	1453.0	1248.4	1051.0	860.9	699.2	622.9	546.6	622.9	699.2	860.9
10°	1917.0	1775.0	1597.4	1343.5	1013.2	739.0	632.6	526.3	632.6	739.0	1013.2
12.5°	2025.3	1922.9	1798.3	1534.3	1131.1	792.5	648.1	503.8	648.1	792.5	1131.1
15°	2163.1	2077.1	1975.8	1704.3	1262.8	880.0	673.6	467.2	673.6	880.0	1262.8
17.5°	2244.1	2163.4	2063.1	1798.4	1369.4	978.9	704.2	429.5	704.2	978.9	1369.4
20°	2257.9	2189.7	2103.4	1853.2	1439.2	1047.9	725.2	402.5	725.2	1047.9	1439.2
22.5°	2244.6	2191.9	2126.6	1893.0	1490.9	1099.2	738.5	377.7	738.5	1099.2	1490.9
25°	2220.3	2186.9	2145.6	1932.3	1547.0	1156.4	749.9	343.4	749.9	1156.4	1547.0
27.5°	2174.7	2152.0	2125.0	1925.9	1554.9	1169.3	739.7	310.2	739.7	1169.3	1554.9
30°	2139.7	2121.2	2101.2	1909.2	1545.2	1163.0	726.5	289.9	726.5	1163.0	1545.2
32.5°	2112.1	2090.4	2071.4	1883.4	1526.4	1149.0	710.4	271.9	710.4	1149.0	1526.4
35°	2093.7	2057.4	2027.4	1835.4	1481.4	1108.0	676.4	244.9	676.4	1108.0	1481.4
37.5°	2101.6	2041.3	1978.5	1769.2	1413.4	1043.9	632.8	221.8	632.8	1043.9	1413.4
40°	2099.6	2025.5	1941.7	1720.9	1363.2	996.3	602.3	208.3	602.3	996.3	1363.2
42.5°	2077.1	1992.5	1894.7	1665.4	1304.6	940.8	567.8	194.8	567.8	940.8	1304.6
45°	2031.4	1934.5	1819.4	1577.4	1208.4	847.8	512.6	177.3	512.6	847.8	1208.4
47.5°	1966.7	1867.3	1745.2	1491.3	1105.5	743.4	452.2	161.0	452.2	743.4	1105.5
50°	1908.9	1812.5	1692.5	1433.5	1035.7	672.4	412.2	152.0	412.2	672.4	1035.7
52.5°	1840.8	1750.2	1637.2	1376.2	967.4	603.3	373.1	143.0	373.1	603.3	967.4
55°	1721.9	1642.7	1543.9	1285.6	867.8	507.5	319.9	132.3	319.9	507.5	867.8
57.5°	1590.3	1523.0	1438.7	1189.2	774.4	425.4	274.1	122.7	274.1	425.4	774.4
60°	1495.8	1434.5	1358.2	1118.6	715.8	380.9	249.6	118.2	249.6	380.9	715.8
62.5°	1396.4	1339.9	1269.6	1042.1	657.3	340.1	225.8	111.5	225.8	340.1	657.3
65°	1235.3	1188.7	1129.9	925.3	575.1	289.3	196.7	104.1	196.7	289.3	575.1
67.5°	1035.6	1012.8	976.3	805.3	499.9	251.1	172.6	94.0	172.6	251.1	499.9
70°	875.9	880.0	867.5	725.5	454.1	232.4	159.8	87.2	159.8	232.4	454.1
72.5°	668.0	714.1	741.7	638.2	403.8	211.8	147.3	82.7	147.3	211.8	403.8
75°	315.9	405.3	525.4	497.9	322.7	178.3	125.7	73.2	125.7	178.3	322.7
77.5°	242.6	289.7	353.3	332.4	227.0	138.2	98.9	59.7	98.9	138.2	227.0
80°	197.3	198.9	201.4	184.5	148.2	113.2	81.9	50.7	81.9	113.2	148.2
82.5°	144.8	143.4	140.9	129.5	109.2	88.2	64.9	41.7	64.9	88.2	109.2
85°	47.2	55.4	65.4	67.2	61.0	52.9	39.1	25.3	39.1	52.9	61.0
87.5°	21.1	20.6	20.6	22.2	24.8	24.6	17.3	10.4	17.3	24.2	25.7
90°	49.2	46.9	46.9	44.5	37.5	28.1	16.4	7.0	16.4	25.8	42.2
92.5°	58.6	58.1	54.4	50.2	41.3	41.3	40.8	25.8	44.5	63.3	91.0
95°	53.9	53.9	63.3	79.7	117.2	119.6	79.7	72.7	103.1	145.3	182.8
97.5°	145.8	173.5	212.9	220.4	208.6	155.7	149.1	138.8	188.9	230.7	291.1
100°	269.6	304.7	332.9	276.6	218.0	215.7	201.6	196.9	250.8	290.7	349.3
102.5°	421.5	432.3	334.7	302.9	289.3	279.4	257.9	255.0	309.0	363.8	413.0
105°	457.1	410.2	412.6	412.6	403.2	384.4	344.6	342.3	403.2	466.5	527.4
107.5°	537.8	544.8	557.0	554.2	543.4	493.2	446.3	435.5	490.4	566.4	633.4
110°	644.7	651.7	656.4	651.7	635.3	572.0	515.7	499.3	548.5	628.2	700.9



TEST NUMBER: P1436047

CATALOG NUMBER: SQ2W-FB-K-150U-125D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	747.8	753.0	763.3	749.2	721.5	648.9	585.1	561.2	610.4	692.0	766.5
115°	911.9	911.9	914.2	907.2	850.9	775.9	691.5	656.4	698.6	773.6	855.6
117.5°	1073.2	1076.0	1066.6	1047.9	982.7	895.5	800.8	744.5	777.8	857.0	941.4
120°	1174.4	1179.1	1169.7	1141.6	1078.3	979.9	872.0	806.4	832.2	909.5	993.9
122.5°	1279.5	1278.5	1267.3	1235.4	1160.8	1058.6	952.7	872.0	882.8	954.6	1037.1
125°	1425.3	1422.9	1413.5	1376.0	1298.7	1193.2	1068.9	970.5	956.4	1017.4	1101.8
127.5°	1564.0	1558.9	1544.3	1498.9	1419.6	1317.9	1181.5	1069.9	1038.5	1076.9	1154.3
130°	1659.7	1652.7	1626.9	1577.6	1500.3	1404.2	1265.9	1139.3	1094.7	1118.2	1186.2
132.5°	1751.6	1731.4	1709.4	1656.4	1584.7	1484.8	1344.6	1212.4	1151.0	1161.3	1214.3
135°	1868.3	1849.6	1821.4	1769.9	1701.9	1603.4	1462.8	1319.8	1235.4	1226.0	1256.5
137.5°	1971.0	1951.3	1919.4	1874.9	1806.4	1718.8	1583.7	1432.8	1326.3	1294.9	1306.6
140°	2034.8	2011.3	1983.2	1938.6	1877.7	1786.3	1655.0	1509.7	1390.1	1345.6	1338.5
142.5°	2087.3	2069.4	2039.4	1998.7	1945.2	1853.8	1726.3	1582.8	1455.7	1398.1	1381.7
145°	2166.0	2152.0	2119.1	2081.6	2037.1	1945.7	1828.5	1685.5	1558.9	1483.9	1448.7
147.5°	2232.6	2221.3	2195.6	2151.5	2114.0	2026.3	1919.4	1792.8	1663.0	1570.1	1524.7
150°	2273.9	2264.5	2238.7	2196.5	2159.0	2076.9	1973.8	1856.6	1732.4	1633.9	1575.3
152.5°	2313.2	2303.9	2274.3	2232.1	2200.3	2123.8	2030.1	1918.5	1792.4	1693.9	1633.4
155°	2365.3	2353.6	2325.4	2285.6	2257.5	2187.1	2100.4	2001.9	1894.1	1791.0	1723.0
157.5°	2406.5	2392.0	2365.8	2331.5	2301.5	2236.8	2161.3	2076.5	1982.2	1883.8	1814.4
160°	2430.9	2414.5	2386.4	2355.9	2327.8	2266.8	2198.8	2121.5	2034.8	1945.7	1870.7
162.5°	2447.8	2433.3	2399.5	2372.8	2348.4	2293.1	2228.9	2159.0	2081.6	2003.8	1934.4
165°	2466.1	2449.7	2414.5	2393.4	2372.3	2325.4	2269.2	2212.9	2147.3	2084.0	2027.7
167.5°	2467.5	2453.9	2418.7	2398.1	2382.6	2342.3	2296.8	2253.7	2202.6	2152.9	2106.0
170°	2463.7	2452.0	2416.9	2398.1	2386.4	2353.6	2313.7	2276.2	2236.4	2194.2	2156.7
172.5°	2450.6	2438.9	2405.6	2390.6	2384.5	2355.4	2323.1	2295.0	2260.7	2229.8	2199.8
175°	2416.9	2407.5	2379.3	2370.0	2372.3	2353.6	2330.1	2313.7	2292.6	2273.9	2257.5
177.5°	2367.6	2362.0	2341.4	2341.4	2348.9	2337.6	2330.1	2322.6	2313.2	2307.6	2302.0
180°	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7



TEST NUMBER: P1436047

CATALOG NUMBER: SQ2W-FB-K-150U-125D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	585.4	585.4	585.4	585.4	585.4	585.4	585.4	585.4	585.4	585.4	585.4
2.5°	626.7	639.7	653.7	665.7	671.7	677.7	671.7	665.7	653.7	639.7	626.7
5°	758.0	826.2	902.5	967.9	1000.4	1032.9	1000.4	967.9	902.5	826.2	758.0
7.5°	1051.0	1248.4	1453.0	1622.8	1687.8	1752.9	1687.8	1622.8	1453.0	1248.4	1051.0
10°	1343.5	1597.4	1775.0	1917.0	1952.0	1987.0	1952.0	1917.0	1775.0	1597.4	1343.5
12.5°	1534.3	1798.3	1922.9	2025.3	2061.3	2097.4	2061.3	2025.3	1922.9	1798.3	1534.3
15°	1704.3	1975.8	2077.1	2163.1	2203.1	2243.2	2203.1	2163.1	2077.1	1975.8	1704.3
17.5°	1798.4	2063.1	2163.4	2244.1	2265.9	2287.6	2265.9	2244.1	2163.4	2063.1	1798.4
20°	1853.2	2103.4	2189.7	2257.9	2271.6	2285.4	2271.6	2257.9	2189.7	2103.4	1853.2
22.5°	1893.0	2126.6	2191.9	2244.6	2259.4	2274.1	2259.4	2244.6	2191.9	2126.6	1893.0
25°	1932.3	2145.6	2186.9	2220.3	2230.3	2240.3	2230.3	2220.3	2186.9	2145.6	1932.3
27.5°	1925.9	2125.0	2152.0	2174.7	2184.4	2194.2	2184.4	2174.7	2152.0	2125.0	1925.9
30°	1909.2	2101.2	2121.2	2139.7	2153.4	2167.2	2153.4	2139.7	2121.2	2101.2	1909.2
32.5°	1883.4	2071.4	2090.4	2112.1	2141.9	2171.7	2141.9	2112.1	2090.4	2071.4	1883.4
35°	1835.4	2027.4	2057.4	2093.7	2148.7	2203.8	2148.7	2093.7	2057.4	2027.4	1835.4
37.5°	1769.2	1978.5	2041.3	2101.6	2154.7	2207.7	2154.7	2101.6	2041.3	1978.5	1769.2
40°	1720.9	1941.7	2025.5	2099.6	2144.7	2189.7	2144.7	2099.6	2025.5	1941.7	1720.9
42.5°	1665.4	1894.7	1992.5	2077.1	2122.1	2167.2	2122.1	2077.1	1992.5	1894.7	1665.4
45°	1577.4	1819.4	1934.5	2031.4	2074.0	2116.5	2074.0	2031.4	1934.5	1819.4	1577.4
47.5°	1491.3	1745.2	1867.3	1966.7	1997.7	2028.7	1997.7	1966.7	1867.3	1745.2	1491.3
50°	1433.5	1692.5	1812.5	1908.9	1933.9	1958.9	1933.9	1908.9	1812.5	1692.5	1433.5
52.5°	1376.2	1637.2	1750.2	1840.8	1863.8	1886.8	1863.8	1840.8	1750.2	1637.2	1376.2
55°	1285.6	1543.9	1642.7	1721.9	1741.9	1761.9	1741.9	1721.9	1642.7	1543.9	1285.6
57.5°	1189.2	1438.7	1523.0	1590.3	1606.6	1622.8	1606.6	1590.3	1523.0	1438.7	1189.2
60°	1118.6	1358.2	1434.5	1495.8	1512.0	1528.3	1512.0	1495.8	1434.5	1358.2	1118.6
62.5°	1042.1	1269.6	1339.9	1396.4	1411.7	1427.0	1411.7	1396.4	1339.9	1269.6	1042.1
65°	925.3	1129.9	1188.7	1235.3	1245.3	1255.3	1245.3	1235.3	1188.7	1129.9	925.3
67.5°	805.3	976.3	1012.8	1035.6	1016.8	998.0	1016.8	1035.6	1012.8	976.3	805.3
70°	725.5	867.5	880.0	875.9	822.1	768.4	822.1	875.9	880.0	867.5	725.5
72.5°	638.2	741.7	714.1	668.0	566.2	464.4	566.2	668.0	714.1	741.7	638.2
75°	497.9	525.4	405.3	315.9	318.4	320.9	318.4	315.9	405.3	525.4	497.9
77.5°	332.4	353.3	289.7	242.6	244.9	247.1	244.9	242.6	289.7	353.3	332.4
80°	184.5	201.4	198.9	197.3	198.6	199.8	198.6	197.3	198.9	201.4	184.5
82.5°	129.5	140.9	143.4	144.8	143.0	141.3	143.0	144.8	143.4	140.9	129.5
85°	67.2	65.4	55.4	47.2	44.7	42.2	44.7	47.2	55.4	65.4	67.2
87.5°	24.0	25.3	28.6	30.5	32.4	31.4	32.4	30.5	28.6	25.3	24.0
90°	53.9	70.3	86.7	96.1	105.5	100.8	105.5	96.1	86.7	70.3	53.9
92.5°	108.3	136.0	156.1	173.0	180.5	179.6	180.5	173.0	156.1	136.0	108.3
95°	218.0	250.8	283.6	307.1	321.2	316.5	321.2	307.1	283.6	250.8	218.0
97.5°	336.2	380.2	416.8	438.8	452.9	462.3	452.9	438.8	416.8	380.2	336.2
100°	414.9	457.1	499.3	525.1	548.5	557.9	548.5	525.1	499.3	457.1	414.9
102.5°	478.7	534.0	580.0	607.6	627.3	636.7	627.3	607.6	580.0	534.0	478.7
105°	583.7	642.3	691.5	726.7	747.8	754.8	747.8	726.7	691.5	642.3	583.7
107.5°	688.7	749.2	794.7	833.6	859.4	874.4	859.4	833.6	794.7	749.2	688.7
110°	771.2	820.5	869.7	904.9	930.6	940.0	930.6	904.9	869.7	820.5	771.2



TEST NUMBER: P1436047

CATALOG NUMBER: SQ2W-FB-K-150U-125D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	840.6	895.5	944.7	979.9	1009.4	1022.5	1009.4	979.9	944.7	895.5	840.6
115°	937.7	1010.3	1054.9	1087.7	1108.8	1120.5	1108.8	1087.7	1054.9	1010.3	937.7
117.5°	1018.3	1094.3	1143.0	1168.3	1178.2	1186.6	1178.2	1168.3	1143.0	1094.3	1018.3
120°	1068.9	1139.3	1195.5	1228.4	1240.1	1244.8	1240.1	1228.4	1195.5	1139.3	1068.9
122.5°	1115.8	1182.4	1236.8	1277.1	1296.3	1301.0	1296.3	1277.1	1236.8	1182.4	1115.8
125°	1181.5	1244.8	1301.0	1340.9	1362.0	1373.7	1362.0	1340.9	1301.0	1244.8	1181.5
127.5°	1238.7	1307.1	1358.7	1394.8	1415.4	1424.8	1415.4	1394.8	1358.7	1307.1	1238.7
130°	1270.5	1340.9	1392.4	1432.3	1451.1	1460.4	1451.1	1432.3	1392.4	1340.9	1270.5
132.5°	1294.9	1369.0	1422.5	1458.6	1479.2	1488.6	1479.2	1458.6	1422.5	1369.0	1294.9
135°	1324.5	1401.8	1458.1	1493.2	1512.0	1521.4	1512.0	1493.2	1458.1	1401.8	1324.5
137.5°	1350.3	1420.6	1479.2	1516.2	1533.1	1539.2	1533.1	1516.2	1479.2	1420.6	1350.3
140°	1369.0	1430.0	1488.6	1523.7	1542.5	1544.8	1542.5	1523.7	1488.6	1430.0	1369.0
142.5°	1393.4	1441.2	1492.3	1527.5	1546.2	1550.4	1546.2	1527.5	1492.3	1441.2	1393.4
145°	1437.0	1465.1	1500.3	1533.1	1549.5	1554.2	1549.5	1533.1	1500.3	1465.1	1437.0
147.5°	1491.8	1500.7	1519.0	1540.6	1556.5	1559.8	1556.5	1540.6	1519.0	1500.7	1491.8
150°	1533.1	1530.8	1537.8	1551.9	1565.9	1563.6	1565.9	1551.9	1537.8	1530.8	1533.1
152.5°	1580.0	1566.4	1565.9	1572.5	1579.0	1578.6	1579.0	1572.5	1565.9	1566.4	1580.0
155°	1659.7	1633.9	1619.8	1615.1	1615.1	1612.8	1615.1	1615.1	1619.8	1633.9	1659.7
157.5°	1747.4	1711.3	1690.2	1678.9	1675.6	1670.5	1675.6	1678.9	1690.2	1711.3	1747.4
160°	1807.4	1767.5	1746.4	1727.7	1720.6	1713.6	1720.6	1727.7	1746.4	1767.5	1807.4
162.5°	1863.6	1825.7	1802.7	1785.8	1778.8	1768.0	1778.8	1785.8	1802.7	1825.7	1863.6
165°	1955.1	1915.2	1889.4	1875.3	1866.0	1856.6	1866.0	1875.3	1889.4	1915.2	1955.1
167.5°	2046.5	2002.9	1986.0	1970.1	1961.1	1944.3	1961.1	1970.1	1986.0	2002.9	2046.5
170°	2102.7	2062.9	2053.5	2039.4	2023.0	2004.3	2023.0	2039.4	2053.5	2062.9	2102.7
172.5°	2151.5	2124.8	2115.4	2101.3	2096.2	2081.2	2096.2	2101.3	2115.4	2124.8	2151.5
175°	2222.3	2201.2	2201.2	2198.8	2191.8	2177.7	2191.8	2198.8	2201.2	2201.2	2222.3
177.5°	2281.4	2270.1	2277.6	2277.6	2275.7	2262.6	2275.7	2277.6	2277.6	2270.1	2281.4
180°	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7	2320.7



TEST NUMBER: P1436047

CATALOG NUMBER: SQ2W-FB-K-150U-125D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	585.4	585.4	585.4	585.4
2.5°	614.7	602.9	591.9	580.9
5°	698.0	643.6	606.1	568.5
7.5°	860.9	699.2	622.9	546.6
10°	1013.2	739.0	632.6	526.3
12.5°	1131.1	792.5	648.1	503.8
15°	1262.8	880.0	673.6	467.2
17.5°	1369.4	978.9	704.2	429.5
20°	1439.2	1047.9	725.2	402.5
22.5°	1490.9	1099.2	738.5	377.7
25°	1547.0	1156.4	749.9	343.4
27.5°	1554.9	1169.3	739.7	310.2
30°	1545.2	1163.0	726.5	289.9
32.5°	1526.4	1149.0	710.4	271.9
35°	1481.4	1108.0	676.4	244.9
37.5°	1413.4	1043.9	632.8	221.8
40°	1363.2	996.3	602.3	208.3
42.5°	1304.6	940.8	567.8	194.8
45°	1208.4	847.8	512.6	177.3
47.5°	1105.5	743.4	452.2	161.0
50°	1035.7	672.4	412.2	152.0
52.5°	967.4	603.3	373.1	143.0
55°	867.8	507.5	319.9	132.3
57.5°	774.4	425.4	274.1	122.7
60°	715.8	380.9	249.6	118.2
62.5°	657.3	340.1	225.8	111.5
65°	575.1	289.3	196.7	104.1
67.5°	499.9	251.1	172.6	94.0
70°	454.1	232.4	159.8	87.2
72.5°	403.8	211.8	147.3	82.7
75°	322.7	178.3	125.7	73.2
77.5°	227.0	138.2	98.9	59.7
80°	148.2	113.2	81.9	50.7
82.5°	109.2	88.2	64.9	41.7
85°	61.0	52.9	39.1	25.3
87.5°	25.7	24.2	17.3	10.4
90°	42.2	25.8	16.4	7.0
92.5°	91.0	63.3	44.5	25.8
95°	182.8	145.3	103.1	72.7
97.5°	291.1	230.7	188.9	138.8
100°	349.3	290.7	250.8	196.9
102.5°	413.0	363.8	309.0	255.0
105°	527.4	466.5	403.2	342.3
107.5°	633.4	566.4	490.4	435.5
110°	700.9	628.2	548.5	499.3



TEST NUMBER: P1436047

CATALOG NUMBER: SQ2W-FB-K-150U-125D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	766.5	692.0	610.4	561.2
115°	855.6	773.6	698.6	656.4
117.5°	941.4	857.0	777.8	744.5
120°	993.9	909.5	832.2	806.4
122.5°	1037.1	954.6	882.8	872.0
125°	1101.8	1017.4	956.4	970.5
127.5°	1154.3	1076.9	1038.5	1069.9
130°	1186.2	1118.2	1094.7	1139.3
132.5°	1214.3	1161.3	1151.0	1212.4
135°	1256.5	1226.0	1235.4	1319.8
137.5°	1306.6	1294.9	1326.3	1432.8
140°	1338.5	1345.6	1390.1	1509.7
142.5°	1381.7	1398.1	1455.7	1582.8
145°	1448.7	1483.9	1558.9	1685.5
147.5°	1524.7	1570.1	1663.0	1792.8
150°	1575.3	1633.9	1732.4	1856.6
152.5°	1633.4	1693.9	1792.4	1918.5
155°	1723.0	1791.0	1894.1	2001.9
157.5°	1814.4	1883.8	1982.2	2076.5
160°	1870.7	1945.7	2034.8	2121.5
162.5°	1934.4	2003.8	2081.6	2159.0
165°	2027.7	2084.0	2147.3	2212.9
167.5°	2106.0	2152.9	2202.6	2253.7
170°	2156.7	2194.2	2236.4	2276.2
172.5°	2199.8	2229.8	2260.7	2295.0
175°	2257.5	2273.9	2292.6	2313.7
177.5°	2302.0	2307.6	2313.2	2322.6
180°	2320.7	2320.7	2320.7	2320.7



TEST NUMBER: P1436047
 CATALOG NUMBER: SQ2W-FB-K-150U-125D-L840-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.61	14.46	14.59	15.46	16.78	23.20	24.05	24.19	25.06	26.38
	3H	14.55	15.31	15.54	16.32	17.66	24.81	25.57	25.80	26.58	27.93
	4H	14.94	15.67	15.95	16.68	18.03	24.99	25.71	25.99	26.72	28.07
	6H	15.20	15.86	16.22	16.88	18.25	25.06	25.73	26.08	26.74	28.11
	8H	15.29	15.92	16.31	16.96	18.32	25.08	25.71	26.10	26.75	28.11
	12H	15.34	15.94	16.37	16.97	18.36	25.06	25.66	26.09	26.69	28.07
4H	2H	18.33	19.05	19.34	20.06	21.41	23.57	24.29	24.58	25.30	26.66
	3H	19.45	20.06	20.48	21.10	22.46	25.45	26.06	26.48	27.10	28.47
	4H	19.73	20.29	20.77	21.32	22.71	25.68	26.23	26.71	27.26	28.65
	6H	19.87	20.34	20.91	21.40	22.79	25.81	26.28	26.85	27.34	28.72
	8H	19.91	20.35	20.95	21.40	22.80	25.85	26.29	26.90	27.34	28.75
	12H	19.91	20.31	20.97	21.37	22.78	25.83	26.23	26.90	27.30	28.70
8H	4H	20.93	21.37	21.97	22.42	23.82	25.77	26.21	26.81	27.26	28.66
	6H	21.18	21.55	22.25	22.64	24.04	25.96	26.33	27.03	27.42	28.82
	8H	21.28	21.60	22.36	22.68	24.10	26.05	26.37	27.13	27.45	28.87
	12H	21.32	21.61	22.40	22.68	24.14	26.06	26.34	27.14	27.41	28.87
12H	4H	20.95	21.35	22.01	22.41	23.82	25.72	26.12	26.78	27.18	28.59
	6H	21.29	21.61	22.37	22.69	24.11	25.95	26.27	27.02	27.34	28.76
	8H	21.43	21.71	22.51	22.78	24.24	26.04	26.33	27.12	27.40	28.86