

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1428277

Luminaire Tested: SQ2W-PR1-K-125U-050D-L840-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1428277
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-9)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-PR1-K-125U-050D-L840-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - PERCEIVE RIPPLE LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 500 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: 4000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8471.3 lumens
Efficiency: N/A
Efficacy: 137.1 lumens/watt
Spacing Criteria (0/90/45): 1.28 / 1.34 / 1.36
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 61.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1428277

CATALOG NUMBER: SQ2W-PR1-K-125U-050D-L840-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

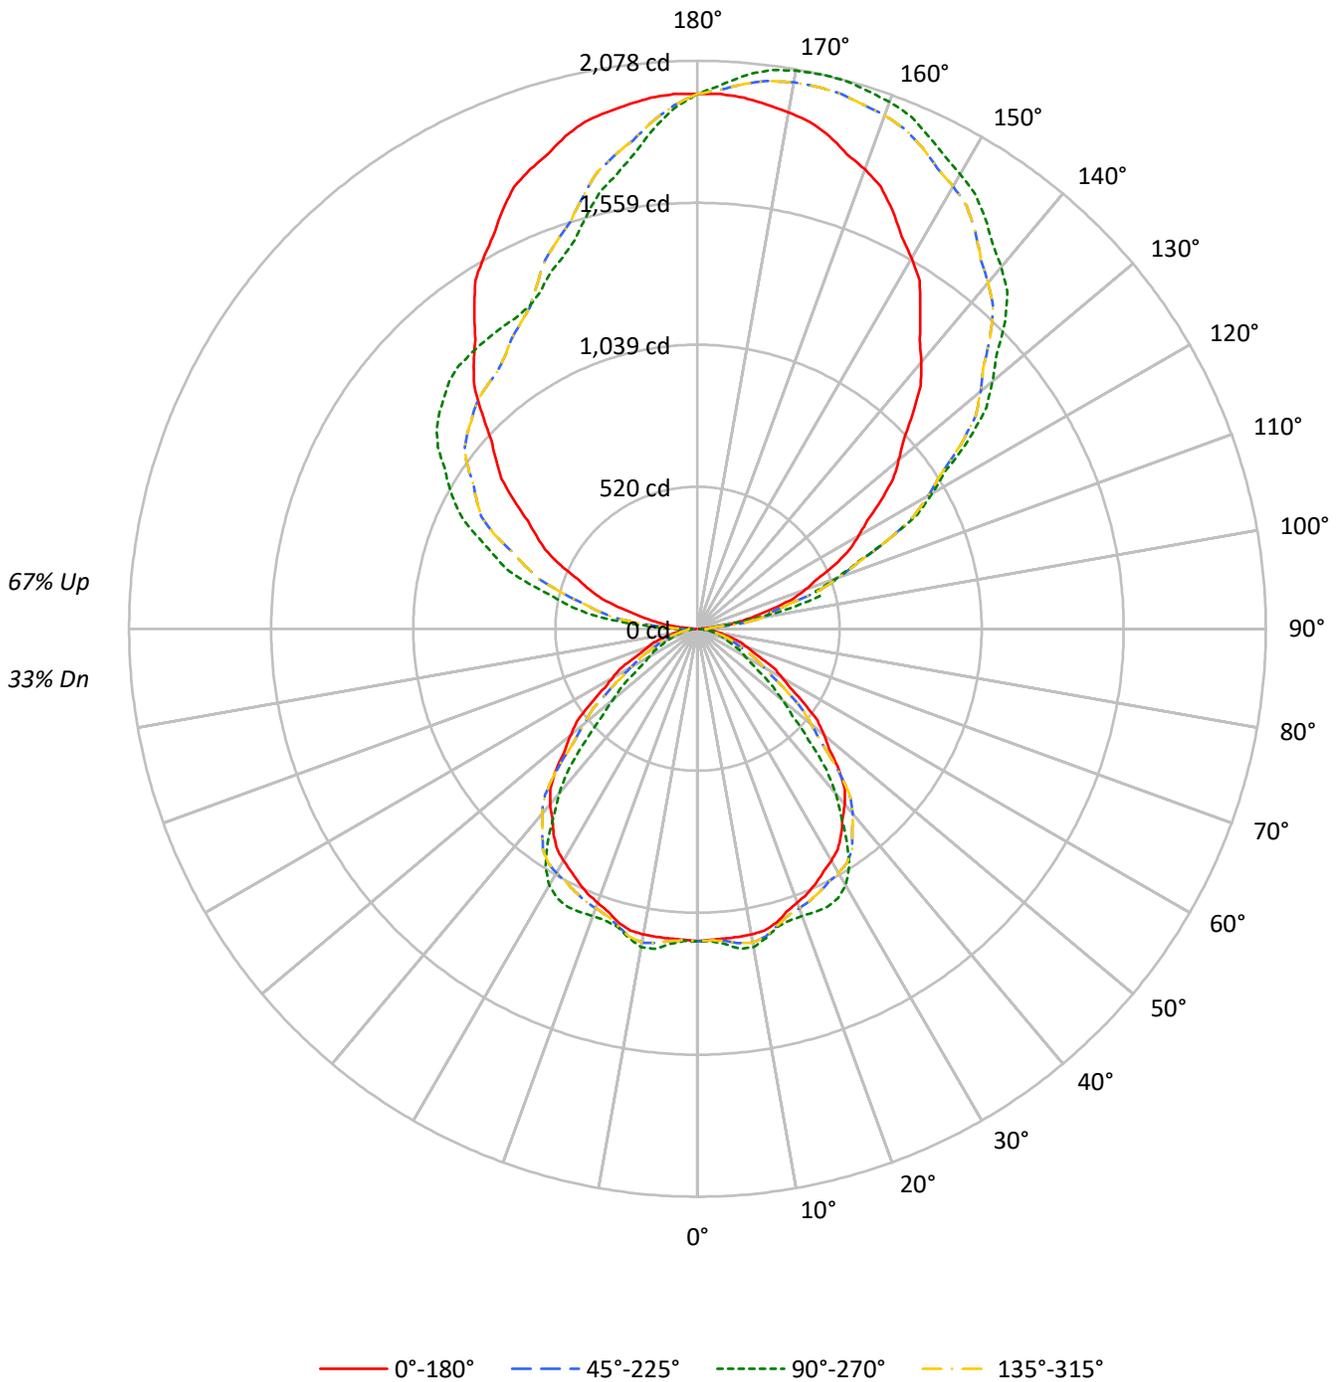



TEST NUMBER: P1428277

CATALOG NUMBER: SQ2W-PR1-K-125U-050D-L840-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40	33				
1	94	90	87	83	85	81	78	76	65	63	61	50	49	47	36	35	35	28				
2	86	79	73	69	77	72	67	63	57	54	51	44	42	40	32	31	30	24				
3	79	70	63	58	71	63	57	53	51	47	43	39	37	34	29	27	26	21				
4	72	62	55	49	65	56	50	45	45	41	37	35	32	30	26	24	22	18				
5	66	55	48	42	60	50	44	39	41	36	32	32	28	26	23	21	20	16				
6	61	50	42	36	55	45	38	34	37	32	28	29	25	23	21	19	17	14				
7	56	45	37	32	51	41	34	29	33	28	25	26	23	20	20	17	16	13				
8	52	40	33	28	47	37	30	26	30	25	22	24	20	18	18	16	14	11				
9	49	37	30	25	44	34	27	23	28	23	20	22	19	16	17	14	13	10				
10	45	34	27	22	41	31	25	21	25	21	18	20	17	14	15	13	11	9				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	18459	18459	18459	18459
5°	18434	18774	18434	18774
10°	18629	19393	18629	19393
15°	18622	18876	18622	18876
20°	18323	19223	18323	19223
25°	18271	20015	18271	20015
30°	18250	20206	18250	20206
35°	18078	18813	18078	18813
40°	17660	16556	17660	16556
45°	16712	13093	16712	13093
50°	15191	10158	15191	10158
55°	13351	7907	13351	7907
60°	11554	6510	11554	6510
65°	9975	5700	9975	5700
70°	8969	5061	8969	5061
75°	8216	4654	8216	4654
80°	7150	4547	7150	4547
85°	5187	2167	5187	2167

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 20°
 Vertical Angle: 45°
 Luminance: 17940 cd/sqm



TEST NUMBER: P1428277

CATALOG NUMBER: SQ2W-PR1-K-125U-050D-L840-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	110.4	1.3
10°-20°	319.6	3.8
20°-30°	494.1	5.8
30°-40°	594.2	7.0
40°-50°	533.6	6.3
50°-60°	357.5	4.2
60°-70°	208.0	2.5
70°-80°	106.8	1.3
80°-90°	34.4	0.4
90°-100°	155.7	1.8
100°-110°	454.1	5.4
110°-120°	741.1	8.7
120°-130°	940.4	11.1
130°-140°	1006.2	11.9
140°-150°	939.6	11.1
150°-160°	773.1	9.1
160°-170°	518.5	6.1
170°-180°	184.1	2.2
0°-30°	924.1	10.9
0°-40°	1518.3	17.9
0°-60°	2409.3	28.4
0°-90°	2758.6	32.6
90°-120°	1350.9	15.9
90°-150°	4237.0	50.0
90°-180°	5713.0	67.4
0°-180°	8471.3	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1143	1143	1143	1143	1143	
5°	1137	1158	1137	1158	1137	109
15°	1114	1129	1114	1129	1114	313
25°	1026	1124	1026	1124	1026	473
35°	917	954	917	954	917	572
45°	732	573	732	573	732	560
55°	474	281	474	281	474	426
65°	261	149	261	149	261	264
75°	132	75	132	75	132	140
85°	28	12	28	12	28	35
90°	6	44	6	85	6	6
95°	61	46	61	267	61	74
105°	288	462	288	636	288	307
115°	553	767	553	945	553	545
125°	818	1215	818	1158	818	732
135°	1113	1591	1113	1283	1113	860
145°	1421	1834	1421	1310	1421	889
155°	1688	1992	1688	1360	1688	776
165°	1866	2077	1866	1565	1866	525
175°	1951	2034	1951	1836	1951	185
180°	1956	1956	1956	1956	1956	



TEST NUMBER: P1428277

CATALOG NUMBER: SQ2W-PR1-K-125U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	1143.3	1143.3	1143.3	1143.3	1143.3	1143.3	1143.3	1143.3	1143.3	1143.3	1143.3
2.5°	1138.6	1144.8	1151.0	1148.2	1142.4	1139.7	1140.2	1140.8	1142.0	1143.3	1142.0
5°	1137.4	1146.2	1155.1	1153.0	1147.3	1145.0	1146.0	1148.1	1153.2	1158.4	1153.2
7.5°	1137.2	1149.7	1162.3	1163.2	1160.3	1160.4	1163.4	1167.4	1174.2	1181.0	1174.2
10°	1136.3	1151.3	1166.3	1168.5	1166.4	1165.7	1166.2	1168.4	1175.6	1182.9	1175.6
12.5°	1130.7	1148.2	1165.7	1163.9	1155.6	1151.1	1150.3	1150.8	1154.7	1158.7	1154.7
15°	1114.1	1134.9	1155.6	1147.2	1129.0	1120.7	1122.3	1124.1	1126.7	1129.3	1126.7
17.5°	1085.0	1106.6	1128.3	1120.7	1103.4	1097.6	1103.2	1108.6	1113.7	1118.8	1113.7
20°	1066.4	1087.6	1108.8	1103.6	1089.7	1086.3	1093.5	1101.2	1110.0	1118.8	1110.0
22.5°	1049.6	1070.8	1092.0	1088.7	1077.2	1076.6	1086.7	1097.4	1109.5	1121.6	1109.5
25°	1025.6	1044.2	1062.9	1063.2	1057.5	1063.2	1080.3	1096.5	1110.0	1123.5	1110.0
27.5°	1000.4	1011.4	1022.4	1029.6	1035.6	1050.2	1073.3	1092.9	1102.4	1111.8	1102.4
30°	978.9	986.2	993.4	1006.9	1022.5	1040.3	1060.5	1076.6	1080.2	1083.8	1080.2
32.5°	955.6	960.0	964.3	983.3	1007.1	1024.4	1035.0	1041.9	1037.2	1032.6	1037.2
35°	917.2	920.8	924.4	948.6	979.7	991.1	982.8	974.2	964.3	954.5	964.3
37.5°	871.5	879.0	886.4	906.1	930.0	929.8	905.5	884.5	873.2	861.9	873.2
40°	837.9	850.4	862.8	876.0	889.5	878.1	841.8	811.4	798.4	785.5	798.4
42.5°	796.9	816.8	836.7	839.6	836.9	812.5	766.3	727.7	711.8	696.0	711.8
45°	731.9	758.8	785.7	770.3	740.8	700.9	650.7	608.6	591.0	573.4	591.0
47.5°	655.2	682.9	710.5	681.5	633.5	587.1	542.2	504.5	488.0	471.5	488.0
50°	604.8	627.1	649.4	616.5	565.2	518.6	476.7	440.7	422.5	404.4	422.5
52.5°	553.6	569.6	585.7	553.1	504.3	458.9	417.0	381.4	364.9	348.5	364.9
55°	474.3	482.6	490.9	460.7	417.7	376.3	336.4	303.7	292.3	280.9	292.3
57.5°	401.6	406.9	412.2	383.6	343.7	306.8	272.9	245.4	237.0	228.7	237.0
60°	357.8	361.4	365.0	336.0	296.1	263.0	236.6	215.1	208.3	201.6	208.3
62.5°	317.7	320.5	323.3	295.3	257.1	227.5	206.4	189.4	184.3	179.2	184.3
65°	261.1	263.6	266.2	242.4	209.8	185.4	169.4	156.4	152.8	149.2	152.8
67.5°	216.1	217.4	218.8	199.1	172.5	152.9	140.2	129.9	126.5	123.1	126.5
70°	190.0	190.5	191.0	173.6	150.3	133.0	121.6	112.4	109.8	107.2	109.8
72.5°	166.7	165.9	165.2	149.7	129.3	114.4	105.1	97.7	95.9	94.2	95.9
75°	131.7	130.1	128.6	115.8	99.2	87.8	81.6	76.7	75.6	74.6	75.6
77.5°	98.4	96.7	95.0	84.4	70.7	62.8	60.8	59.2	59.2	59.2	59.2
80°	76.9	74.8	72.8	64.5	54.1	48.9	48.9	48.9	48.9	48.9	48.9
82.5°	57.3	54.4	51.5	46.5	40.7	37.8	37.8	37.7	37.2	36.8	37.2
85°	28.0	25.4	22.8	22.1	22.1	20.6	17.5	14.8	13.2	11.7	13.2
87.5°	8.6	10.2	12.2	12.2	11.3	10.7	10.7	11.1	11.5	11.5	11.5
90°	5.9	13.8	23.7	31.6	37.5	39.5	39.5	41.5	43.5	43.5	43.5
92.5°	21.7	34.4	34.8	34.8	42.3	45.9	49.0	49.4	51.4	51.4	51.4
95°	61.3	67.2	100.8	98.8	67.2	53.4	45.5	45.5	45.5	45.5	45.5
97.5°	117.0	125.7	131.2	175.9	185.8	179.4	146.2	122.9	109.9	104.0	109.9
100°	166.0	170.0	181.8	183.8	233.2	280.6	256.9	227.3	217.4	211.5	217.4
102.5°	215.0	217.4	235.6	243.9	255.3	282.2	364.4	355.3	348.6	347.4	348.6
105°	288.5	290.5	324.1	339.9	347.8	347.8	345.9	385.4	448.6	462.5	448.6
107.5°	367.2	376.3	415.8	458.1	467.2	469.6	459.3	453.4	451.0	452.6	451.0
110°	421.0	434.8	482.2	535.6	549.4	553.4	549.4	543.5	539.5	539.5	539.5



TEST NUMBER: P1428277

CATALOG NUMBER: SQ2W-PR1-K-125U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	473.1	493.3	547.0	608.3	631.6	643.5	634.8	630.4	626.5	629.7	626.5
115°	553.4	583.0	654.2	717.4	764.8	770.8	768.8	768.8	766.8	766.8	766.8
117.5°	627.7	675.1	754.9	828.5	883.4	899.2	907.1	904.8	902.4	906.3	902.4
120°	679.8	735.2	826.1	909.1	962.5	986.2	994.1	990.1	994.1	990.1	994.1
122.5°	735.2	803.2	892.5	978.7	1041.5	1068.4	1077.9	1078.7	1079.5	1077.1	1079.5
125°	818.2	901.2	1005.9	1094.9	1160.1	1191.7	1199.6	1201.6	1205.5	1215.4	1205.5
127.5°	902.0	996.1	1111.1	1196.9	1263.7	1302.0	1314.2	1318.6	1326.9	1331.2	1326.9
130°	960.5	1067.2	1183.8	1264.8	1330.1	1371.6	1393.3	1399.2	1409.1	1407.1	1409.1
132.5°	1022.1	1133.6	1251.8	1336.0	1396.5	1441.1	1459.7	1476.7	1480.3	1483.0	1480.3
135°	1112.7	1233.2	1351.8	1434.8	1492.1	1535.6	1559.3	1575.1	1585.0	1590.9	1585.0
137.5°	1207.9	1335.2	1449.0	1522.9	1580.7	1618.2	1645.1	1661.7	1672.0	1676.7	1672.0
140°	1272.7	1395.3	1505.9	1583.0	1634.4	1672.0	1695.7	1715.4	1727.3	1727.3	1727.3
142.5°	1334.4	1455.4	1562.9	1639.9	1685.0	1719.4	1744.7	1759.7	1773.1	1773.1	1773.1
145°	1421.0	1541.5	1640.3	1717.4	1755.0	1786.6	1814.3	1826.1	1834.0	1834.0	1834.0
147.5°	1511.5	1618.2	1708.3	1782.2	1813.9	1851.0	1872.7	1882.2	1892.1	1887.8	1892.1
150°	1565.2	1664.1	1751.0	1820.2	1851.8	1887.4	1909.1	1917.0	1926.9	1921.0	1926.9
152.5°	1617.4	1711.5	1790.5	1855.0	1881.8	1917.4	1942.3	1950.2	1956.9	1952.6	1956.9
155°	1687.8	1770.8	1843.9	1903.2	1926.9	1960.5	1984.2	1994.1	2002.0	1992.1	2002.0
157.5°	1750.6	1822.2	1885.8	1940.3	1965.6	1994.5	2016.6	2028.9	2036.8	2032.4	2036.8
160°	1788.6	1853.8	1911.1	1962.5	1986.2	2011.9	2035.6	2049.4	2057.3	2051.4	2057.3
162.5°	1820.2	1879.1	1933.2	1979.9	2000.4	2022.9	2051.4	2063.7	2071.6	2064.1	2071.6
165°	1865.6	1913.1	1960.5	2000.0	2017.8	2035.6	2065.2	2079.1	2085.0	2077.1	2085.0
167.5°	1900.0	1936.4	1974.7	2008.7	2021.8	2039.2	2068.8	2080.3	2087.8	2077.9	2087.8
170°	1919.0	1950.6	1984.2	2011.9	2021.8	2037.6	2067.2	2077.1	2083.0	2073.1	2083.0
172.5°	1934.8	1958.5	1985.8	2010.3	2015.4	2028.1	2056.2	2066.0	2070.4	2062.1	2070.4
175°	1950.6	1964.5	1984.2	2000.0	1998.0	2006.0	2029.7	2037.6	2045.5	2033.6	2045.5
177.5°	1958.1	1964.5	1970.8	1980.3	1973.9	1973.9	1991.3	1996.1	1997.7	1991.3	1997.7
180°	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5



TEST NUMBER: P1428277

CATALOG NUMBER: SQ2W-PR1-K-125U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	1143.3	1143.3	1143.3	1143.3	1143.3	1143.3	1143.3	1143.3	1143.3	1143.3	1143.3
2.5°	1140.8	1140.2	1139.7	1142.4	1148.2	1151.0	1144.8	1138.6	1144.8	1151.0	1148.2
5°	1148.1	1146.0	1145.0	1147.3	1153.0	1155.1	1146.2	1137.4	1146.2	1155.1	1153.0
7.5°	1167.4	1163.4	1160.4	1160.3	1163.2	1162.3	1149.7	1137.2	1149.7	1162.3	1163.2
10°	1168.4	1166.2	1165.7	1166.4	1168.5	1166.3	1151.3	1136.3	1151.3	1166.3	1168.5
12.5°	1150.8	1150.3	1151.1	1155.6	1163.9	1165.7	1148.2	1130.7	1148.2	1165.7	1163.9
15°	1124.1	1122.3	1120.7	1129.0	1147.2	1155.6	1134.9	1114.1	1134.9	1155.6	1147.2
17.5°	1108.6	1103.2	1097.6	1103.4	1120.7	1128.3	1106.6	1085.0	1106.6	1128.3	1120.7
20°	1101.2	1093.5	1086.3	1089.7	1103.6	1108.8	1087.6	1066.4	1087.6	1108.8	1103.6
22.5°	1097.4	1086.7	1076.6	1077.2	1088.7	1092.0	1070.8	1049.6	1070.8	1092.0	1088.7
25°	1096.5	1080.3	1063.2	1057.5	1063.2	1062.9	1044.2	1025.6	1044.2	1062.9	1063.2
27.5°	1092.9	1073.3	1050.2	1035.6	1029.6	1022.4	1011.4	1000.4	1011.4	1022.4	1029.6
30°	1076.6	1060.5	1040.3	1022.5	1006.9	993.4	986.2	978.9	986.2	993.4	1006.9
32.5°	1041.9	1035.0	1024.4	1007.1	983.3	964.3	960.0	955.6	960.0	964.3	983.3
35°	974.2	982.8	991.1	979.7	948.6	924.4	920.8	917.2	920.8	924.4	948.6
37.5°	884.5	905.5	929.8	930.0	906.1	886.4	879.0	871.5	879.0	886.4	906.1
40°	811.4	841.8	878.1	889.5	876.0	862.8	850.4	837.9	850.4	862.8	876.0
42.5°	727.7	766.3	812.5	836.9	839.6	836.7	816.8	796.9	816.8	836.7	839.6
45°	608.6	650.7	700.9	740.8	770.3	785.7	758.8	731.9	758.8	785.7	770.3
47.5°	504.5	542.2	587.1	633.5	681.5	710.5	682.9	655.2	682.9	710.5	681.5
50°	440.7	476.7	518.6	565.2	616.5	649.4	627.1	604.8	627.1	649.4	616.5
52.5°	381.4	417.0	458.9	504.3	553.1	585.7	569.6	553.6	569.6	585.7	553.1
55°	303.7	336.4	376.3	417.7	460.7	490.9	482.6	474.3	482.6	490.9	460.7
57.5°	245.4	272.9	306.8	343.7	383.6	412.2	406.9	401.6	406.9	412.2	383.6
60°	215.1	236.6	263.0	296.1	336.0	365.0	361.4	357.8	361.4	365.0	336.0
62.5°	189.4	206.4	227.5	257.1	295.3	323.3	320.5	317.7	320.5	323.3	295.3
65°	156.4	169.4	185.4	209.8	242.4	266.2	263.6	261.1	263.6	266.2	242.4
67.5°	129.9	140.2	152.9	172.5	199.1	218.8	217.4	216.1	217.4	218.8	199.1
70°	112.4	121.6	133.0	150.3	173.6	191.0	190.5	190.0	190.5	191.0	173.6
72.5°	97.7	105.1	114.4	129.3	149.7	165.2	165.9	166.7	165.9	165.2	149.7
75°	76.7	81.6	87.8	99.2	115.8	128.6	130.1	131.7	130.1	128.6	115.8
77.5°	59.2	60.8	62.8	70.7	84.4	95.0	96.7	98.4	96.7	95.0	84.4
80°	48.9	48.9	48.9	54.1	64.5	72.8	74.8	76.9	74.8	72.8	64.5
82.5°	37.7	37.8	37.8	40.7	46.5	51.5	54.4	57.3	54.4	51.5	46.5
85°	14.8	17.5	20.6	22.1	22.1	22.8	25.4	28.0	25.4	22.8	22.1
87.5°	11.1	10.7	10.7	11.3	12.2	12.2	10.2	8.6	10.2	11.8	13.0
90°	41.5	39.5	39.5	37.5	31.6	23.7	13.8	5.9	13.8	21.7	35.6
92.5°	49.4	49.0	45.9	42.3	34.8	34.8	34.4	21.7	37.5	53.4	76.7
95°	45.5	45.5	53.4	67.2	98.8	100.8	67.2	61.3	87.0	122.5	154.2
97.5°	122.9	146.2	179.4	185.8	175.9	131.2	125.7	117.0	159.3	194.5	245.5
100°	227.3	256.9	280.6	233.2	183.8	181.8	170.0	166.0	211.5	245.1	294.5
102.5°	355.3	364.4	282.2	255.3	243.9	235.6	217.4	215.0	260.5	306.7	348.2
105°	385.4	345.9	347.8	347.8	339.9	324.1	290.5	288.5	339.9	393.3	444.7
107.5°	453.4	459.3	469.6	467.2	458.1	415.8	376.3	367.2	413.4	477.5	534.0
110°	543.5	549.4	553.4	549.4	535.6	482.2	434.8	421.0	462.5	529.7	590.9

TEST NUMBER: P1428277

CATALOG NUMBER: SQ2W-PR1-K-125U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	630.4	634.8	643.5	631.6	608.3	547.0	493.3	473.1	514.6	583.4	646.3
115°	768.8	768.8	770.8	764.8	717.4	654.2	583.0	553.4	588.9	652.2	721.4
117.5°	904.8	907.1	899.2	883.4	828.5	754.9	675.1	627.7	655.7	722.5	793.7
120°	990.1	994.1	986.2	962.5	909.1	826.1	735.2	679.8	701.6	766.8	838.0
122.5°	1078.7	1077.9	1068.4	1041.5	978.7	892.5	803.2	735.2	744.3	804.8	874.3
125°	1201.6	1199.6	1191.7	1160.1	1094.9	1005.9	901.2	818.2	806.3	857.7	928.9
127.5°	1318.6	1314.2	1302.0	1263.7	1196.9	1111.1	996.1	902.0	875.5	907.9	973.1
130°	1399.2	1393.3	1371.6	1330.1	1264.8	1183.8	1067.2	960.5	922.9	942.7	1000.0
132.5°	1476.7	1459.7	1441.1	1396.5	1336.0	1251.8	1133.6	1022.1	970.4	979.1	1023.7
135°	1575.1	1559.3	1535.6	1492.1	1434.8	1351.8	1233.2	1112.7	1041.5	1033.6	1059.3
137.5°	1661.7	1645.1	1618.2	1580.7	1522.9	1449.0	1335.2	1207.9	1118.2	1091.7	1101.6
140°	1715.4	1695.7	1672.0	1634.4	1583.0	1505.9	1395.3	1272.7	1172.0	1134.4	1128.5
142.5°	1759.7	1744.7	1719.4	1685.0	1639.9	1562.9	1455.4	1334.4	1227.3	1178.7	1164.8
145°	1826.1	1814.3	1786.6	1755.0	1717.4	1640.3	1541.5	1421.0	1314.2	1251.0	1221.4
147.5°	1882.2	1872.7	1851.0	1813.9	1782.2	1708.3	1618.2	1511.5	1402.0	1323.7	1285.4
150°	1917.0	1909.1	1887.4	1851.8	1820.2	1751.0	1664.1	1565.2	1460.5	1377.5	1328.1
152.5°	1950.2	1942.3	1917.4	1881.8	1855.0	1790.5	1711.5	1617.4	1511.1	1428.1	1377.1
155°	1994.1	1984.2	1960.5	1926.9	1903.2	1843.9	1770.8	1687.8	1596.9	1509.9	1452.6
157.5°	2028.9	2016.6	1994.5	1965.6	1940.3	1885.8	1822.2	1750.6	1671.2	1588.2	1529.7
160°	2049.4	2035.6	2011.9	1986.2	1962.5	1911.1	1853.8	1788.6	1715.4	1640.3	1577.1
162.5°	2063.7	2051.4	2022.9	2000.4	1979.9	1933.2	1879.1	1820.2	1755.0	1689.3	1630.8
165°	2079.1	2065.2	2035.6	2017.8	2000.0	1960.5	1913.1	1865.6	1810.3	1756.9	1709.5
167.5°	2080.3	2068.8	2039.2	2021.8	2008.7	1974.7	1936.4	1900.0	1856.9	1815.0	1775.5
170°	2077.1	2067.2	2037.6	2021.8	2011.9	1984.2	1950.6	1919.0	1885.4	1849.8	1818.2
172.5°	2066.0	2056.2	2028.1	2015.4	2010.3	1985.8	1958.5	1934.8	1906.0	1879.9	1854.6
175°	2037.6	2029.7	2006.0	1998.0	2000.0	1984.2	1964.5	1950.6	1932.8	1917.0	1903.2
177.5°	1996.1	1991.3	1973.9	1973.9	1980.3	1970.8	1964.5	1958.1	1950.2	1945.5	1940.7
180°	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5



TEST NUMBER: P1428277

CATALOG NUMBER: SQ2W-PR1-K-125U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	1143.3	1143.3	1143.3	1143.3	1143.3	1143.3	1143.3	1143.3	1143.3	1143.3	1143.3
2.5°	1142.4	1139.7	1140.2	1140.8	1142.0	1143.3	1142.0	1140.8	1140.2	1139.7	1142.4
5°	1147.3	1145.0	1146.0	1148.1	1153.2	1158.4	1153.2	1148.1	1146.0	1145.0	1147.3
7.5°	1160.3	1160.4	1163.4	1167.4	1174.2	1181.0	1174.2	1167.4	1163.4	1160.4	1160.3
10°	1166.4	1165.7	1166.2	1168.4	1175.6	1182.9	1175.6	1168.4	1166.2	1165.7	1166.4
12.5°	1155.6	1151.1	1150.3	1150.8	1154.7	1158.7	1154.7	1150.8	1150.3	1151.1	1155.6
15°	1129.0	1120.7	1122.3	1124.1	1126.7	1129.3	1126.7	1124.1	1122.3	1120.7	1129.0
17.5°	1103.4	1097.6	1103.2	1108.6	1113.7	1118.8	1113.7	1108.6	1103.2	1097.6	1103.4
20°	1089.7	1086.3	1093.5	1101.2	1110.0	1118.8	1110.0	1101.2	1093.5	1086.3	1089.7
22.5°	1077.2	1076.6	1086.7	1097.4	1109.5	1121.6	1109.5	1097.4	1086.7	1076.6	1077.2
25°	1057.5	1063.2	1080.3	1096.5	1110.0	1123.5	1110.0	1096.5	1080.3	1063.2	1057.5
27.5°	1035.6	1050.2	1073.3	1092.9	1102.4	1111.8	1102.4	1092.9	1073.3	1050.2	1035.6
30°	1022.5	1040.3	1060.5	1076.6	1080.2	1083.8	1080.2	1076.6	1060.5	1040.3	1022.5
32.5°	1007.1	1024.4	1035.0	1041.9	1037.2	1032.6	1037.2	1041.9	1035.0	1024.4	1007.1
35°	979.7	991.1	982.8	974.2	964.3	954.5	964.3	974.2	982.8	991.1	979.7
37.5°	930.0	929.8	905.5	884.5	873.2	861.9	873.2	884.5	905.5	929.8	930.0
40°	889.5	878.1	841.8	811.4	798.4	785.5	798.4	811.4	841.8	878.1	889.5
42.5°	836.9	812.5	766.3	727.7	711.8	696.0	711.8	727.7	766.3	812.5	836.9
45°	740.8	700.9	650.7	608.6	591.0	573.4	591.0	608.6	650.7	700.9	740.8
47.5°	633.5	587.1	542.2	504.5	488.0	471.5	488.0	504.5	542.2	587.1	633.5
50°	565.2	518.6	476.7	440.7	422.5	404.4	422.5	440.7	476.7	518.6	565.2
52.5°	504.3	458.9	417.0	381.4	364.9	348.5	364.9	417.0	458.9	504.3	504.3
55°	417.7	376.3	336.4	303.7	292.3	280.9	292.3	303.7	336.4	376.3	417.7
57.5°	343.7	306.8	272.9	245.4	237.0	228.7	237.0	245.4	272.9	306.8	343.7
60°	296.1	263.0	236.6	215.1	208.3	201.6	208.3	215.1	236.6	263.0	296.1
62.5°	257.1	227.5	206.4	189.4	184.3	179.2	184.3	189.4	206.4	227.5	257.1
65°	209.8	185.4	169.4	156.4	152.8	149.2	152.8	169.4	185.4	209.8	209.8
67.5°	172.5	152.9	140.2	129.9	126.5	123.1	126.5	140.2	152.9	172.5	172.5
70°	150.3	133.0	121.6	112.4	109.8	107.2	109.8	121.6	133.0	150.3	150.3
72.5°	129.3	114.4	105.1	97.7	95.9	94.2	95.9	105.1	114.4	129.3	129.3
75°	99.2	87.8	81.6	76.7	75.6	74.6	75.6	81.6	87.8	99.2	99.2
77.5°	70.7	62.8	60.8	59.2	59.2	59.2	59.2	60.8	62.8	70.7	70.7
80°	54.1	48.9	48.9	48.9	48.9	48.9	48.9	48.9	48.9	54.1	54.1
82.5°	40.7	37.8	37.8	37.7	37.2	36.8	37.2	37.7	37.8	40.7	40.7
85°	22.1	20.6	17.5	14.8	13.2	11.7	13.2	14.8	17.5	20.6	22.1
87.5°	12.9	14.7	17.4	19.0	20.6	19.8	20.6	17.4	14.7	12.9	12.9
90°	45.5	59.3	73.1	81.0	88.9	85.0	88.9	73.1	59.3	45.5	45.5
92.5°	91.3	114.6	131.6	145.9	152.2	151.4	152.2	114.6	91.3	91.3	91.3
95°	183.8	211.5	239.1	258.9	270.8	266.8	270.8	211.5	183.8	183.8	183.8
97.5°	283.4	320.6	351.4	370.0	381.8	389.7	381.8	320.6	283.4	283.4	283.4
100°	349.8	385.4	421.0	442.7	462.5	470.4	462.5	385.4	349.8	349.8	349.8
102.5°	403.6	450.2	488.9	512.3	528.9	536.8	528.9	450.2	403.6	403.6	403.6
105°	492.1	541.5	583.0	612.7	630.4	636.4	630.4	541.5	492.1	492.1	492.1
107.5°	580.6	631.6	670.0	702.8	724.5	737.2	724.5	631.6	580.6	580.6	580.6
110°	650.2	691.7	733.2	762.9	784.6	792.5	784.6	691.7	650.2	650.2	650.2



TEST NUMBER: P1428277

CATALOG NUMBER: SQ2W-PR1-K-125U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	708.7	754.9	796.5	826.1	851.0	862.1	851.0	826.1	796.5	754.9	708.7
115°	790.5	851.8	889.3	917.0	934.8	944.7	934.8	917.0	889.3	851.8	790.5
117.5°	858.5	922.5	963.6	985.0	993.3	1000.4	993.3	985.0	963.6	922.5	858.5
120°	901.2	960.5	1007.9	1035.6	1045.5	1049.4	1045.5	1035.6	1007.9	960.5	901.2
122.5°	940.7	996.8	1042.7	1076.7	1092.9	1096.9	1092.9	1076.7	1042.7	996.8	940.7
125°	996.1	1049.4	1096.9	1130.4	1148.2	1158.1	1148.2	1130.4	1096.9	1049.4	996.1
127.5°	1044.3	1102.0	1145.5	1175.9	1193.3	1201.2	1193.3	1175.9	1145.5	1102.0	1044.3
130°	1071.2	1130.4	1173.9	1207.5	1223.3	1231.2	1223.3	1207.5	1173.9	1130.4	1071.2
132.5°	1091.7	1154.2	1199.2	1229.7	1247.1	1255.0	1247.1	1229.7	1199.2	1154.2	1091.7
135°	1116.6	1181.8	1229.3	1258.9	1274.7	1282.6	1274.7	1258.9	1229.3	1181.8	1116.6
137.5°	1138.4	1197.6	1247.1	1278.3	1292.5	1297.6	1292.5	1278.3	1247.1	1197.6	1138.4
140°	1154.2	1205.5	1255.0	1284.6	1300.4	1302.4	1300.4	1284.6	1255.0	1205.5	1154.2
142.5°	1174.7	1215.0	1258.1	1287.8	1303.6	1307.1	1303.6	1287.8	1258.1	1215.0	1174.7
145°	1211.5	1235.2	1264.8	1292.5	1306.3	1310.3	1306.3	1292.5	1264.8	1235.2	1211.5
147.5°	1257.7	1265.2	1280.6	1298.8	1312.3	1315.0	1312.3	1298.8	1280.6	1265.2	1257.7
150°	1292.5	1290.5	1296.5	1308.3	1320.2	1318.2	1320.2	1308.3	1296.5	1290.5	1292.5
152.5°	1332.0	1320.6	1320.2	1325.7	1331.2	1330.8	1331.2	1325.7	1320.2	1320.6	1332.0
155°	1399.2	1377.5	1365.6	1361.7	1361.7	1359.7	1361.7	1361.7	1365.6	1377.5	1399.2
157.5°	1473.1	1442.7	1424.9	1415.4	1412.7	1408.3	1412.7	1415.4	1424.9	1442.7	1473.1
160°	1523.7	1490.1	1472.3	1456.5	1450.6	1444.7	1450.6	1456.5	1472.3	1490.1	1523.7
162.5°	1571.2	1539.1	1519.8	1505.6	1499.6	1490.5	1499.6	1505.6	1519.8	1539.1	1571.2
165°	1648.2	1614.6	1592.9	1581.0	1573.1	1565.2	1573.1	1581.0	1592.9	1614.6	1648.2
167.5°	1725.3	1688.6	1674.3	1660.9	1653.4	1639.1	1653.4	1660.9	1674.3	1688.6	1725.3
170°	1772.7	1739.2	1731.2	1719.4	1705.6	1689.7	1705.6	1719.4	1731.2	1739.2	1772.7
172.5°	1813.9	1791.3	1783.4	1771.6	1767.2	1754.6	1767.2	1771.6	1783.4	1791.3	1813.9
175°	1873.5	1855.8	1855.8	1853.8	1847.8	1836.0	1847.8	1853.8	1855.8	1855.8	1873.5
177.5°	1923.3	1913.9	1920.2	1920.2	1918.6	1907.5	1918.6	1920.2	1920.2	1913.9	1923.3
180°	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5



TEST NUMBER: P1428277

CATALOG NUMBER: SQ2W-PR1-K-125U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	1143.3	1143.3	1143.3	1143.3
2.5°	1148.2	1151.0	1144.8	1138.6
5°	1153.0	1155.1	1146.2	1137.4
7.5°	1163.2	1162.3	1149.7	1137.2
10°	1168.5	1166.3	1151.3	1136.3
12.5°	1163.9	1165.7	1148.2	1130.7
15°	1147.2	1155.6	1134.9	1114.1
17.5°	1120.7	1128.3	1106.6	1085.0
20°	1103.6	1108.8	1087.6	1066.4
22.5°	1088.7	1092.0	1070.8	1049.6
25°	1063.2	1062.9	1044.2	1025.6
27.5°	1029.6	1022.4	1011.4	1000.4
30°	1006.9	993.4	986.2	978.9
32.5°	983.3	964.3	960.0	955.6
35°	948.6	924.4	920.8	917.2
37.5°	906.1	886.4	879.0	871.5
40°	876.0	862.8	850.4	837.9
42.5°	839.6	836.7	816.8	796.9
45°	770.3	785.7	758.8	731.9
47.5°	681.5	710.5	682.9	655.2
50°	616.5	649.4	627.1	604.8
52.5°	553.1	585.7	569.6	553.6
55°	460.7	490.9	482.6	474.3
57.5°	383.6	412.2	406.9	401.6
60°	336.0	365.0	361.4	357.8
62.5°	295.3	323.3	320.5	317.7
65°	242.4	266.2	263.6	261.1
67.5°	199.1	218.8	217.4	216.1
70°	173.6	191.0	190.5	190.0
72.5°	149.7	165.2	165.9	166.7
75°	115.8	128.6	130.1	131.7
77.5°	84.4	95.0	96.7	98.4
80°	64.5	72.8	74.8	76.9
82.5°	46.5	51.5	54.4	57.3
85°	22.1	22.8	25.4	28.0
87.5°	13.0	11.8	10.2	8.6
90°	35.6	21.7	13.8	5.9
92.5°	76.7	53.4	37.5	21.7
95°	154.2	122.5	87.0	61.3
97.5°	245.5	194.5	159.3	117.0
100°	294.5	245.1	211.5	166.0
102.5°	348.2	306.7	260.5	215.0
105°	444.7	393.3	339.9	288.5
107.5°	534.0	477.5	413.4	367.2
110°	590.9	529.7	462.5	421.0



TEST NUMBER: P1428277

CATALOG NUMBER: SQ2W-PR1-K-125U-050D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	646.3	583.4	514.6	473.1
115°	721.4	652.2	588.9	553.4
117.5°	793.7	722.5	655.7	627.7
120°	838.0	766.8	701.6	679.8
122.5°	874.3	804.8	744.3	735.2
125°	928.9	857.7	806.3	818.2
127.5°	973.1	907.9	875.5	902.0
130°	1000.0	942.7	922.9	960.5
132.5°	1023.7	979.1	970.4	1022.1
135°	1059.3	1033.6	1041.5	1112.7
137.5°	1101.6	1091.7	1118.2	1207.9
140°	1128.5	1134.4	1172.0	1272.7
142.5°	1164.8	1178.7	1227.3	1334.4
145°	1221.4	1251.0	1314.2	1421.0
147.5°	1285.4	1323.7	1402.0	1511.5
150°	1328.1	1377.5	1460.5	1565.2
152.5°	1377.1	1428.1	1511.1	1617.4
155°	1452.6	1509.9	1596.9	1687.8
157.5°	1529.7	1588.2	1671.2	1750.6
160°	1577.1	1640.3	1715.4	1788.6
162.5°	1630.8	1689.3	1755.0	1820.2
165°	1709.5	1756.9	1810.3	1865.6
167.5°	1775.5	1815.0	1856.9	1900.0
170°	1818.2	1849.8	1885.4	1919.0
172.5°	1854.6	1879.9	1906.0	1934.8
175°	1903.2	1917.0	1932.8	1950.6
177.5°	1940.7	1945.5	1950.2	1958.1
180°	1956.5	1956.5	1956.5	1956.5



TEST NUMBER: P1428277
 CATALOG NUMBER: SQ2W-PR1-K-125U-050D-L840-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.90	15.60	16.00	16.69	18.20	11.27	11.97	12.37	13.06	14.57
	3H	16.10	16.72	17.20	17.82	19.34	12.42	13.04	13.53	14.15	15.67
	4H	16.57	17.17	17.69	18.27	19.79	12.87	13.47	13.99	14.57	16.10
	6H	16.86	17.41	17.99	18.51	20.05	13.21	13.75	14.34	14.86	16.40
	8H	16.96	17.48	18.09	18.60	20.13	13.34	13.86	14.47	14.98	16.51
	12H	17.00	17.49	18.13	18.60	20.15	13.37	13.86	14.50	14.97	16.53
4H	2H	14.98	15.58	16.11	16.68	18.21	11.96	12.55	13.09	13.66	15.18
	3H	16.43	16.92	17.56	18.05	19.59	13.30	13.79	14.43	14.92	16.46
	4H	17.05	17.50	18.19	18.62	20.18	13.84	14.29	14.98	15.41	16.97
	6H	17.47	17.86	18.62	19.00	20.55	14.26	14.65	15.41	15.79	17.34
	8H	17.63	17.99	18.77	19.12	20.69	14.44	14.81	15.59	15.94	17.50
	12H	17.69	18.02	18.85	19.16	20.73	14.48	14.81	15.64	15.96	17.53
8H	4H	17.07	17.43	18.21	18.56	20.13	14.16	14.52	15.30	15.65	17.22
	6H	17.59	17.89	18.75	19.07	20.63	14.69	14.99	15.85	16.16	17.73
	8H	17.83	18.09	18.99	19.24	20.82	14.95	15.21	16.12	16.37	17.95
	12H	17.94	18.17	19.11	19.32	20.94	15.04	15.27	16.21	16.42	18.04
12H	4H	17.02	17.34	18.17	18.49	20.06	14.17	14.50	15.33	15.64	17.21
	6H	17.58	17.84	18.75	19.00	20.58	14.76	15.02	15.93	16.18	17.76
	8H	17.83	18.06	19.00	19.21	20.82	15.05	15.27	16.22	16.43	18.04