

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: CORELITE

Report Number: P1428289

Luminaire Tested: SQ2W-PR1-K-125U-100D-L840-UNV-STD-W-WM-4

Issue Date: 3/10/2026

Test Information

Test Method: LM-79-2019
Report Number: P1428289
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2303-941-3, G2-2308-131-9)
Test Lab: INNOVATION CENTER
Issue Date: 3/10/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: CORELITE
Catalog Number: SQ2W-PR1-K-125U-100D-L840-UNV-STD-W-WM-4
Description: CORELITE SQ2W WALL MOUNTED LED LUMINAIRE
DOWNLIGHT - PERCEIVE RIPPLE LENS
UPLIGHT - ASYMMETRIC ROLL LENS
DOWNLIGHT 1000 LUMENS PER FOOT
UPLIGHT 1250 LUMENS PER FOOT
Light Source: 4000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11055.5 lumens
Efficiency: N/A
Efficacy: 135.5 lumens/watt
Spacing Criteria (0/90/45): 1.28 / 1.34 / 1.36
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 81.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1428289

CATALOG NUMBER: SQ2W-PR1-K-125U-100D-L840-UNV-STD-W-WM-4

Luminous Intensity Polar Plot

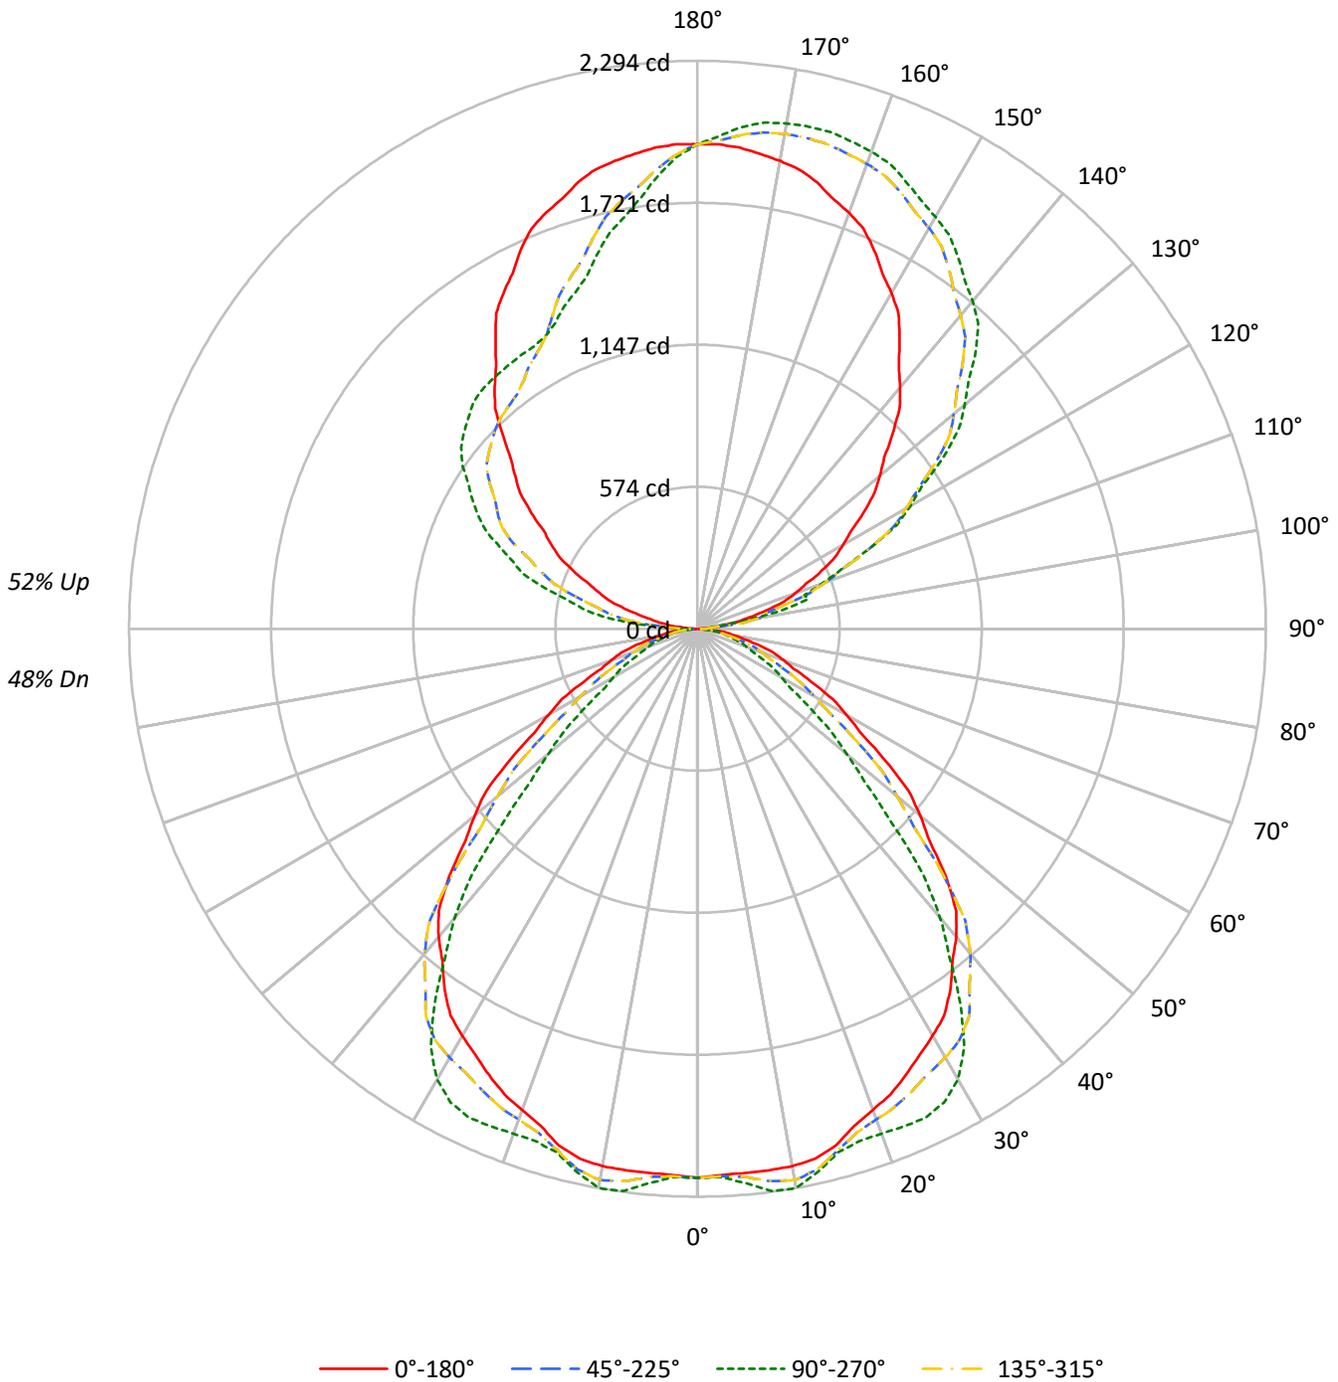



TEST NUMBER: P1428289

CATALOG NUMBER: SQ2W-PR1-K-125U-100D-L840-UNV-STD-W-WM-4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	98	98	98	98	82	82	82	68	68	68	55	55	55	48
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	49	48	47	42
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41	36
3	82	73	66	61	75	68	62	57	58	53	49	48	45	42	39	37	35	31
4	75	65	57	52	69	60	54	49	51	46	42	43	40	37	36	33	31	27
5	69	58	50	45	64	54	47	42	46	41	37	39	35	32	32	29	27	24
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	29	26	24	21
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22	19
8	55	43	35	30	51	40	33	29	35	29	26	30	25	22	25	22	19	17
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18	15
10	48	36	29	24	44	34	27	23	29	24	21	25	21	18	21	18	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	35801	35801	35801	35801
5°	35755	36414	35755	36414
10°	36132	37614	36132	37614
15°	36120	36611	36120	36611
20°	35535	37284	35535	37284
25°	35435	38818	35435	38818
30°	35398	39190	35398	39190
35°	35062	36487	35062	36487
40°	34254	32110	34254	32110
45°	32412	25393	32412	25393
50°	29466	19700	29466	19700
55°	25897	15333	25897	15333
60°	22407	12626	22407	12626
65°	19342	11052	19342	11052
70°	17391	9819	17391	9819
75°	15932	9027	15932	9027
80°	13872	8824	13872	8824
85°	10041	4187	10041	4187

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 20°
 Vertical Angle: 45°
 Luminance: 34798 cd/sqm



TEST NUMBER: P1428289

CATALOG NUMBER: SQ2W-PR1-K-125U-100D-L840-UNV-STD-W-WM-4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	214.1	1.9
10°-20°	619.9	5.6
20°-30°	958.3	8.7
30°-40°	1152.4	10.4
40°-50°	1034.9	9.4
50°-60°	693.4	6.3
60°-70°	403.4	3.6
70°-80°	207.2	1.9
80°-90°	59.2	0.5
90°-100°	155.7	1.4
100°-110°	454.1	4.1
110°-120°	741.1	6.7
120°-130°	940.4	8.5
130°-140°	1006.2	9.1
140°-150°	939.6	8.5
150°-160°	773.1	7.0
160°-170°	518.5	4.7
170°-180°	184.1	1.7
0°-30°	1792.3	16.2
0°-40°	2944.7	26.6
0°-60°	4673.0	42.3
0°-90°	5342.8	48.3
90°-120°	1350.9	12.2
90°-150°	4237.0	38.3
90°-180°	5713.0	51.7
0°-180°	11055.5	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	2217	2217	2217	2217	2217	
5°	2206	2247	2206	2247	2206	211
15°	2161	2190	2161	2190	2161	607
25°	1989	2179	1989	2179	1989	917
35°	1779	1851	1779	1851	1779	1109
45°	1420	1112	1420	1112	1420	1086
55°	920	545	920	545	920	827
65°	506	289	506	289	506	512
75°	255	145	255	145	255	271
85°	54	23	54	23	54	67
90°	6	44	6	85	6	7
95°	61	46	61	267	61	74
105°	288	462	288	636	288	307
115°	553	767	553	945	553	545
125°	818	1215	818	1158	818	732
135°	1113	1591	1113	1283	1113	860
145°	1421	1834	1421	1310	1421	889
155°	1688	1992	1688	1360	1688	776
165°	1866	2077	1866	1565	1866	525
175°	1951	2034	1951	1836	1951	185
180°	1956	1956	1956	1956	1956	



TEST NUMBER: P1428289

CATALOG NUMBER: SQ2W-PR1-K-125U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (FULL):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
0°	2217.4	2217.4	2217.4	2217.4	2217.4	2217.4	2217.4	2217.4	2217.4	2217.4	2217.4
2.5°	2208.4	2220.4	2232.5	2227.1	2215.8	2210.6	2211.4	2212.6	2215.0	2217.4	2215.0
5°	2206.1	2223.2	2240.3	2236.3	2225.2	2220.7	2222.7	2226.7	2236.8	2246.8	2236.8
7.5°	2205.7	2230.0	2254.3	2256.2	2250.5	2250.6	2256.5	2264.1	2277.4	2290.7	2277.4
10°	2203.9	2233.0	2262.1	2266.4	2262.4	2260.9	2261.9	2266.1	2280.2	2294.3	2280.2
12.5°	2193.0	2227.0	2260.9	2257.4	2241.3	2232.5	2231.1	2232.0	2239.6	2247.3	2239.6
15°	2160.9	2201.1	2241.3	2225.0	2189.8	2173.7	2176.7	2180.3	2185.3	2190.3	2185.3
17.5°	2104.4	2146.4	2188.4	2173.7	2140.2	2128.8	2139.7	2150.3	2160.1	2170.0	2160.1
20°	2068.2	2109.4	2150.6	2140.6	2113.4	2106.9	2121.0	2135.8	2152.9	2170.0	2152.9
22.5°	2035.7	2076.9	2118.1	2111.6	2089.3	2088.0	2107.7	2128.4	2151.9	2175.4	2151.9
25°	1989.1	2025.3	2061.5	2062.2	2051.2	2062.2	2095.4	2126.8	2152.9	2179.0	2152.9
27.5°	1940.3	1961.6	1982.9	1997.0	2008.6	2036.8	2081.7	2119.8	2138.1	2156.4	2138.1
30°	1898.7	1912.8	1926.8	1953.0	1983.1	2017.8	2056.9	2088.1	2095.1	2102.1	2095.1
32.5°	1853.5	1861.9	1870.4	1907.2	1953.4	1986.8	2007.5	2020.8	2011.7	2002.7	2011.7
35°	1778.9	1785.9	1793.0	1839.9	1900.2	1922.3	1906.2	1889.4	1870.3	1851.2	1870.3
37.5°	1690.3	1704.8	1719.2	1757.5	1803.7	1803.3	1756.3	1715.6	1693.7	1671.8	1693.7
40°	1625.2	1649.3	1673.4	1699.0	1725.2	1703.1	1632.7	1573.7	1548.6	1523.5	1548.6
42.5°	1545.6	1584.2	1622.8	1628.5	1623.3	1575.9	1486.3	1411.4	1380.6	1349.9	1380.6
45°	1419.5	1471.8	1524.0	1494.1	1436.8	1359.5	1262.0	1180.4	1146.3	1112.1	1146.3
47.5°	1270.8	1324.4	1378.1	1321.7	1228.7	1138.7	1051.7	978.4	946.5	914.5	946.5
50°	1173.1	1216.3	1259.5	1195.7	1096.3	1005.9	924.5	854.7	819.5	784.3	819.5
52.5°	1073.7	1104.8	1136.0	1072.8	978.1	890.1	808.8	739.7	707.8	675.9	707.8
55°	920.0	936.0	952.1	893.6	810.2	729.8	652.5	589.0	566.9	544.7	566.9
57.5°	778.9	789.2	799.4	744.0	666.6	595.1	529.4	476.0	459.8	443.5	459.8
60°	693.9	701.0	708.0	651.7	574.4	510.1	458.9	417.2	404.1	391.0	404.1
62.5°	616.2	621.6	627.0	572.8	498.6	441.2	400.4	367.3	357.5	347.6	357.5
65°	506.3	511.3	516.4	470.2	406.9	359.7	328.5	303.4	296.4	289.3	296.4
67.5°	419.1	421.7	424.3	386.2	334.6	296.5	272.0	252.0	245.3	238.7	245.3
70°	368.4	369.4	370.4	336.8	291.6	257.9	235.8	218.0	213.0	208.0	213.0
72.5°	323.2	321.8	320.4	290.4	250.8	222.0	203.9	189.5	186.1	182.6	186.1
75°	255.4	252.4	249.4	224.5	192.4	170.3	158.2	148.7	146.7	144.7	146.7
77.5°	190.8	187.6	184.3	163.7	137.1	121.9	117.8	114.8	114.8	114.8	114.8
80°	149.2	145.2	141.1	125.1	105.0	94.9	94.9	94.9	94.9	94.9	94.9
82.5°	111.2	105.6	100.0	90.1	78.9	73.2	73.2	73.0	72.2	71.4	72.2
85°	54.2	49.2	44.2	42.9	42.9	39.9	33.9	28.6	25.6	22.6	25.6
87.5°	15.7	17.2	19.2	17.8	14.9	13.3	13.3	13.7	14.1	14.1	14.1
90°	5.9	13.8	23.7	31.6	37.5	39.5	39.5	41.5	43.5	43.5	43.5
92.5°	21.7	34.4	34.8	34.8	42.3	45.9	49.0	49.4	51.4	51.4	51.4
95°	61.3	67.2	100.8	98.8	67.2	53.4	45.5	45.5	45.5	45.5	45.5
97.5°	117.0	125.7	131.2	175.9	185.8	179.4	146.2	122.9	109.9	104.0	109.9
100°	166.0	170.0	181.8	183.8	233.2	280.6	256.9	227.3	217.4	211.5	217.4
102.5°	215.0	217.4	235.6	243.9	255.3	282.2	364.4	355.3	348.6	347.4	348.6
105°	288.5	290.5	324.1	339.9	347.8	347.8	345.9	385.4	448.6	462.5	448.6
107.5°	367.2	376.3	415.8	458.1	467.2	469.6	459.3	453.4	451.0	452.6	451.0
110°	421.0	434.8	482.2	535.6	549.4	553.4	549.4	543.5	539.5	539.5	539.5



TEST NUMBER: P1428289

CATALOG NUMBER: SQ2W-PR1-K-125U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°	100°
112.5°	473.1	493.3	547.0	608.3	631.6	643.5	634.8	630.4	626.5	629.7	626.5
115°	553.4	583.0	654.2	717.4	764.8	770.8	768.8	768.8	766.8	766.8	766.8
117.5°	627.7	675.1	754.9	828.5	883.4	899.2	907.1	904.8	902.4	906.3	902.4
120°	679.8	735.2	826.1	909.1	962.5	986.2	994.1	990.1	994.1	990.1	994.1
122.5°	735.2	803.2	892.5	978.7	1041.5	1068.4	1077.9	1078.7	1079.5	1077.1	1079.5
125°	818.2	901.2	1005.9	1094.9	1160.1	1191.7	1199.6	1201.6	1205.5	1215.4	1205.5
127.5°	902.0	996.1	1111.1	1196.9	1263.7	1302.0	1314.2	1318.6	1326.9	1331.2	1326.9
130°	960.5	1067.2	1183.8	1264.8	1330.1	1371.6	1393.3	1399.2	1409.1	1407.1	1409.1
132.5°	1022.1	1133.6	1251.8	1336.0	1396.5	1441.1	1459.7	1476.7	1480.3	1483.0	1480.3
135°	1112.7	1233.2	1351.8	1434.8	1492.1	1535.6	1559.3	1575.1	1585.0	1590.9	1585.0
137.5°	1207.9	1335.2	1449.0	1522.9	1580.7	1618.2	1645.1	1661.7	1672.0	1676.7	1672.0
140°	1272.7	1395.3	1505.9	1583.0	1634.4	1672.0	1695.7	1715.4	1727.3	1727.3	1727.3
142.5°	1334.4	1455.4	1562.9	1639.9	1685.0	1719.4	1744.7	1759.7	1773.1	1773.1	1773.1
145°	1421.0	1541.5	1640.3	1717.4	1755.0	1786.6	1814.3	1826.1	1834.0	1834.0	1834.0
147.5°	1511.5	1618.2	1708.3	1782.2	1813.9	1851.0	1872.7	1882.2	1892.1	1887.8	1892.1
150°	1565.2	1664.1	1751.0	1820.2	1851.8	1887.4	1909.1	1917.0	1926.9	1921.0	1926.9
152.5°	1617.4	1711.5	1790.5	1855.0	1881.8	1917.4	1942.3	1950.2	1956.9	1952.6	1956.9
155°	1687.8	1770.8	1843.9	1903.2	1926.9	1960.5	1984.2	1994.1	2002.0	1992.1	2002.0
157.5°	1750.6	1822.2	1885.8	1940.3	1965.6	1994.5	2016.6	2028.9	2036.8	2032.4	2036.8
160°	1788.6	1853.8	1911.1	1962.5	1986.2	2011.9	2035.6	2049.4	2057.3	2051.4	2057.3
162.5°	1820.2	1879.1	1933.2	1979.9	2000.4	2022.9	2051.4	2063.7	2071.6	2064.1	2071.6
165°	1865.6	1913.1	1960.5	2000.0	2017.8	2035.6	2065.2	2079.1	2085.0	2077.1	2085.0
167.5°	1900.0	1936.4	1974.7	2008.7	2021.8	2039.2	2068.8	2080.3	2087.8	2077.9	2087.8
170°	1919.0	1950.6	1984.2	2011.9	2021.8	2037.6	2067.2	2077.1	2083.0	2073.1	2083.0
172.5°	1934.8	1958.5	1985.8	2010.3	2015.4	2028.1	2056.2	2066.0	2070.4	2062.1	2070.4
175°	1950.6	1964.5	1984.2	2000.0	1998.0	2006.0	2029.7	2037.6	2045.5	2033.6	2045.5
177.5°	1958.1	1964.5	1970.8	1980.3	1973.9	1973.9	1991.3	1996.1	1997.7	1991.3	1997.7
180°	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5



TEST NUMBER: P1428289

CATALOG NUMBER: SQ2W-PR1-K-125U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
0°	2217.4	2217.4	2217.4	2217.4	2217.4	2217.4	2217.4	2217.4	2217.4	2217.4	2217.4
2.5°	2212.6	2211.4	2210.6	2215.8	2227.1	2232.5	2220.4	2208.4	2220.4	2232.5	2227.1
5°	2226.7	2222.7	2220.7	2225.2	2236.3	2240.3	2223.2	2206.1	2223.2	2240.3	2236.3
7.5°	2264.1	2256.5	2250.6	2250.5	2256.2	2254.3	2230.0	2205.7	2230.0	2254.3	2256.2
10°	2266.1	2261.9	2260.9	2262.4	2266.4	2262.1	2233.0	2203.9	2233.0	2262.1	2266.4
12.5°	2232.0	2231.1	2232.5	2241.3	2257.4	2260.9	2227.0	2193.0	2227.0	2260.9	2257.4
15°	2180.3	2176.7	2173.7	2189.8	2225.0	2241.3	2201.1	2160.9	2201.1	2241.3	2225.0
17.5°	2150.3	2139.7	2128.8	2140.2	2173.7	2188.4	2146.4	2104.4	2146.4	2188.4	2173.7
20°	2135.8	2121.0	2106.9	2113.4	2140.6	2150.6	2109.4	2068.2	2109.4	2150.6	2140.6
22.5°	2128.4	2107.7	2088.0	2089.3	2111.6	2118.1	2076.9	2035.7	2076.9	2118.1	2111.6
25°	2126.8	2095.4	2062.2	2051.2	2062.2	2061.5	2025.3	1989.1	2025.3	2061.5	2062.2
27.5°	2119.8	2081.7	2036.8	2008.6	1997.0	1982.9	1961.6	1940.3	1961.6	1982.9	1997.0
30°	2088.1	2056.9	2017.8	1983.1	1953.0	1926.8	1912.8	1898.7	1912.8	1926.8	1953.0
32.5°	2020.8	2007.5	1986.8	1953.4	1907.2	1870.4	1861.9	1853.5	1861.9	1870.4	1907.2
35°	1889.4	1906.2	1922.3	1900.2	1839.9	1793.0	1785.9	1778.9	1785.9	1793.0	1839.9
37.5°	1715.6	1756.3	1803.3	1803.7	1757.5	1719.2	1704.8	1690.3	1704.8	1719.2	1757.5
40°	1573.7	1632.7	1703.1	1725.2	1699.0	1673.4	1649.3	1625.2	1649.3	1673.4	1699.0
42.5°	1411.4	1486.3	1575.9	1623.3	1628.5	1622.8	1584.2	1545.6	1584.2	1622.8	1628.5
45°	1180.4	1262.0	1359.5	1436.8	1494.1	1524.0	1471.8	1419.5	1471.8	1524.0	1494.1
47.5°	978.4	1051.7	1138.7	1228.7	1321.7	1378.1	1324.4	1270.8	1324.4	1378.1	1321.7
50°	854.7	924.5	1005.9	1096.3	1195.7	1259.5	1216.3	1173.1	1216.3	1259.5	1195.7
52.5°	739.7	808.8	890.1	978.1	1072.8	1136.0	1104.8	1073.7	1104.8	1136.0	1072.8
55°	589.0	652.5	729.8	810.2	893.6	952.1	936.0	920.0	936.0	952.1	893.6
57.5°	476.0	529.4	595.1	666.6	744.0	799.4	789.2	778.9	789.2	799.4	744.0
60°	417.2	458.9	510.1	574.4	651.7	708.0	701.0	693.9	701.0	708.0	651.7
62.5°	367.3	400.4	441.2	498.6	572.8	627.0	621.6	616.2	621.6	627.0	572.8
65°	303.4	328.5	359.7	406.9	470.2	516.4	511.3	506.3	511.3	516.4	470.2
67.5°	252.0	272.0	296.5	334.6	386.2	424.3	421.7	419.1	421.7	424.3	386.2
70°	218.0	235.8	257.9	291.6	336.8	370.4	369.4	368.4	369.4	370.4	336.8
72.5°	189.5	203.9	222.0	250.8	290.4	320.4	321.8	323.2	321.8	320.4	290.4
75°	148.7	158.2	170.3	192.4	224.5	249.4	252.4	255.4	252.4	249.4	224.5
77.5°	114.8	117.8	121.9	137.1	163.7	184.3	187.6	190.8	187.6	184.3	163.7
80°	94.9	94.9	94.9	105.0	125.1	141.1	145.2	149.2	145.2	141.1	125.1
82.5°	73.0	73.2	73.2	78.9	90.1	100.0	105.6	111.2	105.6	100.0	90.1
85°	28.6	33.9	39.9	42.9	42.9	44.2	49.2	54.2	49.2	44.2	42.9
87.5°	13.7	13.3	13.3	14.9	17.8	19.2	17.2	15.7	17.2	18.8	18.6
90°	41.5	39.5	39.5	37.5	31.6	23.7	13.8	5.9	13.8	21.7	35.6
92.5°	49.4	49.0	45.9	42.3	34.8	34.8	34.4	21.7	37.5	53.4	76.7
95°	45.5	45.5	53.4	67.2	98.8	100.8	67.2	61.3	87.0	122.5	154.2
97.5°	122.9	146.2	179.4	185.8	175.9	131.2	125.7	117.0	159.3	194.5	245.5
100°	227.3	256.9	280.6	233.2	183.8	181.8	170.0	166.0	211.5	245.1	294.5
102.5°	355.3	364.4	282.2	255.3	243.9	235.6	217.4	215.0	260.5	306.7	348.2
105°	385.4	345.9	347.8	347.8	339.9	324.1	290.5	288.5	339.9	393.3	444.7
107.5°	453.4	459.3	469.6	467.2	458.1	415.8	376.3	367.2	413.4	477.5	534.0
110°	543.5	549.4	553.4	549.4	535.6	482.2	434.8	421.0	462.5	529.7	590.9



TEST NUMBER: P1428289

CATALOG NUMBER: SQ2W-PR1-K-125U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	110°	120°	130°	140°	150°	160°	170°	180°	190°	200°	210°
112.5°	630.4	634.8	643.5	631.6	608.3	547.0	493.3	473.1	514.6	583.4	646.3
115°	768.8	768.8	770.8	764.8	717.4	654.2	583.0	553.4	588.9	652.2	721.4
117.5°	904.8	907.1	899.2	883.4	828.5	754.9	675.1	627.7	655.7	722.5	793.7
120°	990.1	994.1	986.2	962.5	909.1	826.1	735.2	679.8	701.6	766.8	838.0
122.5°	1078.7	1077.9	1068.4	1041.5	978.7	892.5	803.2	735.2	744.3	804.8	874.3
125°	1201.6	1199.6	1191.7	1160.1	1094.9	1005.9	901.2	818.2	806.3	857.7	928.9
127.5°	1318.6	1314.2	1302.0	1263.7	1196.9	1111.1	996.1	902.0	875.5	907.9	973.1
130°	1399.2	1393.3	1371.6	1330.1	1264.8	1183.8	1067.2	960.5	922.9	942.7	1000.0
132.5°	1476.7	1459.7	1441.1	1396.5	1336.0	1251.8	1133.6	1022.1	970.4	979.1	1023.7
135°	1575.1	1559.3	1535.6	1492.1	1434.8	1351.8	1233.2	1112.7	1041.5	1033.6	1059.3
137.5°	1661.7	1645.1	1618.2	1580.7	1522.9	1449.0	1335.2	1207.9	1118.2	1091.7	1101.6
140°	1715.4	1695.7	1672.0	1634.4	1583.0	1505.9	1395.3	1272.7	1172.0	1134.4	1128.5
142.5°	1759.7	1744.7	1719.4	1685.0	1639.9	1562.9	1455.4	1334.4	1227.3	1178.7	1164.8
145°	1826.1	1814.3	1786.6	1755.0	1717.4	1640.3	1541.5	1421.0	1314.2	1251.0	1221.4
147.5°	1882.2	1872.7	1851.0	1813.9	1782.2	1708.3	1618.2	1511.5	1402.0	1323.7	1285.4
150°	1917.0	1909.1	1887.4	1851.8	1820.2	1751.0	1664.1	1565.2	1460.5	1377.5	1328.1
152.5°	1950.2	1942.3	1917.4	1881.8	1855.0	1790.5	1711.5	1617.4	1511.1	1428.1	1377.1
155°	1994.1	1984.2	1960.5	1926.9	1903.2	1843.9	1770.8	1687.8	1596.9	1509.9	1452.6
157.5°	2028.9	2016.6	1994.5	1965.6	1940.3	1885.8	1822.2	1750.6	1671.2	1588.2	1529.7
160°	2049.4	2035.6	2011.9	1986.2	1962.5	1911.1	1853.8	1788.6	1715.4	1640.3	1577.1
162.5°	2063.7	2051.4	2022.9	2000.4	1979.9	1933.2	1879.1	1820.2	1755.0	1689.3	1630.8
165°	2079.1	2065.2	2035.6	2017.8	2000.0	1960.5	1913.1	1865.6	1810.3	1756.9	1709.5
167.5°	2080.3	2068.8	2039.2	2021.8	2008.7	1974.7	1936.4	1900.0	1856.9	1815.0	1775.5
170°	2077.1	2067.2	2037.6	2021.8	2011.9	1984.2	1950.6	1919.0	1885.4	1849.8	1818.2
172.5°	2066.0	2056.2	2028.1	2015.4	2010.3	1985.8	1958.5	1934.8	1906.0	1879.9	1854.6
175°	2037.6	2029.7	2006.0	1998.0	2000.0	1984.2	1964.5	1950.6	1932.8	1917.0	1903.2
177.5°	1996.1	1991.3	1973.9	1973.9	1980.3	1970.8	1964.5	1958.1	1950.2	1945.5	1940.7
180°	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5



TEST NUMBER: P1428289

CATALOG NUMBER: SQ2W-PR1-K-125U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
0°	2217.4	2217.4	2217.4	2217.4	2217.4	2217.4	2217.4	2217.4	2217.4	2217.4	2217.4
2.5°	2215.8	2210.6	2211.4	2212.6	2215.0	2217.4	2215.0	2212.6	2211.4	2210.6	2215.8
5°	2225.2	2220.7	2222.7	2226.7	2236.8	2246.8	2236.8	2226.7	2222.7	2220.7	2225.2
7.5°	2250.5	2250.6	2256.5	2264.1	2277.4	2290.7	2277.4	2264.1	2256.5	2250.6	2250.5
10°	2262.4	2260.9	2261.9	2266.1	2280.2	2294.3	2280.2	2266.1	2261.9	2260.9	2262.4
12.5°	2241.3	2232.5	2231.1	2232.0	2239.6	2247.3	2239.6	2232.0	2231.1	2232.5	2241.3
15°	2189.8	2173.7	2176.7	2180.3	2185.3	2190.3	2185.3	2180.3	2176.7	2173.7	2189.8
17.5°	2140.2	2128.8	2139.7	2150.3	2160.1	2170.0	2160.1	2150.3	2139.7	2128.8	2140.2
20°	2113.4	2106.9	2121.0	2135.8	2152.9	2170.0	2152.9	2135.8	2121.0	2106.9	2113.4
22.5°	2089.3	2088.0	2107.7	2128.4	2151.9	2175.4	2151.9	2128.4	2107.7	2088.0	2089.3
25°	2051.2	2062.2	2095.4	2126.8	2152.9	2179.0	2152.9	2126.8	2095.4	2062.2	2051.2
27.5°	2008.6	2036.8	2081.7	2119.8	2138.1	2156.4	2138.1	2119.8	2081.7	2036.8	2008.6
30°	1983.1	2017.8	2056.9	2088.1	2095.1	2102.1	2095.1	2088.1	2056.9	2017.8	1983.1
32.5°	1953.4	1986.8	2007.5	2020.8	2011.7	2002.7	2011.7	2020.8	2007.5	1986.8	1953.4
35°	1900.2	1922.3	1906.2	1889.4	1870.3	1851.2	1870.3	1889.4	1906.2	1922.3	1900.2
37.5°	1803.7	1803.3	1756.3	1715.6	1693.7	1671.8	1693.7	1715.6	1756.3	1803.3	1803.7
40°	1725.2	1703.1	1632.7	1573.7	1548.6	1523.5	1548.6	1573.7	1632.7	1703.1	1725.2
42.5°	1623.3	1575.9	1486.3	1411.4	1380.6	1349.9	1380.6	1411.4	1486.3	1575.9	1623.3
45°	1436.8	1359.5	1262.0	1180.4	1146.3	1112.1	1146.3	1180.4	1262.0	1359.5	1436.8
47.5°	1228.7	1138.7	1051.7	978.4	946.5	914.5	946.5	978.4	1051.7	1138.7	1228.7
50°	1096.3	1005.9	924.5	854.7	819.5	784.3	819.5	854.7	924.5	1005.9	1096.3
52.5°	978.1	890.1	808.8	739.7	707.8	675.9	707.8	739.7	808.8	890.1	978.1
55°	810.2	729.8	652.5	589.0	566.9	544.7	566.9	589.0	652.5	729.8	810.2
57.5°	666.6	595.1	529.4	476.0	459.8	443.5	459.8	476.0	529.4	595.1	666.6
60°	574.4	510.1	458.9	417.2	404.1	391.0	404.1	417.2	458.9	510.1	574.4
62.5°	498.6	441.2	400.4	367.3	357.5	347.6	357.5	367.3	400.4	441.2	498.6
65°	406.9	359.7	328.5	303.4	296.4	289.3	296.4	303.4	328.5	359.7	406.9
67.5°	334.6	296.5	272.0	252.0	245.3	238.7	245.3	252.0	272.0	296.5	334.6
70°	291.6	257.9	235.8	218.0	213.0	208.0	213.0	218.0	235.8	257.9	291.6
72.5°	250.8	222.0	203.9	189.5	186.1	182.6	186.1	189.5	203.9	222.0	250.8
75°	192.4	170.3	158.2	148.7	146.7	144.7	146.7	148.7	158.2	170.3	192.4
77.5°	137.1	121.9	117.8	114.8	114.8	114.8	114.8	114.8	117.8	121.9	137.1
80°	105.0	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	94.9	105.0
82.5°	78.9	73.2	73.2	73.0	72.2	71.4	72.2	73.0	73.2	73.2	78.9
85°	42.9	39.9	33.9	28.6	25.6	22.6	25.6	28.6	33.9	39.9	42.9
87.5°	16.5	17.3	20.0	21.6	23.2	22.4	23.2	21.6	20.0	17.3	16.5
90°	45.5	59.3	73.1	81.0	88.9	85.0	88.9	81.0	73.1	59.3	45.5
92.5°	91.3	114.6	131.6	145.9	152.2	151.4	152.2	145.9	131.6	114.6	91.3
95°	183.8	211.5	239.1	258.9	270.8	266.8	270.8	258.9	239.1	211.5	183.8
97.5°	283.4	320.6	351.4	370.0	381.8	389.7	381.8	370.0	351.4	320.6	283.4
100°	349.8	385.4	421.0	442.7	462.5	470.4	462.5	442.7	421.0	385.4	349.8
102.5°	403.6	450.2	488.9	512.3	528.9	536.8	528.9	512.3	488.9	450.2	403.6
105°	492.1	541.5	583.0	612.7	630.4	636.4	630.4	612.7	583.0	541.5	492.1
107.5°	580.6	631.6	670.0	702.8	724.5	737.2	724.5	702.8	670.0	631.6	580.6
110°	650.2	691.7	733.2	762.9	784.6	792.5	784.6	762.9	733.2	691.7	650.2



TEST NUMBER: P1428289

CATALOG NUMBER: SQ2W-PR1-K-125U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	220°	230°	240°	250°	260°	270°	280°	290°	300°	310°	320°
112.5°	708.7	754.9	796.5	826.1	851.0	862.1	851.0	826.1	796.5	754.9	708.7
115°	790.5	851.8	889.3	917.0	934.8	944.7	934.8	917.0	889.3	851.8	790.5
117.5°	858.5	922.5	963.6	985.0	993.3	1000.4	993.3	985.0	963.6	922.5	858.5
120°	901.2	960.5	1007.9	1035.6	1045.5	1049.4	1045.5	1035.6	1007.9	960.5	901.2
122.5°	940.7	996.8	1042.7	1076.7	1092.9	1096.9	1092.9	1076.7	1042.7	996.8	940.7
125°	996.1	1049.4	1096.9	1130.4	1148.2	1158.1	1148.2	1130.4	1096.9	1049.4	996.1
127.5°	1044.3	1102.0	1145.5	1175.9	1193.3	1201.2	1193.3	1175.9	1145.5	1102.0	1044.3
130°	1071.2	1130.4	1173.9	1207.5	1223.3	1231.2	1223.3	1207.5	1173.9	1130.4	1071.2
132.5°	1091.7	1154.2	1199.2	1229.7	1247.1	1255.0	1247.1	1229.7	1199.2	1154.2	1091.7
135°	1116.6	1181.8	1229.3	1258.9	1274.7	1282.6	1274.7	1258.9	1229.3	1181.8	1116.6
137.5°	1138.4	1197.6	1247.1	1278.3	1292.5	1297.6	1292.5	1278.3	1247.1	1197.6	1138.4
140°	1154.2	1205.5	1255.0	1284.6	1300.4	1302.4	1300.4	1284.6	1255.0	1205.5	1154.2
142.5°	1174.7	1215.0	1258.1	1287.8	1303.6	1307.1	1303.6	1287.8	1258.1	1215.0	1174.7
145°	1211.5	1235.2	1264.8	1292.5	1306.3	1310.3	1306.3	1292.5	1264.8	1235.2	1211.5
147.5°	1257.7	1265.2	1280.6	1298.8	1312.3	1315.0	1312.3	1298.8	1280.6	1265.2	1257.7
150°	1292.5	1290.5	1296.5	1308.3	1320.2	1318.2	1320.2	1308.3	1296.5	1290.5	1292.5
152.5°	1332.0	1320.6	1320.2	1325.7	1331.2	1330.8	1331.2	1325.7	1320.2	1320.6	1332.0
155°	1399.2	1377.5	1365.6	1361.7	1361.7	1359.7	1361.7	1361.7	1365.6	1377.5	1399.2
157.5°	1473.1	1442.7	1424.9	1415.4	1412.7	1408.3	1412.7	1415.4	1424.9	1442.7	1473.1
160°	1523.7	1490.1	1472.3	1456.5	1450.6	1444.7	1450.6	1456.5	1472.3	1490.1	1523.7
162.5°	1571.2	1539.1	1519.8	1505.6	1499.6	1490.5	1499.6	1505.6	1519.8	1539.1	1571.2
165°	1648.2	1614.6	1592.9	1581.0	1573.1	1565.2	1573.1	1581.0	1592.9	1614.6	1648.2
167.5°	1725.3	1688.6	1674.3	1660.9	1653.4	1639.1	1653.4	1660.9	1674.3	1688.6	1725.3
170°	1772.7	1739.2	1731.2	1719.4	1705.6	1689.7	1705.6	1719.4	1731.2	1739.2	1772.7
172.5°	1813.9	1791.3	1783.4	1771.6	1767.2	1754.6	1767.2	1771.6	1783.4	1791.3	1813.9
175°	1873.5	1855.8	1855.8	1853.8	1847.8	1836.0	1847.8	1853.8	1855.8	1855.8	1873.5
177.5°	1923.3	1913.9	1920.2	1920.2	1918.6	1907.5	1918.6	1920.2	1920.2	1913.9	1923.3
180°	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5	1956.5



TEST NUMBER: P1428289

CATALOG NUMBER: SQ2W-PR1-K-125U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
0°	2217.4	2217.4	2217.4	2217.4
2.5°	2227.1	2232.5	2220.4	2208.4
5°	2236.3	2240.3	2223.2	2206.1
7.5°	2256.2	2254.3	2230.0	2205.7
10°	2266.4	2262.1	2233.0	2203.9
12.5°	2257.4	2260.9	2227.0	2193.0
15°	2225.0	2241.3	2201.1	2160.9
17.5°	2173.7	2188.4	2146.4	2104.4
20°	2140.6	2150.6	2109.4	2068.2
22.5°	2111.6	2118.1	2076.9	2035.7
25°	2062.2	2061.5	2025.3	1989.1
27.5°	1997.0	1982.9	1961.6	1940.3
30°	1953.0	1926.8	1912.8	1898.7
32.5°	1907.2	1870.4	1861.9	1853.5
35°	1839.9	1793.0	1785.9	1778.9
37.5°	1757.5	1719.2	1704.8	1690.3
40°	1699.0	1673.4	1649.3	1625.2
42.5°	1628.5	1622.8	1584.2	1545.6
45°	1494.1	1524.0	1471.8	1419.5
47.5°	1321.7	1378.1	1324.4	1270.8
50°	1195.7	1259.5	1216.3	1173.1
52.5°	1072.8	1136.0	1104.8	1073.7
55°	893.6	952.1	936.0	920.0
57.5°	744.0	799.4	789.2	778.9
60°	651.7	708.0	701.0	693.9
62.5°	572.8	627.0	621.6	616.2
65°	470.2	516.4	511.3	506.3
67.5°	386.2	424.3	421.7	419.1
70°	336.8	370.4	369.4	368.4
72.5°	290.4	320.4	321.8	323.2
75°	224.5	249.4	252.4	255.4
77.5°	163.7	184.3	187.6	190.8
80°	125.1	141.1	145.2	149.2
82.5°	90.1	100.0	105.6	111.2
85°	42.9	44.2	49.2	54.2
87.5°	18.6	18.8	17.2	15.7
90°	35.6	21.7	13.8	5.9
92.5°	76.7	53.4	37.5	21.7
95°	154.2	122.5	87.0	61.3
97.5°	245.5	194.5	159.3	117.0
100°	294.5	245.1	211.5	166.0
102.5°	348.2	306.7	260.5	215.0
105°	444.7	393.3	339.9	288.5
107.5°	534.0	477.5	413.4	367.2
110°	590.9	529.7	462.5	421.0



TEST NUMBER: P1428289

CATALOG NUMBER: SQ2W-PR1-K-125U-100D-L840-UNV-STD-W-WM-4

CANDELA DISTRIBUTION (continued):

	330°	340°	350°	360°
112.5°	646.3	583.4	514.6	473.1
115°	721.4	652.2	588.9	553.4
117.5°	793.7	722.5	655.7	627.7
120°	838.0	766.8	701.6	679.8
122.5°	874.3	804.8	744.3	735.2
125°	928.9	857.7	806.3	818.2
127.5°	973.1	907.9	875.5	902.0
130°	1000.0	942.7	922.9	960.5
132.5°	1023.7	979.1	970.4	1022.1
135°	1059.3	1033.6	1041.5	1112.7
137.5°	1101.6	1091.7	1118.2	1207.9
140°	1128.5	1134.4	1172.0	1272.7
142.5°	1164.8	1178.7	1227.3	1334.4
145°	1221.4	1251.0	1314.2	1421.0
147.5°	1285.4	1323.7	1402.0	1511.5
150°	1328.1	1377.5	1460.5	1565.2
152.5°	1377.1	1428.1	1511.1	1617.4
155°	1452.6	1509.9	1596.9	1687.8
157.5°	1529.7	1588.2	1671.2	1750.6
160°	1577.1	1640.3	1715.4	1788.6
162.5°	1630.8	1689.3	1755.0	1820.2
165°	1709.5	1756.9	1810.3	1865.6
167.5°	1775.5	1815.0	1856.9	1900.0
170°	1818.2	1849.8	1885.4	1919.0
172.5°	1854.6	1879.9	1906.0	1934.8
175°	1903.2	1917.0	1932.8	1950.6
177.5°	1940.7	1945.5	1950.2	1958.1
180°	1956.5	1956.5	1956.5	1956.5



TEST NUMBER: P1428289
 CATALOG NUMBER: SQ2W-PR1-K-125U-100D-L840-UNV-STD-W-WM-4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.94	19.75	19.92	20.74	22.04	15.31	16.12	16.29	17.11	18.41
	3H	20.15	20.87	21.14	21.86	23.18	16.47	17.19	17.46	18.19	19.51
	4H	20.63	21.31	21.63	22.31	23.64	16.93	17.61	17.94	18.61	19.94
	6H	20.92	21.55	21.94	22.55	23.90	17.27	17.90	18.28	18.90	20.24
	8H	21.02	21.62	22.05	22.64	23.98	17.41	18.00	18.43	19.02	20.36
	12H	21.06	21.63	22.09	22.64	24.00	17.43	18.00	18.46	19.02	20.38
4H	2H	19.04	19.72	20.05	20.72	22.05	16.02	16.70	17.03	17.70	19.03
	3H	20.50	21.06	21.51	22.09	23.43	17.37	17.93	18.39	18.96	20.30
	4H	21.12	21.64	22.15	22.66	24.02	17.91	18.43	18.94	19.45	20.81
	6H	21.55	21.99	22.59	23.04	24.40	18.34	18.78	19.38	19.83	21.19
	8H	21.71	22.12	22.75	23.16	24.53	18.52	18.94	19.56	19.97	21.35
	12H	21.77	22.15	22.83	23.20	24.58	18.57	18.94	19.62	19.99	21.37
8H	4H	21.14	21.56	22.18	22.59	23.97	18.23	18.65	19.27	19.68	21.06
	6H	21.67	22.02	22.73	23.09	24.47	18.77	19.11	19.83	20.19	21.57
	8H	21.91	22.21	22.98	23.27	24.67	19.03	19.33	20.10	20.40	21.79
	12H	22.02	22.29	23.10	23.35	24.78	19.13	19.39	20.20	20.45	21.88
12H	4H	21.10	21.47	22.15	22.52	23.91	18.25	18.62	19.31	19.68	21.06
	6H	21.66	21.96	22.73	23.03	24.42	18.84	19.14	19.91	20.21	21.60
	8H	21.91	22.18	22.98	23.24	24.67	19.13	19.40	20.20	20.45	21.89